

IMPERIAL

DEPARTMENT OF CIVIL AND ENVIRONMENTAL ENGINEERING

CIVE70100 RESEARCH PROJECT – STRUCTURES 2025–2026

Developing design formulae for flexural buckling of stainless steel columns using machine learning techniques

AUTHOR

Iker Decimavilla Garrido

SUPERVISORS

Anton Köllner and Ahmer Wadee

June 30, 2026

Contents

1	Introduction	1
2	Literature review	2
2.1	Structural stability and the mechanics of non-linear materials	2
2.1.1	Column buckling and the normalised slenderness approach	2
2.2	Design philosophies for non-linear material buckling	3
2.2.1	Empirical buckling curves and the Eurocode 3 approach	3
2.2.2	The tangent-modulus approach	3
2.3	The Köllner–Gardner–Wadee (2023) energy formulation and its open question	3
2.3.1	A closed-form solution for Ramberg–Osgood struts	3
2.3.2	The correction factor β	3
	Bibliography	4

List of Figures

2.1	Idealised column strength baseline	3
-----	--	---

List of Tables

1 Introduction

2 Literature review

2.1 Structural stability and the mechanics of non-linear materials

2.1.1 Column buckling and the normalised slenderness approach

Perfect columns are idealised structural members that are perfectly straight and exhibit elastic–perfectly plastic behaviour. The strength of such a member is bounded by two limiting modes of failure: geometric instability and material yielding. The former is governed by the Euler critical buckling load, which for a pin-ended column is

$$N_{\text{cr}} = \frac{\pi^2 EI}{L^2}, \quad (2.1)$$

where E is Young’s modulus, I is the second moment of area and L is the member length (Timoshenko and Gere, 2009). The latter is governed by the squash load $N_y = Af_y$, where A is the cross-sectional area and f_y is the yield stress. Together these define the normalised slenderness $\bar{\lambda}$, which collapses the column’s geometry, material and length into a single dimensionless parameter, while the ultimate load N_u is normalised by the squash load to give the buckling reduction factor χ :

$$\bar{\lambda} = \sqrt{\frac{N_y}{N_{\text{cr}}}}, \quad \chi = \frac{N_u}{N_y}. \quad (2.2)$$

As illustrated in Figure 2.1, the theoretical maximum strength of a perfect column forms a sharp χ – $\bar{\lambda}$ baseline: a pure squashing plateau ($\chi = 1$) for stocky columns and an elastic Euler hyperbola ($\chi = \bar{\lambda}^{-2}$) for slender columns, the two regimes meeting at $\bar{\lambda} = 1$ (Trahair, 2008).

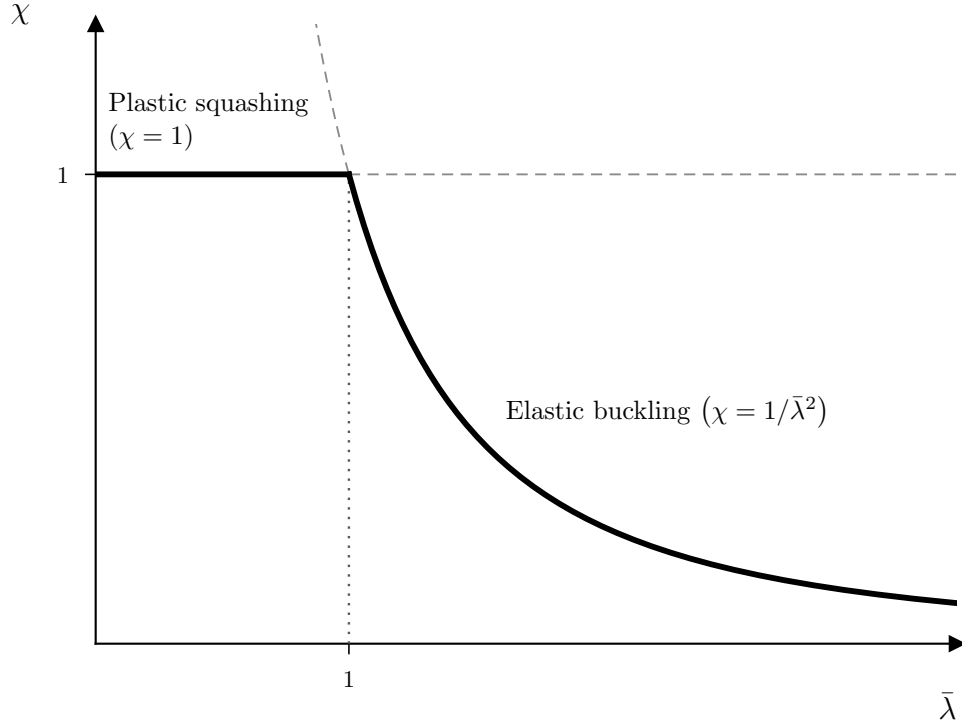


Figure 2.1: Buckling reduction factor χ against normalised slenderness $\bar{\lambda}$ for a perfect, elastic–perfectly plastic column: the lower envelope of the squash plateau ($\chi = 1$) and the Euler hyperbola ($\chi = \bar{\lambda}^{-2}$), which meet at $\bar{\lambda} = 1$.

2.2 Design philosophies for non-linear material buckling

2.2.1 Empirical buckling curves and the Eurocode 3 approach

2.2.2 The tangent-modulus approach

2.3 The Köllner–Gardner–Wadee (2023) energy formulation and its open question

2.3.1 A closed-form solution for Ramberg–Osgood struts

2.3.2 The correction factor β

Bibliography

- Afshan, S. and Gardner, L. (May 2013). Experimental Study of Cold-Formed Ferritic Stainless Steel Hollow Sections. In: *Journal of Structural Engineering* 139.5, pp. 717–728. ISSN: 0733-9445, 1943-541X. DOI: [10.1061/\(ASCE\)ST.1943-541X.0000580](https://doi.org/10.1061/(ASCE)ST.1943-541X.0000580). Available at: <https://ascelibrary.org/doi/10.1061/%28ASCE%29ST.1943-541X.0000580> (Accessed: 06/13/2026).
- Gardner, L. and Nethercot, D. (Sept. 2004). Experiments on Stainless Steel Hollow Sections—Part 2: Member Behaviour of Columns and Beams. In: *Journal of Constructional Steel Research* 60.9, pp. 1319–1332. ISSN: 0143974X. DOI: [10.1016/j.jcsr.2003.11.007](https://doi.org/10.1016/j.jcsr.2003.11.007). Available at: <https://linkinghub.elsevier.com/retrieve/pii/S0143974X03002165> (Accessed: 06/18/2026).
- Timoshenko, S. P. and Gere, J. M., eds. (2009). *Theory of Elastic Stability*. 2nd ed., Dover ed. A McGraw-Hill Classic Textbook Reissue. Mineola, N.Y: Dover Publications. 541 pp. ISBN: 978-1-62198-613-3 978-0-486-13480-2.
- Trahair, N. S., ed. (2008). *The Behaviour and Design of Steel Structures to EC3*. Fourth edition. London: Taylor & Francis. 1 p. ISBN: 978-1-315-27351-8. DOI: [10.1201/9781315273518](https://doi.org/10.1201/9781315273518). Available at: <https://www.taylorfrancis.com/books/9781315273518>.