

## LED 10W Bulk Head

### HLBH-02-10-CW-220VDC

As per IS 10322 & IEC 60598-1


**Product Description:** Energy efficient 10W LED Bulk Head



### Technical Specifications:

Main Housing:	Aluminum casting
Front Cover:	Opal diffuser
LED:	LM80 certified LED
Lumen Maintenance:	50000 hours @ L70
Control Gear:	Isolated, Electronic, CC Driver
Internal Wiring:	Insulated Cu wire
Hardware:	SS & MS Zinc plated and passivated
Ingress Protection:	IP66
Operating Temperature:	-10°C~ 50°C

### GA Drawing:

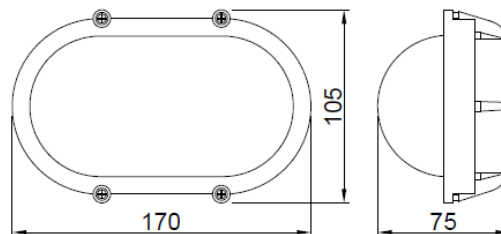

All dimensions in mm (Tolerance:  $\pm 5\text{mm}$ )

### Electrical & Photometry Parameters:

Rated Voltage	System Wattage	System Current	System Lumen Efficacy	CCT (As per ANSI)	CRI
220V	10W $\pm 10\%$	<51mA	$\geq 80\text{lm/W}$	6500K	$\geq 80$

### System Protections:

Open & Short circuit protection, reverse polarity protection, surge protection of 3KV internal.

### Application:

Offices, hospitals, retail outlets, banks, etc.

### Mounting:

Surface or wall mounting.

Note: Due to continuous efforts in developing products, improvement M/s Halonix Technologies Pvt Ltd reserves the right to make changes in the design and data and withdraw the luminaires without any prior notice.

Prepared by :

MK/NK

Industrial Luminaire :

Checked by :

AS

Cat. Ref. : HLBH-02-10-CW-220VDC

Approved by :

RL

Document No :

As improvement in design & method of manufacturing is a continuous process, the product supplied may differ in details from above given data.