



Owner's manual

**458  
ITALIA**







## General remarks

This vehicle, which complies with EC homologation parameters, uses advanced technology and is capable of achieving high performance levels.

It is equipped with sophisticated active and passive safety systems (described below).

These safety features and systems do not authorise the driver to take risks other than those involved in normal driving since their preventive and protective action is guaranteed only in certain conditions. Unless otherwise instructed specifically by **FERRARI** (see the Safety chapter), the deactivation of any of the vehicle's safety systems is PROHIBITED.

While certain safety systems (e.g. the airbags) have been tested to ensure that they offer the highest possible levels of protection, they may nonetheless be hazardous in the event of failure by the driver or passenger to observe the instructions given by **FERRARI**. All vehicle occupants must be attentive at all times and take particular care when transporting passengers who are more subject to injury such as children, disabled and elderly persons.

Safe driving is subject to the following conditions AT ALL TIMES:

- the driver must be in perfect psycho-physical condition;
- road regulations (Traffic Regulations - Vienna Convention on Road Traffic that ended on 8 November 1968) must be strictly observed;
- common rules of caution must always be observed in relation to the quality/performance of the vehicle, driving conditions and contingent situations.

- Caution and discipline are the basis of safe driving.

- Driving takes place in a naturally dangerous context where a number of different risk factors interact. For this reason, it is important to drive bearing in mind that others, whether they are pedestrians, motorcyclists or motorists, can make mistakes. Keeping a safe distance allows emergency measures to be taken. Remember that national and international legislation requires that the driver of the vehicle must be capable of performing corrective and/or emergency manoeuvres at all times.

- Correct and careful use of a vehicle derives, above all, from respect for one's own safety and that of others as well as from compliance with road regulations. Only this respect will help you experience all the emotions that driving this car can offer you.

The driver MUST NEVER allow passengers to increase the risks associated with driving (e.g. by not using safety systems such as the seat belts) by failing to observe the mandatory safety rules that apply to both driver and passengers.

The vehicle MUST NOT be modified or tampered with for any reason whatsoever since, by so doing, the manufacturer's homologation and safety parameters will be modified.



The driver must pay the utmost attention to the signals of the vehicle and, in particular, the warning lights on the dashboard and buzzers. Even when the warning lights do not indicate a situation of immediate danger, the driver must be cautious in relation to possible consequences/degeneration of the failure and other information given.

During routine operations, such as refuelling, precautions should always been taken and it is important to check that flammable liquid has not been spilled; these precautions must be observed even if the operation is performed by others. Similarly, before setting off make sure that the doors are closed by checking the warning lights and also manually. The driver must be fully acquainted with the vehicle and its controls in order to handle and drive it correctly. Command of the vehicle can be acquired/improved by attending the driving courses held by **FERRARI** which we strongly recommend.

The use of terms from the motor sports world (such as F1, SPORT and RACE) is merely indicative of the vehicle's competition-derived technology and does not endorse inappropriate behaviour on the road which does not comply with Traffic Regulations.

Most accidents are caused by distraction. The driver must use any on-board information, communication and entertainment systems responsibly, especially when the vehicle is in motion. Examples of information, communication and entertainment systems are the following: satellite navigation systems, traffic information systems (e.g. ITT), media players (e.g. iPod), telephones with Bluetooth connectivity, etc. (whether merely audio-based or with display).

It is important to bear in mind that on-board systems may be distracting when driving since they may take a driver's attention away from the road for several seconds. Aftermarket video entertainment systems for the passenger (e.g. TV) must be installed where they cannot distract the driver while the vehicle is in motion. While the vehicle is in motion, the attention required to use on-board systems must never exceed the high level of attention required to drive safely in accordance with the Traffic Regulations.

Therefore, these systems may only be used (separately or in combination with others) by the driver:

- in complete safety (stopping the vehicle before use if necessary). Operations that are not involved with driving (e.g. changing dashboard functions), must be performed in maximum safety when the vehicle is stationary;



- putting road safety first; for example, under conditions of poor or limited visibility, looking at a display with active programmes can be distracting even if you take your eye off the road only for a split second;
- ensuring, if the previous vehicle owner has installed systems on the vehicle that are NOT APPROVED by FERRARI (car tuning), that they are fully compatible with the original vehicle equipment.

If the vehicle owner has installed one or more new systems, either fixed or removable, on the vehicle, make sure that these

- have the necessary certification;
- are fully compatible with the original vehicle equipment (i.e. they do not interfere with it);
- are fitted by skilled staff.

The **FERRARI TECHNICAL SERVICE DEPARTMENT** and **FERRARI DEALERS** and **AUTHORISED SERVICE CENTRES** can provide all the information needed to ensure that they are compatible.

Strict priority criteria must be observed when driving a vehicle: you must not therefore take your attention and eye off the road.

In some countries, the use of entertainment/information systems is prohibited on vehicles when driving.

The driver is responsible for use of these entertainment/information systems with video screens if they are prohibited in the country where the vehicle will be driven.

These considerations are not exhaustive, but only refer to some general issues that will be specifically dealt with in this Owner's Manual.



## Introduction

The aim of this Owner's Manual is to help you get the best value from your vehicle and to provide information on routine maintenance: we advise you to read it carefully before setting out. The Owner's Manual should be considered an integral part of the vehicle and must therefore always be kept on board.

Using the vehicle in a way that does NOT comply with the Owner's Manual not only exonerates **FERRARI** of any responsibility but also puts the person at great risk.

## Updating

The high quality level of the vehicle is subject to constant technological improvements. Therefore, there may be differences between this manual and your vehicle.

The **FERRARI SALES AND SERVICE NETWORK** will provide you with all the information on any updates.

All specifications and illustrations contained in this manual refer to those resulting as of the printing date.

## Spare parts

When replacing parts or topping up with lubricants and fluids, we recommend that you use original spare parts and lubricants and fluids recommended by **FERRARI**.

## Warranty Booklet

Each new vehicle comes equipped with a "Warranty Booklet". This contains the vehicle's warranty validity conditions.

This warranty does not affect the buyer's statutory rights as a consumer, which derive from binding legal norms in his or her favour, in the various states or countries or from European Union regulations, towards the Dealer.

The Warranty Booklet also contains the routine maintenance indicated in the "Maintenance Schedule".

The **FERRARI** warranty is voided if **ORIGINAL FERRARI SPARE PARTS** are NOT used for repairs.



## Service

The information in this manual is necessary for the use and proper care of the vehicle. In addition, Customers will get maximum satisfaction and results from the vehicle if they carefully follow the instructions contained in it.

We recommend that you have all the checks and services performed at **FERRARI AUTHORISED WORKSHOPS** since they have highly skilled staff and the necessary equipment.

Please refer to the "Sales and Service Organisation" manual for information on the location of the **FERRARI DEALERS** and **AUTHORISED SERVICE CENTRES**.

The **FERRARI TECHNICAL SERVICE DEPARTMENT** is at your complete disposal for any information and advice. If you have any doubts about the information provided in this manual or how to use or operate the vehicle, please contact the **FERRARI SERVICE NETWORK**.

## Consulting the manual

To facilitate reading the manual, the topics have been divided into sections and chapters.

To further facilitate consultation, each section is identified by a specific colour:

### 1. General

Provides general information about your vehicle.

### 2. Quick reference guide

Contains all the information you need when using the vehicle for the first time.

### 3. Safety

Describes the main safety systems in the vehicle.

### 4. About your vehicle

Provides all necessary information for use of the vehicle.

### 5. Advice for Emergency Situations

Provides useful advice for solving problems that may occur.

### 6. Care of the vehicle

Provides advice for cleaning, care and routine maintenance of your vehicle.

### 7. Glossary

Explains the main technical concepts.

### 8. Table of Contents

Allows you to quickly identify and locate the information required.



Within the various sections, special attention must be paid to the parts marked as follows:

#### Warning



Extreme caution required: failure to comply with the instructions could constitute a serious risk to personal safety and vehicle protection!

#### Important note



Important note: a note containing instructions or information.

#### Environment



Warning for environmental protection: useful advice for protection of the environment.

#### Abbreviations/Acronyms

Some descriptions and terms with particular meanings are found in this manual in an abbreviated form:

AC AIR CONDITIONING

ABS ANTI-LOCK BRAKING SYSTEM

ASR ANTI-SKID REGULATION during acceleration

CST STABILITY and TRACTION CONTROL

DCT DUAL CLUTCH TRANSMISSION

EBD ELECTRONIC BRAKE-FORCE DISTRIBUTION

ECU ELECTRONIC CONTROL UNIT

F1-Trac Traction control derived from the technologies used in the racing sector

#### Introduction



## Environmental protection

### Environment



The following chapter contains useful advice for environmental protection.

FERRARI has designed and constructed a vehicle using technologies, materials and devices capable of reducing the harmful impact on the environment to a minimum.

If you use your vehicle with respect for the environment, you too will contribute towards environmental protection.

Fuel consumption as well as engine, gearbox, brakes and tyres wear mainly depend on two factors:

- use of the vehicle
- driving style.

Both factors are influenced by the driver.

#### *Use of the vehicle*

- Avoid using the vehicle for short trips.
- Check that the tyre pressure is correct.
- Check the fuel consumption.
- Proper periodic maintenance will contribute to preserving your vehicle in full working order and to protecting the environment. We therefore advise you to respect the service due dates indicated in the "Maintenance Schedule".

#### *Driving style*

- Do not accelerate during the starting procedure.
- Do not warm up the engine when the vehicle is stationary.
- Drive carefully and keep a safety distance that corresponds to the driving speed.
- Avoid sudden and frequent acceleration or braking.
- Turn off the engine if the vehicle is kept stationary for long periods of time.
- Shift gears using only 2/3 of the speed permitted for each gear.
- Use the air conditioning in moderation.

### Important note



The vehicle is equipped with exhaust gas control and monitoring systems which must always be kept in perfect working order and controlled regularly.



### End-of-life vehicle collection service

For many years, FERRARI has been globally committed to respecting and protecting the environment by constantly improving its manufacturing processes and developing increasingly eco-compatible products.

To ensure that its customers receive the best service possible, in compliance with environmental legislation and the requirements of EU Directive 2000/53/EC for end-of-life vehicles, FERRARI offers owners the possibility of consigning their end-of-life vehicles at no additional cost so that they can be disposed of.

The EU Directive states that the final owner of an end-of-life vehicle (ELV) must be able to consign his or her vehicle without incurring additional costs.


Since 2007 in almost all European Union member states, ELV collection is free of charge regardless of the year of registration provided that the vehicle (and the engine and bodywork in particular) contains no additional waste.

To dispose of your end-of-life vehicle at no additional cost, contact our Dealers.

Vehicle keys .....	14
Alarm system.....	15
Duplicating the keys .....	16
Replacing remote control batteries .....	17
Electronic alarm .....	17
Identification and homologation plates and labels ..	20
Dimensions and weights .....	26
Main engine specifications .....	27
Consumption and emissions .....	27
Performance.....	27
Wheel rims and tyres .....	28
Refilling.....	31



1

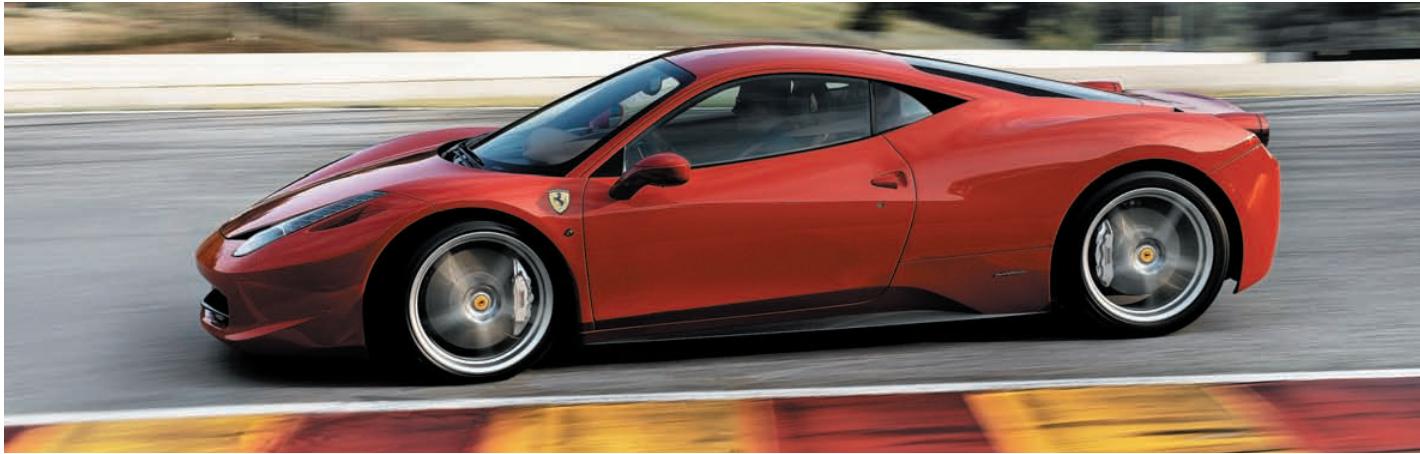

## GENERAL



## Vehicle keys

The vehicle is delivered with two identical keys that can be used for:

- central door locking;
- starting the vehicle;
- activating/deactivating the alarm system;
- activating/deactivating the alarm;
- opening the luggage compartment lid.

### Important note



If the keys are lost or stolen, you can request a duplicate from the FERRARI SERVICE NETWORK (see section "Duplicating the keys" on page 16).



### Key codes

A **CODE CARD** is supplied with the keys. This card shows the following:

- the electronic code;
- the mechanical code for the keys, to be given to the FERRARI SERVICE NETWORK if you request duplicates of the keys.

### Important note



Make sure you record the code numbers in the space provided in the "WARRANTY BOOKLET".

### Warning



The code numbers on the **CODE CARD** must always be kept in a safe and protected place, not accessible to others.

### Important note



In the event of a change of ownership, it is essential that the new vehicle owner is provided with all the keys and with the **CODE CARD**.

## Alarm system

### The FERRARI CODE system

The vehicle is equipped with an electronic immobiliser system (FERRARI CODE) which is automatically activated when the ignition key is removed.

The keys are equipped with an electronic device which transmits a coded signal to the FERRARI CODE ECU. Once this ECU has recognised the signal, it allows starting the engine.

#### *Operating*

Each time the ignition key is removed (see page 87), the protection system activates the engine immobiliser.


- When starting the engine, press the **ENGINE START** button on the steering wheel:

- 1) If the code is recognised, the **CODE** warning light **A** on the instrument panel turns off when the check procedure has been completed, whereas the **EOBD** warning light **B** turns off when the engine is started once the ECU has completed its diagnostic cycle; in these conditions, the protection system has recognised the key code and deactivated the immobiliser.
- 2) If the **CODE** warning light **A** stays on, it means that the code has not been recognised. If this occurs, it is advisable to turn the key back to position **0** and then back to **II**; if the immobiliser device remains active, try with the other key provided.

#### Important note



If you still cannot restart the engine, contact the **FERRARI SERVICE NETWORK**.





- While driving, with the ignition key in position **II**:


- 1) If the **CODE** warning light **A** turns on, it means that the system is performing a self-diagnostic cycle. At the first opportunity, you can stop and test the system: switch off the engine by turning the ignition key to position **0**, then turn the key back to position **II**. The **CODE** warning light **A** will turn on and should go off within one second. If the warning light stays on, repeat the procedure described previously leaving the key at **0** for more than 30 seconds.

#### Important note



If the problem persists, please contact the **FERRARI SERVICE NETWORK**.

- 2) If the **CODE** warning light **A** flashes, it means that the vehicle is not protected by the immobiliser.



#### Important note



Contact the **FERRARI SERVICE NETWORK** immediately to have all the keys stored in the system memory.

#### Important note



Each key provided has its own specific code, which must be stored in the memory of the system control unit.

#### Duplicating the keys

If you request additional keys, provided that the conditions to satisfy your request are met, remember that the codes must be stored (up to a maximum of 7 keys) on all the keys.

Contact the **FERRARI SERVICE NETWORK** directly and bring the following with you:

- all the keys in your possession;
- the **CODE CARD** for the **FERRARI CODE** system;
- a personal identity document;
- the documents proving ownership of the vehicle;
- a report of loss of keys made to the relevant authorities.

The codes of the keys that are not available when the new memorisation procedure is performed will be deleted from the memory, in order to prevent that any lost or stolen keys are used to start the vehicle.



### Replacing remote control batteries

If you press one of the three buttons of the key and this does not activate the corresponding function, check that the alarm system functions are operating correctly by using the other remote control before replacing the batteries.


Replace the remote control batteries as follows:

- open the key cover **C** using a small screwdriver at the position indicated by the arrow;
- remove the battery **D** by pushing in the direction indicated by the arrow to release it from the retainer cover **E**;
- fit a new battery of the same type, observing the indicated polarity;
- close the key cover **C**.

#### Important note



Do not use sharp tools to remove the cover and be careful to avoid damaging the remote control.

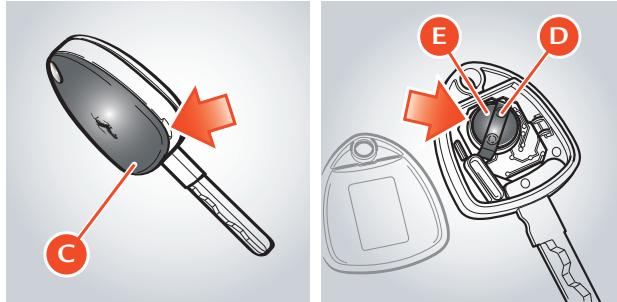

### Electronic alarm

The electronic alarm system performs the following functions:

- remote control for central door locking/unlocking;
- perimeter surveillance, detecting if doors and lids are open;
- motion surveillance, detecting intrusion in the passenger compartment;
- vehicle movement surveillance.

#### Activation

To turn on the alarm system, press button **F** on the key:

- the turn indicators flash once;
- the system "beeps";
- the red LED on the dashboard flashes;
- the central door locking system is activated and the doors are locked.

The system activates after approximately 25 seconds.

When the electronic alarm is activated, the user may request opening of the luggage compartment; in this case, the motion and anti-lift sensors are temporarily deactivated.





If the luggage compartment is then closed, the sensors will be reactivated.

If the turn indicators and the red LED on the dashboard flash 9 times when you activate the alarm system, it means that one of the doors or the front/rear lid is open or not closed properly and is therefore not protected by the perimeter surveillance. If this is the case, check that the doors and front/rear lids are closed properly and close any door or lid that is open without deactivating the alarm system: the turn indicators will flash once to indicate that the door or the front/rear lid is now closed properly and is protected by the perimeter surveillance.

#### Warning



If the turn indicators and the red LED on the dashboard flash 9 times when the alarm system is activated with doors, rear and front lids properly closed, it means that the self-diagnostic feature has detected a malfunction in the system. Contact the FERRARI SERVICE NETWORK to have the system checked.

#### Deactivation

To deactivate the alarm system, press button **G** on the key:

- the turn indicators flash twice;
- the system beeps twice;
- the red LED on the dashboard goes off;
- the dome lights come on;
- the central door locking system is deactivated and the doors are unlocked.

Pressing button **G** twice unlocks the doors and also turns on the low beams for 30 seconds.

The alarm system is off and you can now get into the vehicle and start the engine.

To enter the vehicle if the remote control battery is flat, insert the key into one of the two door locks and turn it to release the lock; the alarm siren will start to sound.

Start the vehicle following the standard procedures. The alarm siren will deactivate.

#### Deactivating the anti-lift alarm

Press button **H** on the roof panel to deactivate the anti-lift alarm system. When this function is deactivated, the indicator light on the button will flash for about 3 seconds and will then turn off.





1

#### *Alarm memory*

If the **CODE** symbol (see page 114) appears on the left TFT display for 10 seconds when the vehicle is started after system diagnosis together with the message "Break-in attempted", this means that an intrusion has been attempted and has activated the alarm.

In this case, the system will indicate the reason for the alarm activation according to the following priority:

- **LED off twice**: lifting sensor alarm
- **LED off three times**: door alarm
- **LED off four times**: luggage compartment lid alarm
- **LED off five times**: ignition key alarm.

The alarm system memory is reset by turning the ignition key.


#### *Ministerial homologation*

The electronic alarm system complies with EU regulations on electromagnetic compatibility and it is marked in compliance. The homologation number is referred to with the following characters.

For those markets that require the transmitter and/or receiver marking, the homologation number is found on the component.

#### **Satellite alarm system (optional)**

On request, the vehicle can be equipped with a satellite alarm system. If the vehicle is equipped with a satellite alarm system, please refer to the booklet "Quick Reference Nav Trak", enclosed with the vehicle documents, for further information.




General

19



## Identification and homologation plates and labels

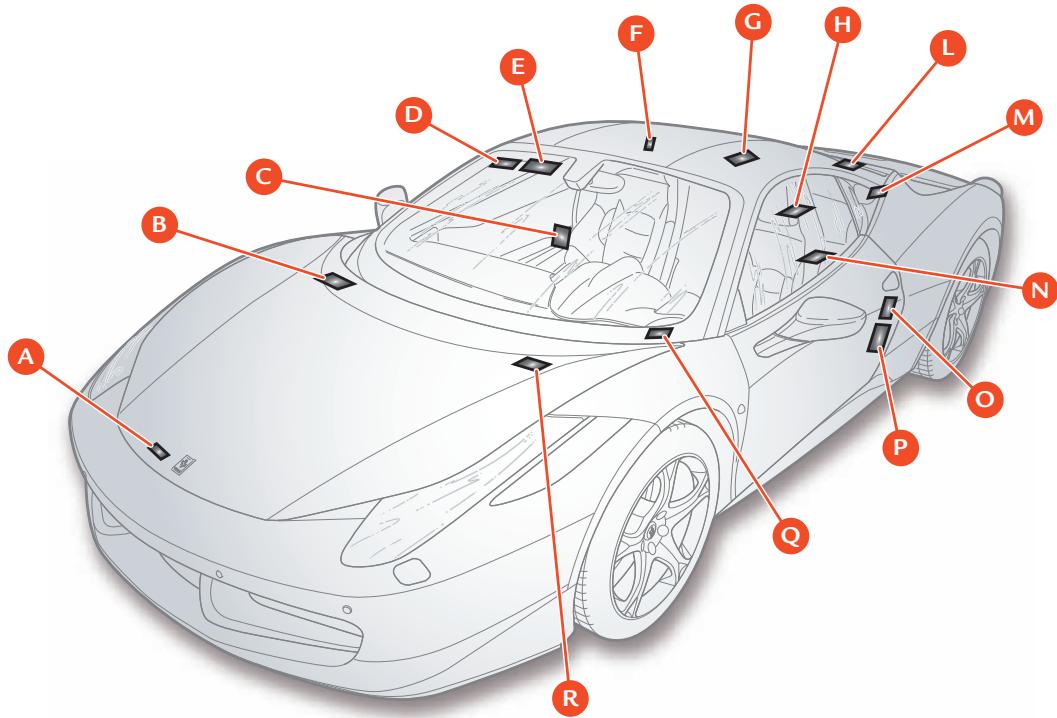



1

Ref.	Label/plate	Position
A	Low-beam homologation	Luggage compartment lid
B	ECE homologation	Luggage compartment lid
C	Vehicle identification	Rear passenger-side door jamb
D	Airbag maintenance	Passenger-side sun visor
E	Passenger airbag warning (2)	Passenger-side sun visor
F	Unleaded fuel	Fuel filler flap
G	Radiator with antifreeze	RH engine compartment cosmetic shield
H	Engine type and number	Crankcase
L	Assembly number	Engine compartment
M	Engine and gearbox oil label	LH engine compartment cosmetic shield
N	Gearbox type and number	Gearbox housing
O	Tyre pressure and type	Driver-side door
P	TPMS present warning	Driver-side door
Q	Chassis number	Windscreen
R	Original paintwork	Luggage compartment lid

General

21



A Low-beam homologation



C Vehicle identification



B ECE homologation



D Airbag maintenance





1

E Passenger airbag warning



G Radiator with antifreeze



F Unleaded fuel



H Engine type and number



General

23



L Assembly number



N Gearbox type and number



M Engine and gearbox oil label



O Tyre pressure and type





1

P TPMS present warning



R Original paintwork



Q Chassis number





General

25



## Dimensions and weights

Wheelbase	2650 mm (104.33 in.)
Max. length	4527 mm (178.23 in.)
Max. width	1937 mm (76.26 in.)
Max. height	1213 mm (47.76 in.)
Front track	1672 mm (65.83 in.)
Rear track	1606 mm (63.23 in.)
Front overhang	1107 mm (43.58 in.)
Rear overhang	770 mm (30.31 in.)
Kerb weight	1485 kg (3273.86 lbs)*

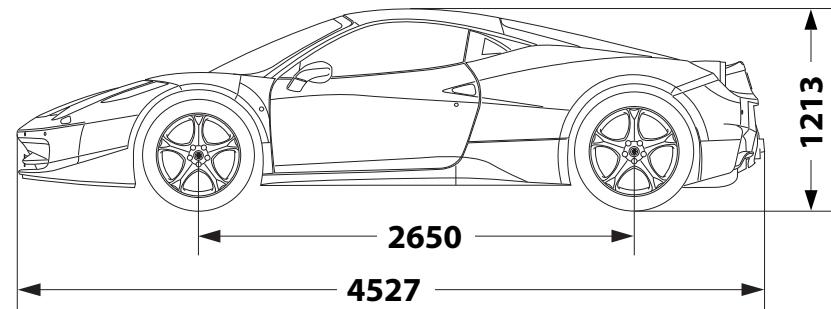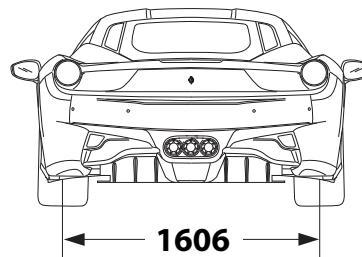

\* considering the most favourable Optional combination



1

## Main engine specifications

Type	F 136 FB
Number of cylinders	8
Cylinder sequence	V 90°
Cylinder bore	94 mm (3.7 in.)
Piston stroke	81 mm (3.2 in.)
Total displacement	4499 cm <sup>3</sup> (274.55 cu. in.)
Compression ratio	12.5:1
Maximum RPM (with limiting device)	9200 RPM
Max. power	416 kW (565 HP)
Corresponding RPM	9000 RPM
Max. torque	540 Nm
Corresponding RPM	6000 RPM

## Consumption and CO<sub>2</sub> emissions

	l/100 km	g/km
City cycle	19.7	454
Motorway	9.7	223
Combined cycle	13.3	307

## Transmission ratios

Gearbox ratios	Differential/bevel gear pair ratio
1 = 3.077	
2 = 2.185	
3 = 1.626	5.143
4 = 1.286	
5 = 1.028	
6 = 0.839	
7 = 0.693	
R = 2.791	

## Performance

0 - 100 km/h	0 - 400 m	Max. speed
< 3.4 s	11.3 s	> 325 km/h (202 mph)

## Electrical system

Supply voltage	Alternator
12 V	Nippondenso 165 A SC3
Battery	Starter motor
Fiamm 12V - 65 A/h - 760 A	Bosch

General

27



## Wheel rims and tyres

### Wheel rims

Front	Rear	Spare wheel
8.5" J x 20"	10.5" J x 20"	4.5" J x 20"

### FERRARI-approved tyres

	Front	Rear	Front	Rear
<b>Michelin Pilot Sport</b>	235/35 ZR20	295/35 ZR20	<b>2.10 bar</b> (30.46 psi)	<b>2.00 bar</b> (29 psi)
<b>Bridgestone Potenza</b>	235/35 ZR20	295/35 ZR20	<b>2.30 bar</b> (33.36 psi)	<b>2.30 bar</b> (33.36 psi)
<b>Pirelli Pzero</b>	235/35 ZR20	295/35 ZR20	<b>2.10 bar</b> (30.46 psi)	<b>2.00 bar</b> (29 psi)

### Optional tyres

	Front	Rear	Front	Rear
<b>Bridgestone Potenza Run Flat</b>	235/35 ZR20	295/35 ZR20	<b>2.30 bar</b> (33.36 psi)	<b>2.50 bar</b> (36.26 psi)
<b>Vredestein spare wheel</b>	146/60 ZR20			<b>4.20 bar</b> (60.92 psi)

### Winter tyres

	Front	Rear	Front	Rear
<b>Pirelli Winter Sottozero</b>	235/35 ZR20	285/35 ZR20	<b>2.10 bar</b> (30.46 psi)	<b>2.00 bar</b> (29 psi)



***Correct tyre reading***

Example: 235/35 ZR20

235 = Nominal width (distance in mm from side to side)

35 = Height/width ratio as a percentage

Z = Tyre to be used for speeds of over 240 km/h (149 mph)

R = Radial tyre

20 = Rim diameter in inches

The tyre manufacture date is included in the description of the tyre:

DOT ... 1009 means that the tyre was manufactured in the 10<sup>th</sup> week of 2009.

***Correct rim reading***

Example: 8.5" J x 20"

8.5 = Rim width in inches

J = Shape of rim flange  
(side projection where tyre bead rests)

20 = Rim diameter in inches  
(corresponds to the diameter of tyre to be fitted)

For further information on tyres, see page 219.



#### Run Flat tyres (optional)

The vehicle can be fitted with "Run flat" tyres, if required. This type of tyre has a reinforced side A which allows the vehicle to continue travelling at moderate speed (80 km/h - 50 mph), even after a puncture, for a specific distance (100 km - 62 mi).


When the instrument panel receives the "tyre puncture" information from the tyre pressure monitoring ECU, calculates the residual tyre life, and displays a warning in the dedicated area of the left TFT display after 50 km (31 mi).

After 100 km (62 mi), a message warning the driver to stop the vehicle will be displayed (for further information, see the "Tyre pressure and temperature monitoring system" paragraph on page 74).

#### Warning



Observing the recommended wheel alignment values is essential in order to obtain the best performance and the longest life of these tyres.

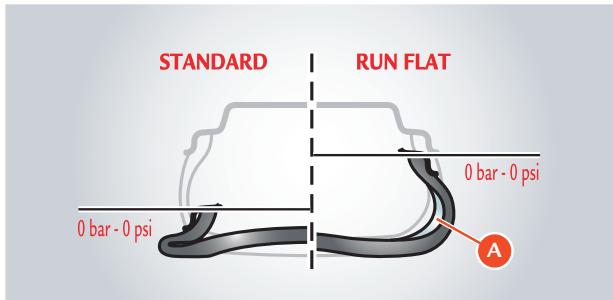

#### Warning



If you are going to use standard tyres on a vehicle that was originally equipped with "Run Flat" tyres, you must contact the FERRARI SERVICE NETWORK to have the dashboard reprogrammed and prevent warning messages from being displayed on the left TFT display.

#### Environment



Maintaining correct tyre pressure helps to improve tyre rolling and reduce fuel consumption.



## Refilling

<i>Parts to be refilled</i>	<i>Quantity</i>	<i>Fill with:</i>	<i>Ref. Page</i>
Engine	Total system capacity Oil level between Min. and Max. Oil consumption	10 l 2 l 1.0 - 2.0 l/1,000 km	<b>Shell</b> HELIX ULTRA SAE 5W-40
Gearbox and differential	3.9 l	<b>Shell</b> TRANSAXLE 75W-90 GL5	215
Clutch system and hydraulic controls	8 l	<b>Shell</b> DCT-F3	
Braking system	1.5 l	DONAX UB BRAKE FLUID DOT4 Ultra	217
Cooling circuit	16.5 l	GLYCOSHELL LONGLIFE at 50%	216
Hydraulic power steering system	1.6 l	DONAX TX	216
Fuel tank	86 l	Unleaded fuel 95 RON.	89
Reserve	14 l		
Air conditioning and heating system			
Compressor	165 cc	PAG ISO 46	
Coolant	670 ± 30 g	DELPHI RL 488 "R 134 A"	
Windscreen washer/headlight washer fluid tank	5 l	Mixture of water and glass cleaner	218

Opening doors .....	34
Controls overview .....	35
Seat adjustment .....	37
Steering wheel adjustment .....	38
Rear-view mirrors .....	39
Seat belts .....	40
Ignition switch.....	41
External lights and turn indicators .....	42
Starting and driving the vehicle.....	44



2



## QUICK REFERENCE GUIDE



## Opening

### Doors

When a door is opened or closed, the window automatically moves down by approximately 2 centimetres/0.8 inches (to its "target position") to avoid colliding with the upper weather strip.

When the door is closed, the window automatically moves up until it reaches the "upper limit".

#### Opening from the outside

Using the remote control, deactivate the alarm and the central door locking system, or turn the key in the lock to deactivate the central door locking system.

To open the door, pull handle **A**: the window will move down to its "target position". When the door is closed, the window will move up until it meets the upper limit.



#### Locking and opening the doors from the inside

#### Warning




Always check that the doors have been closed properly to prevent them from opening while driving.

Both doors can be locked by activating/deactivating the "LOCK/UNLOCK" **B** button on the roof panel. To lock the doors, press button **B**; when the door lock is activated, the light on button **B** comes on. To deactivate the door lock, press button **B** until the light goes out.

If you pull handle **C** to open the door, the window will move down to its target position. When the door is closed, it will move up until it meets its upper limit.

When the opening handle is operated, both doors are unlocked.





2

## Controls overview



Ref.	Control	Page	Ref.	Control	Page
1	Adjustable air vents	171	4	Light switch	130
2	Glove compartment	172	5	External rear-view mirror adjustment control	167
3	Right TFT display controls (NIT)	122	6	Left TFT display controls	94


Quick reference guide

35



Ref.	Control	Page
7	Left TFT display	94
8	Rev counter and gearbox display	119-120
9	Right TFT display	122
10	Turn indicators	132
11	Windscreen washer/wiper lever	127
12	“Manettino” control	125-148
13	“ENGINE START” button	124
14	Suspension damping delink button	126-152
15	High beam and flashing lever	130

Ref.	Control	Page
16	Glove compartment opening button	172
17	Power window controls	90
18	“LAUNCH” control	157
19	“R” reverse control	139
20	Air conditioning controls	168
21	“AUTO” control	142
22	Hazard warning lights control	133

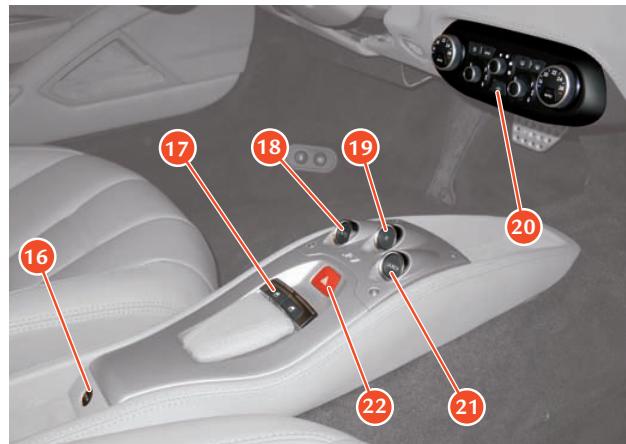



## Adjustments

### Seats

#### Warning



Never adjust the seat while driving; you may lose control of the vehicle. Adjust the driver's seat only when the vehicle is stationary.

Correct adjustment is very important for enhanced driving comfort and maximum efficiency of the passive safety systems.

#### Basic seat

The seat position can be adjusted using the special controls.



#### Backward/forward adjustment

Pull lever **B** up and slide the seat forward or backward to the desired position. Release the lever and "wiggle" in the seat to check that it is locked in place.

#### Warning




The backward/forward adjustment must consider the fact that airbag devices are placed in front of the driver and the passenger (see page 61).

Correct adjustment ensures there is adequate space between the airbag and the driver/passenger (see page 61).

#### Seat back rake adjustment

Turn knob **C** clockwise or counterclockwise until it reaches the required position.

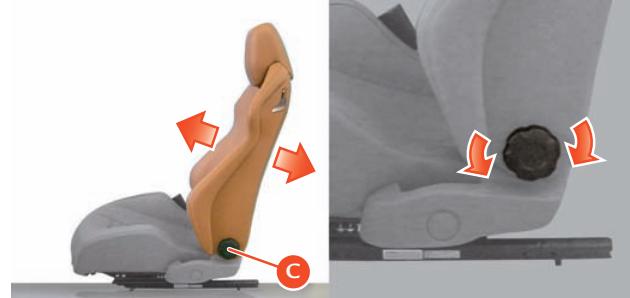

## Quick reference guide

#### *Tilting the backrest*

To tilt the seat, pull lever **L** up and push the backrest towards the front of the vehicle.

When the backrest goes back into position, it will automatically block once it has reached the correct position.


For further information on basic seat adjustment, refer to pages 160-161.

#### *Electrically-adjustable seat (optional)*

For further information on adjustment of the optional electrically-adjustable seat, refer to pages 162-163-164.

#### *Super Racing seat (optional)*

For further information on adjustment of the optional Super Racing seat, refer to page 165.



#### *Steering wheel*

The steering wheel can be electrically adjusted for rake and reach. It can only be adjusted if the ignition key is in position **II**.


Move control **A** (to the left of the steering column) in the four directions to adjust the steering wheel.

The position of the steering wheel is memorised together with the position of the external rear view mirrors when the driver's seat position is memorised (only if memorisation is available).

#### **Warning**



Do not adjust the steering wheel when the vehicle is moving.

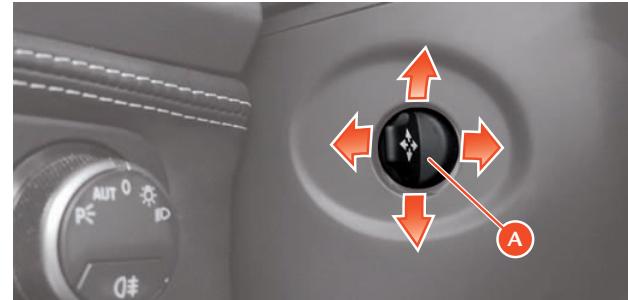



## Rear-view mirrors

### *Internal electrochromic mirror (optional)*

Hold the internal rear-view mirror and move it to the required position.

On request, the internal rear-view mirror can be fitted with an electrochromic mirror that automatically darkens to reduce the dazzling effect of the reflected light on the driver. The speed with which the mirror darkens depends on the intensity of the light.

By pressing button **B** you can activate/deactivate the electrochromic mode. When the electrochromic mode is activated, the green LED **D** comes on.

### *External rear-view mirrors*

These mirrors can be electrically adjusted using the control **C** (with the ignition key in position **II**) and are equipped with defogging elements.

- 1) Mirror selection: turn control **C** to the left or right lock position to select the mirror that requires adjusting.



- 2) Mirror positioning: move control **C** in the four directions (up – down – right – left) to adjust the selected mirror.
- 3) Mirror closure (optional): turn control **C** to the lower central lock position to close the rear-view mirrors.

Once adjusted, move the control **C** into the upper central position where it will be locked in order to avoid changing the external mirror setting inadvertently.


The mirrors will yield in both directions in the event of a collision; if necessary, the mirrors can be pushed both backwards and forwards.

### Warning



The rear-view mirrors must always be positioned correctly while driving.

**Do not adjust the rear-view mirrors when the vehicle is moving.**

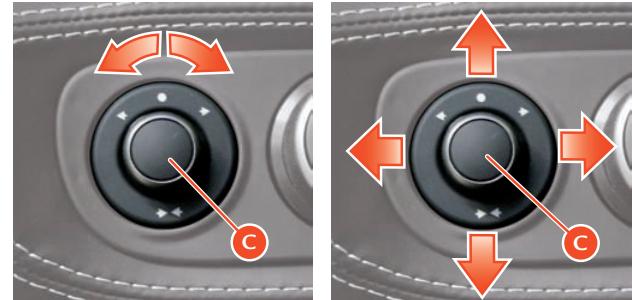



## Seat belts

### Warning





The seat belts must be properly adjusted and fastened at all times.

Correct use of the seat belts can reduce the risk of serious injury in the event of an accident or if the vehicle overturns.

#### Fastening the seat belts

After positioning the seat correctly:

- Grip the latch plate **A**, slowly pull the belt and insert the latch plate into the buckle **B** (if the belt locks while you are pulling it out, let it wind back a little and pull it out again without jerking it).
- Make sure that it has clicked into the locked position: hold the belt and pull it to check that the latch plate has been inserted correctly.
- Position the seat belt correctly.



If the driver's seat belt is not fastened, when you turn the ignition key to position **II**, the warning light on the instrument panel illuminates and remains lit as long as the seat belt is not fastened.

#### Unfastening the seat belts

- Push the release button **E**.
- Guide the latch plate **A** back to its rest position.

### Warning



Do not allow children to be held on a passenger's lap using only one seat belt for both of them.

For further information, refer to the "Safety" chapter on page 54.



2

### Ignition switch

The ignition key can be turned to 2 positions:

#### Position 0 - Stop

Engine off, key removable.

When the key is even only partially extracted, the steering column is locked.

The hazard warning lights and parking lights can be activated.


To facilitate steering wheel release, turn the steering wheel slightly clockwise or counterclockwise while turning the ignition key.

#### Position II - Start

When the key is turned to this position (key-on) the signals generated by the vehicle systems are checked.

The left and right TFT displays are activated on the instrument panel and when the signals have been checked, the gearbox display comes on (see page 120).

For further information, see page 87.



### Warning



Never remove the key when the vehicle is moving!

The steering wheel will lock with the first turn of the steering wheel.

Always remember to remove the key from the ignition when you get out of the vehicle!

Never leave children unattended in the vehicle.

Quick reference guide

41



## External lights and turn indicators

### Light switch

The switch A, on the dashboard to the left of the steering wheel, can be set to five different positions:

- 0 Lights off
- Running and number plate lights on (\*)
- Low beams on (\*)
- Parking lights

**AUT** Automatic operation of the external lights according to ambient light.

(\*) The relative warning light on the instrument panel comes on.



### High beams

To turn on the high beams when the light switch A is set to  $\text{ID}$ , pull back lever B on the steering wheel.

When the high beams are on, the relative warning light  $\text{ID}$  on the instrument panel comes on.

Then push lever B towards the dashboard or pull it back to turn off the high beams and turn on the low beams.

#### Important note



Follow the Road Regulations of the country you are travelling in for using the high beams.

### Flashing the headlights

The headlights can be flashed by pushing the left-hand lever B towards the dashboard.





#### Turn indicators

Quickly press the left indicator or right indicator button **C** on the steering wheel to switch on the relevant turn indicator.

The relative warning light or on the instrument panel comes on.

The turn indicator goes off when the steering wheel is realigned.

Holding down one of the two **C** buttons (for more than 0.3 seconds) temporarily switches on the relevant turn indicator: it is switched off after 3 flashes ("lane change" function).



#### Rear fog lights

The rear fog lights are turned on only if the high beams or low beams are on when button **D** is pressed.

##### Important note



Use the rear fog lights only in poor visibility conditions.

2

#### Hazard warning lights

Press button **E** to turn on the hazard warning lights. All the turn indicators will start blinking intermittently; these lights will operate with the ignition key in any position.

When the lights are on, the relative warning lights on the instrument panel and the button flash.

To turn them off, press the button again.

For further information, refer to the "Lighting" paragraph on page 130.



Quick reference guide

43



## Starting and driving the vehicle

### System start-up

After turning the ignition key to position II (key-on), the left and right TFT displays are activated on the instrument panel and system diagnosis is performed. During diagnosis, which lasts 5 seconds, a check is performed on the warning lights on the panel and the presence of any faults is checked.


Once the system check has been completed, the gearbox display is activated and the letter "P" (Parking) or "N" (Neutral) will be displayed.

### Important note



#### BEFORE YOU DRIVE

If the warning light A does not turn off after diagnosis, indicating a fault in the gearbox also shown by the symbol and special message on the left TFT display (see page 119), contact the FERRARI SERVICE NETWORK.



### Warning



Contact the FERRARI SERVICE NETWORK.

### Important note



The vehicle is equipped with an electro-hydraulically controlled gearbox system operated by means of paddles on the steering wheel.

The default setting for the DCT gearbox is always "Automatic" mode (see page 142).

Every time the vehicle is started, the DCT gearbox is in "Auto easy exit" mode (see page 142) unless the vehicle was in "Automatic" mode when the engine was turned off.

To exit the "Auto easy exit" mode operate the UP and DOWN paddles (while the vehicle is moving) or press the AUTO button on the centre console.



2

**Important note**

Immediately release the **UP** and **DOWN** paddles or button **R** after the gearbox display shows that the gear has been engaged; a prolonged manoeuvre would cause the gearbox failure warning light to turn on (see page 119) and triggering of the buzzer.

**Important note**

None of the gears can be engaged if the luggage compartment lid is open or not properly closed. When the vehicle is stationary, with the driver-side door open or not properly closed and the brake pedal released, the system disengages the gear engaged after approximately two seconds.

*Starting the engine*

Before starting the engine, make sure that the alarm system and all electrical devices with high power absorption are turned off.

- Make sure that the electric parking brake is applied and that the doors are closed.
- Hold the brake pedal down when starting the engine.

**Warning**

Do not press the accelerator pedal.

- Turn the ignition key to position **II** and wait for the gearbox display to come on.
- Press the **ENGINE START** button (see page 124) and release it as soon as the engine starts.

Do not hold the **ENGINE START** button down for a long time.

If the engine does not start, turn the key back to position **0** and wait for the gear display to go off before retrying.

**Warning**

Hold the brake pedal down while starting the engine.

**Quick reference guide**

45



If the engine fails to start after several attempts, check for one of the following causes:

- insufficient speed of the starter motor (flat battery)
- ignition device faulty
- electrical contacts faulty
- fuel pump fuses blown.

#### *Warming up the engine*

Do not run the engine at high speed until the engine oil temperature has reached at least 65-70 °C (149-158 °F), approximately.

#### *Starting the vehicle*

With the engine started, the vehicle stationary and the brake pedal pressed, pull the right-hand "UP" paddle towards the steering wheel to engage 1<sup>st</sup> gear.

Release the brake pedal and press the accelerator to start off.

With the engine running and the vehicle stationary, you can change directly from 1<sup>st</sup> or 2<sup>nd</sup> gear to R (reverse) by pressing R and from reverse to 1<sup>st</sup> by moving the UP paddle.



#### **Warning**



If the "UP" and "DOWN" paddles are not working, the message "Depress brake pedal and press LAUNCH to engage gear" will appear on the left TFT display; you can therefore engage the gear by pressing the LAUNCH button on the centre console (see page 157) and the brake pedal.

In these cases, the "Launch Control" function is not available. If the engaged gear was R, the LAUNCH button must be pressed twice to engage 1<sup>st</sup> gear.

#### **Important note**



When reverse is selected, an acoustic safety signal beeps intermittently as long as "R" is engaged.

If the system automatically selects 2<sup>nd</sup> gear when attempting to shift from R to 1<sup>st</sup> gear, this indicates that 1<sup>st</sup> gear has jammed. Therefore, this is not a malfunction, as it falls within the system operating logic. For the same reason, when shifting from 1<sup>st</sup> gear to "R", the system will automatically engage "N" if the gear has jammed.

During prolonged stops with the engine running, it is advisable to keep the gearshift in "N".

#### **Important note**



If you allow the vehicle to move forward in N, when UP or DOWN is requested, a gear will be engaged that corresponds to the speed of the vehicle.



#### *UP-shifting*

Use the right-hand **UP** paddle without releasing the accelerator pedal.

An **UP**-shift request is not accepted when engagement of the requested gear forces the engine to underrev or if an **UP**-shift is already in progress due to engine overrevving.

For further information, see page 140.

#### *DOWN-shifting*

Use the left-hand **DOWN** paddle without releasing the accelerator pedal.

A **DOWN**-shift request is not accepted if engagement of the requested gear forces the engine beyond a certain RPM, depending on the gear requested, or if a **DOWN**-shift is already in progress due to engine underrevving.

For further information, see page 140.

#### *"N" (Neutral) request*

With the engine running, pull both **UP** and **DOWN** paddles towards the steering wheel at the same time without pressing the brake pedal to request neutral "N".

If necessary, "N" can be requested at any speed. Subsequently, if an "**UP**" or "**DOWN**" shift is requested, the system will engage the gear most suited to the speed of the vehicle.

#### *Stopping the vehicle*

When the vehicle stops, the system automatically engages 1<sup>st</sup> gear unless Neutral has already been requested.

When the vehicle is stationary and the engine is running, hold the brake pedal down until ready to move off again.

#### *Switching off the engine*

The engine can be switched off with the gearbox either in "N" or with a gear engaged.

After turning the ignition key from position **II** to position **0**, the gearbox display will remain on for a few more seconds to display the engaged gear. If the gearbox is in "N" a buzzer will sound. Before switching off, the letter "**P**" is displayed on the gearbox display to inform the driver that the Park Lock has been activated.

#### **Warning**



Never leave the vehicle with the gearbox in "N". Always make sure that the letter "**P**" (Parking) appears on the gearbox display.

For further information, see page 156.

Passive safety.....	52
Active safety .....	53
Seat belts .....	54
How to fasten seat belts .....	56
Pretensioners.....	58
Auxiliary Occupant Protection Systems.....	60
Driver and passenger airbags.....	61
Side airbags.....	66
Fuel inertia switch.....	69
ABS and EBD .....	70
Stability and Traction Control.....	71
Electric parking brake .....	73
TPMS (optional) .....	74





3



## SAFETY



FERRARI has designed and built a high performance vehicle. In order to take advantage of the safety systems described below, it is essential to comply with the indicated regulations.

#### *Special recommendations*

This vehicle has been built to comply with homologation regulations that also concern safety and environmental protection. These high technological standards must always be accompanied by careful and cautious driving.

Particular attention must be paid to:

- Overheated components. High temperatures develop in the engine compartment near the exhaust system. Do not park the vehicle on paper, grass, dry leaves or other flammable materials. They could catch fire if they come into contact with hot parts of the exhaust system. Do not fit other heat shields or remove those fitted on the exhaust system. Do not let flammable substances come into contact with the exhaust system.
- Moving parts of the vehicle such as belts, fans, etc. They must always be adequately protected. Do not remove the guards or operate on the moving parts without taking due precautions.
- Installations under pressure such as braking system, air conditioning system, cooling system and lubrication system may create pressures inside them. Do not perform any operation which may cause gas or liquids to spill out with the risk of injury to persons and damage to things.

#### *Emissions*

##### **Warning**



- The exhaust gas generated by the running engine may be hazardous, especially when in closed spaces. As well as consuming oxygen, the engine discharges carbon dioxide, carbon oxide and other toxic gases.
- Fuel is highly inflammable and emits vapours which may be noxious if inhaled.  
Do not use naked flames or create sparks near the open fuel tank or in any other condition where fuel comes into contact with air.

#### *Lubricants*

##### **Warning**



- The oils used may also be flammable: take the same precautions as those adopted for fuel.

#### *Flammable fluids*

##### **Warning**



- The fluid in the battery is poisonous and corrosive. Do not let it spill out and come into contact with the skin, eyes or objects. Do not use naked flames or create sparks near the battery.

#### *Fuel inertia switch*

- See page 69.



### Warning



Seat belts must be worn at all times and must be properly fastened and adjusted!

Correct use of the seat belts can significantly reduce the risk and severity of injury if an accident occurs or if the vehicle overturns.

### Warning



For an effective restraining action, the seat belt must be fastened correctly with the seat backrest in the upright position.

The seat belt is fastened correctly when the upper part of the belt crosses the centre of the shoulder (not the neck) and the abdominal section is fitted over the hips (not the abdomen).

Make sure that the belt is not twisted and that it passes closely over your body; if not, in the event of a head-on collision, it may move and cause injury to the abdomen.

Avoid wearing bulky clothing that may interfere with the proper operation of the seat belts.

### Warning



Each seat belt has been designed to protect only one occupant. If more than one person uses the same seat belt, the risk of injury in the event of an accident is increased.

Do not sit babies, small children or other persons on your lap. If there is a collision, the weight of an adult may cause the child to be crushed by the seat belt causing severe or even fatal injuries.

3



## Passive safety

The passive safety system has been designed to reduce the risk and severity of injury if an accident occurs.

The vehicle is equipped with the following seat belts:

- 3-point driver's seat belt with pretensioner and load limiting device (see page 54)
- 3-point passenger seat belt with pretensioner and load limiting device (see page 54).

### Warning



Auxiliary safety systems are not a substitute for seat belts. All occupants must always wear a seat belt. Correct use of the seat belts combined with use of the auxiliary safety systems provides optimal protection to the occupants in various types of collisions.

The vehicle also has the following auxiliary occupant protection system components (see also page 60 "Auxiliary occupant protection systems"):

- front driver's airbag (for operating functions see page 61)
- front passenger airbag (for operating functions see page 61)
- driver's head protection side airbag (head bag) (for operating functions see page 66)
- passenger head protection side airbag (head bag) (for operating functions see page 66)
- seats (see page 160)
- deformable body

- occupant protection system ECU
- ECU auxiliary sensors
- instrument panel warning light (see page 61)
- inertia switch.

### Warning



The protective action of the airbags is always integrated with the seat belts and the pretensioners. The compulsory use of the seat belt is provided by the national regulations (in Italy, for example, by the Codice della Strada, i.e. Traffic Regulations).

## Deformable body

The deformable body absorbs shock and distributes it over the entire structure of the vehicle allowing progressive deceleration.

The passenger compartment structure, on the other hand, has been designed to provide maximum resistance without undergoing deformation in order to guarantee a protective survival cell for the occupants.



3

## Active safety

The aim of the active safety system is to reduce the risk of accidents and injury severity.

The vehicle has been designed to provide a high level of safety for whoever uses it. The following systems are specific active safety components:

- braking system
- air conditioning and heating system
- external lights
- buzzer and warning lights (flashing).

The braking system includes the mechanical brake system and the electronic stability and traction control system (ABS and EBD): this is designed to prevent the wheels from locking and to provide good handling and stability.

In some situations, fast acceleration is important to get out of dangerous situations. However, always use the accelerator with extreme caution. During acceleration of the driving wheels, the anti-skid system may help you in certain dangerous situations.

The air conditioning and heating system in the passenger compartment can add to driving comfort and keep you alert so that you can react quickly when necessary.

It is very important to be able to see the road clearly and be seen and external lights must be turned on when the conditions so require.



## Seat belts

Statistics show that when used correctly, seat belts reduce the risk of injury in various types of crashes including the risk of ejection from the vehicle and impact with the interior of the vehicle.

If not unfastened, the seat belts do not provide any type of protection. Before every trip, always make sure that all occupants are wearing their seat belts.

### Warning



Seat belts must be worn at all times and must be properly fastened and adjusted!

Correct use of the seat belts can reduce the risk of serious injury in the event of an accident or if the vehicle overturns.



### Warning




For an effective restraining action, the seat belt must be fastened correctly with the seat backrest in the upright position.

The seat belt is fastened correctly when the upper part of the belt crosses the centre of the shoulder (not the neck) and the abdominal section is fitted over the hips (not the abdomen).

Make sure it is not twisted and that it passes closely over your body; if not, in the event of a head-on collision, it may move and cause injury to the abdomen.

Avoid wearing bulky clothing that may interfere with the proper operation of the seat belts.

The seat belts have a lap-shoulder belt with an automatic emergency-locking retractor and are fitted with a pyrotechnic-powered pretensioner and an automatic system that reduces the force applied to the occupant.

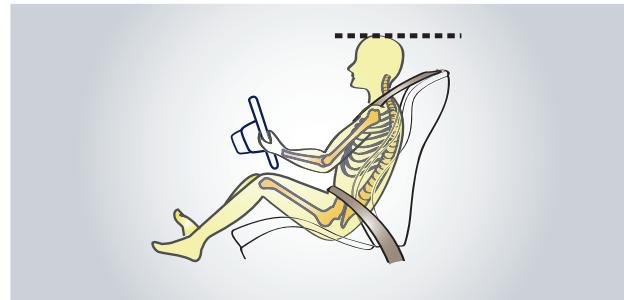

**Warning**

Do not let the seat belts come into contact with cutting edges. They may get damaged and may consequently break in the event of a collision.

**Warning**

Each seat belt has been designed to protect only one occupant. If more than one person uses the same seat belt, the risk of injury in the event of an accident is increased.

The seat belt must never be passed around a baby, child or other person sitting on a passenger's lap.

Do not sit babies, small children or other persons on your lap.

If there is a collision, the weight of an adult may cause the child to be crushed by the seat belt causing severe or even fatal injuries.

**Warning**

Do not attach or pin anything onto the seat belts: they may get damaged and may consequently break in the event of a collision.

**Warning**

If a seat belt has come into contact with cutting edges or was somehow perforated, we recommend that you have it immediately replaced by the FERRARI SERVICE NETWORK.

**3**



## How to fasten seat belts

### Warning



For an effective restraining action, the seat belt must be fastened correctly with the seat backrest in the upright position.


The seat belt is fastened correctly when the upper part of the belt crosses the centre of the shoulder (not the neck) and the abdominal section is fitted over the hips (not the abdomen).

Make sure it is not twisted and that it passes closely over your body; if not, in the event of a head-on collision, it may move and cause injury to the abdomen.

Avoid wearing bulky clothing that may interfere with the proper operation of the seat belts.

Once you have adjusted the seat correctly (see page 160):

- Grip the latch plate **A**, slowly pull the belt and insert the latch plate into the buckle **B** (if the belt locks while you are pulling it out, let it wind back a little and pull it out again without jerking it).



- Make sure that it has clicked into the locked position: hold the belt and pull it to check that the latch plate has been inserted correctly.

- Position the seat belt correctly.

If the driver's seat belt is not fastened, when you turn the ignition key to position **II**, the warning light **D** on the instrument panel lights up and remains lit until the seat belt is fastened.

55 seconds after a speed of 10 km/h (6 mph) is exceeded, a buzzer sounds warning the driver that the seat belt is not fastened.

When a speed of 20 km/h (12 mph) is exceeded, the buzzer activates immediately and stops after 90 seconds.

This acoustic signal is emitted only once, even if the vehicle speed goes above and below the above mentioned limits. It is repeated (when the vehicle speed is in the indicated ranges) only if the seat belt is fastened and unfastened again or, in any case, every time the engine is turned off and then on.





### Warning



Each seat belt has been designed to protect only one occupant.  
If more than one person uses the same seat belt, the risk of  
injury in the event of an accident is increased.

The seat belt must never be passed around a baby, child or  
other person sitting on a passenger's lap.


Do not sit babies, small children or other persons on your lap.

If there is a collision, the weight of an adult may cause the  
child to be crushed by the seat belt causing severe or even fatal  
injuries.

3

### Unfastening the seat belts

- Push the release button E.
- Guide the latch plate A back to its rest position.





## Pretensioners

The seat belts are fitted with pyrotechnic-powered pretensioners. The pretensioner is activated by the airbag ECU when there is a sufficiently severe head-on collision (impact direction between 11 and 1 o'clock p.m.) or a sufficiently severe side collision. The pretensioner is also activated when there is a sufficiently severe rear collision or a roll-over. The belt will rewind a few centimetres just before the restraining action begins, thereby improving the fitting across the occupant's body.

Activation of a pretensioner is signalled by the illumination of the warning light A on the instrument panel.

### Warning



Pretensioners that have been activated will no longer function and may not be repaired under any circumstances. Contact the FERRARI SERVICE NETWORK for replacement.



When a pretensioner is activated, a small amount of smoke is released. This smoke is not harmful.

### Warning



Activation of the pretensioners only depends on the status of the seat belts and is not affected by the occupants' presence.

If the seat belt is not fastened, the pretensioner will not activate, even if the seat is occupied.

The seat belts are fitted with a load limiting device. The load limiting device is located in the belt retractor and allows controlled release of the belt during a collision thereby limiting the impact that the belt has on the occupant's body.

### Maintenance of seat belts and pretensioners

- Following a serious collision, replace the seat belts that were worn at the time even if they do not appear to be damaged.
- Periodically check that the screws on the anchor points are tight and that the seat belt is in perfect condition and slides smoothly.
- The seat belt must be kept clean; the presence of any dirt could prevent the seat belt retractor from working properly.
- To clean the seat belt, wash it by hand with mild soap and water and let it dry. Do not use strong detergents, bleach or aggressive solvents, as they can weaken the fibres.

Make sure the retractors do not get wet: proper functioning is only ensured if they are kept dry.

- The pretensioner requires no maintenance or lubrication.



If immersed in water or mud, it must be replaced.

- Pretensioners must be replaced at regular intervals as indicated in the "Warranty Booklet".

**Important note**



All work on any part of this safety system must be performed by the FERRARI SERVICE NETWORK.

**Warning**



Removing or making modifications of any kind to the seat belts, belt retractors and pretensioners is not allowed.

Maintenance work involving strong impacts, vibrations or heating of the pretensioner area may activate them; vibrations caused by road bumps will not have this effect.

**3**



## Auxiliary Occupant Protection Systems

### Warning



Auxiliary Occupant Protection Systems are not a substitute for seat belts but increase their efficiency. Correct use of the seat belts, with the supplementary action of the Auxiliary Occupant Protection Systems, offers maximum protection in the event of a head-on collision or vehicle roll-over.

#### *Auxiliary Occupant Protection System components*

The Auxiliary Occupant Protection System components are:

- Seat with built-in headrest.
- Dual-stage front driver's airbag.
- Dual-stage front passenger airbag.
- Driver's head protection side airbag (head bag).
- Passenger head protection side airbag (head bag).
- Driver's seat belt (3-point with pretensioner and an automatic system that reduces the force applied to the occupant).
- Passenger seat belt (3-point with pretensioner and an automatic system that reduces the force applied to the occupant).
- Electronic Control Unit (ECU).
- Additional sensors.
- Instrument panel warning light.
- Deformable body.

The front driver's airbag and front passenger airbag have been designed to increase the level of protection given by the seat belts in the event of a head-on collision (see page 61).

The driver's head protection side airbag and passenger head protection side airbag have been designed to increase the level of protection given by the seat belts in the event of a side collision and are placed between the occupant's head and external structures which could penetrate the passenger compartment and cause injury (see page 66).



### Warning



The warning light A comes on when the ignition key is turned to position II. If no malfunctions are detected, it goes out after 4 seconds. If the warning light does not come on, if it remains on or if it comes on while driving, contact the FERRARI SERVICE NETWORK immediately.

### Driver and passenger airbags

#### Warning



The front airbags do not provide protection in the event of side-on collisions, some head-on/angular collisions, roll-overs or subsequent collisions (if there is a second collision once the airbags have been deployed in an earlier collision). The seat belts have been designed to reduce the risk of injury in the event of a roll-over or subsequent collision.



### Warning



The front airbags have been designed not to inflate if a minor collision occurs. The seat belts have been designed to reduce the risk of injury if a minor collision occurs.


#### Warning



The driver and the passenger must maintain a distance of at least 25 cm (10 in.) from the steering wheel and the dashboard. Always drive with your hands on the rim of the steering wheel so that in the event of activation, the airbag can deploy without obstruction.

Driving with your hands on the steering wheel spokes or on the airbag cover increases the risk of injury for your wrists and arms.

3

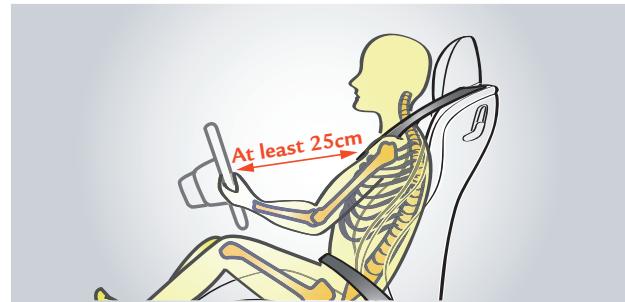

Safety

61



### Warning



The front passenger must be seated correctly and must avoid putting hands, feet or legs on the dashboard since if the front airbag is activated, it may cause injury to legs and prevent the airbag from working properly.

#### Operating

The front airbags are controlled by an ECU which activates them when there is a sufficiently severe head-on collision (direction of impact between 11 and 1 o'clock p.m.).

In the event of a collision with an impact force that causes deceleration that exceeds the value set for the internal sensor, the ECU will transmit a signal to deploy the airbags. The airbags will begin to inflate, breaking the cover along the breakage line and will deploy completely in a few tenths of milliseconds. Once deployed, they will serve as protection between the driver and/or passenger and structures that could cause injury.

The airbags deflate immediately afterwards.

### Warning



The driver and passenger should not carry objects (drink cans or bottles, pipes, etc.) that may cause injury if the airbags are activated.

Persons, animals or items must not be placed between the airbags and the occupant.

### Environment



When the system is activated, gases are released in the form of fumes, together with the gas used for inflating the airbags. These gases are not harmful.

**The driver's airbag** has been designed to be deployed according to the following strategy:

- For low severity crashes, the airbag control unit will not deploy the airbag.
- For crashes of higher severity, the control unit will deploy the driver airbag in low energy mode.
- For crashes of even higher severity, the control unit will deploy the driver airbag in high energy mode.

**The passenger airbag** has been designed to be deployed according to the following strategy:

- For low severity crashes, the airbag control unit will not deploy the airbag.
- For crashes of higher severity, the control unit will deploy the passenger airbag in low energy mode.
- For crashes of even higher severity, the control unit will deploy the passenger airbag in high energy mode.

### Warning



The driver and passenger must always fasten their seat belts and sit in an upright position, as far as possible away from the airbag, in order to have optimal protection in all types of collision.





### Warning



Always keep the backrest of your seat in the upright position and sit with your back properly resting against it.

### Important note



Do not modify the system components or wiring, under any circumstances.

With the ignition key inserted and in position **II**, although the engine is off, the airbags can still be activated when the vehicle is stationary if it is hit by a moving vehicle.

Remember that if the ignition key is set to **0** none of the safety devices (airbags or pretensioners) is activated in the event of a collision; failure of the airbags to inflate in these circumstances is not indicative of a system malfunction.



### Important note



Do not cut or tamper with the connectors of the airbag harness or on the airbag modules.

### Warning



Do not cover the steering wheel and the padded panel on the dashboard on the passenger's side with adhesive tape or treat it in any way.

**3**

### Warning



Do not place objects above or near the top of the dashboard and the steering wheel.

In the event that the airbags are deployed, these objects would be projected into the passenger compartment at a high speed that would seriously jeopardise the safety of the occupants.

### Warning



The airbag modules are subject to wear and tear and must be replaced at the intervals indicated in the "Warranty Booklet" EVEN if the vehicle has NOT been involved in a collision.

**Safety**

**63**



### Warning



Do not modify the airbag modules in any way (indicated in the relevant picture). Do not damage the airbag modules (for example pinning something onto them or pressing objects against their covers).

If, for any reason, an airbag cover gets damaged, have the airbag module immediately checked by the FERRARI SERVICE NETWORK. Activation of a damaged module could cause serious or fatal injuries.

### Important note



Do not remove or dismantle parts of the steering wheel, dashboard or door panels; if necessary, this procedure should only be performed by a FERRARI SERVICE NETWORK CENTRE.

### Important note



All the airbag system components must be replaced after an accident that caused airbag deployment.

### Important note



Following an accident not involving airbag deployment, contact the FERRARI SERVICE NETWORK to have the system checked and any system components that may be damaged or malfunctioning replaced.

### Important note



The airbag system components have been specially designed only for this specific vehicle model. Do not use them on a different vehicle model, as this may cause serious damage and consequent injury, even fatal, to the occupants in the event of an accident.

### Warning



Damaged or defective components of the airbag system cannot be repaired and must be replaced.

Improper operations performed on the system components may cause failures or accidental deployment or failure of the airbags to inflate with consequent damage and injury, even fatal.

### Environment



To scrap the vehicle, please contact the FERRARI SERVICE NETWORK to have the airbag system deactivated.



#### Important note



If the vehicle has been stolen or there has been an attempted theft, have the airbag system checked by the **FERRARI SERVICE NETWORK**.

#### Important note



The label E on the passenger-side sun visor bears the airbag system expiry date. When this expiry date is approaching, contact the **FERRARI SERVICE NETWORK** to have the system replaced.

The label F indicates the presence of the airbag system.

3



## Side airbags

### Warning



Airbags are not a substitute for seat belts but they increase their efficiency. Correct use of seat belts, with the supplementary action of the side airbags, offers maximum protection in the event of a collision or vehicle roll-over.

### Side airbag system components

### Warning



The side airbags fitted on the vehicle have not been designed to reduce the risk of being thrown out in the event of vehicle roll-overs.

The vehicle has 2 side airbags, one in the driver-side door and the other in the passenger-side door.

The head bag system consists of 2 airbags, one on each door. In the event of a side collision, the airbag on the impact side deploys immediately to protect the occupant's head.

### Warning




When the ignition key is turned to position II, the warning light A will come on. If no malfunctioning in the airbag system is detected, it will go off after 4 seconds. If the warning light does not come on, if it remains on or if it comes on while driving, contact the FERRARI SERVICE NETWORK immediately.

### Operating

The side airbags are controlled by the ECU that activates them when a sufficiently severe collision occurs.

In the event of a side collision with a force of impact exceeding the limit set by the ECU, this will transmit a signal that activates the pretensioner and the side airbag on the impact side.





The airbag will start inflating, opening its cover along the breaking line, until it is fully deployed (in a few hundredths of seconds). After deployment, the side airbag will be positioned as a protection between the driver's or passenger's head and the external structures which could penetrate the passenger compartment and cause injury. The airbags deflate immediately afterwards.

Side airbag activation is not affected by the front passenger's height or weight. The side bag is activated whenever the airbag ECU detects a collision of a sufficient impact force for deployment.

#### Warning



Never drive with your head out of the window as this places your head and neck in the airbag deployment area. In the event of a side-on collision, this position increases the risk of being thrown out of the vehicle and compromises the protective effect of the side airbags.

#### Warning



Never place an object over or near the airbag covers. In the event that the airbags are deployed, these objects would be projected into the passenger compartment at such high speed as to seriously jeopardise the safety of the occupants.

#### Warning



Never modify the airbag modules. Do not damage the airbag modules and trim panels above them (for example, the area above the door panel) (by pinning something onto them or pressing objects against their covers, for example).

If, for any reason, an airbag cover gets damaged, have the airbag module immediately checked by the FERRARI SERVICE NETWORK. Activation of a damaged module could cause serious injuries.

3

#### Important note



Please consider that the airbag ECU is not capable of automatically detecting damages involving the airbag covers.

Do not cover the upper part of the driver-door and passenger-door panels with adhesive tape or material and do not treat them in any way.

#### Warning



After deployment, the airbag components can no longer offer any protection; therefore, they cannot be repaired and must be replaced. After activation of a head bag, have it replaced by the FERRARI SERVICE NETWORK.

Safety

67



### Warning



The airbag modules are subject to wear and tear and must be replaced at the intervals indicated in the "Warranty Booklet" EVEN if the vehicle has NOT been involved in a collision.

### Important note



The label E on the passenger-side sun visor bears the airbag system expiry date. When this expiry date is approaching, contact the FERRARI SERVICE NETWORK to have the system replaced.

### Important note



Never remove the door panel. If required, this operation must be performed by the FERRARI SERVICE NETWORK.





### Fuel inertia switch

The fuel inertia switch is a safety device which deactivates the fuel pump relays if a collision occurs.

A symbol appears on the left TFT display and the hazard warning lights come on to indicate that the switch has been activated.

When the fuel inertia switch is activated, the doors are also unlocked (if locked) and the central dome light comes on.

#### Warning



The fuel pump relays can be reactivated by pressing the button in the battery compartment which can be accessed by opening the passenger side footrest.

3





## ABS and EBD

The **ABS** system is a safety device which activates to prevent wheel locking if the driver presses the brake pedal too sharply, especially under low grip conditions.

The system is composed of:

- electro-hydraulic unit
- electronic brake-force distribution **EBD**
- four speed sensors on the wheels, incorporated in the bearings
- the entire ESP sensor system (steering angle sensor, accelerometer, yaw sensor, etc.).

These features add to the vehicle's standard braking system, without changing its characteristics.

### Important note



When the **ABS** system is active, during emergency braking or in poor grip conditions, a "pulsing" sensation will be felt through the brake pedal. Hold the brake pedal down to continue the braking action.

When one of the wheels starts locking, the hydraulic control unit controls the braking circuit by running a 3-phase cycle:

- reduction (if necessary)
- maintenance
- pressure increase in the hydraulic circuit.

In the event of **ABS** activation under braking, these regulation cycles will be repeated until the car comes to a stop or pressure on the brake pedal is reduced.

In addition, the system offers the following advantages:

- Driving stability (no skidding): even in the event of sharp braking approaching wheel locking.
- Manoeuvrability (no side-skidding on sharp turns).

This means that even when an emergency situation requires sudden braking, the driver can avoid obstacles, or brake on a curve, without affecting the vehicle stability.

### Warning



**ABS** system performance remains unaltered as long as the speed limit for the tyre side grip is not exceeded. If this limit is exceeded, vehicle skidding cannot be avoided.

- Optimal braking distance:

depending on the type of road surface, the braking distance may be reduced by as much as 40%.

### Warning



The **ABS** system does NOT exempt the driver from driving carefully and responsibly at all times.



### Important note



The **ABS** system cannot compensate for driving too fast for traffic or road conditions, worn tyres, worn braking system components or driving errors.

The **ABS** system has been designed for the sole purpose of assisting the driver in controlling braking under extreme conditions in which he/she could instinctively cause the wheels to lock.

### FBP - FERRARI Brake Prefill

Brake design parameters provide a set distance between the brake pads and discs (the "air gap"): as soon as the brake pedal is pressed, the presence of the air gap leads to a slight delay in brake response.

The FBP (FERRARI Brake Prefill) system eliminates the air gap by applying slight pressure to the braking system as soon as the accelerator pedal is released just before braking. This results in more immediate brake response and reduces braking distance during emergency braking thereby improving safety.

### CST - Stability and Traction Control

The **CST** is composed of two main systems:

**VDC** Vehicle Dynamics Control, performed through the braking system

**F1-Trac** traction control, performed through engine torque modulation, depending on maximum grip on the road and secondary systems that are always active such as the **ABS** and **EBD**.

To provide optimal control in different driving and grip conditions, four different settings have been developed:

- **Level 1:** (Manettino set to **Low-grip**) ensures stability and maximises traction on every type of road surface, both in low and very low grip conditions, by means of engine and brake control (in this condition, the standard **ASR** system is activated instead of the **F1-Trac** function).
- **Level 2:** (Manettino set to **SPORT**) ensures stability and maximises traction only in medium- to high-grip conditions by optimising engine and brake control.
- **Level 3:** (Manettino set to **RACE**) enhances the racing features of the vehicle by reducing engine control to a minimum and maximising brake control. This mode is designed to ensure stability on the race track in high grip conditions only.
- **Level 4:** (Manettino set to **CT OFF**) further enhances the racing style performance of the vehicle: **F1-Trac** traction control is deactivated whereas stability control remains active when a certain level of sideslip is exceeded. **F1-Trac** traction control is off. Stability is NOT guaranteed.
- **Level 5:** (Manettino set to **CST OFF**) **CST** off. Stability is NOT guaranteed, but all the other auxiliary systems such as the **ABS**, **EBD** and the **E-Diff 3** electronic differential remain active. During braking, the **VDC** system remains active.

3

Safety

71



## F1-Trac

**F1-Trac** is a traction control system that derives directly from FERRARI's expertise in F1 vehicles.

**F1-Trac** is faster and more accurate than traditional control systems and is capable of delaying and minimising engine torque adjustments as required in order to ensure the desired trajectory. The system estimates the maximum available grip in advance, by continuously monitoring the relative wheel speed and using an auto-adaptive operating logic. Comparing this information with the vehicle dynamics model stored in the control system, **F1-Trac** optimises the vehicle behaviour by controlling engine torque delivery.

### Important note



**F1-Trac does not work when the Manettino is set to CT OFF and CST OFF driving modes.**

The main feature that distinguishes the F1-Trac system from a traditional traction control system lies in its ability to estimate grip level accurately which allows the driver to make full use of the vehicle's performance driving potential.

The **F1-Trac** system guarantees:

- maximum traction when coming out of bends;
- driving stability and ease even under extreme driving conditions;
- driving comfort.

On this vehicle, integration of the **F1-Trac** and E-Diff 3 systems ensures maximum performance and stability.

## E-Diff 3

The vehicle is equipped with an electronic differential, working on the rear axle, which continually performs a variable check on the locking between the two axle shafts.

The electronic differential system, integrated with **F1-Trac** traction control, is capable of improving:

- performance;
- directional stability of the vehicle;
- active safety even when close to grip limit;
- driving comfort and handling.

The system is based on the analysis and forecast of vehicle performance in all possible conditions. This is done by continually monitoring the pressure of the clutch actuator on the differential.

The input signals are the dynamic parameters of the vehicle that the control system translates into a torque difference between the two driving wheels.

On bends, the electronic differential can:

- stabilise the vehicle when the accelerator pedal is released by locking the rear axle;
- control vehicle dynamics by locking the differential according to lateral acceleration and vehicle speed;
- maximise vehicle stability and, at the same time, acceleration on bends by locking the differential according to lateral acceleration, speed, engaged gear and torque produced by the engine.

To obtain these results, the electronic differential system interacts with the **F1-Trac**, **CST**, **ABS** systems, F1 gearbox and suspension damping control.




## EPB - Electric parking brake

On this vehicle the parking brake is actuated by an electric motor. The parking brake can be applied and released using the special control **B** on the dashboard to the left of the steering wheel. A special warning light comes on on the panel to indicate that the parking brake has been applied (see page 117).

It is deactivated by pushing down the brake pedal and pressing button **B**. The warning light will go off when the parking brake has been released completely.

The electric parking brake can be used as an emergency brake when the vehicle is in motion. If this is the case, the system acts on all four wheels until button **B** is released by communicating with the ESP system which prevents locking.

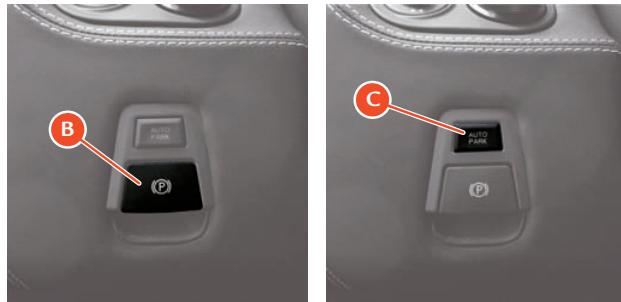

### Warning



Always apply the handbrake when the vehicle is parked.

The vehicle should be blocked. If this is not the case, please contact the FERRARI SERVICE NETWORK.

3

#### Autohold function

The EPB Autohold function automatically activates the electric parking brake when the engine is switched off. When the key is turned to on, the Autohold function is always activated but can be temporarily deactivated by pressing the **AUTO PARK C** button.

When the **C** button is pressed, the message "PARK OFF" is displayed on the left TFT display for 5 seconds. If button **C** is pressed again, then the message "PARK ON" is displayed on the left TFT display for 5 seconds.

#### "Automatic Vehicle Holding" AVH function

The electric parking brake provides optimised release on hill starts due to its Automatic Vehicle Holding function: in certain circumstances, this system keeps the vehicle braked using differentiated brake shoe/pad release so that there is time to move your foot from the brake pedal to the accelerator without the vehicle moving backwards.

Safety

73

## Tyre temperature and pressure monitoring system (TPMS) (optional)

The vehicle is equipped with a system that measures the tyre pressure and temperature using special sensors fitted inside the wheel rims next to the air valve. These sensors transmit a signal that is received by the antennas on the car body, behind the gravel guards, that are connected to the ECU.

### Important note



The system may be momentarily affected by radioelectrical interference from devices that use similar wavelengths.

The ECU processes this information and transmits data on tyre pressure and temperature and any system errors to the instrument panel.

The signal transmitted by the ECU activates symbols on the left TFT display (see page 94) with two priority levels: a **soft warning** (SW) if the pressure loss is **0.2 bar more** than the rated pressure and a **hard warning** (HW) if it is **0.5 bar more** or there is a dynamic decrease of over 0.2 bar/min.

The TPMS can be calibrated using the special menu item in the left TFT display (see page 96).

### Important note



System calibration using the special menu item on the left TFT display is necessary after replacement or inflation of a tyre or tyres.

### Warning




The TPMS warns the driver that the tyre pressure has decreased. However, this does NOT exempt the driver from periodically checking that the tyres are inflated to the indicated pressure.

In addition, the system does NOT warn the driver of damage to the tyres by external agents.

### Displaying messages on the left TFT display

By using the commands on the left TFT display (see page 94), the driver can access the TYRES screen page which displays the vehicle symbol with the pressure and temperature values of each tyre as shown in example 1.

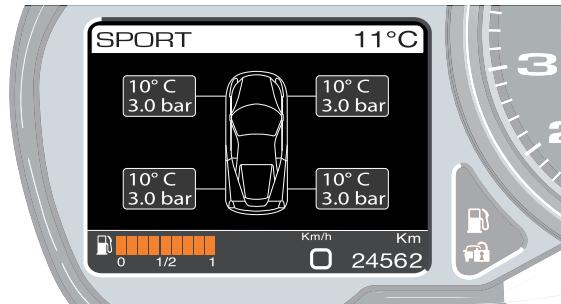



If an event occurs that needs to be displayed as a symbol and/or special message when the TYRES screen page is displayed, the screen page is reduced as shown in example 2. For further information, refer to the "Fault displaying logic" paragraph on page 111.

#### *Low pressure*

Regardless of the type of screen page on the left TFT display, when the instrument panel receives the signal from the tyre pressure ECU that the pressure level of one or more tyres is below the alarm threshold, the screen page shown in example 3 (for a warning related to only one tyre) or example 4 (for a warning related to several tyres) appears immediately.

The screen page is displayed for 20 seconds and then the screen page that was previously displayed reappears. If the failure persists, the screen page shown above (example 3 or 4) will be automatically displayed for 20 seconds the next time the engine is started.

The driver can call up the TYRES screen page at any time to display which tyres have low pressure (example 5).

**3**



**Safety**


**75**



Occasionally, the system may not detect which wheel signals a failure. If this is the case, then only the message “Check tyre pressure” will be displayed as shown in example 6.

#### Tyre puncture

Regardless of the type of screen page on the left TFT display, when the instrument panel receives the signal from the tyre pressure ECU that the pressure level of one or more tyres is below the alarm threshold, the screen page shown in example 7 (warning not to proceed for vehicles fitted with normal tyres) or example 8 (warning to proceed at a maximum speed of 80 km/h (50 mph) for vehicles fitted with Run Flat tyres) appears immediately. At the same time, a warning light comes on on the panel (see page 117) in fixed mode.





The screen page is displayed for 20 seconds and then the screen page that was previously displayed reappears whereas the warning light remains on in fixed mode.

If normal tyres are used, the failure follows the same display logic as the other priority level 0 faults (see the “Fault displaying logic” paragraph on page 111) until the situation is corrected and the system is recalibrated.

If the vehicle is fitted with Run Flat tyres, the maximum distance allowed in a “tyre puncture” state is 100 km (62 mi). The instrument panel will calculate the residual tyre life and will redisplay the screen page shown in example 8 after 50 km (31 mi). The same screen page (warning not to exceed a maximum speed of 80 km/h) is displayed if the vehicle exceeds 80 km/h (50 mph). Once the distance of 100 km (62 mi) has been exceeded, the panel displays the screen page shown in example 7 (warning not to proceed).

If you call up the TYRES screen page, you can identify the punctured tyre at any time (example 9).





If another tyre is punctured, the instrument panel will update the number of km (mi) which can still be driven according to the distance driven after the previous puncture and will display the screen page shown in example 10.

While priority level 0 (normal tyre puncture) or priority level 2 (Run Flat tyre puncture with maximum speed limit not exceeded and tyres still usable) faults are being displayed, the driver can press the **OK** button with “ESCAPE” function (see page 111): the screen page disappears whereas the warning light on the panel remains on in fixed mode.




As above, the TYRES screen page can be called up at any time to display which tyres are punctured (example 11).

Occasionally, the system may not detect which wheel signals a failure. If this is the case, the screen page shown in example 12 (for vehicles fitted with normal tyres) or example 13 (for vehicles fitted with Run Flat tyres) will be displayed.

The symbol and message are displayed for 20 seconds and then the screen page that was previously displayed reappears whereas the warning light remains on in fixed mode.

If the vehicle is fitted with Run Flat tyres, the instrument panel will calculate the residual tyre life and will redisplay the screen page shown in example 13 after 50 km (31 mi). The same screen page (warning not to exceed a maximum speed of 80 km/h) is displayed if the vehicle exceeds 80 km/h (50 mph). Once a distance of 100 km (62 mi) has been exceeded, the panel displays the screen page shown in example 12 (warning not to proceed).

3



Safety

77

#### *System not calibrated*

If the system has not been calibrated or one or more tyres have been replaced, the symbol and message shown in example 14 will be displayed. At the same time, the warning light on the instrument panel (see page 117) will flash for 90 seconds.

When the display cycle ends (20 seconds), the symbol and message disappear and the screen page that was previously displayed reappears whereas the warning light remains on until the system has been calibrated.

The TPMS can be calibrated using the special menu item in the left TFT display with the ignition key in position II and the engine off.

To calibrate the TPMS, call up the MENU screen page on the left TFT display (see page 96) with the ignition key in position II and the engine off. Once the MENU screen page appears, select the items "Car setup", "Calibrate TPMS".



When the Menu item is displayed and the subsequent calibration accepted, the screen page shown in example 15 appears for 5 seconds.

#### **Warning**



Before calibrating the system, make sure that the tyre pressure corresponds to the indicated pressure values (see page 28). If this is not the case, the TPMS may issue wrong low pressure indications.





#### **TPMS failure**

The screen page shown in example 16 is displayed in the following circumstances:

- malfunction in the circuit and/or wiring connecting the ECU
- signal is not received by one or more sensors due to a faulty, broken or flat battery
- fault in the TPMS ECU.


At the same time, a warning light comes on on the panel (see page 115) in flashing mode for 90 seconds. The warning light then remains on in fixed mode until the situation is corrected.

The TYRES screen page cannot be called up by the driver.

#### **System temporarily not active**

The screen page shown in example 17 is displayed in the following circumstances:

- overheating of sensors
- during calibration (the TPMS ECU does not recognise the sensors)
- radio frequency that interferes with the wheel sensor signal.



At the same time, a warning light comes on on the panel (see page 115) in flashing mode for 90 seconds. The warning light then remains on in fixed mode until the situation is corrected.

The TYRES screen page cannot be called up by the driver.

#### **System not active**

For a few seconds at key-on, if the TPMS has been deactivated by a diagnostic tool, the screen page in example 18 is displayed.

At the same time, a warning light comes on on the panel (see page 117) in flashing mode for 90 seconds. The warning light then remains on in fixed mode until the situation is corrected.

The TYRES screen page cannot be called up by the driver.

**3**



Doors .....	82
Engine compartment lid.....	83
Luggage compartment lid .....	84
Ignition switch.....	87
Fuel filler cap and neck .....	88
Power windows .....	90
Instruments and gauges .....	92
Controls on the steering wheel .....	124
Lighting.....	130
Driving the vehicle .....	136
EPB - Electric parking brake .....	154
Park Lock .....	156
Launch Control .....	157
Seat adjustment .....	160
Air conditioning and heating system .....	168
Passenger compartment accessories .....	172



4



## ABOUT YOUR VEHICLE



## Doors

When a door is opened or closed, the window automatically moves down by approximately 2 centimetres/0.8 inches (to its “target position”) to avoid colliding with the upper weather strip.

When the door is closed, the window automatically moves up until it reaches the “upper limit”.

### Opening from the outside

Using the remote control, deactivate the alarm and the central door locking system, or turn the key in the lock to deactivate the central door locking system.

To open the door, pull handle **A**: the window will move down to its “target position”. When the door is closed, the window will move up until it meets the upper limit.



### *Locking and opening the doors from the inside*



#### Warning



Always carefully check manually that the doors have been closed properly to prevent them from opening while driving.

Both doors can be locked by activating/deactivating the “LOCK/UNLOCK” **B** button on the roof panel. To lock the doors, press button **B**; when the door lock is activated, the light on button **B** comes on. To deactivate the door lock, press button **B** until the light goes out.

A function that automatically inserts the door lock when the vehicle is moving at a speed of 20 km/h (12 mph) or over can be activated on the “Car setup” menu on the left TFT display of the instrument panel (see page 96).






If you pull handle **C** to open the door, the window will move down to its target position. When the door is closed, it will move up until it meets its upper limit.

If handle **C** is lifted without opening the door, the window will move down to its target position and stop and if the door is not opened after 2 seconds, the window will move back up until it meets the upper limit. Therefore, to open the door, release handle **C** and pull it again.

When the opening handle is operated, both doors are unlocked.

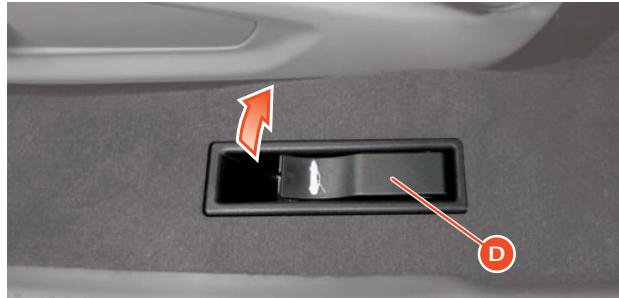

## Engine compartment lid

### *Opening*

Pull release lever **D** on the driver-side internal sill.

Lift the engine compartment lid. The lid is held open by two gas struts **E**.

The engine compartment lid can also be opened with the ignition key at off.

### *Closing*

Lower the lid until it is closed and press down near the lock until you hear it click in place.

#### **Warning**



Always check manually that the engine compartment lid has been closed properly to prevent it from opening while driving.

**4**





#### ***Emergency Opening***

If the lid opening lever does not work, pull string **N** in the fuel tank filler neck compartment to open the engine compartment lid.



#### **Luggage compartment lid**

##### ***Opening***

The luggage compartment lid can also be opened with the ignition key at off.

Push release button **F** on the left edge of the driver-side floor or press button **G** on the ignition key for more than 2 seconds.

Stand in front of the vehicle, slightly lift the lid and pull the retaining lever **H** to lift it completely.

The lid is held open by two gas struts **L**.

The luggage compartment is illuminated by an internal light that comes on automatically when the luggage compartment lid is opened.





### Important note



After removing the battery from the vehicle or disconnecting it from the electrical system using the special switch (see page 200), a door lock/unlock cycle must be performed using the buttons on the key when reconnecting so that the release button **F** resumes normal operation (electronic system self-acquisition procedure).

### Closing


Lower the lid until it is closed and press down near the lock until you hear it click in place.

### Warning



Always check that the luggage compartment lid has been closed properly to prevent it from opening while driving.

4



## About your Vehicle

85



#### *Emergency Opening*

If the luggage compartment lid opening button does not work, there is a string for manual emergency opening underneath the dashboard to the left of the steering wheel as shown by the arrow in the figure.





## Ignition switch

The ignition key can be turned to 2 positions:

### Position 0 - Stop

Engine off, key removable.

When the key is even only partially extracted, the steering column is locked.

The hazard warning lights and parking lights can be activated.

To facilitate steering wheel release, turn the steering wheel slightly clockwise or counterclockwise while turning the ignition key.

### Position II - Start

When the key is turned to this position (key-on) the signals generated by the vehicle systems are checked.

The left and right TFT displays are activated on the instrument panel and when the signals have been checked, the gearbox display comes on (see page 120).

## Warning



Never remove the key when the vehicle is moving!

The steering wheel will lock with the first turn of the steering wheel.

Always remember to remove the key from the ignition when you get out of the vehicle!


Never leave people who are more subject to injury unattended in the vehicle.

4

### Key lock

If more than 20 seconds elapse after turning the key to position 0, the key lock device must be released to remove the key:

press button K and remove the key at the same time.



## About your Vehicle

87



## Fuel filler flap and neck

### Warning



Always turn off the engine during refuelling.

Do not smoke or use naked flames when refuelling. There is a risk of fire.

The following can be harmful for your health:

- fuel coming into contact with your skin
- inhaling fuel vapours.

### Opening

To open the fuel filler flap, press button **M** on the left edge of the driver-side floor.


### Closing

To close the fuel filler flap, push it until it clicks in place.



### Emergency Opening

If the opening button does not work, the fuel filler flap can be opened manually by pulling the cable **P** on the right-hand side of the engine compartment.

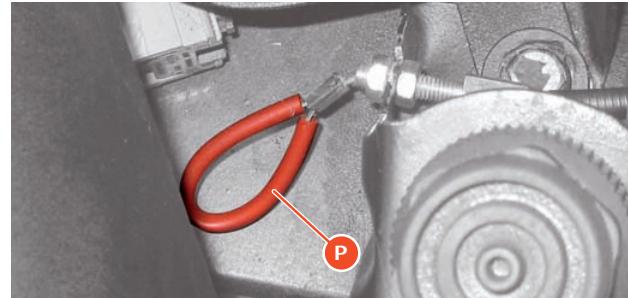



#### **Capless filler neck**

This vehicle has a capless filler neck for fuelling. This system allows you to refuel by opening the fuel filler flap and simply placing the nozzle in the filler neck without having to unscrew a cap and screw it up again.

Two flaps placed in series, both with airtight seals, act as a cap. The external flap is locked by a series of "teeth" and the only way to open the external flap correctly is by inserting a petrol pump nozzle.



#### **Warning**



Place the nozzle in the filler neck carefully to avoid damaging the device seal.

Do not try to open the external flap of the filler neck by pushing it with your fingers or lever it open using unsuitable tools (e.g. screwdrivers). This may damage the external flap mechanism and the seal.

#### **Warning**



Do not overfill the fuel tank; this may cause the fuel to leak out.

After fuelling, wait for about 5 seconds before slowly removing the nozzle from the filler neck: in this way, the last drops of fuel will flow into the tank and will not drip onto the vehicle.

**4**

#### **Warning**



Do not place funnels or portable container nozzles in the filler neck.

If you need to refuel from a portable fuel container, use only the funnel supplied in the tool bag (see page 178) that releases the automatic closing device.



## Power windows

The power windows can only be used with the ignition key in position II.

### Driver-side power window

Press button A to move the window up or down.

This allows manual operation (partial opening/closing) or automatic operation (complete opening/closing): press button A and quickly release to activate manual operation; if the button is pressed at length (over 0.3 seconds), automatic window operation is activated. The window will only stop when it reaches the end of its travel or by pressing the button again.

### Passenger-side power window

Press button B to move the window up or down.

Only manual operation is possible (partial opening) to raise the window: when button B is released, the window stops at the position reached.

To lower the window, automatic operation is also possible (full opening): if the button is pressed at length (over 0.3 seconds) automatic window operation is activated. The window will only stop when it reaches the end of its travel or by pressing the button again.

When the door is open, the window moves down to its “target position”; this is to prevent the window from colliding with the upper weather strip when it is closed.



**Warning**

Improper use of the power windows can be dangerous. Before use, always check that people and objects are at a safe distance.

Pay particular attention during the automatic operation of the driver-side power window.

To protect the passengers remaining in the car against accidental activation of the power windows, always remove the key from the ignition.

**4**About your Vehicle

91



## Instruments and gauges





4

- 1 Left TFT display
- 2 Rev counter
- 3 Right TFT display
- 4 Gear display
- 5 Warning lights on the panel
- 6 Manettino status
- 7 Fuel level


## Left TFT display

Located on the instrument panel, it performs the following functions:

- displays the control parameters
- displays general information while driving
- displays fault warnings.

The driver can interact with the system by selecting the configuration and setting the parameters using the controls on the dashboard to the left of the steering wheel.

The display is activated and set by pressing the MAIN (A), VDA (B), OK (C) and UP, DOWN, LEFT, RIGHT (D) buttons.

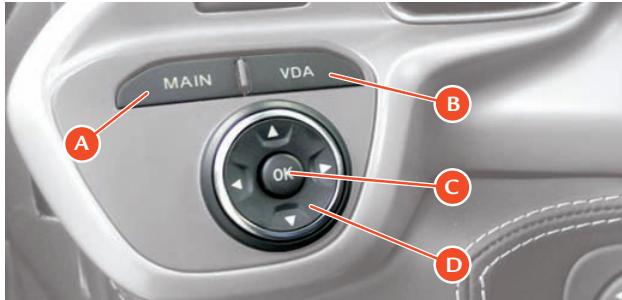

### MAIN screen page

If you press the MAIN button, you activate the MAIN screen page which can be used to access the four screen page groups SETUP, VDA, TRIP and STATUS. These groups contain the following screen pages:

SETUP (pressing the UP button)

MENU screen page

STATUS (pressing the DOWN button)

SPORT screen page

SPORT 2 screen page

TYRES screen page (only if TPMS is present)

VDA (pressing the LEFT button)

Chronometer screen page

Vehicle status screen page

Manettino status screen page

TRIP (pressing the RIGHT button)

TRIP A screen page

TRIP B screen page






Press the **RIGHT** and **LEFT** buttons to sequentially switch between screen pages in a group. Press **RIGHT** to go to the next screen page (for example, in the **STATUS** group from **SPORT** to **SPORT 2**) and press **LEFT** to go to the previous screen page. Press the **RIGHT** button after the last screen page to go back to the first screen page and press the **LEFT** button after the first screen page to go back to the last screen page.

When a screen page is called up, it remains on the display until you decide to select another one.

Every screen page consists of four display areas:

- A** - selected driving mode (Manettino position), windscreen wiper status, outside temperature and “Warning: danger of ice” icon
- B** - display of virtual control gauges, parking sensor screen page, display of abnormal events/warnings (message text and special symbol, when available), display of brightness adjustment function
- C** - total or trip odometer (TRIP A or B), range
- D** - fuel level gauge, area for minimised symbol for faults that do not have a specific warning light on the panel (see page 111), speed repetition.

4

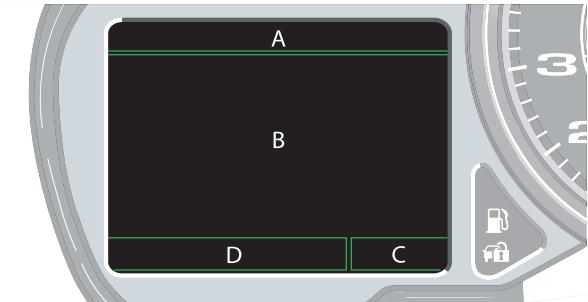

## About your Vehicle

95

## Display setting and configuration of vehicle parameters

### Warning



Display setting and parameter configuration should be performed when the vehicle is stationary

#### *MENU screen page*

Display setting and configuration of the various vehicle parameters is possible using the MENU screen page (the only screen page in the SETUP group) that can be directly called up by pressing the UP button when the MAIN screen page is activated.

Navigation within the menu is on several levels; the first level offers a list of items through which the following parameters can be set or the following information can be displayed:

- **Dimming:** display dimming setting
- **Display setup:** display setting
- **Date/Hour:** date and time setting
- **Language/M.U.:** language and units of measurement setting
- **Car setup:** vehicle parameter configuration
- **Calibr. TPMS:** TPMS calibration (only if present)
- **Service:** information on scheduled maintenance.

These items are the main menu functions. To scroll through the list of items, press the UP and DOWN buttons; to select the required function, press and quickly release the OK button or the RIGHT button.





## 4

Once the function has been selected, the individual subfunctions or parameters that can be activated are displayed. To select them, use the UP and DOWN buttons and press and quickly release the OK (or RIGHT) button to activate a subsection or activate the selected parameter.

To go back to a previous level in the menu hold down the OK button, press the LEFT button or select the BACK item which is normally in the list of subfunctions. If no operation is performed for at least 10 seconds, the first menu level reappears on the display.

### *Adjusting brightness*

The brightness of the two TFT displays on the instrument panel can be adjusted by selecting the special item on the MENU screen page or by using directly the UP and DOWN buttons when the MENU screen page is not displayed and when the chronometer is off if the Chronometer screen page is displayed.

The first time one of the two buttons is pressed, the screen page is displayed. The next time the buttons are pressed, the brightness can be adjusted.

The adjustment made, which can be activated even when the vehicle is moving, can be seen immediately and does not affect the brightness of the warning lights on the panel.

The screen page disappears when the OK button is pressed or automatically if it is not used for 5 seconds and is replaced by the screen page that was previously displayed.




## About your Vehicle

### Fuel level gauge

The fuel level gauge is always displayed in area **D** of the display (see page 95). The gauge has 9 yellow bars that gradually “turn off” as the fuel level drops.



When the second bar goes off, the first bar turns red until fuel runs out.



In “Fuel level low” condition, a warning light comes on on the panel (see page 114) and a special symbol and message are displayed for 10 seconds together with information on driving range in km. If the condition that has generated it persists, this signal is repeated every 8 km (5 mi).

In limited cruising range conditions, the information on driving range in km is replaced by the words “Limited cruising range”.





#### **SPORT screen page**

The SPORT screen page displays the following virtual gauges:

- Engine coolant temperature
- Engine oil temperature

If the SPORT screen page is being displayed and an event occurs that needs to be displayed as a symbol and/or special message, the virtual gauges are minimised. For further information, refer to the "Fault displaying logic" paragraph on page 111.



#### **SPORT 2 screen page**

The SPORT 2 screen page displays the following virtual gauges:

- Engine oil pressure
- Voltmeter

If the SPORT 2 screen page is being displayed and an event occurs that needs to be displayed as a symbol and/or special message, the virtual gauges are minimised. For further information, refer to the "Fault displaying logic" paragraph on page 111.

**4**






#### TYRES screen page (only if TPMS is present)

The TYRES screen page, available only if there is a TPMS (tyre pressure and temperature monitoring system), displays the vehicle symbol and indicates the pressure and temperature values for each tyre.


If the TYRES screen page is being displayed and an event occurs that needs to be displayed as a symbol and/or special message, the screen page is minimised. For further information, refer to the "Fault displaying logic" paragraph on page 111.

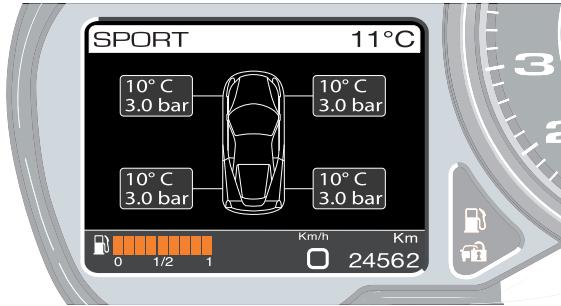

#### VDA (Vehicle Dynamic Assistance) screen page group

In addition to its chronometer function, the Vehicle Dynamic Assistance (VDA) screen page group provides a valid support for assessing vehicle status when on the track and can be used to intuitively understand the most suitable conditions for performance driving. The VDA group, which is recalled by pressing the LEFT button with the MAIN screen page displayed or directly by pressing the VDA button with any screen page displayed, consists of the "Chronometer", "Vehicle status" and "Manettino status" screen pages.

The "Vehicle status" screen page functions are only available when the "Manettino" driving mode control switch (see page 125) is set to RACE, CT OFF or CST OFF, positions developed especially when using the vehicle on track; however, if the Manettino is set to Low-grip or SPORT mode, the "Vehicle status" screen page is displayed along with the message "VDA available in Race - CT off - CST off".

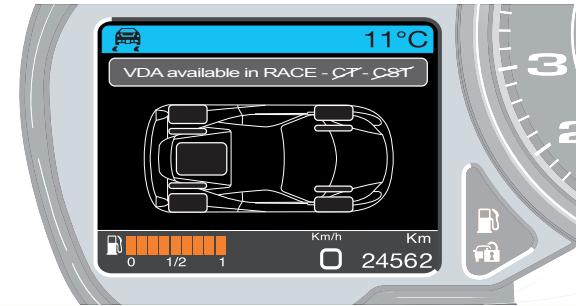



#### *Chronometer screen page*

The “Chronometer” screen page is used to time laps and memorise lap time if the vehicle is used on track. The screen page displays the following information:

##### **Current Lap**

indicates the time elapsed since the start of the chronometer

##### **LAP TIME/Best**

indicates the time required to complete the last best lap

##### **LAP TIME/Last**

indicates the time required to complete the last lap

##### **TOP SPEED/Best**

indicates the maximum speed reached

##### **TOP SPEED/Last**

indicates the maximum speed reached in the last lap

If the “Chronometer” screen page is being displayed and an event occurs that needs to be displayed as a symbol and/or special message, the screen page is minimised. For further information, refer to the “Fault displaying logic” paragraph on page 111.



During display of the event/malfunction, the chronometer remains active.

Each time the key is turned to on, the chronometer is reset whereas the last valid Best Lap and Last Lap information is memorised.

#### *Chronometer operating logic*

The chronometer is controlled using the OK, UP and DOWN buttons that perform the following functions:

- Pressing and quickly releasing the OK button:  
when the chronometer is off, starts the Current Lap chronometer  
when the chronometer is on, resets and restarts the Current Lap and updates the information on previous laps (end of lap/start of next lap)
- Pressing and quickly releasing the UP or DOWN button:  
when the chronometer is on, stops the chronometer and updates information on previous laps  
when the chronometer is off, displays the screen page for adjusting display brightness
- Holding down the UP or DOWN button:  
when the chronometer is on or off, resets the chronometer and information on previous laps.

Note that during display of an event/malfunction, pressing and quickly releasing the OK button interrupts the event/malfunction display cycle (“ESCAPE” function), without affecting the chronometer.



#### Vehicle status screen page

The “Vehicle status” screen page, which is directly called up by pressing the VDA button or by pressing the LEFT button when the MAIN screen page is displayed, is intended to help the user bring the vehicle to optimum performance when driving on high grip surfaces.


This is made possible by an algorithm that determines the thermal state of the main vehicle subsystems (tyres, brakes and engine) in relation to the dynamics of various parameters (lateral acceleration, speed, etc.). The status of the vehicle is displayed concisely using three levels which are blue, green and red:

##### WARMUP

Warm-up stage for components and self-acquisition of control systems; during this stage, the vehicle should be driven so that it is taken to optimum conditions of use.



##### GO

The vehicle has completed the warm-up stage: all its subsystems have reached optimum conditions of use for performance driving.

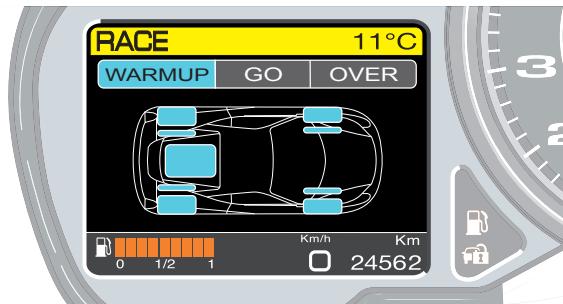

##### OVER

One or more systems have reached an overheating condition that may affect vehicle dynamics. Slowing down is therefore recommended to restore these systems to optimum conditions of use.

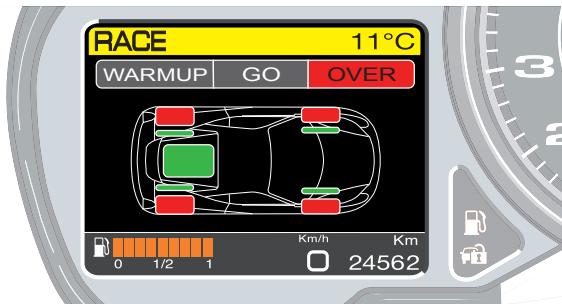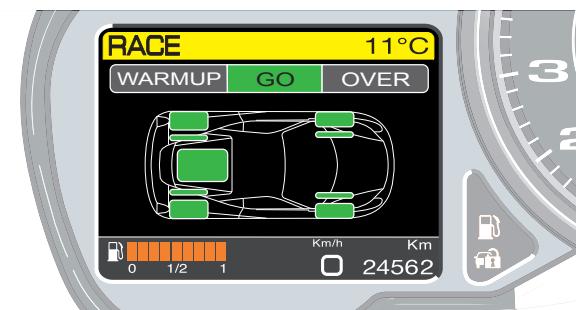



After each start, the CST stability and traction control system compensates for the tyre rolling radius and detects the spare wheel. While this procedure is being performed, the Vehicle Status screen page indicates to the driver that system self-acquisition is in progress by displaying the message "CST autolearning".

#### Warning





Use of the vehicle on race tracks: after each start, cover the first straight stretch of the track (at least 500 meters/0.3 mi) at a constant speed so that the CST stability and traction control system can calculate exactly the grip available and the rolling radius of the tyres (the calculation is reset every time the engine stops).

If this rule is not followed, system performance may be reduced.

If one or more signals related to the performance parameters used to calculate the thermal state of the subsystems (lateral acceleration, speed, etc.) are not valid, the Vehicle Status screen page indicates to the driver that the function is not available by displaying the message "Function not available".

4

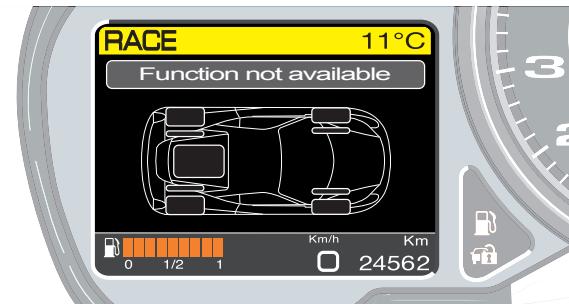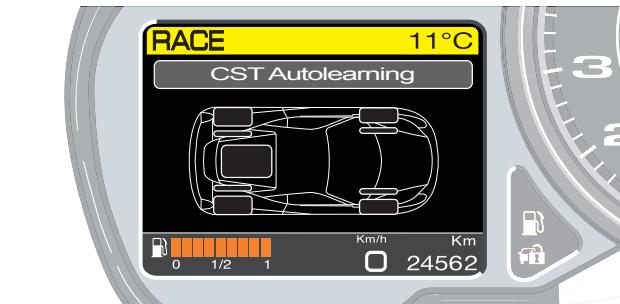

About your Vehicle

103



#### *Manettino status screen page*

The “Manettino status” screen page displays a list of parameters which can be configured using the “Manettino” driving mode control switch (see page 96) and indicates the configuration each one assumes in a specific driving mode.

The systems involved are the following:

- **F1-Trac**: traction control
- **E-Diff**: electronic differential
- **F1-DC**: dual clutch F1 gearbox
- **CST**: stability and traction control
- **ABS**: anti-lock braking system
- **SCM**: magnetorheologically controlled suspension


If one of the other two VDA screen pages is displayed (“Chronometer” or “Vehicle Status”), the “Manettino Status” screen page is displayed in timed mode for 3 seconds when the position of the Manettino is changed so that the driver is informed of the new status that the systems are in. After 3 seconds, the screen page that was previously displayed reappears.

The “Manettino status” screen page is also automatically displayed in timed mode at key-on if one of the other two VDA screen pages was displayed at the previous key-off and the Manettino was in a different position from the current one.

#### **Important note**



If there is a Manettino failure, the “Manettino Status” screen page cannot be displayed or recalled.

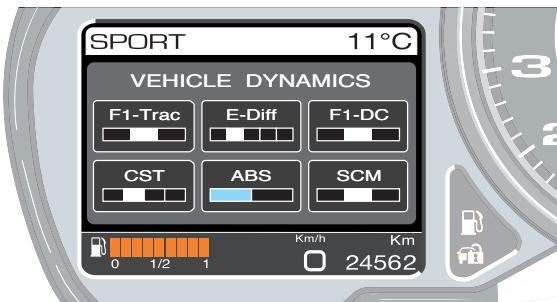



#### TRIP A and TRIP B screen pages

The TRIP A or TRIP B screen page displays the following information:

- Maximum speed
- Average speed
- Travel distance
- Travel time
- Range

If the TRIP A or TRIP B screen page is being displayed and an event occurs that needs to be displayed as a symbol and/or special message, the screen page is minimised. For further information, refer to the "Fault displaying logic" paragraph on page 111.





#### **“Warning: danger of ice” message**

To warn the driver of the presence of ice on the road if the outside temperature is 3 °C (38 °F) or below, the “snow” symbol and the “warning: danger of ice” message are displayed for 10 seconds in the top right of the display.

When they are displayed, the symbol and message appear instead of the outside temperature; after 10 seconds, the outside temperature is displayed again and the “snow” symbol appears next to it as long as the outside temperature remains 6 °C (43 °F) or below.

#### **Speed limit setting and “Speed limit exceeded” message**

The MENU screen page can be used to set a speed limit in the range 30 - 250 km/h (17 - 155 mph) with 5 km/h (3 mph) steps which sends a message to the driver when exceeded. To set the speed limit, call up the MENU screen page by pressing the **UP** button when the MAIN screen page is activated. Select “Car setup” and “Speed limit”. To set the value, use the **UP** and **DOWN** buttons.

When the minimum limit of 30 km/h (17 mph) is reached, press the **DOWN** button again to deactivate the function or press the **UP** button after reaching the maximum speed of 250 km/h (155 mph). The function is normally deactivated (OFF).

When the set limit is exceeded, the driver is informed in the following way:

The symbol showing the set limit and a “speed limit exceeded” message appear in the top right of the display for 10 seconds accompanied by an acoustic signal. Once the warning cycle has ended, the message disappears whereas the symbol continues to be displayed next to the outside temperature until the speed decreases to 5 km/h (3 mph) below the set limit.





### Parking sensors (optional)

To help the driver when parking, the vehicle can be fitted on request with four sensors in the rear bumper (rear parking sensors), or four sensors in the front and rear bumpers (front and rear parking sensors).

#### Warning



The system will only operate correctly if the sensors on the bumpers are free of mud, dirt, snow or ice.

When approaching obstacles in front of or behind the vehicle, the parking sensors inform the driver of the distance between the vehicle and the obstacle by way of acoustic signals, which become more frequent as the obstacle approaches, and visual signals in area **B** of the left TFT display (see page 95). By supplementing the driver's direct visual information with that provided by the system acoustic signals and visual warnings, potential collisions can be avoided when parking.

#### Warning



It is the driver, however, who holds full responsibility for parking manoeuvres and other potentially dangerous situations. The system has only been designed as an aid during parking manoeuvres since it detects obstacles that are outside the driver's field of vision.

Use of the sensors therefore does not mean that the driver can be less careful and attentive and not watch out for persons and obstacles during parking manoeuvres.

The rear parking sensors are automatically activated when the key is in position **II** and reverse gear is engaged. When the rear sensors are activated, an acoustic signal warns the driver that the system has been activated. If the vehicle is also equipped with front sensors, these can be activated or deactivated by pressing the relative button on the roof panel (see page 135).

#### "Stop and Go" function

The "Stop & Go" function, available on vehicles with front and rear parking sensors, automatically activates the front sensors when vehicle speed is 10 km/h (6 mph) or below. This system has been designed to assist the driver in certain traffic conditions (e.g. tailbacks) and signals when the minimum distance is reached between the vehicle and the vehicle in front.

To activate or deactivate the system, call up the MENU screen page, select the items "Car setup", "Parking sensor", and select one of the two options, "STOP&GO ON" and "STOP&GO OFF".

4

#### Indication of obstacles

The parking sensor system emits acoustic signals as soon as an obstacle is detected which become more frequent as the obstacle approaches. The acoustic signal stops immediately if the distance from the obstacle increases whereas the tone cycle remains constant if the measured distance from the central sensors remains unchanged.

The vehicle symbol and sensor detection zones appear on the left TFT display: these zones indicate which part of the vehicle is approaching an obstacle (if front or rear and if left, right or central) and the distance from the obstacle (maximum, medium or minimum).

## About your Vehicle




107



If an obstacle is detected at maximum distance in the central front part, it will be displayed as shown below (green).

If an obstacle is detected at medium distance in the central front part, it will be displayed as shown below (orange).

If an obstacle is detected at minimum distance in the central front part, it will be displayed as shown below (red).

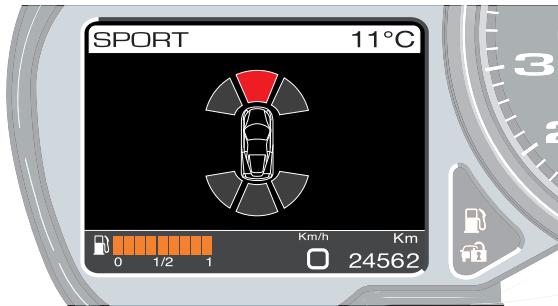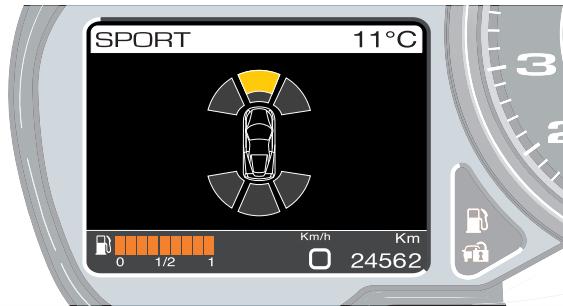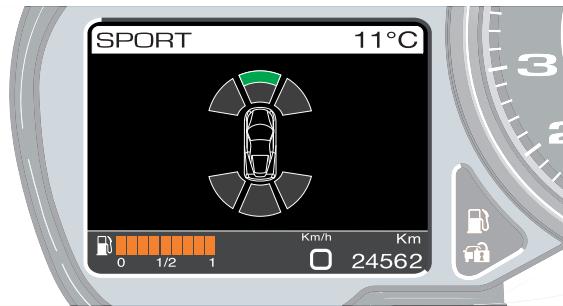



## 4

If the front sensors are deactivated or not present, the display does not show the symbols in the front. In the same way, if front sensors are fitted and the rear ones are not activated, the display only shows the symbols in the front. If all the sensors are activated, the system can give several pieces of information at the same time: if an obstacle is detected at a maximum distance in the front central part and at a minimum distance in the rear right part, it will be displayed as shown below.



If the parking sensor system symbols are being displayed and an event occurs that needs to be displayed as an icon and/or special message, the symbol is moved from the centre of the display to the right as shown below.

### Cleaning the sensors

When cleaning the sensors, be very careful not to scratch or damage them and avoid using dry, rough or hard cloths.

The sensors must be washed with clean water and car shampoo added if necessary. In car washes that use steam jet or high pressure water cleaning equipment, quickly clean the sensors keeping the nozzle at a distance of at least 10 cm (4 in.).

For the repainting of bumpers or retouching the paintwork in the sensor area, contact the FERRARI SERVICE NETWORK. If paint is applied incorrectly, it may prevent the parking sensors from working properly.

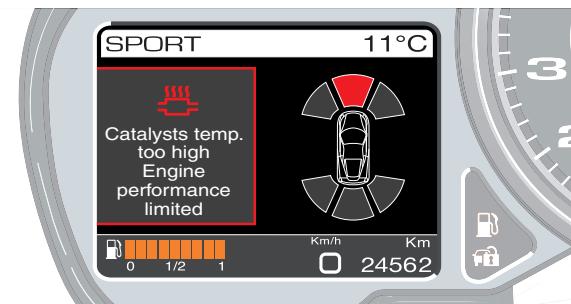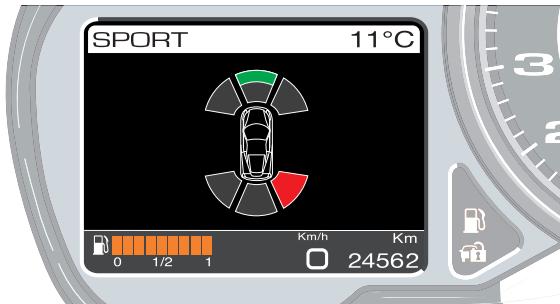

## About your Vehicle

109



#### *Indication of parking sensor failure*

The system ECU checks all the components each time the reverse gear is engaged. If at least one parking sensor is faulty, the special symbol (see page 118) is displayed on the left TFT display together with the message "Parking sensor failure. Warning! Possible obstacles" accompanied by an acoustic signal.

##### **Important note**



The sensors are able to detect obstacles with reasonably large, even surfaces (e.g.: poles with diameters of over 60 mm (2.4 in.), walls, barriers, trees). Detection is not optimum with obstacles with sharp projections or uneven surfaces.

##### **Important note**



During parking manoeuvres, always take the utmost care since obstacles may be located above or below the sensors.

##### **Important note**



Objects placed close to the rear part of the vehicle are not always detected by the system and may therefore damage the vehicle or be damaged themselves.

##### **Important note**



The signals sent by the sensors may also be affected by damage to the sensors caused by dirt, snow or ice on the sensors or by ultrasound systems (e.g. pneumatic brakes on lorries or pneumatic drills) in the vicinity.

##### **Warning**



It is the driver, however, who holds full responsibility for parking manoeuvres and other potentially dangerous situations. The system has only been designed as an aid when parking and operating the retractable hard top since it detects obstacles that are outside the driver's field of vision.

The sensors are therefore not a substitute for the driver's care and attention when parking and checking for the presence of persons or objects.



## Fault display

### *Fault displaying logic*

When a fault occurs, the corresponding warning light (if present) comes on on the panel whereas a description of the fault (if available) and the relevant symbol (if available) are displayed on the left TFT display. The message appears on the display at the same time as the warning light (if present) comes on and the main screen page that is displayed at that moment is reduced.

The fault remains on the display for 20 seconds. When the display cycle ends, if the fault does not have a special warning light on the panel, the symbol remains minimised in area **D** of the display (see page 93) until the cause of malfunctioning has been resolved. In area **B** the main screen page is displayed in "maximum" size.


When the display cycle ends, if the fault has a special warning light on the panel, the screen page that was displayed prior to the event reappears and the symbol is not minimised in area **D**.

The warning light remains on until the cause of malfunctioning has been resolved.

If the fault is resolved within 20 seconds, it remains displayed and the warning light remains lit for 2 seconds.

### *"ESCAPE" function*

Displaying a fault on the screen can be interrupted by pressing and quickly releasing the OK button with "ESCAPE" function. When the OK button is pressed, the screen page that was displayed prior to the event reappears. If the fault does not have a special warning light on the panel, the symbol remains minimised in area **D** until the cause of malfunctioning has been resolved.

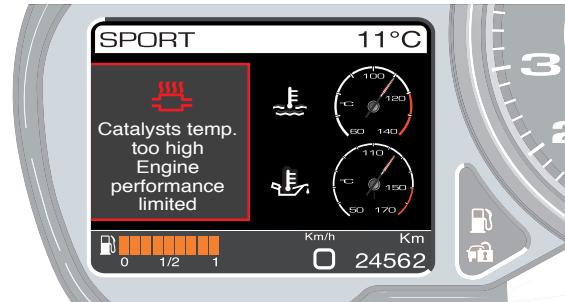



#### Fault priority levels

The simultaneous display of several faults follows a logic that depends on the priority level assigned to it:

Priority level 0 - Extremely critical fault

Priority level 1 - Critical fault


Priority level 2 - Non-critical fault

When several fault events occur at the same time, faults with priority level 0 are displayed first, followed by priority level 1 and then priority level 2. The information on the various faults is displayed in turn for 5 seconds each. In any case, the total display time for each fault is never less than 20 seconds.

If a fault message with priority level 1 or 2 is being displayed, the priority level 2 message is only displayed once the priority level 1 message has been displayed for at least 2 seconds. If, on the other hand, another new priority level 0 fault occurs, this is displayed immediately.

#### Indication of failure of turn indicators and running lights

A failure of the running lights (front and/or rear) and turn indicators (front and/or rear) is indicated in the same way as other faults but the vehicle symbol with the faulty running light or turn indicator indicated in red is displayed together with a description of the failure instead of the "External lights failure" symbol (see page 115). When the display cycle ends or the **OK** button with "ESCAPE" function has been pressed, the "External lights failure" symbol is minimised.

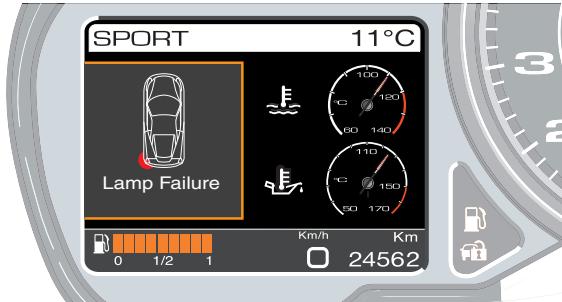




4

#### *“Doors, engine or luggage compartment lid open” function display*

If one or more doors or the engine and/or luggage compartment lid are open, the vehicle symbol appears on the display and indicates which doors or lids are open together with a special message. If the vehicle is in motion, an acoustic signal is also emitted. When the display cycle ends or the **OK** button with “ESCAPE” function has been pressed, the special symbol is minimised (see page 117).

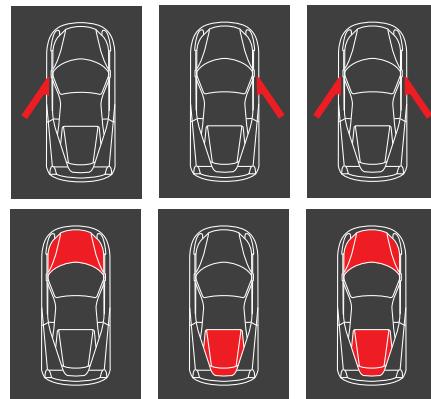



## List of left TFT display symbols and warning lights on the panel

TFT	Warning light	Description and warnings
-----	---------------	--------------------------



### Alarm system failure

Indicates a fault in the alarm system (priority level 1).  
The system is not programmed (priority level 2).  
Failure and system not programmed (priority level 1).

Contact the FERRARI SERVICE NETWORK.



Alarm system failure (priority level 2).  
Break-in attempted (priority level 2).



Fuel reserve  
Indicates that the fuel level is too low (priority level 2).



Battery conditioner connected  
When the instrument panel is on, it indicates that the battery conditioner is connected (priority level 0).



Inertia switch  
Indicates activation of the inertia switch following an accident and the resulting cut-out of the fuel supply (priority level 0).

The hazard warning lights are also automatically activated.



### Alternator failure

If there is a fault in the recharging system (priority level 1).



### Low windscreens washer fluid level

Indicates a low level of washer fluid in the windscreens washer tank (priority level 2).



### Oil temperature

Indicates that the oil temperature is too high (priority level 0).

Turn off the engine and contact the FERRARI SERVICE NETWORK.



### Adaptive headlights failure

Symbol and warning light in flashing mode indicate there is a failure in the adaptive headlight system (priority level 2).



### Windscreen wiper motor failure

Indicates a windscreen wiper motor failure (priority level 2).



### Engine coolant temperature

Indicates that the engine coolant temperature is too high (priority level 0).

Turn off the engine and contact the FERRARI SERVICE NETWORK.



#### *Oil pressure*

Indicates that the engine oil pressure is too low (priority level 0).

**Turn off the engine and contact the FERRARI SERVICE NETWORK.**



A flashing warning light indicates an engine oil pressure sensor failure (priority level 2).



#### *Engine diagnostic system (EOBD) failure*

While the engine is running, it indicates a fault in the emission control system and in the ignition/injection system (priority level 0).

**Turn off the engine and contact the FERRARI SERVICE NETWORK.**

After turning the ignition key to position II, it remains on for a self-check for a few seconds after the engine has started.

#### *Running lights*

When the running lights or low beams are turned on.



#### *Stop lights failure*

Indicates a system failure or blowing of the STOP light bulb (priority level 2).



#### *External lights failure*

Indicates a system fault or blowing of a bulb in the running, turn indicator or rear fog lights (priority level 2).



#### *Number plate lights failure*

Indicates a system failure or blowing of the number plate light bulb (priority level 2).



#### *Rear fog lights*

When the rear fog lights are turned on.



#### *Twilight sensor failure*

Indicates a twilight sensor failure (priority level 2).



#### *High beams*

When the high beams are turned on.  
When the high beams are used to flash.



#### *Right turn indicator*

When the right turn indicators are activated.



#### *Left turn indicator*

When the left turn indicators are activated.





#### ➡️➡️ Hazard warning lights

Simultaneous switching on of the right and left turn indicator warning lights indicate that the hazard warning lights have been activated.



#### Catalytic converter temperature

Indicates that the catalytic converter temperature is too high: stop the vehicle (priority level 0).

Contact the FERRARI SERVICE NETWORK.



Indicates that the catalytic converter temperature is very high: reduce speed until the symbol goes out (priority level 1).

Indicates a failure of the catalytic converter temperature sensor (priority level 0).



#### Checking the engine oil level

Indicates a low engine oil level (priority level 0).



#### Seat heating

Indicates that heated seat function is enabled (remains displayed for 5 seconds).



#### Power steering failure

Indicates that the power steering system is inefficient (priority level 2).

Contact the FERRARI SERVICE NETWORK.



#### ABS

Indicates an ABS system failure (priority level 1).

The standard braking system is still functioning.  
Contact the FERRARI SERVICE NETWORK.



#### ASR + CST on

The symbol (displayed for 5 seconds together with the "CST on" message) indicates that the ASR and CST systems are active (priority level 1).



#### ASR + CST off

The symbol and warning light indicate that the ASR and CST systems are deactivated (priority level 1).  
The symbol is displayed for 5 seconds together with the "CST off" message.



#### ASR/CST system failure

Indicates an ASR/CST system failure (priority level 1).

#### Warning



Stop the vehicle avoiding sharp braking. Stop driving and contact the FERRARI SERVICE NETWORK immediately.

#### Warning



The vehicle can still be driven at low speed (max. 40 km/h - 25 mph) to clear the road.



#### *ASR/CST system activation (flashing warning light)*

Indicates that the ASR/CST system has activated (priority level 1).



#### *CCM brake discs worn*

Indicates that the carbon ceramic brake discs are worn (priority level 2).

Contact the FERRARI SERVICE NETWORK to have the brake pads replaced.



#### *TPMS*

Indicates a puncture in one or more standard tyres (priority level 0) or Run Flat tyres (priority level 2).

With the warning light in flashing mode for a maximum of 90 seconds after which it remains on in fixed mode, it indicates:

A failure in the TPMS (priority level 2).

TPMS temporarily inactive (priority level 2).

TPMS inactive (priority level 2).

TPMS not calibrated (priority level 2).



#### *Doors/front and rear lids open*

The symbol, which is minimised, indicates that one or more doors and/or lids are open.



#### *Airbag system failure*

Indicates a system failure (priority level 0).

With the warning light in flashing mode, it indicates that the airbag test cycle has not been completed (priority level 0).

Contact the FERRARI SERVICE NETWORK.



#### *Driver-side seat belt not fastened*

Indicates that the driver-side seat belt has not been fastened (priority level 0) together with an acoustic signal lasting 90 sec.



#### *Passenger-side seat belt not fastened*

Indicates that the passenger-side seat belt is not fastened (priority level 0).



#### *Speed limit exceeded*

Indicates that the speed set by the driver has been exceeded (priority level 2), the figure shown indicates the set speed.



#### *E-Diff system failure*

Indicates an electronic differential failure (priority level 1)





#### *Brake malfunction*

Indicates that the brake fluid level is low (priority level 0).  
Indicates an EPB (electric parking brake) failure (priority level 0).  
Indicates an overhaul of the Parking Brake system (priority level 0).



Indicates an EBD system failure (priority level 0).



#### *Rain sensor failure*

Indicates a rain sensor failure (priority level 2).



#### *Suspension control system failure*

Indicates a malfunction in the suspension control system (priority level 2).

**Contact the FERRARI SERVICE NETWORK.**



#### *Front Lift system status*

When on in fixed mode, it indicates that the Front Lift system is activated (vehicle raised).  
When on in flashing mode, it indicates that the Front Lift system is being operated (activation or deactivation cycle).



#### *Front Lift system failure*

Indicates a Front Lift system failure (priority level 1).



#### *Generic failure*

Indicates an airbag warning light failure (priority level 2).



Indicates a Manettino failure (priority level 1).



Indicates a failure in the electronic system (priority level 2).



#### *TPMS*

Indicates that calibration of the TPMS has been activated.



#### *Brake pad wear*

Indicates excessive wear of the brake pads (priority level 2).



#### *Parking sensor failure*

Indicates that the parking sensor system is faulty (for vehicles equipped with this system) (priority level 2).



#### *Scheduled Maintenance (Service)*

Indicates the Scheduled Maintenance deadline.



#### *AVH system*

Indicates an AVH system failure (priority level 0).



#### *Ice hazard*

Indicates that the outside temperature is 3 °C (38 °F) or lower, highlighting the risk of icy road surfaces.

Drive carefully in these conditions and slow down since tyre grip is significantly reduced.

#### **Warning**



In this condition, activate the "Low grip" driving mode.

#### **(P)** *Parking brake*

Indicates that the parking brake is applied.



#### **!** *Gearbox failure*

Indicates a system failure (priority level 1).

Contact the FERRARI SERVICE NETWORK.

#### **Electronic rev counter**

The electronic rev counter indicates the engine RPM. The numbers on the dial multiplied by 1000 correspond to the engine RPM in one minute.

Avoid engine speed rates in the red sector.

There is a space to the bottom right of the rev counter for the display which gives information on dual clutch transmission (DCT).

**4**






### Engine RPM LED on steering wheel (optional)

The five LEDs on the steering wheel rim (available on request) light up in sequence and inform the driver that the maximum engine RPM has been reached for gearshifting. When 5500 RPM is reached, the first LED comes on; the others come on in sequence when 6250, 7000, 7750 and 8920 RPM are reached.

The LEDs on the steering wheel can be deactivated using the MENU screen page on the left TFT display (see page 96): call up the MENU screen page, select the items "Car setup" and "RPM on steer" and then select OFF. To reactivate the function, select ON.

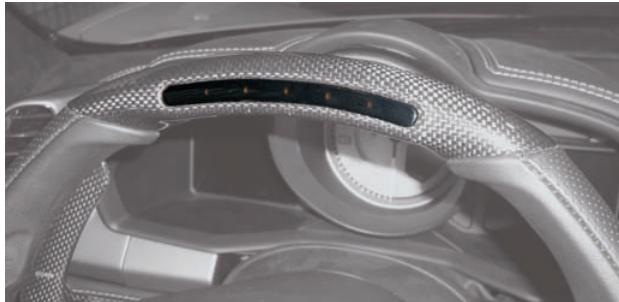

### Gearbox display

The display which gives information on dual clutch transmission (DCT) is found to the bottom right of the rev counter; with the ignition key in position II, it displays the following information:

- Gear engaged;
- Indication of "Automatic gearbox" mode;
- Indication of "Auto easy exit" mode;
- Indication of gearbox in "Parking" mode;
- Indication of Launch Control activated;
- Indication of AVH system activated.

#### Important note



Information on the gearbox is useful in all operating conditions.





#### Gear engaged

The gearbox display shows the number or letter indicating the engaged gear in the centre.

N	Neutral
R	Reverse
1	1 <sup>st</sup> gear
2	2 <sup>nd</sup> gear
3	3 <sup>rd</sup> gear
4	etc.

When the key is turned to off, the display remains on for at least 3 seconds and displays the engaged gear. If the control panel reads N (Neutral), the letter N is displayed and a buzzer will sound.

#### Indication of "Automatic gearbox" mode

When the gearbox is used in "automatic" mode (see page 142), the word "auto" appears in the bottom of the gearbox display together with the number or letter indicating the engaged gear.



#### Indication of "Auto easy exit" mode

When the gearbox is used in "Auto easy exit" mode (see page 142), the word "auto" appears in the bottom of the display together with a small "arrow" pointing downwards on the left.

#### Indication of gearbox in "Parking" mode

When the gearbox is in "Parking" mode, i.e. the Park Lock gearbox locking device is activated (see page 156), the letter "P" appears in the centre of the gearbox display.

4

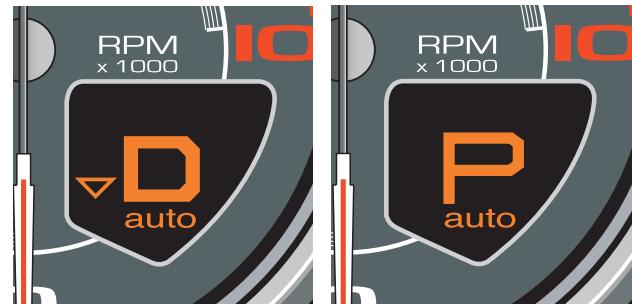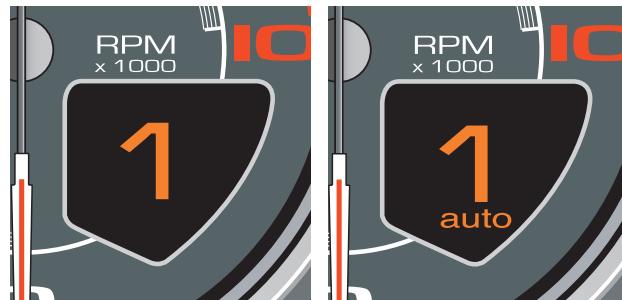

## About your Vehicle

121




#### *Indication of Launch Control activated*

When the gearbox is used in "manual" mode and the Launch Control function is requested by pressing the special button on the centre console (see page 157), the word "launch" appears in the bottom of the gearbox display. The word remains while the function is activated.

#### *Indication of AVH system activated*

In certain circumstances, when the AVH system is activated (see page 155), the word "HOLD" appears in the top of the gearbox display.

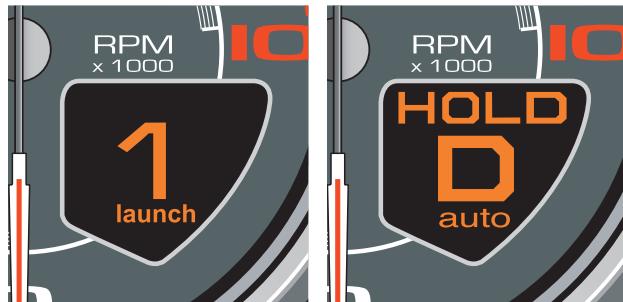

#### **Right TFT display**

Located on the instrument panel, it performs the following functions:

- it displays the speedometer
- it displays infotainment system information
- it displays the rear parking camera (if present).

The driver can interact with the system by selecting the configuration and setting the parameters using the controls on the dashboard to the right of the steering wheel.

Holding button **A** down switches the infotainment system on and off.

Holding button **B** down allows you to select whether to display infotainment system information or display the speedometer.





### Infotainment system

The infotainment system includes the following functions:  
 CD/DVD player with charger mounted in glove compartment,  
 MW/LW/FM radio, 30 GB hard disk drive, USB connection, iPod®  
 connector (optional), satellite navigator (optional), Bluetooth  
 connectivity, voice recognition.  
 As well as using the commands on the dashboard to the right of  
 the steering wheel, the infotainment system can be controlled using  
 buttons behind the steering wheel.  
 For further information on the infotainment system, please refer to  
 the instruction manual enclosed with the vehicle documents.

### Speedometer display

The speedometer can be displayed on the right TFT display in  
 "Speedometer" or "Digital speed" mode.

To select the desired display mode, call up the MENU screen page  
 on the left TFT display (see page 96) and select the items "Display  
 setup", "Display right".



### "Speedometer" screen page

The "Speedometer" screen page indicates the speed by displaying a  
 virtual analogue speedometer.

### "Digital speed" screen page

The "Digital speed" screen page indicates the speed in digital form.

#### Important note

The speedometer is always also displayed in digital form in area  
**D** of the left TFT display (speed repetition, see page 95).



4

### Time display

By selecting the special item on the MENU screen page of the left  
 TFT display, you can activate/deactivate the time display in the top  
 right of the "Speedometer" and "Digital speed" screen page. The  
 time is displayed approximately 10 seconds after key-on.



## About your Vehicle

123






#### *"Rear Parking Camera" screen page (optional)*

If the vehicle has a rear parking camera (optional), the "Rear Parking Camera" screen page is automatically displayed on the right TFT display when reverse gear is engaged. This screen page, which continues to be displayed until reverse gear is disengaged, shows the field of vision of the camera mounted on the rear bumper and helps the driver when parking.

The image is integrated with static green, yellow and red grids that indicate the distance of the obstacles that come into the camera's field of vision.

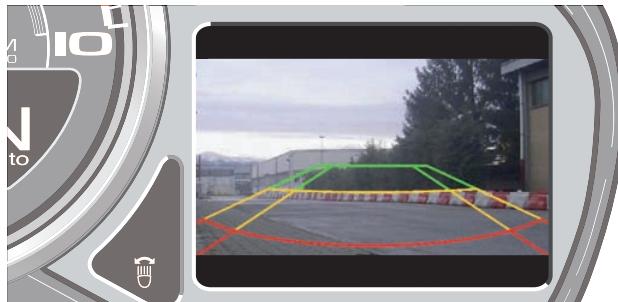

#### **Controls on the steering wheel**

##### *Start button*

Press the ENGINE START button **A** to start the engine. When the engine has started, release the ENGINE START button.

Do not hold the ENGINE START button down for a long time.

For more information on starting the engine, see page 138.





#### **“Manettino” driving mode control switch**

The driver can select the desired driving mode by using the “Manettino” **B**.

The driving mode selected does not exempt the driver from complying with the rules of safe driving.

#### **Important note**



In the event of a failure of one of the onboard systems, signalled by the special symbol on the left TFT display, the Manettino” moves to a “recovery” position, but still allows the vehicle to be driven. In these cases, contact the FERRARI SERVICE NETWORK.



#### **Driving modes that can be selected with “Manettino”**

##### **Low-grip mode**

This is the maximum safety driving mode. Recommended in low grip conditions.

##### **SPORT mode**

This is the ideal setting for vehicle performance recommended for everyday driving.

##### **RACE mode**

This mode offers maximum performance and stability in high grip conditions and is particularly suitable when using the vehicle on track.

##### **CT OFF mode**

When this mode is selected, the F1-Trac traction control system is disabled whereas stability control remains active. This setting is used on the racing track.

##### **CST OFF mode**

This mode allows the driver complete freedom and control of the vehicle for track use. No electronic system other than the E-Diff controls vehicle stability.

#### **Warning**



In low- to medium-grip conditions (e.g. wet, icy, sandy roads), do not deactivate the CST system.

For further information on the driving modes that can be selected, refer to the paragraph “Driving using the driving mode control switch” on page 148.



### Suspension damping delink button

By pressing button **C** on the left of the steering wheel, the driver can choose to separate the suspension damping control from the logic of the “Manettino” driving mode control switch.

For further information, see page 147.



### Horn control

The horn sounds when you press on the horn symbol on the steering wheel rim.





### “UP” shift paddle

Pull the right-hand **UP** paddle towards the steering wheel to shift gears up.

### “DOWN” shift paddle

Pull the left-hand **DOWN** paddle towards the steering wheel to shift gears down.



### Windscreen washer/wiper lever

#### Important note



The windscreen wipers and washer only work when the ignition key is in position **II**.

The windscreen wipers and washer are operated using lever **A** on the steering wheel: the lever must be pressed towards the dashboard or pulled back according to the function you require.

The windscreen wipers have 4 different speeds:

**OFF** Windscreen wipers stationary.

**AUTO** The rain sensor adjusts the windscreen wiper timing to the intensity of the rain.

**1** Slow continuous operation

**2** Fast continuous operation

4



### About your Vehicle

127



With the wipers stationary (**OFF**), quickly pressing lever **A** towards the dashboard activates the windscreen wipers in **AUTO** speed.

With the wipers on, quickly pressing the lever towards the dashboard increases windscreen wiper speed (from **AUTO** to **1**, from **1** to **2**).

With the wipers set to **AUTO** or **OFF**, holding the lever towards the dashboard activates maximum speed (**2**). With speed **1** or **2**, on the other hand, the windscreen wipers stop.

With the wipers on, quickly pulling lever **A** back decreases windscreen wipers speed (from **2** to **1**, from **1** to **AUTO**, from **AUTO** to **OFF**).

With the wipers stationary, quickly pulling the lever back activates fast temporary operating of the wipers (antipanic wiping).

The windscreen wiper speed is indicated in the top of the left TFT display as shown in the figure below.



#### Important note



Windscreen wiper operating is always guaranteed even if there is an electronic system failure. If there is a failure, the windscreen wipers can be activated by pressing lever **A** and deactivated by pulling it back.

If there is a particularly serious failure, operating may not be automatically maintained: if this is the case, the windscreen wipers can be kept activated by holding down lever **A**.

#### Windscreen washer

To activate the windscreen washer, keep lever **A** pulled. When the lever is released, the windscreen wiper returns to the preset speed.

#### Warning



Do not start the windscreen washer during the cold months until the windscreen has warmed up. If it has not warmed up, the liquid could freeze on the glass and interfere with visibility.

#### Headlight washer

The headlight washer is activated automatically when the windscreen washer is operated and the low beams are on. The headlight washer and windscreen washer share the same fluid tank and a low fluid level is indicated by the relative symbol on the left TFT display.



#### Rain sensor

The rain sensor automatically adjusts the windscreen wiper timing to the intensity of the rain. The system is activated by moving the windscreen wiper to **AUTO**.

When operating automatically, the wiper speed ranges from a minimum intermittent setting (one wipe every 5 seconds approx.) when the windscreen is damp to fast continuous operation in heavy rain.

#### Important note



The rain sensor function is deactivated by turning the ignition key to position **0** and leaving the windscreen wiper in position **AUTO**. To reactivate the system at the next key-on, set the wipers to **AUTO** by quickly pressing the lever A towards the dashboard.

#### Warning



Before cleaning the front windscreen (for example in service stations) make sure the rain sensor is deactivated or that the key is in position **0**. The rain sensor must be deactivated also when washing the vehicle by hand or in automatic car washes.

In case of ice or snow on the front windscreen, do not activate the rain sensor to avoid damaging the wiper motor and/or blades.

#### Rain sensor failure

If there is a rain sensor failure, indicated by a special symbol on the left TFT display (see page 118) while the windscreen wiper is set to **AUTO**, the wipers will be set to intermittent operation with one wipe every 1 second approximately. If this is the case, we recommend that you deactivate the rain sensor and turn on the wipers, if necessary, in continuous mode.

#### Important note



If this occurs, contact the FERRARI SERVICE NETWORK as soon as possible.

4

## Lighting

The external lights and turn indicators only work when the ignition key is in position II.

The external lights can be switched on and off manually or automatically, depending on the ambient light.

### Light switch

The switch A, on the dashboard to the left of the steering wheel, can be set to five different positions:

- 0 Lights off
- Running and number plate lights on (\*)
- Low beams on (\*)
- Parking lights

**AUT** Automatic operation of the external lights according to ambient light.

(\*) The relative warning light on the instrument panel comes on.



### High beams

To turn on the high beams when the light switch A is set to  $\text{ID}$ , pull back lever B on the steering wheel.

When the high beams are on, the relative warning light  $\text{ID}$  on the instrument panel comes on.

Then push lever B towards the dashboard or pull it back to turn off the high beams and turn on the low beams.

### Flashing the headlights

The headlights can be flashed by pushing the left-hand lever B towards the dashboard.

Flashing also occurs with lights off if the ignition key is set to II. The high beams are used for flashing.





#### Important note



Follow the Road Regulations of the country you are travelling in for using the high beams.

#### Parking lights

The parking lights work only with the ignition key in position **0** or with the key removed.

They are activated by turning the light switch **A** to position **PLS**.

When the parking lights are on, the warning light illuminates on the instrument panel .

When the parking lights are on, hold down one of the two turn indicators **C** buttons on the steering wheel (see page 130) for more than 0.5 seconds to turn on the partial parking lights on the corresponding side; press the same turn indicator again for more than 0.5 seconds to go back to full parking lights.

When the partial parking lights are on (on only one side of the vehicle), the running light warning light turns off whereas the vehicle symbol indicating which parking light is on (left or right) is displayed on the left TFT display for 10 seconds.

When the light switch **A** is turned to **AUT** and the ignition key is in position **II**, the running lights, low beams and number plate lights turn on and off automatically according to the ambient light.

#### Important note



The high beams can only be activated manually by pulling back the left-hand lever **B**.

#### Important note



If the high beam control is activated, the high beams will turn on every time the lights are activated automatically. We recommend therefore that you turn them off every time the twilight sensor deactivates the external lights.

#### Warning



If there is fog during the day, the running lights and low beams will not be turned on automatically. The driver must always be ready to turn on the lights manually and also the rear fog lights, if necessary.

#### Important note



After automatic activation of the external lights, it will always be possible to turn on the rear fog lights manually. When the external lights are deactivated automatically, the rear fog lights are also turned off (if active) automatically. Therefore, if necessary, the driver will have to turn on the rear fog lights manually upon the next automatic activation.



### Warning



The driver is always responsible for turning on the external lights, depending on the ambient light and in compliance with the regulations in force in the country of use. The automatic system for turning on and off the external lights must be considered an aid for the driver. If necessary, turn the lights on and off manually.

#### Twilight sensor

The twilight sensor is comprised of a global sensor which measures the ambient light upwards.

In the event of sensor failure, the system switches on low beams and running lights, regardless of the daylight conditions; a failure message will appear on the instrument panel display.

The failure indication will be displayed as long as the light switch is turned to AUT.

If this occurs, we recommend that you deactivate the automatic system and turn on the external lights manually if necessary.

#### Important note



If this occurs, contact the FERRARI SERVICE NETWORK as soon as possible.

#### Day lights

The LEDS on the headlights serve as front turn indicators and day lights. To activate or deactivate the day running lights, call up the MENU screen page on the left TFT display, select the items "Car setup", "Day lights" and select ON to activate the function and OFF to deactivate it.

#### Turn indicators

Quickly press the left indicator or right indicator button C on the steering wheel to switch on the relevant turn indicator.

The relative warning light → or ← on the instrument panel comes on.

The turn indicator goes off when the steering wheel is realigned.

Holding down one of the two C buttons (for more than 0.3 seconds) temporarily switches on the relevant turn indicator: it is switched off after 3 flashes ("lane change" function).





#### Rear fog lights

The rear fog lights are turned on only if the high beams or low beams are on when button **D** is pressed; the relevant warning light **E** on the instrument panel comes on to indicate that they have been turned on.

##### Important note



Use the rear fog lights only in poor visibility conditions.



#### Hazard warning lights

Press button **F** to turn on the hazard warning lights. All the turn indicators will start blinking intermittently; these lights will operate with the ignition key in any position.

When the lights are on, the relative warning lights on the instrument panel and the button flash.

To turn them off, press the button again.

4





#### *“Follow me home” function*

With the “Follow me home” function, the low beams stay lit for a preset period of time once the engine has been turned off and light up the area around the vehicle to help the driver and passengers see their way in the dark.

The function can be manually activated by pressing the high beam/flashing lever **B** (see page 128) when the ignition key is in position **0** or removed, within 3 minutes of switching off the engine (time that is reduced to 30 seconds if the driver- side door is opened). Each time lever **B** is pressed, the period of time that the low beams remain on increases by 30 seconds up to a maximum of 210 seconds.

Each time lever **B** is pressed, the message “Follow me” appears on the left TFT display followed by the preset period of time that the low beams remain on.

#### *AFS2 adaptive headlights (optional)*

The AFS2 adaptive headlight system (available on request) enables synchronous movement of the left and right front beams (high and low) and has been designed to illuminate the road better and reduce areas of shadow in the vehicle's trajectory.

The headlights' swivel angle, which ranges from 8° inwards and 15° outwards, is defined by the steering angle.

The AFS2 system also uses a “Dynamic Levelling” device that directs the light beam vertically when accelerating and braking by moving the headlights up to 1.9° upwards when braking and up to 1° downwards when accelerating.

The adaptive headlight system deactivates its corrective action when driving round bends at low speed.





#### Dome light

When the doors are closed, the dome light **D** on the roof can be turned on or off using the switch **E**.


Switches **F** and **G** turn the driver-side and passenger-side spotlights on and off.

The dome light activates automatically in the following conditions:

- when a door is opened, for approx. 3 minutes
- when all the doors are closed and the key is in position 0, for approx. 10 seconds
- when the key is removed, for approx. 10 seconds
- when the doors are unlocked, for approx. 10 seconds
- when the inertia switch is activated, for approx. 15 minutes.

The dome light deactivates automatically in the following conditions:

- after the preset activation time expires
- when the doors are closed and the key is in position II
- when the doors are locked
- when the inertia switch is reactivated.



#### Roof panel controls

##### Door lock/unlock

Both doors can be locked by activating/deactivating the "LOCK/UNLOCK" **H** button. For further information, see page 82.

##### Deactivating the anti-lift alarm

Press button **L** to deactivate the anti-lift alarm system. For further information, see page 18.

##### Front parking sensors (optional)

On vehicles fitted with front and rear parking sensors, the front parking sensors are activated/deactivated by pressing button **M**. When the front parking sensors are activated, the light on the button comes on.





## Driving the vehicle

### Running-in

The latest manufacturing techniques have allowed us to achieve high precision and accuracy levels in the construction and assembly of components. Nonetheless, the vehicle movable parts undergo a settling process, basically during the first hours of operation.

### Engine and transmission

Avoid exceeding 5,000 RPM for the first 1,000 km (620 mi).

After starting, do not exceed 4,000 RPM until the engine has warmed up (oil temperature: 65-70 °C/149-158 °F).

Do not let the engine run at a constantly high speed for a prolonged time.

### Warning



#### BEFORE YOU DRIVE

Check that the seat belts are fastened

Check that the doors are closed

Check that the seat is properly adjusted

Check the rear-view mirror adjustment (central and sides).

### Before a trip

#### Preliminary checks

Check the following at regular intervals and always before long trips:

- tyre pressure and condition
- levels of fluids and lubricants
- condition of the windscreen wiper blades
- proper functioning of the warning lights and external lights.

### Important note



In any case, it is advisable to perform these checks at least every 1000 km (620 mi) and always comply with the maintenance schedule.

*It is also advisable to:*

- clean the glass covers of the external lights and all the glass surfaces
- properly adjust the mirrors, steering wheel, seats and seat belts.

#### Refilling

### Warning



Use unleaded fuel only!

Using leaded fuel would permanently damage the catalytic converters.

For specifications and quantities of lubricants and fluids, refer to the "Refilling" table on page 31.



## Starting and driving the vehicle

### System start-up

After turning the ignition key to position II (key-on), both TFT displays are activated on the instrument panel and system diagnosis is performed. During diagnosis, which lasts 5 seconds, a check is performed on the warning lights on the panel and the presence of any faults is checked.

If diagnosis detects any errors, they are only displayed once the 5 seconds required for the check have elapsed. The cases listed below are an exception and errors are displayed as soon as the key is turned to on, even during diagnosis:

- Low engine oil pressure (see page 115)
- Inertia switch triggered (see page 114)
- Semi-automatic gearbox safety warnings
- Deactivation of EPB warning (see page 154).

If the next scheduled maintenance deadline is approaching, each time the key is turned to on, information on scheduled maintenance is automatically displayed after diagnosis. For further information, refer to the "Maintenance Schedule" paragraph on page 208.

Finally, each time the key is turned to on, the message for activation of the alarm when an intrusion has been attempted (see page 19) is also displayed (after diagnosis).


Once the system check has been completed, the gearbox display is activated and the letter "P" (Parking) or "N" (Neutral) will be displayed.

### Important note



#### BEFORE YOU DRIVE

If the warning light A does not turn off after diagnosis, indicating a fault in the gearbox also shown by the symbol and special message on the left TFT display (see page 119), contact the FERRARI SERVICE NETWORK.





#### Important note



The vehicle is equipped with an electro-hydraulically controlled gearbox system operated by means of paddles on the steering wheel.

The default setting for the DCT gearbox is always "Automatic" mode (see page 142).

Every time the vehicle is started, the DCT gearbox is in "Auto easy exit" mode (see page 142) unless the vehicle was in "Automatic" mode when the engine was turned off.

To exit the "Auto easy exit" mode operate the **UP** and **DOWN** paddles (while the vehicle is moving) or press the **AUTO** button on the centre console.

#### Important note



Immediately release the **UP** and **DOWN** paddles or button **R** after the gearbox display shows that the gear has been engaged; a prolonged manoeuvre would cause the gearbox failure warning light to turn on (see page 119) and triggering of the buzzer.

#### Important note



None of the gears can be engaged if the luggage compartment lid is open or not properly closed. When the vehicle is stationary, with the driver-side door open or not properly closed and the brake pedal released, the system disengages the gear engaged after approximately two seconds.

#### *Starting the engine*

Before starting the engine, make sure that the alarm system and all electrical devices with high power absorption are turned off.

- Make sure that the electric parking brake is applied and that the doors are closed.
- Hold the brake pedal down when starting the engine.

#### Warning



Do not press the accelerator pedal.

- Turn the ignition key to position **II** and wait for the gearbox display to come on.
- Press the **ENGINE START** button (see page 124) and release it as soon as the engine starts.

Do not hold the **ENGINE START** button down for a long time.

If the engine does not start, turn the key back to position **0** and wait for the gear display to go off before retrying.

#### Warning



Hold the brake pedal down while starting the engine.



If the engine fails to start after several attempts, check for one of the following causes:

- insufficient speed of the starter motor (flat battery)
- ignition device faulty
- electrical contacts faulty
- fuel pump fuses blown.

#### *Warming up the engine*

Do not run the engine at high speed until the engine oil temperature has reached at least 65-70 °C (149-158 °F), approximately.

#### *Starting the vehicle*

With the engine started, the vehicle stationary and the brake pedal pressed, pull the right-hand **UP** paddle towards the steering wheel to engage 1<sup>st</sup> gear.

Release the brake pedal and press the accelerator to start off.

With the engine running and the vehicle stationary, you can change directly from 1<sup>st</sup> or 2<sup>nd</sup> gear to “R” (reverse) by pressing **R** on the centre console and from reverse to 1<sup>st</sup> by moving the **UP** paddle.



#### **Warning**



If the **UP** and **DOWN** paddles are not working, the message “Depress brake pedal and press LAUNCH to engage gear” will appear on the left TFT display; you can therefore engage the gear by pressing the **LAUNCH** button on the centre console (see page 157) and the brake pedal.

In these cases, the “Launch Control” function is not available.

If the engaged gear was **R**, the **LAUNCH** button must be pressed twice to engage 1<sup>st</sup> gear.

#### **Important note**



When reverse is selected, an acoustic safety signal beeps intermittently as long as “R” is engaged.

**4**

If the system automatically selects 2<sup>nd</sup> gear when attempting to shift from “R” to 1<sup>st</sup> gear, this indicates that 1<sup>st</sup> gear has jammed. Therefore, this is not a malfunction, as it falls within the system operating logic. For the same reason, when shifting from 1<sup>st</sup> gear to “R”, the system will automatically engage “N” if the gear has jammed.

During prolonged stops with the engine running, it is advisable to keep the gearshift in “N”.

#### **Important note**



If you allow the vehicle to move forward in N, when UP or DOWN is requested, a gear will be engaged that corresponds to the speed of the vehicle.

## About your Vehicle

139



#### *UP-shifting*

Use the right-hand **UP** paddle without releasing the accelerator pedal.

An **UP**-shift request is not accepted when engagement of the requested gear forces the engine to underrev or if an **UP**-shift is already in progress because of engine overrevving.

In any event, it is advisable to:

- Shift gears without releasing the accelerator pedal if pressed.
- Wait until gearshifting has been completed before requesting the next shift, avoiding a rapid sequence of multiple requests.

#### *UP-shifting due to overrevving*

The system “automatically” engages a higher gear if the accelerator pedal is pressed and the engine approaches the “runaway speed rate” (overrevving).

##### **Important note**



This will not occur when the system is in “RACE”, “CT OFF” and “CST OFF” driving mode.

#### *DOWN-shifting*

Use the left-hand **DOWN** paddle without releasing the accelerator pedal.

A **DOWN**-shift request is not accepted if engagement of the requested gear forces the engine beyond a certain RPM, depending on the gear requested, or if a **DOWN**-shift is already in progress because of engine underrevving.

In any event, it is advisable to:

- Shift gears without releasing the accelerator pedal if pressed.
- If **DOWN**-shifting is requested to start overtaking which requires quick acceleration, press the accelerator pedal just before using the paddle.
- Wait until gearshifting has been completed before requesting the next shift, avoiding a rapid sequence of multiple requests.

#### *DOWN-shifting due to underrevving*

- The system shifts down “automatically” if the engine goes below a minimum number of revs (1250 RPM).
- The **DOWN**-shift request from the paddle is ignored if gearshifting is already in progress due to engine underrevving.

#### *Sequential downshifting*

During deceleration, with the brake pedal pressed and the ABS system disabled, sequential downshifting can be performed by holding the left-hand “**DOWN**” paddle down.

The sequential gearshifting request is accepted until the second gear is engaged.

This system is only activated when the “Manettino” is set to SPORT, RACE, CT OFF or CST OFF.



#### **“N” (Neutral) request**

With the engine running, pull both **UP** and **DOWN** paddles towards the steering wheel at the same time without pressing the brake pedal to request neutral “N”.

If necessary, “N” can be requested at any speed. Subsequently, if an “**UP**” or “**DOWN**” shift is requested, the system will engage the gear most suited to the speed of the vehicle.

#### **Stopping the vehicle**

When the vehicle stops, the system automatically engages 1<sup>st</sup> gear unless Neutral has already been requested.

When the vehicle is stationary and the engine is running, hold the brake pedal down until ready to move off again.

#### **Switching off the engine**

The engine can be switched off with the gearbox either in “N” or with a gear engaged.

After turning the ignition key from position **II** to position **0**, the gearbox display will remain on for a few more seconds to display the engaged gear. If the gearbox is in “N” a buzzer will sound. Before switching off, the letter “P” is displayed on the gearbox display to inform the driver that the Park Lock has been activated.

#### **Warning**



Never leave the vehicle with the gearbox in “N”. Always make sure that the letter “P” (Parking) appears on the gearbox display.

#### **Warning**



Never leave the vehicle with the engine running.

#### **Important note**



If the vehicle is not in Parking mode (the letter “P” must be displayed on the gearbox display), the key cannot be removed.

**4**

For information on the Park Lock, see page 156.



#### *“Automatic gearbox” mode*

The “Automatic gearbox” mode is enabled/disabled by pressing the **AUTO C** button on the centre console. When the “Automatic” mode is enabled, the word “auto” appears on the gearbox display. To exit the “Automatic” mode, you must press the **AUTO** button until the word “auto” on the gearbox display disappears.

When the “Automatic Gearbox” mode is enabled, the system will automatically UP-shift and DOWN-shift according to vehicle speed, engine revs and the torque/power request of the driver.

When you are in “Automatic” mode, you can however manually shift gears using the **UP** and **DOWN** paddles. The system remains in “Automatic” mode: this is indicated by the word “auto” that remains on the gearbox display in flashing mode when the paddles are used.

When the vehicle is stationary, a “N”, 1<sup>st</sup> gear or “R” request will not result in a change from “Automatic” to “Manual”.



#### *“Auto easy exit” mode*

Every time the vehicle is started, the gearbox starts in “Auto easy exit” mode unless it was in “Automatic” mode when the engine was turned off. In this case, it remains in “Automatic” mode the next time the engine is started.

Activation is signalled by the word “auto” and an arrow ▼ in the gearbox display.

In this mode, the system will automatically UP-shift and DOWN-shift according to vehicle speed, engine revs and the torque/power request of the driver.

To exit the “Auto easy exit” mode and go to “Manual” mode, operate the **UP** or **DOWN** paddle (while the vehicle is moving) or press the **AUTO** button on the centre console.

If the “Automatic” gearbox mode is then requested by pressing the **AUTO** button, the system will apply all the characteristics of the “Automatic” gearbox mode.

#### *Push start*

##### **Warning**



Push starting is not allowed.



### ***Safe driving***

For safe driving, it is essential that the driver be aware of the best driving techniques suited to various circumstances. Always try to prevent dangerous situations by driving with caution.

#### ***Before you drive***

- Adjust the position of the seat, steering wheel and rear-view mirrors, in order to obtain the best driving position.
- Adjust the backrest so that your chest is upright and your head is as close to the headrest as possible.
- Ensure that nothing (e.g. mat covers, etc.) is blocking the pedals.
- Check that the lights and headlights are working properly.
- Ensure that any child restraint systems (e.g. child seats, cradles etc.) are properly fixed on the passenger seat.
- Your reflexes are quicker if you eat lightly before driving: avoid heavy meals before a trip.
- Do not drink alcoholic drinks before and during the journey.

At regular intervals, check the following:

- Tyre pressure and condition.
- Engine oil level.
- Engine coolant level and system condition.
- Brake fluid level.
- Steering fluid level.
- Windscreen washer fluid level.

### ***While travelling***

- Caution is the number one rule for safe driving, which also means you should take other people's behaviour into consideration.
- Follow the Road Regulations in force in the country you are driving in and always respect the speed limit.
- Always make sure that the driver and passengers have their seat belts fastened and that all children are travelling in suitable child seats.
- Good personal physical conditions ensure you can drive long distances safely.

#### **Warning**



Driving under the influence of drugs, some medicines and alcohol is dangerous to yourself and others as well as contravening road regulations and legal norms.

Travelling without your seat belt fastened increases the risk of serious injury and death in the event of a collision. Always fasten seat belts and use child seats, if present.

Do not travel with objects lying on the floor, especially in front of the driver's seat: in the event of braking, these could slide under the pedals, making it impossible to brake or accelerate.

Additionally, ensure that any loose floor mats sit correctly.

Water, ice and salt spread on icy roads may deposit on the brake discs and reduce the efficiency of the initial braking.

**4**

## **About your Vehicle**

**143**



- Make regular stops to loosen up your limbs and refresh yourself, and avoid driving for hours on end.
- Keep a constant air circulation in the passenger compartment.
- Never coast downhill with the engine off: in these conditions the engine brake, servo brake and power steering are inefficient, braking requires greater pressure on the pedal and steering will be harder.

#### *Driving at night*

When you are travelling at night, follow these fundamental rules:

- Reduce speed, particularly on dark roads.
- Driving conditions are more demanding at night, so take particular care.
- If you start feeling tired or sleepy, stop immediately: to continue driving would be a risk for yourself and for others. Continue only after you have had a rest.
- At night, it is difficult to judge the speed of vehicles in front of you as you can only see their taillights: keep at a greater safety distance than you would during the day.
- Use the high beams only outside of urban areas and when you are sure that they will not disturb other drivers.
- Turn off the high beams when you see oncoming vehicles and use the low beams.
- Keep the lights and headlights clean.
- Watch out for animals crossing the road when travelling outside urban areas.

#### *Driving in the rain*

Rain and wet roads can cause hazardous situations.

All manoeuvres are more difficult on a wet road since tyres have significantly less grip on the road. This means that the braking distances increase considerably and road-holding decreases.

Below is some advice for driving in the rain:

- Keep a greater safety distance between yourself and the other vehicles and reduce your speed.
- When it is raining very hard, visibility is also reduced. In these cases, to make yourself more visible to others, turn on the low beams even during the day.
- Drive through puddles at low speed to avoid losing control of the vehicle ("aquaplaning"): if this occurs, grip the steering wheel firmly.

#### **Warning**



If the road is wet, reduce your speed to avoid "aquaplaning" (when the tyre no longer touches the road surface because the side channels of the tyre tread are not capable of removing all the channelled water due to their particular shape or insufficient depth and a layer of water is placed between the road surface and the tyre. The fluid pressure generated is so high that it supports the vehicle's weight making it virtually impossible for the driver to control the vehicle).



- Use the ventilation system to demist the windscreen (see page 168) and avoid visibility problems.
- Periodically check the condition of the windscreen wiper blades.

#### *Driving in fog*

Whenever possible, avoid travelling if there is thick fog. If you have to drive in misty conditions, or if there is thick fog or fog banks, follow these rules:

- Keep a moderate speed.
- Turn on the low beams, also during the day, and use the rear fog light. Avoid using the high beams.

#### **Warning**



On stretches where visibility is good, turn off the rear fog light, it may be annoying for the occupants of the vehicles behind you.

- Remember that fog makes the road damp and therefore all manoeuvres are more difficult and braking distances are longer.
- Keep a safe distance from the vehicle in front of you.
- As far as possible, avoid suddenly changing speed and direction.
- As far as possible, avoid overtaking.
- In the event of an emergency stop, (e.g. failures, inability to proceed due to poor visibility conditions, etc.) try to free the main driving lane. Then turn on the hazard warning lights and, if possible, the low beams. On approaching another vehicle, sound the horn rhythmically.

#### *Driving on mountain roads*

Below is some advice for driving on steep mountain roads:

- To prevent the brakes from overheating when driving downhill, use the engine to brake by engaging a lower gear.
- Never coast downhill or drive downhill with the engine off or in neutral, nor with the ignition key removed from the steering column.
- Drive at a moderate speeds and do not "cut" corners.
- Remember that overtaking uphill is slower and requires a longer free stretch of road. If you are overtaken when driving uphill, ensure that the other vehicle can pass easily.

#### *Driving on snowy or icy roads*

Below is some advice for driving in these conditions:

- Keep a very moderate speed.
- Keep a safe distance from the vehicles in front of you.
- Fit snow tyres approved for the vehicle.
- Given the poor grip, use the engine brake as much as possible and avoid sudden braking.
- Avoid sudden acceleration and sharp changes in direction.
- During the winter season, even apparently dry roads can have icy sections.

Therefore, be careful when driving along stretches of road in the shade as there may be icy patches.



#### *Driving with the "ABS" braking system*

The ABS system assists the driver as follows:

- It prevents the wheels from locking and skidding during emergency braking, particularly in low-grip conditions.
- It allows braking and changing direction at the same time. This feature is affected by the physical limits and lateral grip of the tyres.
- When the ABS is activated, you will feel a slight pulsing of the brake pedal during emergency braking or in low-grip conditions. DO NOT release the pedal but continue to push it to give continuity to the braking action.
- The ABS prevents the wheels from locking, but it does not increase the physical limits of grip between the tyres and the road: keep a safe distance from the vehicles ahead and reduce speed before curves.



## Suspension damping control

This vehicle uses latest generation MagneRide™ magnetorheological suspension, a system developed by Delphi and perfected by FERRARI for continuous automatic damping control.

By processing data received from the vehicle dynamics sensors and sensors that detect bodyshell movements, the ECU interprets the driving conditions and the road surface and immediately adjusts suspension response by varying the control current of each shock absorber.

These sensors allow the ECU to calculate the vehicle speed, vertical and lateral acceleration, steering angle and instantaneous pressure in the braking system, and hence to control suspension damping.

This system not only ensures an optimal compromise between racing-style performance (handling) and comfort, but is capable of emphasising either aspect by using the different adjustments available controlled by the "Manettino" driving mode control switch. Three different setting levels are available on this vehicle.

### Level 1 (COMFORT)

Slightly more flexible setting, optimised to better absorb road unevenness and provide a better grip on wet road surfaces (Manettino set to "Low grip").

### Level 2 (SPORT)

Slightly more rigid adjustment optimised for sports-style driving and for high speed (with medium-high grip), without significantly affecting comfort (Manettino set to "SPORT").

### Level 3 (RACE)

Even more rigid setting optimised for use on the race track (Manettino set to RACE, CT OFF, CST OFF).

4



## Driving using the driving mode control switch (“Manettino”)

The driving mode control switch on the steering wheel allows the driver to use the vehicle potential in a fast and intuitive way.

There are five modes available, which correspond to the grip level (from low to high) and consequently to the level of driving assistance required (from high to none).

### Low-grip mode

“Low-Grip” mode ensures stability on dry as well as on wet roads. It is therefore recommended for low grip conditions (e.g. rain) and on slippery or extremely uneven roads, but also to enhance comfort during city driving. Suspension damping is optimised to provide the best possible absorption (Level 1) and the CST system is at its maximum level; the standard Bosch ASR system is activated instead of the F1-Trac function.

If “Low grip” mode is selected, it is indicated on the left TFT display as shown below:



### SPORT mode

The “SPORT” mode is the best setting for daily road use. This mode is designed to ensure stability only in medium-high grip conditions. Suspension damping shifts to Level 2 and gearshifting is more racy. The CST system also switches to a different level offering you greater driving freedom.

If “SPORT” mode is selected, it is indicated on the left TFT display as shown below:





### RACE mode

The RACE mode should be used on the race track. Gearshifting favours the racing style of the vehicle whereas the CST shifts to Level 3 (engine power reductions are minimal) and the suspension becomes even stiffer (Level 3). The performance ABS shifts to "Sport" level. This mode is designed to ensure stability on the race track in high grip conditions.

If "RACE" mode is selected, this is indicated on the left TFT display as shown below:


### Warning



Use of the vehicle on race tracks: after each start, cover the first straight stretch of the track (at least 500 meters/0.3 mi) at a constant speed so that the traction control system and the ABS may calculate exactly the grip available and the diameter of the tyres (the calculation is reset every time the engine stops).

If this rule is not followed, system performance may be reduced.

4

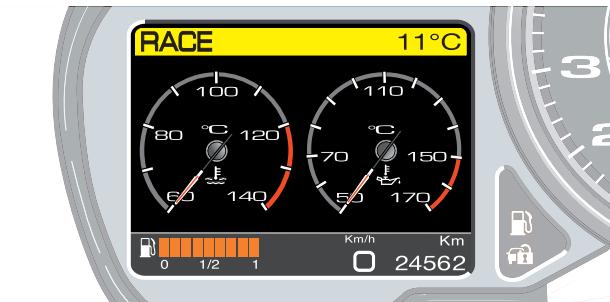



### CT OFF mode

In "CT OFF" mode the F1-Trac traction control is disabled. This mode further enhances the already racing -style behaviour of the vehicle: traction control is disabled while stability control remains active when a certain level of sideslip is exceeded. The gearshift mode, suspension damping and the performance ABS setting are the same as the previous position. The electronic differential has a specific setting developed to emphasise the dynamic qualities of the vehicle. Stability is not ensured.

If "CT OFF" mode is selected, this is indicated on the left TFT display as shown below:



### CST OFF mode

In "CST OFF" mode the CST system is disabled. No electronic systems other than the E-Diff control vehicle stability and the driver is allowed complete freedom and control of the vehicle for track use. The gearshift mode, suspension damping and the performance ABS setting are the same as the "RACE" and "CT OFF" modes.

#### Warning



In low- to medium-grip conditions (e.g. wet, icy, sandy roads), do not deactivate the **CST** system.

#### Important note



Every time the engine is started, the **CST** system will reactivate.

#### Important note



When the brake pedal is pressed, traction control is activated via the VDC system (vehicle dynamics control via the braking system).



If "CST OFF" mode is selected, this is indicated on the left TFT display as shown below:

4



## About your Vehicle

151



### Suspension damping delink button

The driver may decide to separate the suspension setting from the logic of the “Manettino” driving mode control switch using the special button A on the steering wheel.

By pressing button A, irrespective of the position of the Manettino, the suspension setting shifts to Level 1 (COMFORT).

Position of Manettino	Suspension setting	Button A pressed
Low grip	COMFORT	remains COMFORT
SPORT	SPORT	shifts to COMFORT
RACE	RACE	shifts to COMFORT
CT OFF	RACE	shifts to COMFORT
CST OFF	RACE	shifts to COMFORT



If button A has been pressed and subsequently the position of the Manettino is changed, the suspension setting follows the operating logic dictated by the Manettino.

#### Important note



Upon turning off and restarting the vehicle, the suspension setting depends on the position of the Manettino.

When the Manettino is set to SPORT, RACE, CT OFF or CST OFF, shifting to the COMFORT suspension setting by pressing button A is indicated by displaying the special symbol and “Bumpy road” message on the left TFT display for 5 seconds.





4

After 5 seconds, next to the Manettino status in the top of the display, the suspension symbol continues to be displayed as shown in the photo below (example shows Manettino in "SPORT" mode).



## About your Vehicle

153




## EPB - Electric parking brake

On this vehicle the parking brake is actuated by an electric motor. The parking brake can be applied and released using the special control **B** on the dashboard to the left of the steering wheel. A special warning light comes on on the panel to indicate that the parking brake has been applied (see page 119).

It is deactivated by pushing down the brake pedal and pressing button **B**. The warning light will go off when the parking brake has been released completely.

The electric parking brake can be used as an emergency brake when the vehicle is in motion. If this is the case, the system acts on all four wheels until button **B** is released by communicating with the ESP system which prevents locking.



### Warning



Always apply the handbrake when the vehicle is parked.  
The vehicle should be blocked. If this is not the case, please contact the FERRARI SERVICE NETWORK.

#### *Deactivation of EPB warning*

If the electric parking brake is activated, the message “Depress brake pedal and deactivate EPB”, is immediately displayed on the left TFT display (even during system diagnosis, see page 137) accompanied by an acoustic signal when the vehicle is started.

With the engine running and the parking brake still activated, once a speed of 10 km/h (6 mph) is reached, the message “Parking brake on”, is displayed on the left TFT display accompanied by an acoustic signal.



#### *Autohold function*

The EPB Autohold function automatically activates the electric parking brake when the engine is switched off. When the key is turned to on, the Autohold function is always activated but can be temporarily deactivated by pressing the **AUTO PARK C** button.

When the **C** button is pressed, the message “PARK OFF” is displayed on the left TFT display for 5 seconds. If button **C** is pressed again, then the message “PARK ON” is displayed on the left TFT display for 5 seconds.

#### *“Automatic Vehicle Holding” AVH function*

The electric parking brake provides optimised release on hill starts due to its Automatic Vehicle Holding function: in certain circumstances, this system keeps the vehicle braked using differentiated brake shoe/pad release so that there is time to move your foot from the brake pedal to the accelerator without the vehicle moving backwards.





## Park Lock

The Park Lock is a locking device built into the gearbox.

This device is used to prevent the vehicle from moving when the multi-disc clutches are open, i.e., with the engine off and/or without the hydraulic pressure required for gearbox operating.

The device operates automatically every time the key is turned to off: if a gear is engaged when the key is turned to off, the Park Lock is immediately activated. If the gearbox is in "N" (neutral), the Park Lock starts operating after a minimum preset time (needed for the Carwash procedure, see next paragraph). To inform the driver that the Park Lock has been engaged, the letter "P" is displayed on the gearbox display.

The Park Lock is deactivated when the engine is running, the first gear or "R" is requested (with the brake pedal pressed) and the luggage compartment lid has been closed correctly.

## Carwash procedure

The Park lock device can be electrically disabled on a temporary basis when the engine is switched off by performing the Carwash procedure.

This procedure is necessary when the vehicle has to be moved with the engine off and when washing the vehicle.

### Warning



When the Park Lock device is electronically deactivated (Carwash procedure), the vehicle may move.

The vehicle is only kept stationary by the parking brake which must be applied.

To perform the Carwash procedure, do the following:

- with the engine running, select the first gear;
- select neutral "N";
- switch off the engine;
- turn the key to position II (key-on) within 3 seconds of switching off.

The message "Carwash mode activation" will appear on the left TFT display.



### Launch Control

The “Launch Control” mode is a performance start function. Activating this function optimises vehicle acceleration from a standing start.

The device, which is not available when the Manettino is set to the “Low grip” driving mode, transfers the necessary torque to the ground and avoids skidding of the wheels during acceleration.

To start the vehicle in “Launch Control” mode, do the following:

- the vehicle must be stationary
- the gearbox must be in “Manual” mode
- hold the brake pedal down and select first gear
- press the **LAUNCH L** button on the left of the centre console: an acoustic signal informs the driver that the device has been switched on and the word “launch” appears on the gearbox display
- press the accelerator pedal and release the brake pedal.

#### Important note



The “Launch Control” function is not available in presence of:

- a sloping road surface, even slight
- high clutch temperatures

4




### **“Front Lift” system (optional)**

On request, the vehicle can be fitted with a front suspension lift system: this device acts on the front suspension and raises the front of the car by approximately 40 mm (1.5 in.) to make access to garages or steep ramps easier and avoid damaging the car.

The system can be activated when the engine is running at a speed of below 40 km/h (25 mph) by pressing button A on the centre console. At speeds of over 40 km/h (25 mph), the system is deactivated whereas if it is already activated, it is automatically deactivated when exceeding 40 km/h.

Throughout the entire Front Lift system activation cycle, the special warning light (see page 118) remains on in flashing mode whereas the vehicle symbol with an arrow pointing upwards and a message “Front Lift moving” appears on the left TFT display. When the system has been activated (front of the vehicle raised), an acoustic signal is emitted and the message “Front Lift ON” appears for 5 seconds whereas the warning light on the panel stays on in fixed mode until the system is deactivated.

To deactivate the system, press button A again: at the start of the deactivation cycle, the warning light on the panel starts to flash again whereas the vehicle symbol with an arrow pointing downwards and the message “Front Lift moving” appears on the left TFT display. The message remains until the system has been completely deactivated.

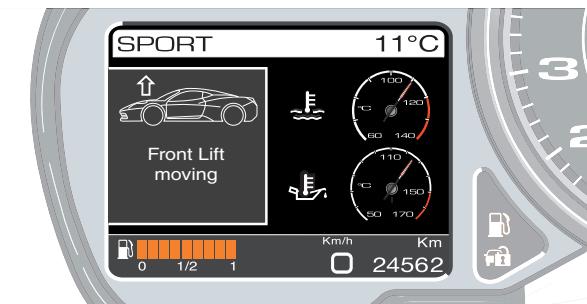



If the engine is turned off with the front suspension lift activated, the message “Front Lift ON. Set Front Lift to OFF” appears on the left TFT display at key-off. Turn the key back to position II (key-on) and press button A to lower the vehicle. If it is not manually deactivated by pressing the button, within 15 seconds of turning off the engine, the system is automatically deactivated.

#### Warning



The system has not been designed to remain activated when the engine is turned off and the vehicle is stationary. If the engine is turned off with the front lift activated, the vehicle is automatically lowered after 15 seconds.

Do not use the front suspension lift to park the vehicle on obstacles (e.g. pavements); these obstacles may come into contact with the front of the vehicle and damage it once the system has been deactivated.


In the event of engine failure, the “Front Lift” system can however be activated by pressing button A for 10 seconds. In this way, the vehicle front can be lifted even in emergencies when the engine is turned off (for example, to load it onto the ramp of a breakdown vehicle).

#### Important note



The front suspension lift should only be used for the purposes described above and not to drive over speed control systems (e.g. traffic calmers) more quickly.

4

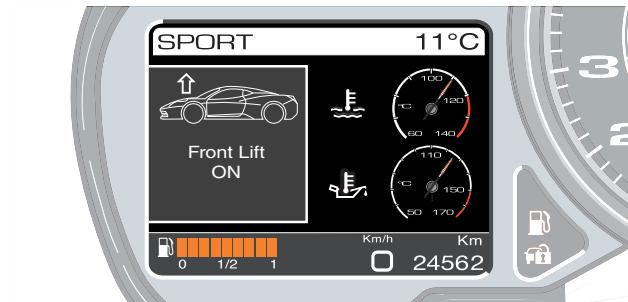

## About your Vehicle

159



## Seat adjustment

### Warning



As with all adjustment, seat adjustment must be performed when the vehicle is stationary.

Correct adjustment is very important for enhanced driving comfort and maximum efficiency of the passive safety systems.

#### Basic seat

The seat position can be adjusted using the special controls.



### Backward/forward adjustment

Pull lever **B** up and slide the seat forward or backward to the desired position. Release the lever and "wiggle" in the seat to check that it is locked in place.

### Warning




The backward/forward adjustment must consider the fact that airbag devices are placed in front of the driver and the passenger (see page 61).

Correct adjustment ensures there is adequate space between the airbag and the driver/passenger (see page 61).

### Seat back rake adjustment

Turn knob **C** clockwise or counterclockwise until it reaches the required position.

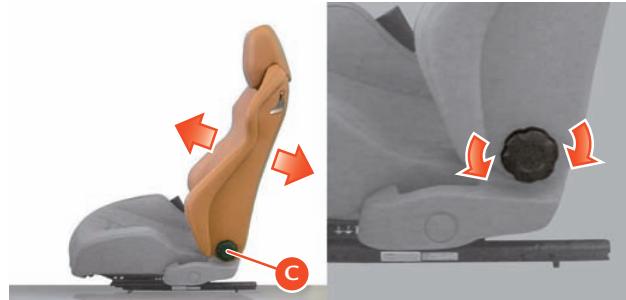




#### *Tilting the backrest*

To tilt the seat, pull lever **L** up and push the backrest towards the front of the vehicle.

When the backrest goes back into position, it will automatically block once it has reached the correct position.

4





#### *Electrically-adjustable seat (optional)*

The seat position can be electrically adjusted using the special controls.

Three adjustments are possible using control **D**:

- backward/forward adjustment: push the control forwards or backwards
- height adjustment: push the control up or down
- seat inclination (tilting): push the front or rear end of the control up or down to adjust seat inclination.

#### **Warning**



The backward/forward adjustment must consider the fact that airbag devices are placed in front of the driver and the passenger (see page 61).

Correct adjustment ensures there is adequate space between the airbag and the driver/passenger (see page 61).



#### *Seat back rake adjustment*

Use control **E** to adjust the seat back rake. Push the control forward or backward to adjust the seat back rake.

#### *Lumbar support adjustment (Full Electric option)*

Use control **F** to adjust the lumbar support. Push the control on the seat symbols to increase or decrease the lumbar support.

#### *Backrest and cushion side width adjustment (Full Electric option)*

Use control **G** to pneumatically adjust the width of the backrest sides and the seat cushion. Push the control on the seat symbols to increase or decrease the side width.





#### **Driver's seat position memory (Full Electric option)**

When a door is open and the key is in position 0, the seat can be moved for a limited period (approx. 15 sec.). Each time a door is opened or both doors are closed and the key is set to OFF, the seat can be moved again for a limited period.


The seat position can only be memorised when the key is in position II, by pressing one of the three buttons 1, 2 or 3 (H) each one corresponding to a memorisable position. Pressing one of these buttons for longer than 3 seconds memorises the position of the driver seat, rear-view mirrors and steering wheel (confirmed by emission of a double tone).

To recall the memorised position, press one of the buttons H and release it within 3 seconds. Operation begins as soon as the button is released.

Recalling the memorised position is not allowed when the vehicle is in motion. If the vehicle starts to move while the memory recall is being operated, the seat and column do not stop moving and reach the memorised position.

With reverse gear engaged, the position of the passenger external rear-view mirror can be adjusted to a position other than the driving position, to help parking manoeuvres. This position can be memorised along with all the other memorisable positions.

If the personalised reverse gear position is never set, when the reverse gear is engaged, the passenger external rear-view mirror will in any case move slightly downwards and inwards (compared with the driving position).





#### *Seat heating system (Full Electric option)*

Turn control **N** to activate the seat heating function.

When this function is active on one or both seats, the relative warning light on the panel comes on. Using control **N**, the driver can adjust the heating, choosing from 3 levels identified on the control with the numbers 1, 2 and 3. In position 0, seat heating is not activated.



#### *Tilting the backrest*


To tilt the seat, pull lever **L** up and push the backrest towards the front of the vehicle.

When the backrest goes back into position, it will automatically block once it has reached the correct position.

#### **Warning**



Do not use the electric seat adjustment controls when the backrest is tilted.





### Super Racing seat

The seat position can be adjusted using the special controls.

#### Backward/forward adjustment


Pull lever **P** up and slide the seat forward or backward to the desired position. Release the lever and “wiggle” in the seat to check that it is locked in place.

#### Warning



The backward/forward adjustment must consider the fact that airbag devices are placed in front of the driver and the passenger (see page 61).

Correct adjustment ensures there is adequate space between the airbag and the driver/passenger (see page 61).

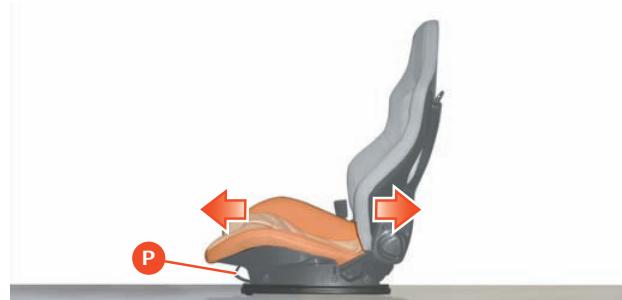

#### Seat back rake adjustment

Turn knob **Q** clockwise or counterclockwise until the desired back rake has been reached.

#### Tilting the backrest

Pull lever **R** up to tilt the backrest forward.



4



## Adjusting the steering wheel

The steering wheel can be electrically adjusted for rake and reach. It can only be adjusted if the ignition key is in position **II**.


Move control **A** (to the left of the steering column) in the four directions to adjust the steering wheel.

On versions equipped with a driver's seat with memory, the position of the steering wheel is memorised together with the position of the external rear-view mirrors when the seat position is memorised.

### Warning



Do not adjust the steering wheel when the vehicle is moving.

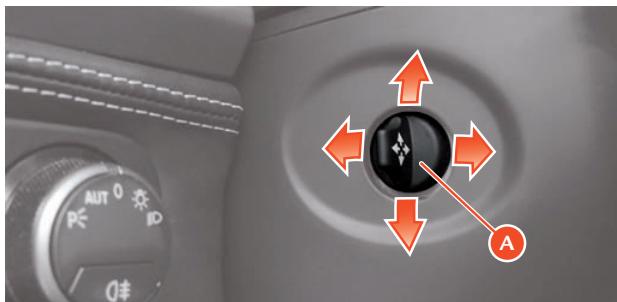

## Rear-view mirrors

### Internal rear-view mirror

Hold the internal rear-view mirror and move it to the required position.

On request, the internal rear-view mirror can be fitted with an electrochromic mirror that automatically darkens to reduce the dazzling effect of the reflected light on the driver. The speed with which the mirror darkens depends on the intensity of the light.

By pressing button **B** you can activate/deactivate the electrochromic mode. When the electrochromic mode is activated, the green LED **D** comes on.






#### *External rear-view mirrors*

These mirrors can be electrically adjusted using the control **C** (with the ignition key in position **II**) and are equipped with defogging elements.

- 1) Mirror selection: turn control **C** to the left or right lock position to select the mirror that requires adjusting.
- 2) Mirror positioning: move control **C** in the four directions (up – down – right – left) to adjust the selected mirror.
- 3) Mirror closure (optional): turn control **C** to the lower central lock position to close the rear-view mirrors.

Once adjusted, move the control **C** into the upper central position where it will be locked in order to avoid changing the external mirror setting inadvertently.

The mirrors will yield in both directions in the event of a collision; if necessary, the mirrors can be pushed both backwards and forwards.

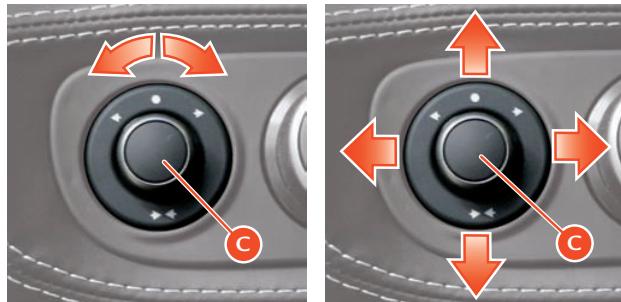

On versions equipped with a driver's seat with memory, every time the seat position is memorised, the external rear-view mirror position is also stored automatically, both for the normal travelling direction and reverse manoeuvring.

To memorise a new position of the external rear-view mirrors, turn the ignition key to position **II** and adjust the position of the mirrors; then engage reverse and reposition the external mirrors to ensure the best possible visibility to perform the manoeuvre, then disengage reverse gear.

Finally, press one of the buttons 1, 2 or 3 on the seat (see page 161), each one corresponding to a memorisable position, until a double tone confirms that the procedure is complete.

The new position of the external rear-view mirrors will be automatically memorised together with the seat position.

In addition, the mirror positions can be adjusted for both the normal travelling direction and for reverse manoeuvring.

**4**

#### **Warning**



The rear-view mirrors must always be positioned correctly while driving.

**Do not adjust the rear-view mirrors when the vehicle is moving.**

On request, the external rear-view mirrors can be fitted with an electrochromic mirror.





## Air conditioning and heating system

### Operating modes

#### Automatic

This mode automatically adjusts the air distribution, temperature and ventilation levels according to the temperature set by the user.

#### Partially Automatic


This mode allows the user to adjust certain parameters manually, while others remain automatic.

#### Manual

This mode allows the user to set the values to suit the passengers' needs.

### Controls

- 1 Left-hand temperature setting and **AUTO** button
- 2 A.C. compressor activation/deactivation
- 3 Single-zone mode activation/deactivation
- 4 Air distribution fan speed
- 5 Rear window demist activation/deactivation
- 6 Windscreen demist activation/deactivation
- 7 Right-hand temperature setting and **AUTO** button
- 8 Right-hand air distribution mode setting
- 9 Air recirculation
- 10 Left-hand air distribution mode setting

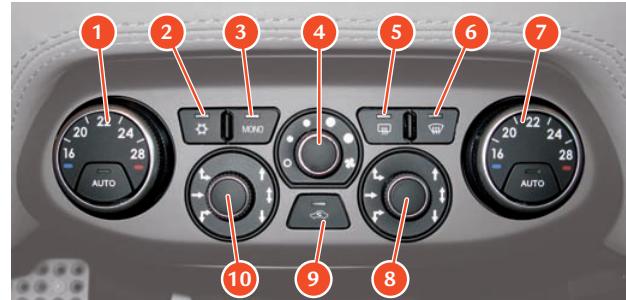

**Left-hand temperature setting and AUTO button (1)**

This is used to select the required air temperature in the left-hand side of the passenger compartment; the **AUTO** button is used to activate automatic operation (LED on).

**A.C. compressor activation/deactivation (2)**

This is used to activate (LED on) or deactivate (LED off) the A.C. compressor.

**Single-zone mode activation/deactivation (3)**

This is used to activate (LED on) or deactivate (LED off) the single-zone operating mode.

**Air distribution fan speed (4)**


The four setting positions allow the occupants to select the air flow rate.

**Rear window demist activation/deactivation (5)**

Press this button (LED on) to activate rear window defogging/demisting.

**Windscreen demist activation/deactivation (6)**

Press this button (LED on) to activate windscreen defogging/demisting.





#### *Right-hand temperature setting and AUTO button (7)*

This is used to select the required air temperature in the right-hand side of the passenger compartment; the AUTO button is used to activate automatic operation (LED on).

#### *Right-hand air distribution mode setting (8)*

This is used to select one of the six air flow distribution modes in the right-hand side of the passenger compartment.



#### *Air recirculation (9)*

If released (LED off), the air flow comes from outside the passenger compartment.

When outside temperatures exceed 32 °C (90 °F), the air recirculation feature remains on with a 60-second pause every twenty minutes to refresh the air.

If you activate the windscreen washer function, the air recirculation feature activates for 20 seconds, to prevent any smell of detergent products from entering the passenger compartment.

If pressed (LED on), the air flow comes from inside the passenger compartment.

The recirculation increases air heating or cooling.

#### *Left-hand air distribution mode setting (10)*

This is used to select one of the six air flow distribution modes in the left-hand side of the passenger compartment.

Once the internal temperature has stabilised at the desired level, you are advised not to change the position of the temperature selection switch unless the external temperature changes drastically.





#### Maintenance

The pollen filter must be replaced every year, as indicated in the "Maintenance Schedule".

#### Important note



The air coming out of the vents does not correspond to the temperature requested by the user, but is the temperature required to maintain the desired temperature inside the passenger compartment.

#### Important note



We recommend keeping the air flow set to open and directing the air flow to a neutral position.

4

#### Adjusting the air vents


The adjustable air vents are positioned on the sides and in the central section of the dashboard.

Use control A to direct the air flow.

Use control B to adjust the air flow rate.

Turned to left: closed.

Turned to right: open.

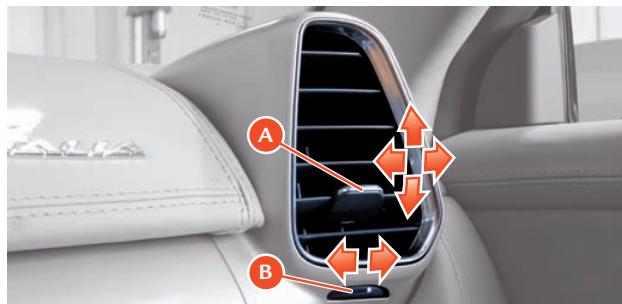

#### About your Vehicle

171



## Passenger compartment accessories

### Glove compartment

This is located on the passenger side of the dashboard. To open it press the **OPEN C** button on the centre console: the glove compartment will move down slowly by way of a damped opening mechanism.

The glove compartment is illuminated by an internal light that comes on automatically when it is opened.

#### Warning




Keep the glove compartment closed while driving.

To close the glove compartment, push the top part until you hear the click of the lock.



Opening of the glove compartment can be deactivated by pressing button **C**. Call up the MENU screen page on the left TFT display (see page 96) and then select the items “Car setup”, “Glove box key” and OFF. To reactivate opening using the button, select ON.






#### Pocket-change compartments

They are located on the lower part of the doors and on the centre console.

There is also a cup holder in the front of the centre console.

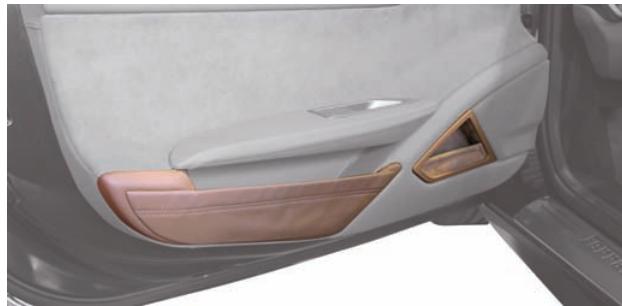

#### Sun visors

The sun visors can be moved by pulling them down towards the windscreen and sideways by unhooking them from the fastener and turning them towards the door glass.



4



#### 12V power socket

The power socket **D** on the centre console can be used to power small electrical appliances such as mobile phones, lights, vacuum cleaner and any other accessory with absorption not exceeding 140 Watts and a voltage of no more than 12 Volts.

##### Warning



Prolonged use of this device may discharge the battery.

Do not try to insert plugs into the power socket that are not the right size and shape.

##### Warning



Use the power socket to connect the tyre repair and inflation kit in an emergency ONLY for the amount of time strictly necessary.





Toolkit .....	178
Replacing light bulbs .....	183
Replacing a fuse .....	186
Replacing a wheel .....	194
Towing .....	196
Battery .....	198
Battery conditioner .....	200
EPB emergency release .....	204
Park Lock emergency release .....	206



## ADVICE FOR EMERGENCY SITUATIONS



### Warning



Repair work using the toolkit requires:

- suitable protective equipment (e.g. gloves)
- adequate precautions to be taken (e.g. during tyre replacement never lie under a vehicle raised by a jack)
- minimum specific expertise when working in contact with electrical parts/components (e.g. battery).

### Toolkit

#### *Tool bag*

Stored in the luggage compartment, it contains the necessary tools for emergency repair jobs:

- pair of cotton gloves;
- set of fuses;
- pliers for removing fuses;
- tow hook;
- insulated cutting pliers;
- funnel for emergency fuelling;
- screwdriver for slotted and crosshead screws;
- EPB emergency release tool;
- Park Lock emergency release tool.



**Warning**

The Electric Parking Brake (EPB) emergency release tool and the Park Lock emergency release tool may only be used by specialised workshop technicians, as indicated on label on the tool bag.

**Warning**

The Electric Parking Brake (EPB) emergency release tool is flexible and is kept folded up in the tool bag: remove the tool from its housing very carefully to prevent the end flying out.

**5****Advice for Emergency Situations**

179



#### *Emergency tyre repair and inflation kit*

Stored in the luggage compartment, it can be used in the event of a puncture or low tyre pressure to repair and/or inflate a tyre enough to continue the journey safely.

##### **Important note**



To use the tyre repair and inflation kit correctly, refer to the instruction booklet supplied with the kit.

##### **Warning**



Give the instruction manual supplied with the kit to the personnel that will handle the tyre repaired with the tyre repair kit.

##### **Warning**



In the event of a puncture caused by foreign objects, tyres can be repaired with cuts of up to **4 mm** in diameter on the tyre tread and shoulder.

##### **Warning**



Punctures cannot be repaired on the sides of the tyre. Do not use the tyre repair kit if the tyre has been damaged after driving with a flat tyre.

##### **Warning**



Damage to the wheel rim that causes air leaks cannot be repaired. Do not remove foreign objects (screws or nails) that have penetrated the tyre.

##### **Warning**



After using the repair kit, the vehicle must be considered in an emergency situation: drive with the greatest care (maximum permissible speed 80 km/h - 50 mph).

##### **Warning**



Apply the sticker supplied with the kit where it can easily be seen by the driver to indicate that the tyre has been treated with the tyre repair kit.

Drive carefully especially on bends.

Avoid sudden accelerations or braking.

##### **Warning**



The kit is to be used to temporarily repair only one tyre punctured by small objects: the kit may not be useful in the case of large punctures or tearing.



#### Important note



After driving for approximately 10 minutes, stop and recheck the tyre pressure.

Remember to apply the parking brake.

#### Warning



If the pressure has decreased below **1.8 bar** (26.11 psi), do not continue driving: the kit cannot guarantee the correct hold because the tyre is too damaged. Contact the FERRARI SERVICE NETWORK.

If the tyre pressure is at least **1.8 bar** (26.11 psi), restore the correct pressure and continue driving.

Drive very carefully to the nearest FERRARI SERVICE NETWORK.

#### Warning



The repaired tyre must be replaced as soon as possible and the workshop personnel must be informed that the tyre was treated with tyre repair fluid.

#### Warning



Keep the kit in its box and out of children's reach.

Do not inhale or swallow the fluid contained in the cartridge and avoid contact with the skin and eyes.

#### Warning



The spray contains ethylene glycol and latex.

The latex may cause an allergic reaction, is harmful if swallowed and is irritating to eyes. May cause sensitisation by inhalation and skin contact. Avoid contact with eyes, skin and clothing.

In case of contact, rinse immediately with plenty of water. If swallowed, do not induce vomiting, rinse mouth, drink plenty of water and seek immediate medical advice. Keep out of reach of children. The product should not be used by asthma sufferers. Do not inhale vapours during use. In the event of an allergic reaction, seek immediate medical advice. Store the spray can in its special case away from sources of heat.

The liquid sealant has an expiry date: the expiry date is indicated on the kit.



## Environment



Replace the spray can containing the expired liquid sealant. Do not dispose of the spray can and sealant in normal domestic waste. Dispose of in accordance with national and local regulations or ask the FERRARI SERVICE NETWORK to take care of disposal.

### Warning



The sealant in the kit cartridge can damage the sensor inside the wheel rim on vehicles fitted with a tyre temperature and pressure monitoring system (TPMS).

If this occurs, the sensor must be replaced. Contact the FERRARI SERVICE NETWORK.

### Warning



Wear the protective gloves supplied with the tyre inflation and repair kit.

## Useful accessories

In addition to the tools supplied with the vehicle, the hazard warning triangle and fluorescent safety jacket should always be kept on board in order to signal hazardous situations in compliance with regulations.



## Replacing the front and rear light bulbs

### Important note



To replace the front and rear light bulbs, contact the **FERRARI SERVICE NETWORK**.


To adjust the headlight beam, please contact the **FERRARI SERVICE NETWORK**.

## Replacing number plate light bulbs

To replace a number plate light bulb, proceed as follows:

- remove the light from the right side where there is a spring clip;
- remove the transparent cover **A** from its housing;
- replace the bulb by removing connector **B** from its housing;
- refit the connector and transparent cover by inserting it first from the left side and then pressing on the other side.

5

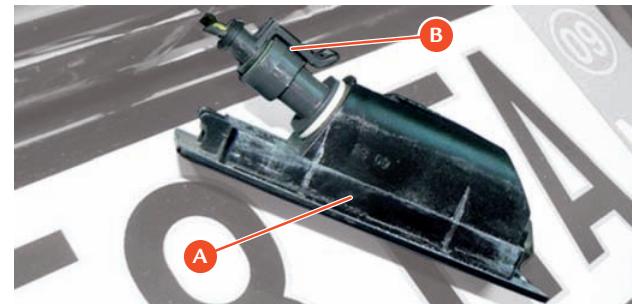


## Advice for Emergency Situations

183

## Replacing other light bulbs

### *Roof dome light*


- Use a screwdriver to gently prise under the edge of the transparent cover **C** of the dome light and remove it from the roof panel.
- Replace the bulb **D** or **E** or **F**.
- Refit the dome light and make sure that the wires are not trapped by inserting it first from the connector side and then pressing on the opposite side.

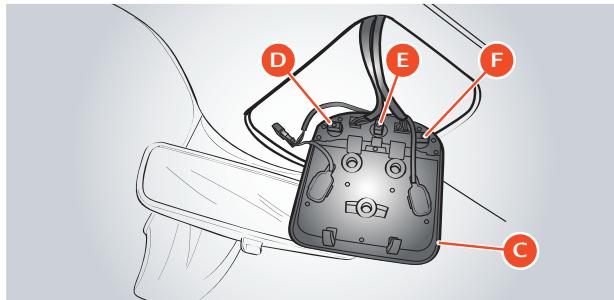

### *Glove compartment, underdoor and luggage compartment bulbs*

- Use a screwdriver to gently prise under the edge of the transparent cover **G** and lift it;
- Completely remove the transparent cover from its housing;
- Take the bulb out of its clips;
- Replace the bulb;
- Refit the transparent cover and make sure that the wires are not trapped by inserting it first from the connector side and then pressing on the opposite side.

Follow the same procedure for replacing the underdoor light bulbs and the luggage compartment dome light bulb.

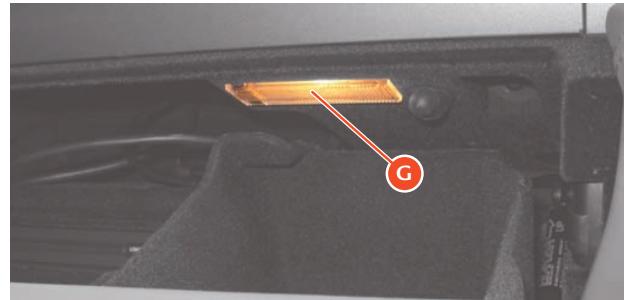



### Light bulbs (12 V except for high beam and low beam)

	Type	Power
Low beams and high beams	gas-discharge (XENON)	Das
Front running lights	LED	
Front turn indicator lights	LED	
Side turn indicator lights	incandescent	T4W
Running and stop lights	LED	
Reverse lights	incandescent	H6W
Supplementary stop lights	LED	
Rear turn indicator lights	LED	
Rear fog lights	incandescent	W16W
Number plate lights	incandescent	5W
Passenger compartment dome light	incandescent	8W
Spotlights	incandescent	5W
Glove compartment light	incandescent	5W
Underdoor courtesy lights	incandescent	5W
Luggage compartment light	incandescent	10W



## Replacing a fuse

When an electrical device is not working, check that the corresponding fuse is not blown.

**A** - Unblown fuse.

**B** - Blown fuse.

### Important note



If the problem persists, contact the FERRARI SERVICE NETWORK.



### Important note



When replacing a fuse, always use fuses of the same amperage (same colour).

The tool bag contains spare fuses.

To remove the fuses, use the pliers **C** in the tool bag.



### Fuse colours

	Ampere
yellow ochre	5
brown	7.5
red	10
light blue	15
yellow	20
white	25
green	30


### Maxi fuse colours

	Ampere
yellow	20
green	30
orange	46
red	50
blue	60



#### ***Location of the fuse and relay boxes***

- A - Fuses and relays in battery compartment
- B - Body Computer fuses and relays
- C - Fuses and relays in passenger compartment on passenger side
- D - Fuses and relays on driver-side rear side panel

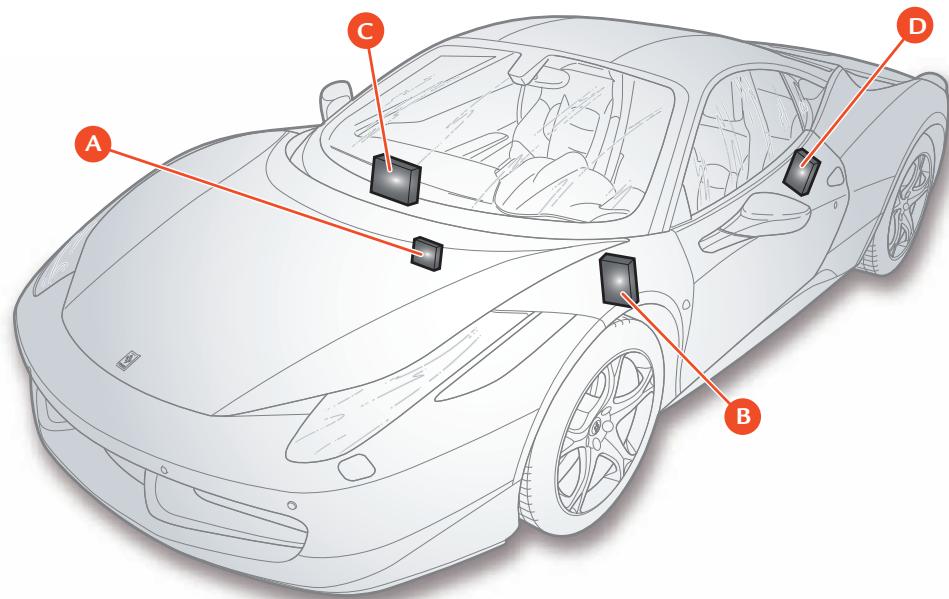

**5**

#### **Advice for Emergency Situations**

**187**



### Fuses and relays in battery compartment

To access these fuses:

- remove the passenger footrest;
- remove the box cover A.


#### Important note



Only open the boxes containing the fuses that need to be checked to avoid damaging other components.

Box A contains these fuses:

Ref.	Amp.	Use
CAL2	CAL2	Power supply (starter motor and alternator)
F-70	150	Engine relay and fuse ECU power supply (SCM)

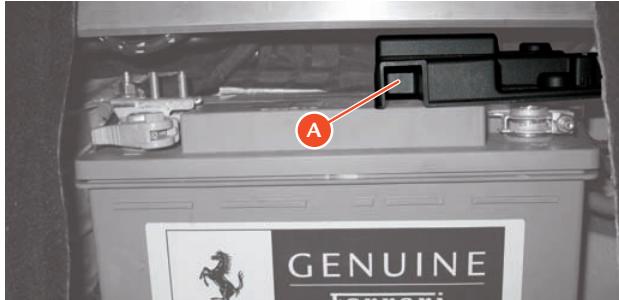

F-71	40	Front lift pump
F-72	40	Parking brake power
F-73	70	Dashboard ECU power


### Body Computer fuses and relays

To access these fuses, remove the dashboard panel 1.

#### Important note



Only open the boxes containing the fuses that need to be checked to avoid damaging other components.





Box B contains these fuses and relays:

Ref.	Amp.	Use
F-12	15	Right high beam
F-13	15	Left high beam
F-31	7.5	INT/A for dashboard ECU and Body Computer Node relay coils
F-32	10	Dome lights, foot well and step lights, Side Marker relay coil
F-34	30	Suspension Control Node
F-35	7.5	Stop light control, clutch control, air conditioning node
F-36	10	Volumetric anti-theft system, parking sensors, fuel filler flap relay coil
F-37	10	Stop light control, Instrument Panel Node, Suspension Control Node
F-38	15	Luggage compartment lock actuator
F-39	15	Dashboard ECU devices (NBC interconnection)
F-40	30	Heated rear window
F-42	7.5	ABS
F-43	30	Windscreen washer/wiper relay power supply
F-44	20	Passenger seat heating, cigarette lighter
F-47	30	Driver-side door, driver-side power window
F-48	30	Passenger-side door, passenger-side power window

F-49	7.5	Rain and twilight sensor, parking sensors, parking brake control, column adjustment control, hazard warning lights, Steering Wheel Node, Differential Control Node, radio, CAN box interface
F-50	7.5	Airbag Node, weight sensor
F-51	7.5	Semi-automatic Gearbox Node
F-52	15	Power socket, driver seat heating
F-53	10	Instrument Panel Node power supply
T01	20	Low beam relay
T11	30	Heated rear window relay
T12	30	Service relay 1 (dependent on INT/A ignition switch)
T13	50	Jumper (service power supply 2)



## Advice for Emergency Situations

## Fuses and relays in passenger compartment on passenger side

These fuses are located behind the glove compartment 2.

Boxes C contain these fuses and relays:

Ref.	Amp.	Use
F-01	60	+30 Radiator fan relay 2
F-02	30	+30 ABS (valves)
F-03	30	+30 Hard top Node (pump) - not used
F-04	50	+30 ABS (pump)
F-05	40	+30 Air conditioning Node
F-06	50	+30 Radiator fan relay 1
F-07	20	+30 Horn relay
F-08	7.5	Air conditioning and heating system compressor
F-09	7.5	+30 Supplementary stop light relay (third stop light)




F-10	15	+30 Fuel pump relay 1
F-11	25	Left bank oxygen sensor
F-14	15	+30 High beam relay
F-15	7.5	+30 Power supply for EPB-activated stop light control relay, right headlight LED module power supply relay
F-16	25	+30 Right bank engine control power supply
F-17	25	+30 Left bank engine control power supply
F-18	10	+30 Left cylinder bank injection system power supply, LH cylinder bank injection main relay coil
F-19	10	+30 Right cylinder bank injection system power supply
F-20	30	+30 Right cylinder bank injection system main relay
F-21	15	+30 Fuel pump relay 2
F-22	15	Left bank (ignition coil)
F-23	10	+30 ABS (electronic)
F-24	15	Right bank (ignition coil)
F-30	30	+30 HI-FI amplifier relay
F-81	40	+30 Supplementary ECU power supply
F-82	70	+30 Dashboard ECU and ECU on driver-side rear side panel power supply
F-83	50	+30 Air pump relay



F-84	15	+30 Fuel pump relay 1
F-85	25	Headlight washer
F-87	25	Right bank oxygen sensors
F-88	10	+15 Left cylinder bank injection system
F-89	10	+15 Right cylinder bank injection system
F-91	15	+30 Tyre pressure node, LH headlight LED module relay
F-92	7.5	+30 Alternator sensing
F-93	30	+30 Ignition switch
F-94	15	+30 Radio/CAN box/ICP/clock spring/Japan navigation system stabiliser
F-95	10	+30 Current stabiliser
F-97	30	+30 Stabiliser for Becker amplifier
T02	30	High beam relay
T03	30	Fuel pump second speed relay



T05	30	Fuel pump relay 2
T06	30	Glove compartment relay
T07	50	Horn relay
T08	30	Air conditioning and heating system compressor relay
T09	30	Left cylinder bank injection system main relay
T10	30	Right cylinder bank injection system main relay
T14	30	Fuel pump relay 1
T17	10/20	INT/A relay (devices excluded at ignition)
T19	30	EPB-activated stop light control relay
T20	30	Starting relay
T26	10/20	Windscreen wiper first speed relay
T27	10/20	Windscreen wiper second speed relay
T28	30	Windscreen washer pump relay

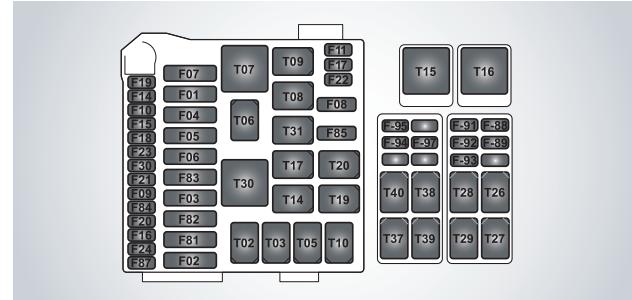

T29	30	Supplementary stop light relay (third stop light)
T30	50	Air pump relay
T31	30	Headlight washer pump relay
T37	30	Radiator fan relay 2
T38	30	Left headlight LED module power supply relay
T39	30	Right headlight LED module power supply relay
T40	30	Radiator fan relay 1

#### Fuses and relays on driver-side rear side panel

To access these fuses, remove the driver-side rear side panel **3**.

Boxes **D** contain these fuses and relays:


Ref.	Amp.	Use
F-54	15	+30 Gearbox cooling fan
F-56	30	+30 Driving Position Node
F-57	7.5	Side Markers 1 (LH front and RH rear)
F-59	7.5	Reverse light power supply
F-60	30	+30 Passenger Position Node
F-61	7.5	+30 Driver Position Node (electronic), front lift
F-62	7.5	+30 Passenger Position Node (electronic)
F-63	15	+30 Semi-automatic gearbox main relay
F-64	7.5	Fuel filler flap actuator power supply





F-65	20	+30 Door lock actuator
F-66	7.5	+30 Semi-automatic Gearbox Node
F-67	7.5	Side Markers 2 (RH front and LH rear)
F-78	15	+30 Battery charger
F-80	30	+30 Starting relay
T21	50	Side Marker relay
T22	30	Reverse light relay
T23	30	Fuel filler flap relay
T24	30	Gearbox cooling fan relay
T25	30	Semi-automatic gearbox main relay
T43	30	Start enable relay

5

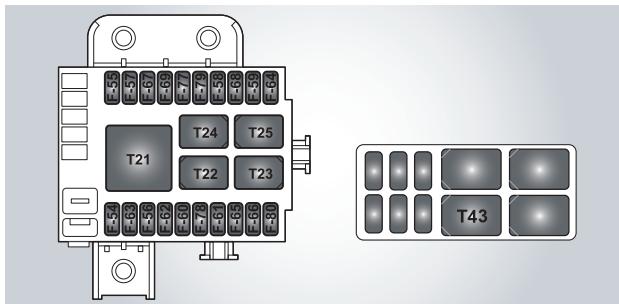

## Advice for Emergency Situations

193



## Replacing a wheel

### Important note



If one or more wheels need to be replaced, proceed as follows:


- replace the wheel stud bolts with damaged threads or tapers
- carefully clean the wheel stud bolts before fitting
- do not lubricate the contact surfaces between the stud bolt and the wheel rim and between the wheel rim and the brake disk.

In order not to remove the antilock coating, do not clean the wheel rim cones with solvents or aggressive products.

### *Collapsible spare wheel (optional)*

On request, the vehicle comes with a kit containing:

- collapsible spare wheel **A** with space-saving tyre; label **B** indicates the maximum speed allowed of 80 km/h (50 mph).

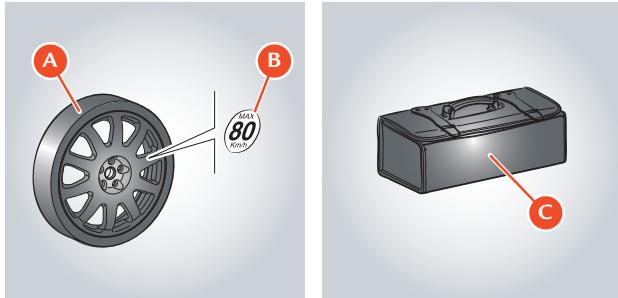

- additional tool bag **C** containing the jack for raising the vehicle and the socket wrenches for operating the jack and tightening the wheel stud bolts.

### Warning



The spare wheel must only be used for short trips in the event of an emergency.

When the spare wheel is fitted, never exceed the maximum speed of 80 km/h (50 mph) and drive carefully, especially around bends and when overtaking, avoiding sudden acceleration or braking.

Do not exceed the approved weight limits.

Do not fit snow chains on the spare wheel.

Never fit more than one spare wheel at a time.

### Important note



Failure to comply with these instructions could lead to loss of control of the vehicle and consequently damage to the vehicle and injuries to its occupants.



#### Replacing a wheel


- Position the vehicle on an even surface, then block the rear wheels by applying the parking brake.

##### Warning



Make sure that the vehicle is in a safe position by applying the parking brake.

- If necessary, switch on the hazard warning lights and place the hazard triangle at the required distance from the vehicle.
- Take the spare wheel and tools out of the luggage compartment.
- Loosen the five wheel stud bolts approximately one turn each using wrench **D** supplied.
- Place the base of the jack **E** on flat firm ground under one of the jacking points **F** on the underfloor as shown in the figure.

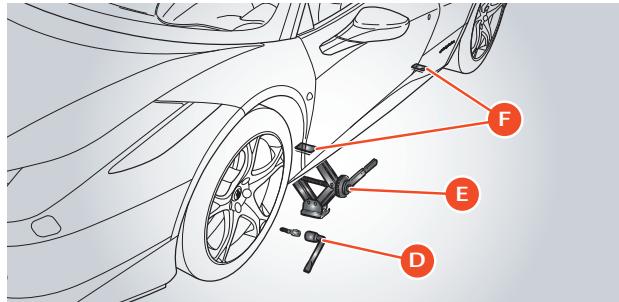

- Raise the vehicle carefully using jack **E** until the wheel is off the ground.

##### Warning



If the jack is not positioned correctly, the vehicle could slip off.

Make sure that no part of the body is underneath the vehicle while changing the wheel.

The supplied jack must only be used for changing wheels.

- Unscrew the five stud bolts and remove the wheel.
- Fit the uninflated collapsible spare wheel.
- Screw the stud bolts into place but do not tighten them.

##### Warning



Inflate the collapsible spare wheel before lowering the vehicle to avoid damaging the rims.

- Inflate the collapsible spare wheel using the inflation kit.



### Warning



The kit must be used in "tyre inflation" mode. Refer to the instruction manual supplied with the kit.

- Inflate the spare wheel to the indicated pressure (see page 28).
- Lower the vehicle and remove the jack.
- Tightly fasten the stud bolts, alternately going from one stud bolt to one that is diametrically opposite.

As soon as possible, tighten the stud bolts with the torque wrench to a torque of 100 Nm.

### Warning



The spare wheel does not have a tyre pressure monitoring sensor (see label on spare wheel tool bag). After fitting, it is not checked by the system but complies with international regulations ECE R64/01.

After fitting, we recommend that you go to the nearest FERRARI SERVICE NETWORK.

### Towing

When towing the vehicle, avoid using anchor points that are not designed for tow hook A inserted in housing C.


Proceed as follows:

- Take tow hook A out of the tool bag;
- Open cover B in the right-hand side of the front bumper;
- Tightly screw tow hook A into housing C;
- Release the EPB;
- Release the Park Lock.

### Warning



If there is an electrical system failure, release the EPB and Park Lock manually (see pages 204-206).





### Warning



While towing the vehicle, you must comply with Road Regulations.

### Warning




Do not tow the vehicle by attaching to levers, suspension and wheel rims but only to the tow hook properly fitted in place. Keep the key in position II to enable the lights to work and prevent the steering wheel from locking if it is turned; when towing the vehicle, do not start the engine.

### Important note



Remember that when the engine is switched off, the power steering and brake servo functions do not work.



### Fuel inertia switch

The fuel inertia switch is a safety device which deactivates the fuel pump relays if a collision occurs.

A symbol appears on the left TFT display and the hazard warning lights come on to indicate that the switch has been activated.

When the fuel inertia switch is activated, the doors are also unlocked (if locked) and the central dome light comes on.

### Warning



The fuel pump relays can be reactivated by pressing the button in the battery compartment which can be accessed by opening the passenger side footrest.



5

## Advice for Emergency Situations

197



## Battery

The battery is located in the passenger compartment behind the passenger side footrest.

### Checking the battery

#### Warning



The battery does not need topping up with distilled water or sulphuric acid.

#### Warning



The battery must only be removed from the vehicle by the FERRARI SERVICE NETWORK.

#### Warning



Do not place the battery near sources of heat, sparks or naked flames.

The vehicle is equipped with a sealed lead acid battery that does not require maintenance.

- Periodically check that the terminals and pins are clean and firmly secured.
- Visually inspect the outer casing for any cracks.
- If the battery overcharges, it will wear out quickly. Have the vehicle electrical system checked if the battery tends to discharge easily.

### Disconnecting the battery

Before disconnecting the battery, deactivate the electronic alarm using the remote control.

#### Warning



Never disconnect the battery from the electrical system when the engine is running.

Before disconnecting the battery, lower the side windows by at least 2-3 centimetres (0.8-1.2. in.) to avoid damaging the strips when opening and closing the doors.

#### Warning



When the battery is connected and charged, this operation is automatically performed when the doors are opened and closed. The windows must remain lowered until the charged battery is reconnected. If the battery is discharged and the windows are fully up, only open the doors when strictly necessary and take great care; do not close them again until the windows can be lowered.

#### Important note



We recommend using the battery conditioner if the vehicle is going to left unused for a long period.

To cut off the power supply from the battery to the electrical system, use the quick release **C** on the left side of the battery. Use the locking lever to loosen the terminal.



Detach the terminal from the battery: the power supply from the battery to the electrical system is cut off.

**Warning**



The battery quick release must only be used if the battery conditioner cannot be connected.

**Warning**



Place the terminal so that it does not come into contact with the battery pole or other metal parts of the vehicle.



*Battery master switch*

The battery earth cable can be disconnected using the special switch under the right-hand luggage compartment cosmetic shield and can be accessed by removing cap **P**.

**Warning**



The battery master switch must only be used by the FERRARI SERVICE NETWORK.

*Reconnecting the battery*

Place the clamp on the battery and fasten it by closing the locking lever.

Each time the battery is reconnected, do the following before starting the engine:

- close both doors and close the luggage compartment lid; unlock and lock the doors using the remote control; open the luggage compartment lid using the remote control;



**Advice for Emergency Situations**



- adjust the clock (date and time on instrument panel);
- close both doors and fully raise the driver side and passenger side windows to their upper limit; check that the windows move down to the "target position" when the doors are opened.

#### Warning



WAIT at least 1 minute before inserting the key in the ignition switch.

Before starting the engine, wait at least 60 second with the ignition key in position **II** to allow the electronic system that controls the motor-driven valves and the AC ECU to run a self-acquisition process.

During this period, no devices must be activated.

The Motronic ECU self-acquisition cycle will only function correctly when the intake air temperature is above 5 °C (41 °F).

After removing the battery from the vehicle or disconnecting it from the electrical system using the battery master switch, it is important to check that the external temperature is within the indicated values when reconnecting before performing the self-acquisition cycle.

#### Battery conditioner

The vehicle is equipped with a battery conditioner to maintain and recharge the battery.

##### Important note



Using the battery conditioner will extend the life of the battery.

The device is kept in a pocket inside the car cover bag supplied with the vehicle.

The battery conditioner connection socket **D** is located under the dashboard on the passenger side.

#### Warning



Place the battery conditioner where it can be easily seen away from heat sources and out of children's reach.





After connecting the battery conditioner to the socket in the vehicle, run the connection cable under the passenger door on the front side.

#### Important note



Do not run the connection cable out of the vehicle in positions other than those indicated to prevent damaging the seals and/or the cable.

If you do not plan to use the vehicle for over a week, we recommend you connect the battery conditioner to keep the battery in perfect working order.

#### Warning



The engine cannot be started as long as the battery conditioner is connected to the vehicle socket.



#### Important note



Additional technical information on the use of the device can be found in the manual provided inside the pocket of the car cover bag.

#### Exhaust system overheating alarm devices (“Slow Down” function)

If the engine is running unevenly resulting in exhaust system overheating, the “Slow Down” function is activated: a special symbol (see page 116) appears on the left TFT display accompanied by a message.

The message varies according to three alarm levels:

- **Temperature high:** “Catalysts temp. high. Slow down”.
- **Temperature too high:** “Catalysts temp. too high. Engine performance limited”.
- **Catalytic converter temperature system failure:** “Catalysts temp. not plausible. Go to dealer slowly”.

Displaying of the message is controlled by the thermistor via the engine control ECU.

#### Warning



Incorrect use of the vehicle may cause the “Slow Down” function to be activated.

5

## Advice for Emergency Situations

201



### Warning



If the temperature is **high**:

slow down immediately so that the exhaust system temperature decreases.

### Warning



If the temperature is **too high**:

the temperature in the catalytic converters has reached a dangerous level and could damage them; if you continue to drive, the engine control ECU intervenes and reduces the torque produced by the engine.

The torque limit remains active until the catalytic converter temperature goes down to normal operating values.

### Warning



If catalytic converter temperature system failure information is displayed:

- the engine control ECU intervenes and reduces the torque produced by the engine
- the driver must slow down and slowly drive to the nearest FERRARI SERVICE NETWORK to have the engine parameters checked.

### Warning




If the EOBD warning light (see page 115) comes on at the same time as the "Slow Down" message, go to the FERRARI SERVICE NETWORK to have the ECU error memory checked. Do not proceed in any other way.

### Clutch overheat alarm devices

Extremely high performance use of the vehicle at high engine speeds for prolonged periods and at high ambient temperatures may cause the DCT gearbox clutch to overheat. In this case, the following safety warnings will be displayed on the left TFT display, corresponding to two different alarm levels:

- The message "Clutch overheated"
- The message "Clutch overheated" accompanied by an audible warning signal

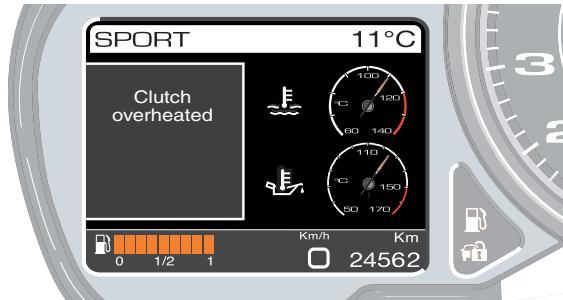



When the message "Clutch overheated" is displayed, the driver may note a difference in the behaviour of the system during gearshifts and/or during standing starts.

#### Important note



Certain high performance actions (such as, but not limited to: LAUNCH control starts, standing start with wheelspin with Manettino set to CST OFF, etc.) may be inhibited to prevent excessive overheating of the clutches: the system warns the driver that the action is not permitted, visualising the message "Operation not admissible" on the left TFT display.

#### Warning



As soon as any of the warnings described above appear on the left TFT display, the driver must slow down and continue driving at an engine speed between 2000 and 3000 rpm and minimising gear shift frequency to allow the clutches to cool down as quickly as possible, and maintain these driving conditions until the message "Clutch overheated" is no longer displayed.

#### Engine malfunction alarm devices

If the "engine control system failure" (EOBD, see page 115) warning light flashes or comes on permanently while the engine is running, it indicates that the engine or the emission control system may be malfunctioning.

The electronic system detects and isolates the error preventing damage to the engine or the production of harmful emissions.

#### Warning



When the "engine diagnostic system failure" warning light comes on, engine performance may be considerably reduced.

Drive carefully, avoiding sudden acceleration and high speeds. Contact the FERRARI SERVICE NETWORK immediately.



## Replacing the brake pads and discs

### *Brake pads*

The front brake pads have a wear detector connected to the brake warning light; if this warning light comes on or braking is not even, have the pad thickness and the state of the braking surfaces checked.

The minimum brake pad thickness is 3 mm - 0.12 in. (thickness of the friction material only).

### *Replacing brake pads*

When the brake failure warning light comes on, it means that the front brake pads are excessively worn and must be replaced immediately.

#### Warning



To guarantee the quality of the components and proper installation, we recommend that you have the brake pads replaced at a FERRARI SERVICE CENTRE.

After replacement, avoid sudden braking until the new pads are seated properly (approximately 300 km - 186 mi).

## Emergency release of the electric parking brake (EPB)

#### Warning



The release procedure must only be carried out by specialised workshop technicians.


If the system cannot be released, contact the nearest FERRARI SERVICE CENTRE.

#### Warning



When the electric parking brake is deactivated manually, the vehicle may move.

To keep the vehicle stationary, the Park Lock safety device must be applied: make sure that the letter "P" appears on the gearbox display.

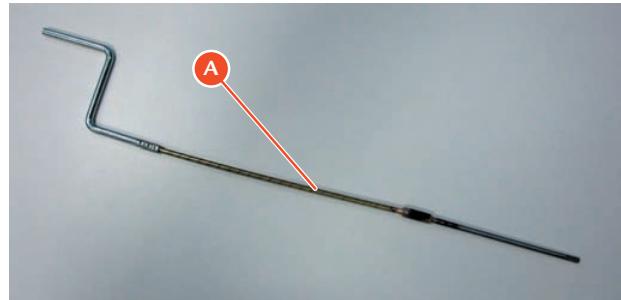



If the electric parking brake cannot be deactivated because the battery is flat or there is a failure in the electrical system that controls it and the vehicle needs to be moved, the emergency release procedure described below must be performed.

- Take wrench **A** for EPB emergency release out of the tool bag.

#### Warning



Wrench **A** may only be used by specialised workshop technicians, as indicated on label **C** on the tool bag.

- Place the release wrench **A** in the hole **B** on the rear RH gravel guard and turn clockwise: this loosens the parking brake cables.



#### Important note



To release the brake completely, the wrench needs to be turned 50 times, whereas it starts to be released after approximately 20 turns.

Once the electric parking brake has been manually released, the EPB node records a failure at the next key-on and a special symbol and the following message are displayed on the left TFT display: "Parking Brake system revision. Go to dealer".

#### Warning



The parking brake resumes normal operation, but it is important to go to the nearest workshop to have it calibrated and delete any errors in the error memory.

Go to a FERRARI SERVICE CENTRE.

Calibration is necessary for safety reasons.



## Advice for Emergency Situations

205



## Park Lock emergency release

### Warning



The emergency release procedure must only be carried out by specialised workshop technicians.

If the system cannot be released, contact the nearest FERRARI SERVICE CENTRE.

### Warning



This should be avoided unless absolutely necessary:

- to tow the vehicle;
- if there is a Park Lock failure (displayed on the left TFT display with the message "Only manual unlock gearbox allowed: See handbook").



### Warning



When the Park Lock safety device is deactivated manually, the vehicle may move unexpectedly.

The vehicle is only kept stationary by the parking brake, if applied.

The Park Lock manual emergency release device is found in the engine compartment, in line with the gearbox next to the filter housing, as shown by the arrow in the figure.

To perform the Park Lock emergency release procedure, do the following:

- Take wrench D out of the tool bag.

### Warning



Wrench D may only be used by specialised workshop technicians, as indicated on label C on the tool bag.






- Open the engine compartment lid.
- Extend wrench **D** and place it in the manual release device housing keeping it bent so that it can reach the housing.

**Important note**



Make sure that notch **G** of wrench **D** fits onto pin **H** in the housing of the device.

- Once the wrench has been placed in the housing, lightly press down on the filter housing to bring to wrench at right angles to the housing.
- To perform the emergency release, turn wrench **D** counterclockwise for a quarter turn.



If the electrical system allows it, check that the letter "N" appears on the gearbox display by turning the ignition key to position **II**. The following message will appear on the left TFT display: "Gearbox not in Parking position". At the same time, an audible signal is repeated four times to indicate that it has been released.



5

**Advice for Emergency Situations**

207

Warranty Booklet .....	210
Maintenance .....	210
Level checks.....	212
Wheels and tyres .....	219
Maintenance of the seat belts and pretensioners ...	221
Cleaning the vehicle .....	221
If the vehicle is stored for long periods.....	225



## CARE OF THE VEHICLE



## Warranty Booklet

The vehicle comes with a "Warranty Booklet". This contains the vehicle's warranty validity conditions.

### Warning



The warranty booklet also contains special blank spaces where the FERRARI SERVICE NETWORK can register the regular maintenance services performed, as indicated in the maintenance schedule.

## Maintenance

It is essential to always keep the vehicle in proper working order to ensure a long working life and to prevent any running defects, caused by negligence or lack of maintenance, and consequently to avoid hazardous situations.

### Important note



All repair work on any safety system component must be performed by the FERRARI SERVICE NETWORK.

## Maintenance schedule

At the intervals prescribed, the FERRARI SERVICE CENTRES must perform all the fine-tuning and checking operations indicated in the "Warranty Booklet".

It is however advisable to report any small fault which occurs when using the vehicle (e.g. small leaks of essential fluids) to the FERRARI SERVICE NETWORK immediately and not wait until the next service is due to correct the problem.

Periodic maintenance services must be performed at least once a year even if the specified mileage limit has not been reached (see "Yearly Maintenance" in the "Warranty Booklet").

### Displaying information on scheduled maintenance

If the next scheduled maintenance deadline is approaching, at key-on, the message "Service Stop within..." is displayed for 5 seconds on the left TFT display followed by the number of kilometres or days before vehicle servicing. The information is provided in kilometres or days according to the deadline that comes first.





Information on scheduled maintenance can also be displayed on the left TFT display if requested by the driver irrespective of the scheduled deadlines. To do this, call up the MENU screen page (see page 94) and select "Service".

#### **Chassis and bodywork maintenance**

The chassis has technological and manufacturing specifications that require that any operation be performed by staff specially trained to work with this innovative technology.

It is of crucial importance to use equipment tested by FERRARI if the repair work is to be performed in accordance with rules of good workmanship. Proper execution of repair work ensures that the commercial value of the vehicle is preserved and the safety standards are complied with.

#### **Important note**



If the chassis is damaged in an accident, FERRARI advises customers to contact the FERRARI SERVICE NETWORK who will perform the necessary safety checks.

The chassis, under standard conditions of use, requires no maintenance; it is however advisable to contact the FERRARI SERVICE NETWORK at the intervals indicated in the "Warranty Booklet" in order to have it checked.



## Level checks

Ref.

- A Engine oil tank cap
- B Coolant tank cap
- C Power steering oil tank cap

Page



- 214
- 216
- 216

Ref.

- D Brake fluid tank cap
- E Windscreen/headlight washer fluid tank cap

Page

- 217
- 218

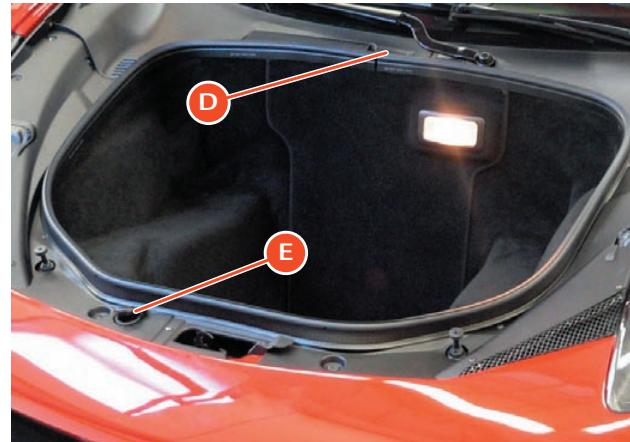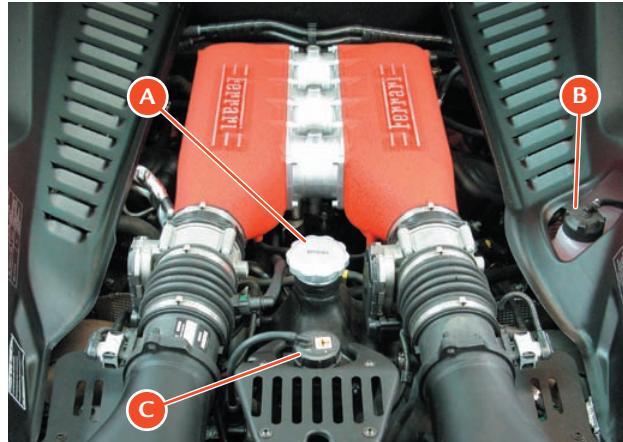

**Important note**

The level checks must be performed at the intervals indicated in the "Warranty Booklet" or, in any case, before starting a long journey.

**Environment**

All the materials used for the following operations (e.g. cloths soaked with oil or grease, pans, etc.) must be disposed of in compliance with the environmental protection regulations.

**Important note**

Only use lubricants and/or fluids recommended by FERRARI (see the "Refilling" table on page 31).

**6****Care of the vehicle**

213



#### Checking the engine oil level

##### Warning



The engine oil level must be checked when the engine is idling and warm and the vehicle is on level ground.

**DO NOT** add oil with different characteristics from those of the oil already in the engine.

The symbol, shown below, on the left TFT display and the message "Check engine oil level" inform the driver that the engine oil level must be checked.



Proceed as follows:

1. Run the engine until the engine oil temperature has reached 90 °C (194 °F).
2. Let the engine idle.
3. Wait 2 minutes and then open the engine compartment lid and unscrew oil tank cap **A**.
4. Clean the dipstick on the cap.
5. Rest cap **A** on the tank filler neck with the cap spring in its housing as shown in detail **M**.
6. Remove the cap and check that the level is between the **MIN** and **MAX** notches on the dipstick.

##### Important note



The distance between the **MIN** and **MAX** notches corresponds to approximately 2 litres of oil.

7. Top up if necessary with the recommended oil and make sure you do not fill beyond the **MAX** level on the dipstick.

##### Warning



If the oil level is below **MIN**, top it up and then have the system checked by the FERRARI SERVICE NETWORK.

8. Screw the cap back on tightly.





After topping up, the “low oil level” symbol on the left TFT display may remain on for some time. This will allow the system to perform all the necessary checks. You should therefore consider this behaviour normal.

- When you have added or changed the oil, check the oil level once again as indicated above.

#### Environment





Top up with due care to avoid pouring the oil out of the filler neck.

#### *Checking the DCT gearbox oil level*

##### **Important note**



We recommend that you have the oil level of the DCT gearbox checked by the FERRARI SERVICE NETWORK or by skilled staff.

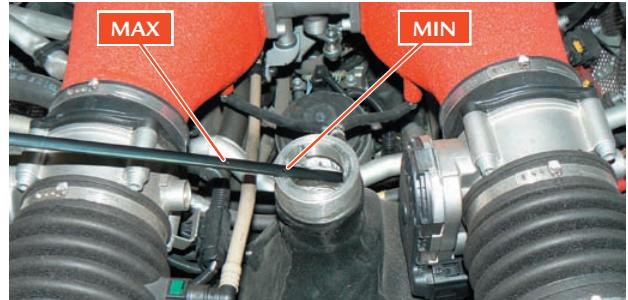

**6**

#### Care of the vehicle

215



#### Checking the coolant level

##### Warning



The coolant in the cooling system reaches very high temperatures and pressures. This procedure must always be performed when the ENGINE IS COLD. Never remove the cap from the expansion tank when the engine is running or warm.


- Check that the level comes up to the dotted line shown in the figure.
- If the level is low, remove the cap **B** from the expansion tank and top up with the recommended coolant.

##### Important note



If frequent top-ups are required after short trips, have the system checked by the FERRARI SERVICE NETWORK.

- Screw the cap **B** back on tightly.

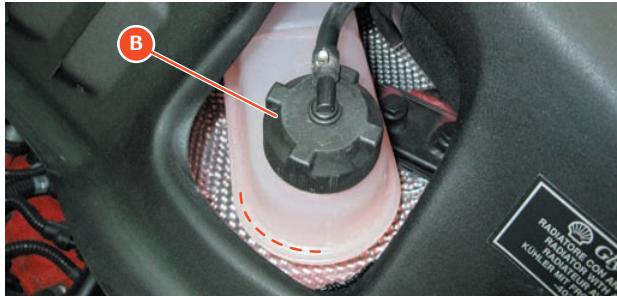

#### Checking the power steering system oil level

##### Warning



The power steering oil level must be checked with the engine warm, after having driven at least 15 km (9 mi). If it is checked when the engine is cold, the level may appear to be very low even when the recommended amount of oil is in the system.

##### Warning



If the oil level is below MIN, top it up and then have the system checked by the FERRARI SERVICE NETWORK.

Proceed as follows:

- Remove cap **C** with the dipstick from the tank.





- Check that the power steering oil level is between the **MIN** and **MAX** levels on the dipstick.
- If the level is near the **MIN** reference mark, top up with the recommended oil up to the **MAX** level.

#### Warning



Always use the indicated quantity of new, recommended fluid taken from sealed containers.


The fluid in the circuit is synthetic. The use of mineral-based fluid may irreparably damage the rubber system gaskets.

- Screw the cap **C** back on tightly.

#### Environment



Do not dispose of used fluid in the environment.

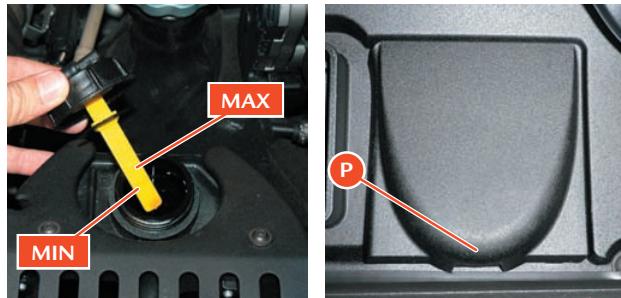

#### Checking the brake fluid level

The brake fluid tank is located under the right-hand under-windscreen protective cover. Proceed as follows:

- Remove cover **P**, remove cap **D** and check that the fluid is near the **MAX** mark shown in the figure.

#### Important note




Clean cap **D** before removing it

- If the level is near the **MIN** mark shown in the figure, top up with the recommended oil to the **MAX** mark.

#### Warning



Always use the indicated quantity of new, recommended fluid taken from sealed containers.

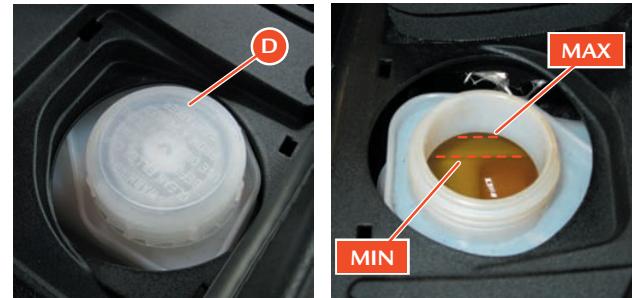

6

## Care of the vehicle

217



## Environment



Never dispose of used fluid in the environment.

### Warning



The fluid in the brake system may damage plastic, rubber and painted parts and is highly dangerous if it comes into contact with the eyes or the skin.

If the fluid comes into contact with the eyes or skin, wash the affected part thoroughly with running water. To avoid any risk, always use protective goggles and gloves.

Keep out from children's reach!

### Warning



The use of mineral-based fluids will irreparably damage the system rubber gaskets.

Do not use fluids other than those already in the system for topping up.

- Screw cap **D** back on tightly.

### *Windscreen and headlight washer fluid*

The windscreen and headlight washer fluid tank can be accessed by lifting the luggage compartment lid.

- Lift the cap **E** and fill the tank with the recommended fluid (see the "Refilling" table on page 31) until it can be seen in the fluid filling manifold.
- Close cap **E**.





## Wheels and tyres

To ensure maximum performance and tyre life and to permit the best tyre adjustment on the wheel rim, it is important to comply with the following instructions for the first 200/300 km (125 - 185 mi) with new tyres:

- avoid sudden acceleration
- avoid sharp braking and steering
- drive at moderate speed on straight roads and on curves.

### How to use the tyres

#### Important note



To ensure safe driving, the tyres must be kept in good condition.

The inflation pressure must correspond to the specified values and must be checked only when the tyres are cold since tyre pressure increases as tyre temperature increases.

Never reduce the pressure if the tyres are hot.

#### Environment



Periodically check the tyre pressure. Driving with the tyres inflated to the correct pressure helps to reduce fuel consumption.

Low tyre pressure can lead to overheating, internal damage and even destruction of the tyres.

#### Warning



Inflating the tyres to a pressure other than that prescribed will render the TPMS monitoring system (if present) inaccurate.

Sudden impact with pavements, potholes and other obstacles of various types as well as long trips on rough roads can cause damage to the tyres that is not always visible to the naked eye.

Check the tyres regularly for any signs of damage (e.g. scratches, cuts, cracks, bulges, etc.).

If sharp objects penetrate the tyres, they can cause damage which is only visible when the tyre is removed.

Have any damage inspected by an expert as it may considerably reduce tyre life.

Remember that tyres deteriorate over time even if they are rarely used or not used at all.

Cracks in the tread and side walls, possibly accompanied by bulging, are sure signs of ageing.

6

## Care of the vehicle

219



### Warning



The FERRARI SERVICE NETWORK has the necessary equipment for tyre replacement.

Have the tyres replaced by the FERRARI SERVICE NETWORK that has the necessary equipment available to avoid causing damage through carelessness to the sensor located inside the wheel rim (on vehicles with the tyre temperature and pressure monitoring system - TPMS).

Ensure that tyres are not kept in stock for more than 4 years. The maximum limit for keeping tyres in stock is 4 years provided they are kept away from sunlight, bad weather and damp and where there is a low oxygen content.

### Important note



The FERRARI SERVICE NETWORK can certify whether aged tyres are suitable for use. In any case, tyres that have been on a vehicle for more than 3 years must be checked by a FERRARI SERVICE CENTRE.

### Warning



We recommend replacing tyres every 4 years under normal use. Frequent use in maximum load conditions and at high temperatures may accelerate ageing.

Never fit tyres of uncertain origin.

### Warning



The tyres are of the "directional" type and there is an arrow marked on their side wall to indicate the direction in which they must rotate or which side is the outer side. When replaced, maximum performance levels can only be ensured if the rotation direction corresponds with the direction indicated by the arrow.

Tyres on the same axle must always be replaced in pairs.

Regularly check the tyre tread (minimum acceptable depth 1.7 mm). As the tread wear increases, there is a greater risk of skidding.

### Warning



Drive carefully on wet roads to reduce the risk of "aquaplaning".

### Wheel alignment check and adjustment

When you notice unusual wear of the tyres and in any case, at the intervals prescribed in the "Warranty Booklet", have the FERRARI SERVICE NETWORK check the wheel toe-in and camber.



### Maintenance of seat belts and pretensioners

- Periodically check that the screws on the anchor points are tight and that the seat belt is in perfect condition and slides smoothly.
- The seat belt must be kept clean; the presence of any dirt could prevent the seat belt retractor from working properly.
- To clean the seat belt, wash it by hand with mild soap and water, rinse it and let it dry. Do not use strong detergents, bleach or aggressive solvents, as they can weaken the fibres.
- Do not let the seat belt retractors get wet: proper functioning is only ensured if they are kept dry.
- The pretensioner requires no maintenance or lubrication. If immersed in water or mud, the pretensioner must necessarily be replaced.
- The pretensioner must be replaced at the intervals indicated in the "Warranty Booklet".

### Cleaning the vehicle

#### Cleaning the exterior

##### Environment



All the materials used for the following operations (e.g. cloths soaked with oil or grease, pans, etc.) must be disposed of in compliance with the environmental protection regulations.

Proper care of the vehicle on the part of the owner is essential for the vehicle long life.

Here is a list of the main precautions to be taken.

- Certain parts of the vehicle should not be left wet or dirty for long periods of time: in particular, the passenger compartment floor and the luggage compartment must always be kept clean and dry. The draining holes under the doors should be kept unclogged to allow any water to drain.
- The underbody and the lower surfaces of the vehicle should be cleaned regularly, and more frequently (at least once a week) if the vehicle is used on salty or rough roads. The vehicle should be cleaned thoroughly and carefully: cleaning that merely wets encrusted mud without removing it completely can prove damaging.
- The vehicle must be washed regularly with suitable equipment. Do not use very hot water or steam to clean the paintwork and the lower surfaces. It is advisable to soften any dirt first, then remove it with a jet of water at room temperature.

6

### Care of the vehicle

221



#### Important note



Do not use aggressive products for cleaning the windows.  
The use of aggressive products could seriously damage the bodywork.

- Do not wash the vehicle in direct sunlight or when the bodywork is still warm: make sure that the jet of water does not blast the paintwork; wash the vehicle with a sponge and a mild soap and water solution; rinse the vehicle again with a jet of water and dry it with a chamois leather.

#### Important note



When the vehicle has been washed, apply slight pressure to the brake pedal at moderate speed before driving at a normal speed, until the brake discs and pads have cleaned off.

In order to maintain the shine on the paintwork, polish it once or twice a year with products recommended by FERRARI.

- Any areas that are cracked or chipped by stones, scratches or parking manoeuvres, etc., must be immediately repaired by the FERRARI SERVICE NETWORK.
- Do not park the vehicle in damp and/or unventilated areas for long periods of time.

#### Cleaning and care of matt paintwork (optional)

#### Warning



The paintwork MUST NOT be polished using any type of product.

Owners must take great care of vehicles with matt paintwork (optional).

Here is a list of the main precautions to be taken.

- Wash the vehicle using a steam cleaner and rinse with demineralised water only.
- It must be dried using an automatic dryer or compressed air. Manual drying can ONLY be performed using a 3M microfibre yellow cloth (FERRARI code 571.400.022) that is clean and soaked in demineralised water in the areas where limescale deposits are present. The cloth must be kept in a special clean container.
- To clean any grease or oil marks, a 3M microfibre yellow cloth (FERRARI code 571.400.022) that is clean and soaked in R107/S solvent (heptane) can be used. A new cloth must be used and it must not have been previously soaked in demineralised water.
- Do not wash the vehicle in direct sunlight or when the bodywork is still warm.
- Do not apply stickers to the bodywork.



- Any areas that are cracked or chipped by stones, scratches or parking manoeuvres, etc., must be immediately repaired by the FERRARI SERVICE NETWORK.

**Important note**



DO NOT lean against the vehicle especially if you are wearing clothes with buttons, buckles or are wearing rings, necklaces, etc. This may cause irreparable damage to the bodywork.

**Important note**



To use suitable products, contact the FERRARI SERVICE NETWORK.

*Cleaning of protective anti stone-chipping film (optional)*

The film has been designed to protect the bodywork: anything that damages the paint will also damage the film.

**Warning**



Do not pour denatured ethyl alcohol, acetone, isopropyl alcohol, heptane or substances that contain these compounds on the film.

- Do not apply adhesive elements on the film.
- When cleaning, do not use metal or abrasive substances in general and acid chemical compounds.

**Important note**



Avoid the film coming into contact with the brake fluid: the film will become opaque.

- Do not use solvents along the edges of the film to them from penetrating inside the adhesive layer.

**Important note**



Nürburgring Silver, Avus White, Alloy Grey, Met Avio, Ivory, Met Light Blue, Met Sky-Blue and Fuji White vehicles must be washed every month and waxed at least twice a year so that dirt, acid rain, pollutants, etc. do not penetrate the pores of the film and cause it to tarnish.

**Important note**



We recommend that the film be replaced every 24 months for Nürburgring Silver, Avus White, Alloy Grey, Met Avio, Ivory, Met Light Blue, Met Sky-Blue and Fuji White vehicles, which may show a light visible tarnish due to dirt inside the pores of the film.

It should be noted that timely and accurate cleaning (monthly washing and waxing twice a year at least) will prevent deterioration of the film.



## Cleaning the interior

### *Cleaning and care of the leather upholstery*

As indicated in the "Maintenance Schedule" (see the "Warranty Booklet"), proper and regular treatment, at least once a year, will help preserve the quality, natural characteristics and softness of the leather upholstery in your FERRARI.

With this in mind, specific leather care products are also available ("Cleaner" and "Cream") both tested by FERRARI.

These products can be ordered through the FERRARI SPARE PARTS SERVICE DEPARTMENT, both individually and as part of the "Care Kit" which includes the complete range of products for cleaning the vehicle.

#### Important note



For use of the "Care Kit" products, contact the FERRARI SERVICE NETWORK.

The following products must be avoided when cleaning the leather: harsh detergents, turpentine, liquid stain removers, petrol, solvents and domestic cleaning products. All of these products damage the natural material.

### *Cleaning and care of the Alcantara® upholstery*

#### Warning



Do not use steam cleaners.

- Carefully dust the parts to be cleaned
- Use a soft cloth or sponge moistened with clean water
- Thoroughly wring out the cloth and wipe it over the entire Alcantara® area making sure you do not overwet it
- Repeat the procedure
- Let it dry completely
- To recondition the material, gently use a brush with soft bristles.



### If the vehicle is stored for long periods

If the vehicle is not used for long periods of time, certain precautions should be taken:

- if possible, park the vehicle on a level surface in a covered and well-ventilated area
- prevent the vehicle from moving by engaging a gear
- bring the tyre pressure to 3.0 bar (43.51 psi) and periodically change the point where the tyres rest on the ground
- connect the battery conditioner

#### Important note



If you do not want to connect the battery to the battery conditioner in order to keep certain devices functioning such as radio station memory, alarm system, etc., the battery must be recharged at least once a month. If the vehicle is not used for long periods of time without connecting the battery conditioner, the battery must be recharged at least every three months.

- protect the vehicle with a breathable fabric cover and avoid materials that prevent any dampness on the bodywork from evaporating.

Before using the vehicle again after long periods of inactivity, adjust the tyre pressure to the indicated pressure and check the fluid levels of all the systems.

Glossary..... 229





## GLOSSARY





Abbreviation	Meaning
<b>ABS</b>	(Anti-lock Braking System) The ABS prevents wheel locking when braking so that vehicle handling can be maintained.
<b>AC</b>	Air conditioning.
<b>ASR</b>	(Antriebs Schlupf Regelung) Anti-skid regulation during acceleration.
<b>Autohold</b>	Automatic activation of the electric parking brake (EPB) when the engine is switched off. This function can be disabled.
<b>Auto easy exit</b>	Simplified function gear shifting. To exit "Auto easy exit" mode, simply operate one of the two shift paddles.
<b>AVH</b>	Automatic Vehicle Holding Additional function of the electric parking brake (EPB): it allows gradual release of brake shoes/pads when the vehicle starts up. This guarantees an optimised release for the vehicle and is an aid for the driver.
<b>CST</b>	Stability and Traction Control. It consists of two systems: VDC and F1-Trac.
<b>DCT</b>	Dual Clutch Transmission: each clutch is associated with a part of the gearbox, one is designed for engaging even gears, the other for odd gears. Once a gear has been engaged, the system has already preselected the next one. After reaching the correct RPM, a clutch opens and at the same time the other one closes, so that the traction force is not interrupted.
<b>Disposal</b>	The procedure laid down in Directive 2000/53/EC and the implementation standard.
<b>E-Diff 3</b>	Evolved electronic differential integrated with the F1-Trac traction control.
<b>EBD</b>	(Electronic Brake-Force Distribution) Electronically-controlled brake-force distribution.
<b>ECU</b>	Electronic Control Unit.
<b>EPB</b>	Electric Parking Brake: the system operates by means of an ECU and an electric motor on the rear brake shoes.



Abbreviation	Meaning
<b>F1-Trac</b>	Traction control derived from the technologies used in the racing sector. The system can estimate the maximum available grip in advance by continuously monitoring the relative wheel speed and using an auto-adaptive operating logic. Comparing this information with the vehicle dynamics model stored in the control system, F1-Trac, optimises the vehicle behaviour by controlling engine torque delivery.
<b>FBP</b>	(FERRARI Brake Prefill) System that eliminates the distance between the brake pads and discs by applying slight pressure to the braking system as soon as the accelerator pedal is released just before braking. This results in more immediate brake response.
<b>Homologation</b>	The procedure laid down in Directive 2007/46/EC and the implementation standard.
<b>Launch Control</b>	Strategy for performance standing starts.
<b>Manettino</b>	The driving mode control switch on the steering wheel which allows the driver to use vehicle potential in a quick, intuitive way.
<b>Park Lock</b>	Automatic DCT gearbox park lock. When the engine is off, a mechanical lock is automatically activated to prevent the vehicle from moving if the electric parking brake is not activated.
<b>TFT displays</b>	Multifunction colour displays on the instrument panel that provide vehicle information.
<b>TPMS</b>	Tyre Pressure Monitoring System (optional). Using special sensors fitted inside the wheel rims next to the air valve, the data measured is sent to an ECU. The data and messages are displayed on the left TFT display.
<b>Traction power</b>	Force exerted by the vehicle on the road surface through the wheels; it indicates the grip.
<b>VDC</b>	Vehicle Dynamic Control performed through the braking system and engine torque.
<b>Xenon headlights</b>	Headlights on the front of the vehicle that produce a more intense beam by using a voltaic arc rather than an incandescent spiral.





Table of Contents ..... 234



8



## TABLE OF CONTENTS

---



# Index

## Symbols

12V power socket ..... 174

## A

“Automatic gearbox” mode ..... 142

“Auto easy exit” mode ..... 142

Abbreviations ..... 9

ABS ..... 70

Activation of electronic alarm ..... 17

Active safety ..... 53

Adaptive headlights ..... 134

Adjusting display brightness ..... 97

Adjusting the air vents ..... 171

Adjusting the steering wheel ..... 166

AFS2 ..... 134

Air conditioning and heating system ..... 168

Air conditioning controls ..... 168

Air recirculation ..... 170

Alarm memory ..... 19

Alarm system ..... 15

Autohold function ..... 73, 155

Automatic gearbox ..... 142

Automatic Vehicle Holding ..... 73, 155

Auto easy exit ..... 142  
Auxiliary Occupant Protection Systems ..... 60  
AVH function ..... 73, 155

## B

Backrest and seat cushion side width adjustment ..... 162

Basic seat ..... 160

Battery ..... 198

Battery conditioner ..... 200

Battery master switch ..... 199

Before a trip ..... 136

Brake fluid ..... 217

## C

Capless filler neck ..... 89

Carwash ..... 156

Carwash procedure ..... 156

Checking the battery ..... 198

Chronometer ..... 101

Chronometer operating ..... 101

Chronometer screen page ..... 101

Cleaning and care of the Alcantara upholstery ..... 224

Cleaning and care of the leather upholstery ..... 224

Cleaning the exterior ..... 221

Cleaning the interior ..... 224

Cleaning the parking sensors ..... 109

Cleaning the vehicle ..... 221



Closing the engine compartment lid .....	83
Closing the fuel filler flap .....	88
Closing the luggage compartment lid .....	85
Clutch overheat alarm devices .....	202
Collapsible spare wheel .....	194
Configuration of vehicle parameters .....	96
Consulting the manual .....	8
Consumption .....	27
Controls on the steering wheel .....	124
Controls overview .....	35
Coolant .....	216
CST - Stability and Traction Control .....	71
CST OFF mode .....	125, 150
CT OFF mode .....	125, 150

## D

“Doors, engine or luggage compartment lid open” function display .....	113
“DOWN” shift paddle .....	127
Day lights .....	132
DCT gearbox oil .....	215
Deactivating the anti-lift alarm .....	18
Deactivation of electronic alarm .....	18
Deformable body .....	52
Dimensions .....	26
Disconnecting the battery .....	198
Display setting .....	96
Dome light .....	135

Doors .....	34, 82
DOWN-shifting .....	47, 140
DOWN-shifting due to underrevving .....	140
Driver-side power window .....	90
Driver’s seat position memory .....	163
Driver and passenger airbags .....	61
Driver and passenger airbag operating .....	62
Driving at night .....	144
Driving in fog .....	145
Driving in the rain .....	144
Driving on mountain roads .....	145
Driving on snowy or icy roads .....	145
Driving style .....	10
Driving the vehicle .....	44, 136
Driving using the driving mode control switch (“Manettino”) .....	148
Driving with the “ABS” braking system .....	146
Duplicating the keys .....	16

## E

“ESCAPE” function .....	111
E-Diff 3 .....	72
EBD .....	70
Electrically-adjustable seat .....	162
Electrical system .....	27
Electric parking brake .....	73, 154
Electronic alarm .....	17
Emergency opening of engine compartment lid .....	84

## Table of Contents



Emergency opening of fuel filler flap .....	88
Emergency opening of luggage compartment lid .....	86
Emergency release of the electric parking brake (EPB) .....	204
Emergency tyre repair and inflation kit .....	180
Emissions .....	27
End-of-life vehicle collection service .....	11
Engaged gear display .....	121
Engine compartment lid .....	83
Engine malfunction alarm devices .....	203
Engine oil .....	214
Engine RPM LED on steering wheel .....	120
ENGINE START .....	124
Environmental protection .....	10
EPB - Electric parking brake .....	73, 154
Exhaust system overheating alarm devices .....	201
External lights .....	42
External rear-view mirrors .....	167

## F

“Follow me home” function .....	134
“Front Lift” system .....	158
F1-Trac .....	72
Failure of turn indicators and running lights .....	112
Fault display .....	111
FBP - Ferrari Brake Prefill .....	71
Ferrari CODE system .....	15
Flashing the headlights .....	42, 130
Follow me home .....	134
Front Lift .....	158
Front parking sensors (activation/deactivation) .....	135
Fuel filler cap and neck .....	88
Fuel filler neck .....	88
Fuel inertia switch .....	69, 197
Fuel level .....	98
Fuel level gauge .....	98
Fuses .....	186

## G

Gearbox display .....	120
Gear engaged .....	121
General remarks .....	4
Glossary .....	229
Glove compartment .....	172



## H

Hazard warning lights .....	43, 133
Headlight washer .....	128
High beams .....	42, 130
Horn .....	126
Horn control .....	126
How to fasten seat belts .....	56
How to use the tyres .....	219

## I

Identification and homologation plates and labels .....	20
If the vehicle is stored for long periods .....	225
Ignition switch .....	41, 87
Indication of AVH system activated .....	122
Indication of Launch Control activated .....	122
Infotainment system .....	123
Instruments and gauges .....	92
Internal rear-view mirror .....	166

## K

Key-on .....	87
Key codes .....	14
Key lock .....	87

## L

LAUNCH button .....	157
Launch Control .....	157
Leather upholstery .....	224
Left TFT display .....	94
Left TFT display symbols .....	114
Level checks .....	212
Lighting .....	130
Light bulbs .....	185
Light switch .....	42, 130
LOCK/UNLOCK .....	135
Locking and opening the doors from the inside ....	34, 82
Low-grip mode .....	125, 148
Low tyre pressure .....	75
Luggage compartment lid .....	84
Lumbar support adjustment .....	162

## M

“Manettino” driving mode control switch .....	125
MAIN .....	94
Maintenance .....	210
Maintenance of seat belts and pretensioners .....	58
Maintenance schedule .....	210
Main engine specifications .....	27
MAIN screen page .....	94
Manettino .....	125, 148
Manettino status .....	104



Manettino status screen page .....	104
Matt paintwork .....	222
MENU .....	96
MENU screen page .....	96
Ministerial homologation .....	19

## N

“N” (Neutral) .....	141
“N” request .....	47, 141
Neutral .....	47, 141

## O

OK button .....	94
Opening doors .....	34
Opening doors from the outside .....	82
Opening the engine compartment lid .....	83
Opening the fuel filler flap .....	88
Opening the luggage compartment lid .....	84
OPEN button .....	172

## P

“Parking” mode .....	121
Parking lights .....	131
Parking sensors .....	107
Parking sensor failure .....	110
Park Lock .....	156
Park Lock emergency release .....	206

Passenger-side power window .....	90
Passenger compartment accessories .....	172
Passive safety .....	52
Performance .....	27
Performance start .....	157
Pocket-change compartments .....	173
Power steering system fluid .....	216
Power windows .....	90
Pretensioners .....	58
Push start .....	142

## R

“Rear Parking Camera” screen page .....	124
RACE mode .....	125, 149
Rain sensor .....	129
Rain sensor failure .....	129
Rear-view mirrors .....	39, 166
Rear fog lights .....	43, 133
Rear Parking Camera .....	124
Reconnecting the battery .....	199
Refilling .....	31
Remote control batteries .....	17
Replacing a fuse .....	186
Replacing a wheel .....	194
Replacing light bulbs .....	183
Replacing remote control batteries .....	17
Replacing the brake pads and discs .....	204
Right TFT display .....	122



Roof panel controls .....	135
Running-in .....	136
Run Flat tyres .....	30
<b>S</b>	
“Slow Down” function .....	201
“Speedometer” screen page .....	123
“Speed limit exceeded” message .....	106
“Stop and Go” function .....	107
Safe driving .....	143
Satellite Alarm System .....	19
Seats .....	37, 160
Seat adjustment .....	37, 160
Seat belts .....	40, 54
Seat heating .....	164
Sequential downshifting .....	140
Service .....	8
SETUP .....	94
Side airbags .....	66
Side airbag operating .....	66
Spare parts .....	7
Special recommendations .....	50
Speedometer .....	123
Speedometer display .....	123
Speed limit setting .....	106
SPORT 2 screen page .....	99
SPORT mode .....	125, 148
SPORT screen page .....	99

Stability and Traction Control .....	71
Starting the engine .....	45, 138
Starting the vehicle .....	46, 139
Start button .....	124
State of vehicle .....	102
STATUS .....	94
Steering wheel .....	38, 166
Stopping the vehicle .....	47, 141
Sun visors .....	173
Super Racing seat .....	165
Suspension damping control .....	147
Suspension damping delink button .....	126, 152
Switching off the engine .....	47, 141
System start-up .....	137

**T**

Tilting the backrest .....	161
Toolkit .....	178
Tool bag .....	178
Towing .....	196
Tow hook .....	196
TPMS .....	74
TPMS failure .....	79
TPMS inactive .....	79
TPMS not calibrated .....	78
TPMS temporarily inactive .....	79
Transmission ratios .....	27
TRIP .....	94



TRIP A/B .....	105
TRIP A and TRIP B screen pages .....	105
Turn indicators .....	43, 132
Twilight sensor .....	132
Tyres .....	28
TYRES screen page .....	100
Tyre pressure .....	28
Tyre puncture .....	76
Tyre temperature and pressure monitoring system .....	74
<b>U</b>	
“UP” shift paddle .....	127
Unfastening the seat belts .....	57
UP, DOWN, LEFT, RIGHT buttons .....	94
UP-shifting .....	47, 140
UP-shifting due to overrevving .....	140
Use of the vehicle .....	10

<b>V</b>	
VDA .....	94, 100
Vehicle Dynamic Assistance .....	100
Vehicle keys .....	14
Vehicle status screen page .....	102

## W

“Warning: danger of ice” message .....	106
Warming up the engine .....	46, 139
Warning lights on the panel .....	114
Warranty Booklet .....	7, 210
Weights .....	26
Wheel alignment check and adjustment .....	220
Wheel rims .....	28
While travelling .....	143
Windscreen and headlight washer fluid .....	218
Windscreen washer .....	128
Windscreen washer/wiper .....	127
Windscreen washer/wiper lever .....	127
Winter tyres .....	28



Equipment and options in FERRARI vehicle models may vary because of specific legal and market requirements. The information contained in this publication is therefore not binding in any way.

FERRARI reserves the right to make any modification to the vehicle models described in this manual, at any time, for either technical or commercial reasons.

Contact the nearest FERRARI Dealer for any further information you may require.

In the interests of efficiency and safety, as well as to preserve the value of the vehicle, we do not recommend modifying the equipment using non-approved parts.



---

Code no. **82933600**

Catalogue no. **3586/09**

---

EDITION

2<sup>nd</sup> Edition **January 2010**

---

EDITING

STAR s.r.l.  
Alessandria - Italia

---

PRINTING

STAR s.r.l.  
Alessandria - Italia



Technical Service Department

Via Abetone Inferiore, 4

41053 Maranello

Modena - Italia