



BEST SOURCE REPRODUCER™ (BSR-100)

The most flexible and powerful post processing Best Data Selector and Reproducer available

Experience seamless Best Source post-processing and reproduction with the BSR-100. This cutting-edge technology effortlessly processes up to 32 recorded PCM streams from multiple diverse receiving / recording locations. The BSR-100 includes the Parraid 2-channel PSIme PCM output board for PCM signal reproduction or simulation.





FEATURES

- Process up to 32 input streams from up to 32 Chapter 10 files.
- Select from Bit Voting, In-lock, DQM, or Last-in-lock algorithms for Best Data processing.
- Align all input channels to create the best composite output stream.
- Output the "Best Data Stream" composited from all selected input channels.
- Output Chapter 10 files, TMOIP, or baseband PCM signals.
- File BDE™ is included for Data alignment, Best Data processing, and Chapter 10 file output.
- Origin is included for data reproduction, simulation, and TMOIP output.

FILE BDE™

Easily select channels for BDE processing and passing to output. Include correlation fields to align data channels. Configure out of lock output (Last-in-lock, Fake AAAA, Most-in-lock, Initial Source, or no fill). Select from multiple BDE algorithms including In-Lock-Weighted, Bit Vote, Last-in-lock, and DQE/DQM. Optionally repair corrupted frame synchronization patterns.

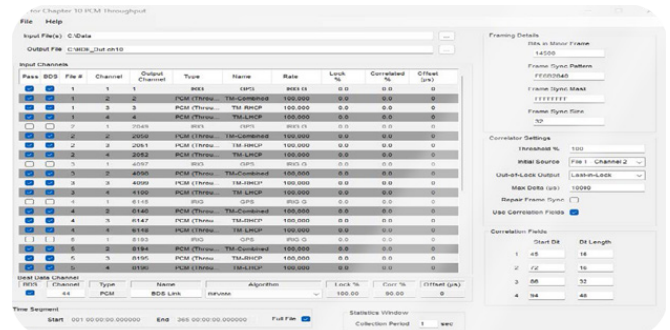

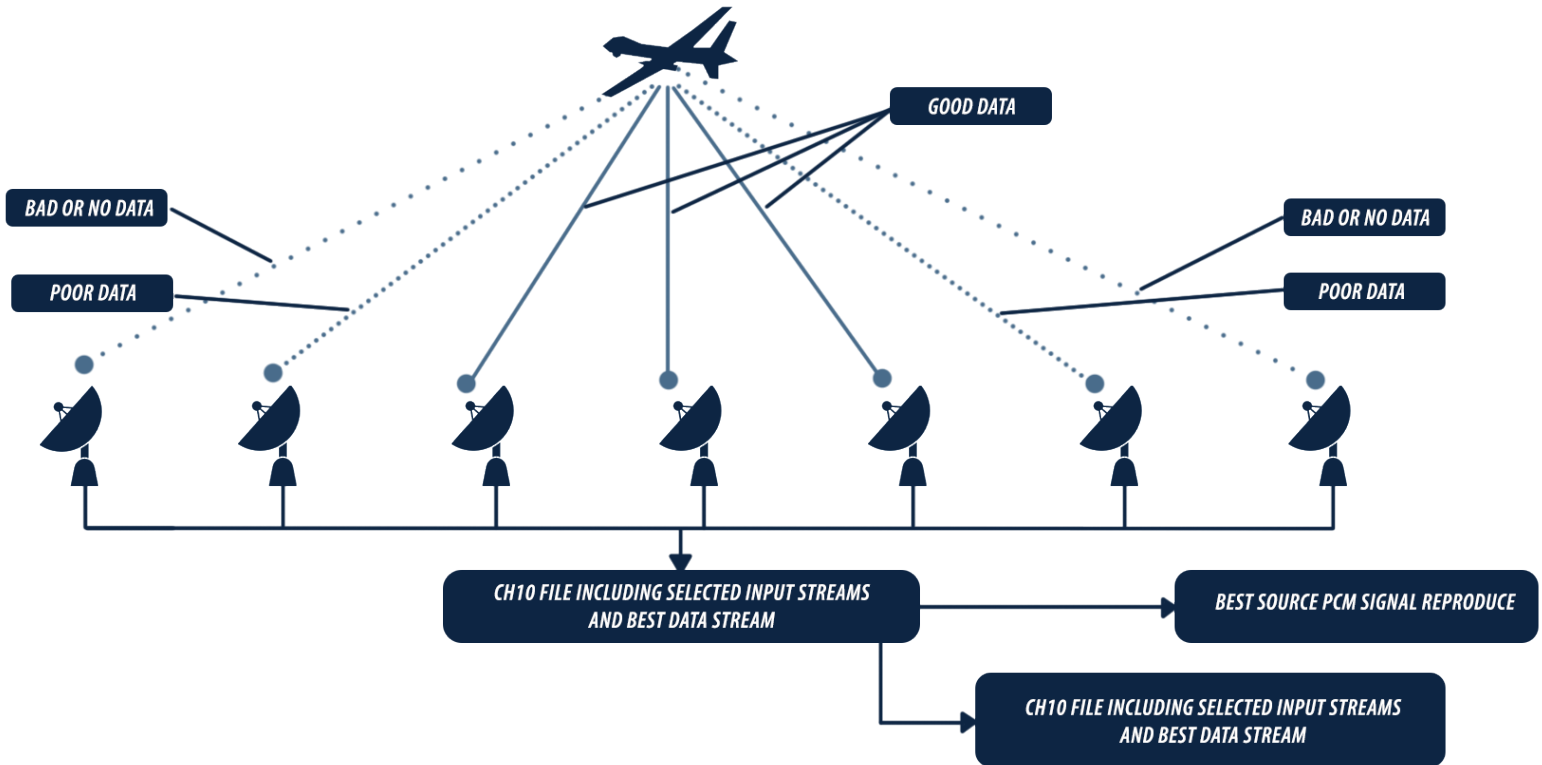

ORIGIN™ SIMULATION SOFTWARE

Create simulations including multiple PCM channels and a time channel with IRIG-A, B, or G output. Simulate data values for any word using preset data value generators or configure word values with CSV file lookup tables. Play existing Chapter 10 files to baseband signal outputs, UDP Chapter 10 streams or TMoIP 218-20 Streams.

