


SCENARIO 3
UNSEALED SECTION OF ROAD




SCENARIO 4
UNSEALED SECTION OF ROAD

SCENARIO 3 SIDE ROAD INSET:

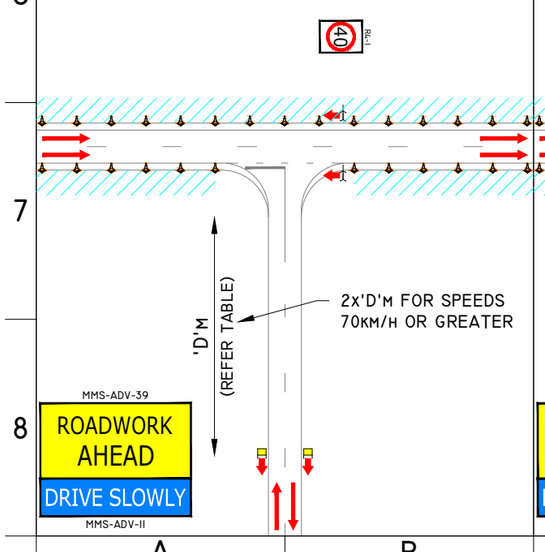

SCENARIO 4 SIDE ROAD INSET:

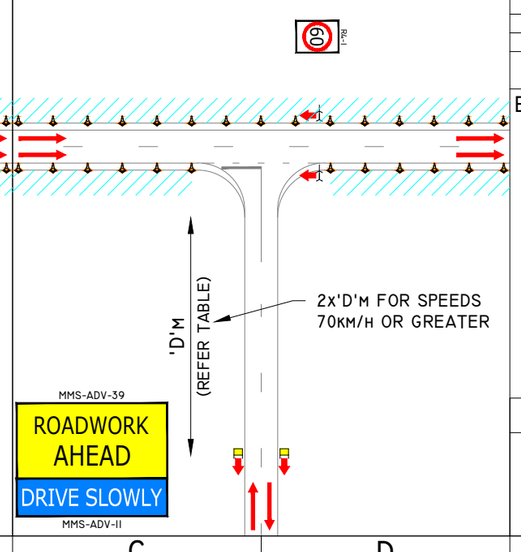

TABLES

SIGN SPACING
AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

BARRIER LINE INSET

(REFER TABLE)

ROAD CONDITION SIGN	ROAD CONDITION SIGN

TO REPLACE BLANK 1200x300 PANEL DURING THE ABSENCE OF BARRIER LINES.

DO NOT OVERTAKE
MMS-ADV-10

LEGEND

- EXISTING ROAD
- PROPOSED CONES
- WORKSITE

EXCAVATION PROTECTIONS
AGTTM PART 3 - TABLE 6.1

SPEED (KM/H)	VOLUME (VPD)	CLEARANCE (M)	DEPTH (MM) 50-250	251-500	>500
LESS THAN OR EQUAL 65	ANY	LESS 2.5	01	02	03
		2.5 - 5	01	01	02
		GREATER 5	01	01	01
GREATER THAN OR EQUAL 70	LESS THAN 1500	LESS 5	01	02	03
		GREATER 5.1	01	01	01
	GREATER THAN 1501	LESS 6	01	02	03
		GREATER 6.1	01	01	01

PROTECTION OPTIONS:
- 01 = USE REGULAR CONE OR BOLLARD SPACING DIMENSIONS.
- 02 = USE TRAFFIC CONES OR BOLLARDS AT 4M MAXIMUM SPACING.
- 03 = USE A ROAD SAFETY BARRIER SYSTEM (SITE SPECIFIC TMP REQUIRED)

AFTERCARE CHECKLIST

SIZE OF SITE	REDUCE THE EXTENTS OF THE WORKSITE AS MUCH AS POSSIBLE.
TEMPORARY SPEED LIMITS	IF TEMPORARY SPEED LIMITS HAVE BEEN INSTALLED, THE DESIGN SHOULD CONSIDER WHETHER THESES ARE STILL REQUIRED OR WHETHER THE TEMPORARY SPEED LIMIT SHOULD BE CHANGED (ALL CHANGES SHALL BE APPROVED)
UNSAFE CONDITIONS	NOTIFY MAIN ROADS WA OF ANY UNSAFE CONDITIONS I.E. LOOSE MATERIAL ON THE ROAD SURFACE, PLANT PARKED INCORRECTLY.
SIGNS	TTM SIGNS AND DEVICES NEED TO REMAIN IN PLACE AND SERVICEABLE WHILE THE SITE IS NOT ATTENDED, CHECK THAT ALL SIGNS ARE BALLASTED AND POSITIONED CORRECTLY.
DELINEATION	CHECK THAT ALL DELINEATION DEVICES ARE CLEAN AND POSITIONED CORRECTLY.

SCENARIO 3:
- 40KM/H SPEED REDUCTION FOR AN UNSAFE EXCAVATION ADJACENT TO THE ROAD.

SCENARIO 4:
- 60KM/H SPEED REDUCTION FOR AN UNSAFE EXCAVATION ADJACENT TO THE ROAD.

NOTES

TOLERANCES
POSITION OF SIGNS:
MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN.
MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.
SPACING OF DELINEATING DEVICES:
MAXIMUM 10% MORE THAN THE SPACING GIVEN.
NO MINIMUM.
AGTTM PART 6 SECTION 6.8.

DOCUMENTATION
ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP.
1. ALL SIGN LOCATIONS ARE TO BE CHECKED ON SITE PRIOR TO SETOUT AND POSITIONS ADJUSTED AS PER THE 'TOLERANCES'.
2. WHERE TEMPORARY SPEED REDUCTIONS ARE IMPLEMENTED, THEY SHOULD BE NO MORE THAN 20KM/H LESS THAN THE POSTED SPEED LIMIT.
3. WHERE TEMPORARY SPEED REDUCTIONS GREATER THAN 20KM/H ARE REQUIRED AN ON-SITE RISK ASSESSMENT SHALL BE COMPLETED.
4. PERIODIC INSPECTIONS OF THE SITE SHALL BE CONDUCTED AS PER *AGTTM PART 6 SECTION 7.4 AFTERCARE - WORKSITE ARRANGEMENTS OUTSIDE WORKING HOURS.*
5. FOR BOX EDGED SIGN ALTERNATIVES, CONSULT AWTM PRIOR TO IMPLEMENTATION.

PEDESTRIAN MANAGEMENT
1. 'PEDESTRIAN WATCH YOUR STEP' SIGN TO BE INSTALLED ON EACH APPROACH WHERE WORKS MAY ENCROACH ONTO OR ADJACENT TO EXISTING FOOTPATH FACILITIES.
2. TM PERSONNEL TO MONITOR AND ESCORT PEDESTRIANS THROUGH THE WORK AREA AS REQUIRED.
3. PEDESTRIANS MAY BE HELD ON EITHER END OF THE WORKSITE UNTIL IT IS SAFE TO PASS AS REQUIRED.

ROAD CONDITION SIGNS

PLACEMENT ON EITHER SIDE OF FRAME

(A) MMS-RC-8	(B) MMS-RC-4	(C) MMS-RC-9	(D) MMS-RC-10
SOFT EDGES	NO LINES	TRAFFIC HAZARD	WATER OVER ROAD

PLACEMENT ON RIGHT SIDE OF FRAME

(E) MMS-RC-1	(F) MMS-RC-6	(G) MMS-RC-13
		ROUGH SURFACE

PLACEMENT ON LEFT SIDE OF FRAME

(H) MMS-RC-2	(I) MMS-RC-5	(J) MMS-RC-12
LOOSE SURFACE	ROUGH SURFACE	WET BITUMEN

mainroads WESTERN AUSTRALIA

METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH
WATERLOO CRESCENT EAST PERTH 6004
TELEPHONE (08) 138 138

DATE OF DRAWING: 2025 JULY	SCALE: -
LOCAL GOVERNMENT AUTHORITY: -	POSTED SPEED: -
ROAD AUTHORITY: MAIN ROADS WA	WORKSITE SPEED: -
CHECKED BY: TYLER HARTLEY	SIGNATURE: Tyler Hartley
ACCREDITATION: RTM-0066	
DESIGNED BY: MICHAEL REED	SIGNATURE:
ACCREDITATION: AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
AFTERCARE MANAGEMENT
GENERAL AFTERCARE - ONE WAY ROAD AND TEMPORARY SPEED ZONES (2/2)

DRAWING NO	REVISION
0922-01531-AC-008B	6