


SCENARIO 1:

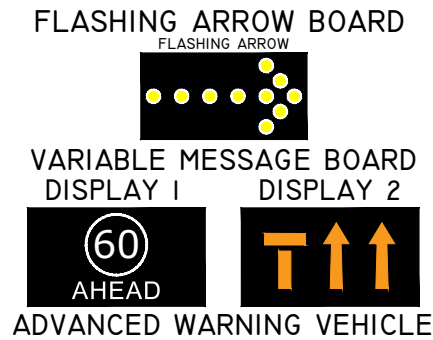


CONVOY DISTANCE SPACING
(REFER TABLE)

MAY BE TM
VEHICLE OR TMA

ADVANCED WARNING VEHICLE SUPPLEMENT
(DOES NOT SHOW ALL REQUIRED VEHICLES IN CONVOY)
FOR USE WHERE INSUFFICIENT ROOM IS PROVIDED ON SHOULDER,
EMERGENCY LANE OR MEDIAN.

SCENARIO 2:

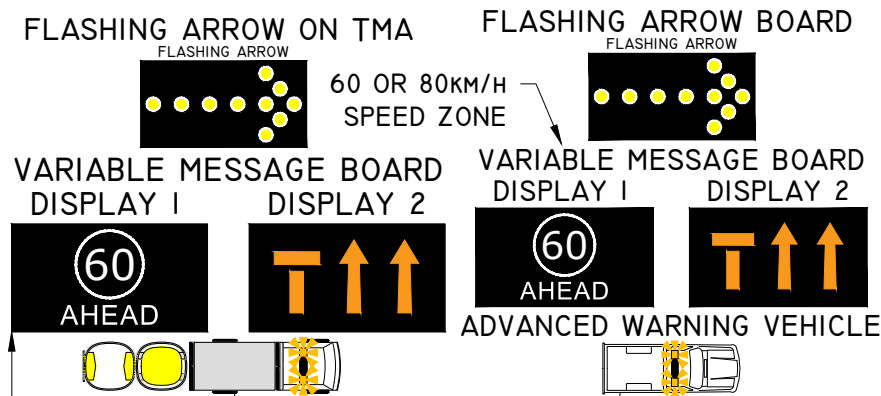

CONVOY DISTANCE SPACING
(REFER TABLE)

SHUNT
DISTANCE

LAST SHADOW VEHICLE TMA

ADDITIONAL TMA, CANNOT BE LAST
SHADOW VEHICLE TMA. POSITION
ADJACENT TO LAST SHADOW
VEHICLE IN EMERGENCY LANE OR
ADJACENT TRAFFIC LANE

ADVANCED WARNING VEHICLE SUPPLEMENT
(DOES NOT SHOW ALL REQUIRED VEHICLES IN CONVOY)
FOR USE WHERE INSUFFICIENT ROOM IS PROVIDED ON SHOULDER,
EMERGENCY LANE OR MEDIAN.
BLOCKER TRUCK MOUNTED ATTENUATOR IN USE.

SCENARIO 1:
WORKS PROTECTED BY SHADOW VEHICLE

1. A RISK ASSESSMENT MAY BE PROVIDED FOR THE USE OF TRUCK MOUNTED ATTENUATOR IN PLACE OF THE SHADOW VEHICLE.

SCENARIO 2:
WORKS PROTECTED BY TMA

1. REFER TO THE MRWA REQUIREMENTS FOR THE USE OF TRUCK MOUNTED ATTENUATORS IN WA OR SECTION 4.5.1 OF THE TMP.

NOTES

1. THIS DRAWING IS INDICATIVE ONLY AND DOES NOT DETAIL THE REQUIRED CONVOY VEHICLES AND PROCEDURES FOR A MOBILE CONVOY. THIS DRAWING MUST BE IMPLEMENTED WITH AN APPROVED MOBILE CONVOY PLAN.
2. LANES ARE INDICATIVE ONLY AND MAY VARY ON SITE.
3. A RISK ASSESSMENT MUST BE COMPLETED PRIOR TO THE IMPLEMENTATION OF WORKS CONVOY TO DETERMINE IF THE WORKS CAN BE COMPLETED SAFELY.
4. VEHICLE LOCATIONS MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS.
5. WHERE THERE IS INSUFFICIENT SIGHT DISTANCE AND THE ADVANCED WARNING VEHICLE IS WITHIN THE LIVE TRAFFIC LANE, THE VEHICLE MUST NOT STOP. ADVANCE WARNING VEHICLE TO SLOW, INCREASING THE DISTANCE BETWEEN MOBILE CONVOY TO PROVIDE ADDITIONAL WARNING. WHERE SIGNIFICANT IMPACTS OCCUR AN ADDITIONAL SHADOW VEHICLE SHOULD BE USED.
6. AN ADDITIONAL TMA MUST BE PROVIDED TO PROTECT THE ADVANCED WARNING VEHICLE ON SECTIONS WHERE THE SHOULDER, VERGE OR MEDIAN CANNOT BE USED. THE TMA TO POSITION NEXT TO LAST SHADOW VEHICLE DURING NORMAL SECTIONS TO PREVENT VEHICLES FROM ENTERING THE WORK AREA. THIS COULD BE IN THE EMERGENCY LANE OR ADJACENT TRAFFIC LANE. ALTERNATIVELY, ADVANCED WARNING VEHICLE MAY BE SUPPLEMENTED WITH TMA FOR THE DURATION OF THE WORKS.
7. REFER TO MANUFACTURING ADVICE FOR SHUNT DISTANCES ON TRUCK MOUNTED ATTENUATORS.
8. NUMBER OF LANES AND CONFIGURATION OF ROAD ARE INDICATIVE ONLY.
9. WHEN THE SPEED LIMIT IS REDUCED BY MORE THAN 20KM/H, CONSIDER THE USE OF MULTIPLE ADVANCE WARNING VEHICLES TO DECREASE THE SPEED IN STEPS, WHERE THIS IS NOT IMPLEMENTED A RISK ASSESSMENT MUST BE COMPLETED.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES

DISTANCE BETWEEN VEHICLES IN MOBILE
CONVOY - EXCLUDING SHADOW VEHICLE
AGTTM PART 4 - TABLE 3.1

SPEED LIMIT (KM/H)	DISTANCE (M)
≤45	50
46-55	70
56-65	90
66-75	110
76-85	140
86-95	160
96-105	200
>106	230

LEGEND

- EXISTING ROAD
- EXISTING BARRIER



METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH
WATERLOO CRESCENT EAST PERTH 6004
TELEPHONE (08) 138 138

DATE OF DRAWING 2025 JULY	SCALE -
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -
ROAD AUTHORITY MAIN ROADS WA	WORKSITE SPEED 60 / 80KM/H
CHECKED BY TYLER HARTLEY	SIGNATURE <i>Tyler Hartley</i>
ACCREDITATION RTM-0066	SIGNATURE <i>Michael Reed</i>
DESIGNED BY MICHAEL REED	
ACCREDITATION AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
CLASS 2 - MOBILE SCENARIOS
MOBILE WORKS CONVOY
INSUFFICIENT ROOM IN VERGE / MEDIAN

DRAWING NO 0922-01531-MS2-007	REVISION 6
----------------------------------	---------------