
SCENARIO 1:

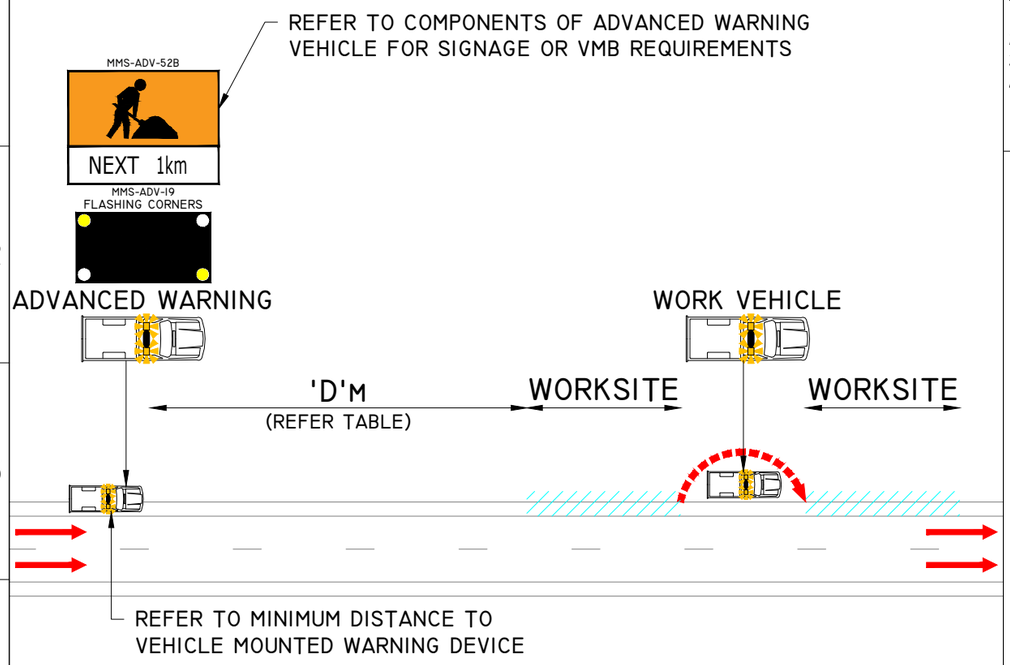


FREQUENTLY CHANGING WORK AREA - OUTSIDE LANE

(WORKERS ON FOOT)

AGTTM PART 5 - SECTION 5.3

SCENARIO 2:

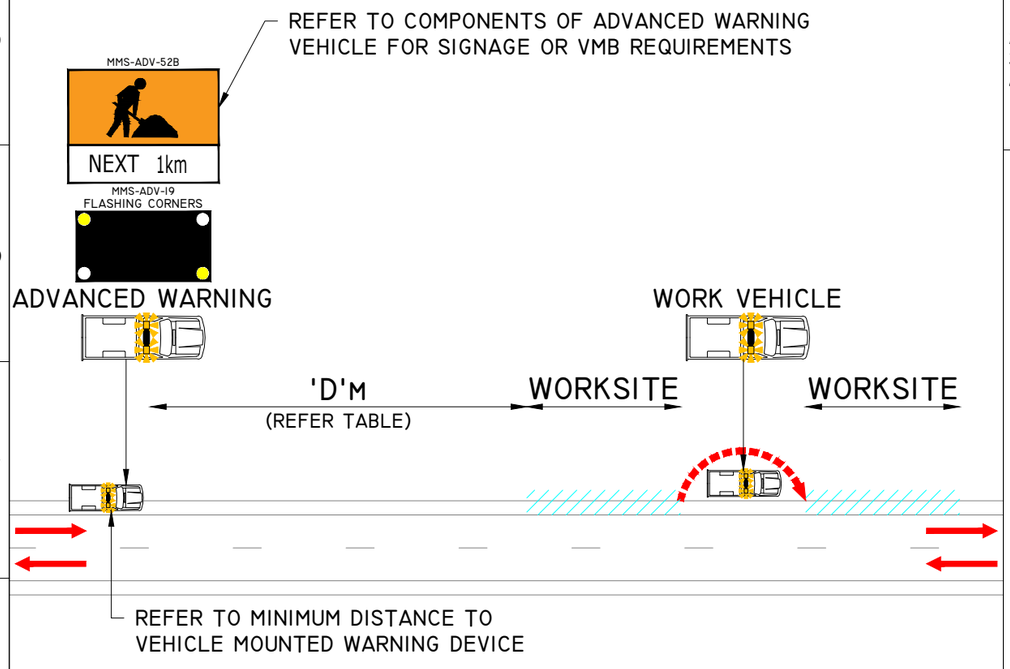


FREQUENTLY CHANGING WORK AREA - OUTSIDE LANE


(WORKERS ON FOOT)

AGTTM PART 5 - SECTION 5.3

COMPONENTS OF ADVANCED WARNING VEHICLE

1. FLASHING ARROW BOARD WITH FRONT ASPECT BOARD.
2. TWIN FLASHING BEACONS.
3. REAR MOUNTED VARIABLE MESSAGE BOARD.
4. CONVENTIONAL SIGN MMS FRAME CAN BE MOUNTED TO BACK OF VEHICLE AS AN ALTERNATIVE TO THE VARIABLE MESSAGE BOARD.







DISPLAY 2




ALTERNATING MESSAGE DISPLAY FOR VMB






COMPONENTS OF ADVANCED WARNING VEHICLE

1. FLASHING ARROW BOARD WITH FRONT ASPECT BOARD.
2. TWIN FLASHING BEACONS.
3. REAR MOUNTED VARIABLE MESSAGE BOARD.
4. CONVENTIONAL SIGN MMS FRAME CAN BE MOUNTED TO BACK OF VEHICLE AS AN ALTERNATIVE TO THE VARIABLE MESSAGE BOARD.







DISPLAY 2



ALTERNATING MESSAGE DISPLAY FOR VMB





SCENARIO 1:

MULTI-LANE ROAD (WORKERS ON FOOT)

SCENARIO 2:

TWO-WAY CARRIAGEWAY (WORKERS ON FOOT)

NOTES

1. ON HIGH SPEED / VOLUME ROADS, SHADOW VEHICLE MUST BE REPLACED WITH A TMA. A TMA MAY BE USED IN ALL OTHER CIRCUMSTANCE SUBJECT TO A RISK ASSESSMENT.
2. VEHICLES MUST BE EQUIPPED WITH A VEHICLE MOUNTED WARNING DEVICE.
3. THE VEHICLE MOUNTED WARNING DEVICE SHALL BE MOUNTED AS HIGH AS PRACTICABLE AND NOT BE OBSCURED, E.G BY OVERHANGING VEGETATION OR A RAISED TRUCK BODY.
4. AS THE WORKS PROGRESS ALONG THE ROAD, WORK VEHICLE, SPOTTER AND/OR SHADOW VEHICLE MOVES WITH THE WORKERS.
5. THE FOLLOWING MUST BE ADHERED FOR FREQUENTLY CHANGING WORK AREA:
 - 5.1. THE WORK AREA IS OUTSIDE OF TRAFFIC LANES.
 - 5.2. WORKS MOVE FREQUENTLY BETWEEN SUCCESSIVE LOCATIONS.
 - 5.3. THE MAXIMUM WORK PERIOD AT ANY ONE LOCATION IS:

 FOR TRAFFIC SPEEDS 70KM/H OR LESS:
 - 5.3.1. 20 MIN AT ANY TRAFFIC VOLUME.
 - 5.3.2. 40 MIN AT TRAFFIC VOLUMES OF 150VPH OR LESS.
 - 5.3.3. 1 HOUR AT TRAFFIC VOLUMES OF 40VPH OR LESS.

 FOR TRAFFIC SPEEDS GREATER THAN 70KM/H (WITHIN 1.2M):
 - 5.3.4. 5 MIN IF THERE ARE WORKERS ON FOOT.

 FOR TRAFFIC SPEEDS 70KM/H OR LESS (OUTSIDE 1.2M):
 - 5.3.5. 20 MIN FOR ALL SCENARIOS.
 - 5.4. THERE IS A MINIMUM SIGHT DISTANCE FROM APPROACHING ROAD USERS TO THE VEHICLE MOUNTED WARNING DEVICE OF:
 - 5.4.1. 150M IF THE SPEED IS 60KM/H OR LESS.
 - 5.4.2. 250M IF THE SPEED IS MORE THAN 60KM/H.
6. FOR SCENARIOS WITH LARGE PLANT, REFER TO TGC-TMC-STLI-026.
7. PRIOR TO EQUIPMENT OR MATERIALS BEING BROUGHT INTO THE WORK AREA, A DRIVE THROUGH CHECK OF THE WORKSITE TRAFFIC MANAGEMENT SETUP SHOULD BE MADE IN ALL DIRECTIONS, INCLUDING SIDE ROADS.
8. PRIOR TO COMMENCEMENT OF WORKS, A RISK ASSESSMENT MUST BE UNDERTAKEN TO ENSURE THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS PRIOR TO SETUP.
9. THE WORKS AND/OR SHADOW VEHICLE LOCATION MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS. THE WORK VEHICLE MUST BE LOCATED WITHIN 40M OF THE PROPOSED WORKS.
10. EQUIPMENT OR MATERIALS BROUGHT TO THE SITE MUST BE UNLOADED FROM THE NON-TRAFFIC SIDE OF A STATIONARY WORK VEHICLE, OR THE REAR OF A STATIONARY WORK VEHICLE WITH A SPOTTER OR SHADOW VEHICLE IN PLACE.


DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

SHADOW VEHICLE INSET

(ONLY REQUIRED ON POSTED SPEEDS 80KM/H OR GREATER)

SHADOW VEHICLE MAY BE DISPENSED WITH UNDER RISK ASSESSMENT UNDERTAKEN BY AN AWTM AS PART OF THE TM ADVICE OR A WTM ON SITE. IN THE ABSENCE OF SHADOW VEHICLE A LOOKOUT PERSON IS REQUIRED. REFER TO SECTION 4.5 OF THE TMP FOR MORE DETAILS.

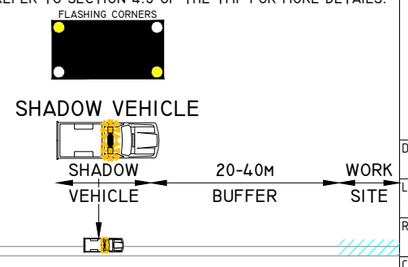

TABLES

SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

MINIMUM SIGHT DISTANCE TO VEHICLE MOUNTED WARNING DEVICE - NO SPOTTER

AGTTM PART 5 - TABLE 4.2

SPEED LIMIT (KM/H)	DISTANCE (M)
≤45	225
46-55	275
56-65	335
66-75	390
76-85	445
86-95	500
96-110	555
>110	SPOTTER REQUIRED

WORK TASK ≤ 10 SECONDS. WORKER TO FACE ONCOMING TRAFFIC.

LEGEND

EXISTING ROAD

WORK ZONE

mainroads WESTERN AUSTRALIA

METROPOLITAN REGIONS

TRAFFIC MANAGEMENT BRANCH

WATERLOO CRESCENT EAST PERTH 6004

TELEPHONE (08) 138 138

DATE OF DRAWING: 2025 JULY	SCALE: -
LOCAL GOVERNMENT AUTHORITY: -	POSTED SPEED: -
ROAD AUTHORITY: MRWA	WORKSITE SPEED: -
CHECKED BY: TYLER HARTLEY	SIGNATURE: Tyler Hartley
ACCREDITATION: RTM-0066	
DESIGNED BY: MICHAEL REED	SIGNATURE: MReed
ACCREDITATION: AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
SHORT TERM LOW IMPACT
FREQUENTLY CHANGING WORK AREA
VMB VEHICLE ADVANCED WARNING

DRAWING NO	REVISION
0922-01531-STLI-027	6