
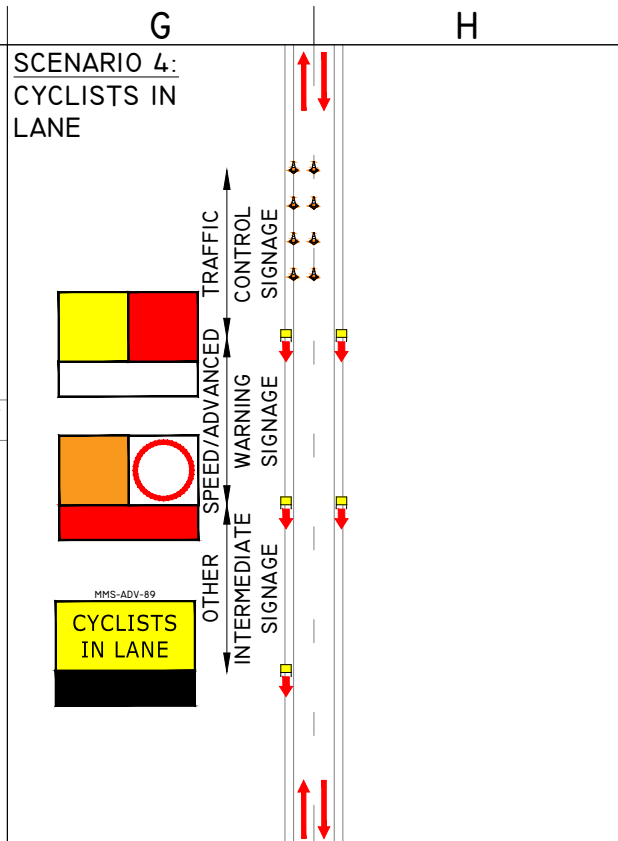
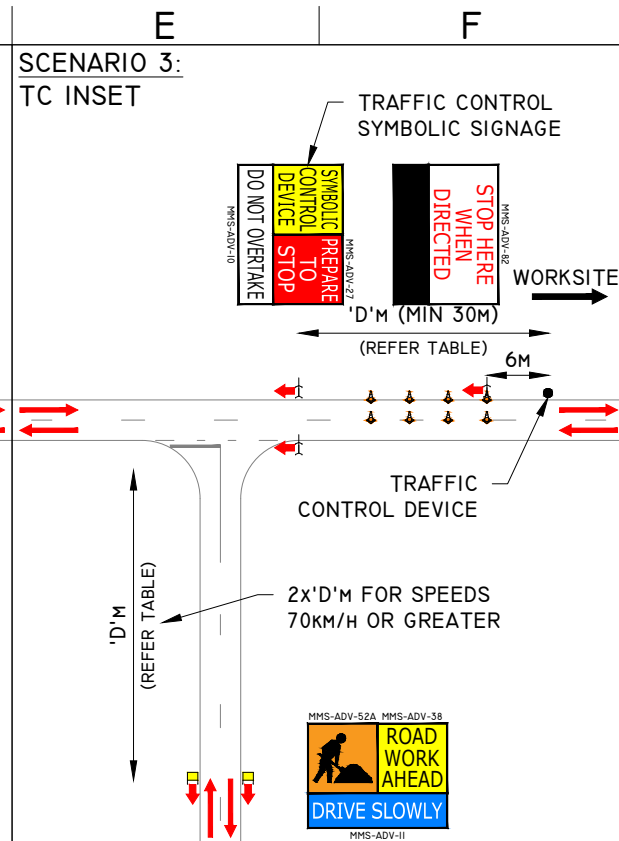
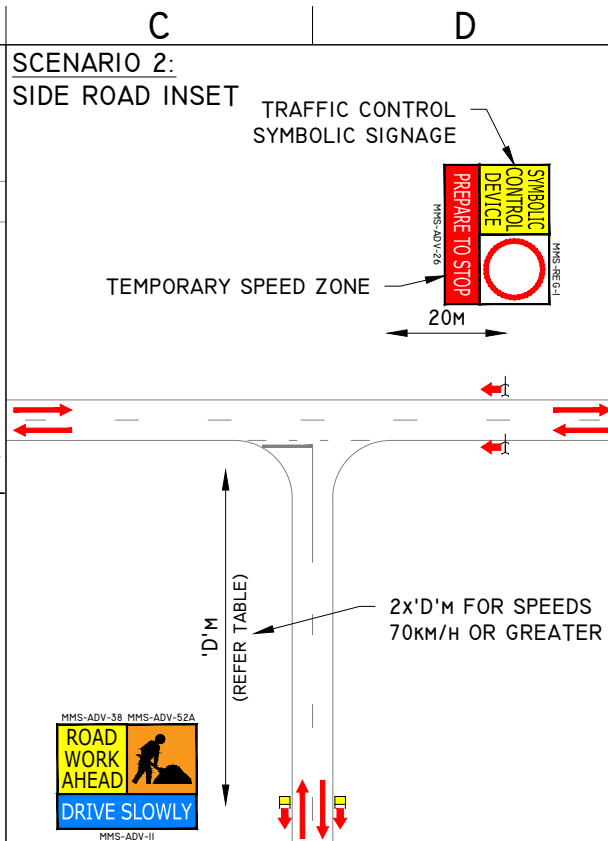


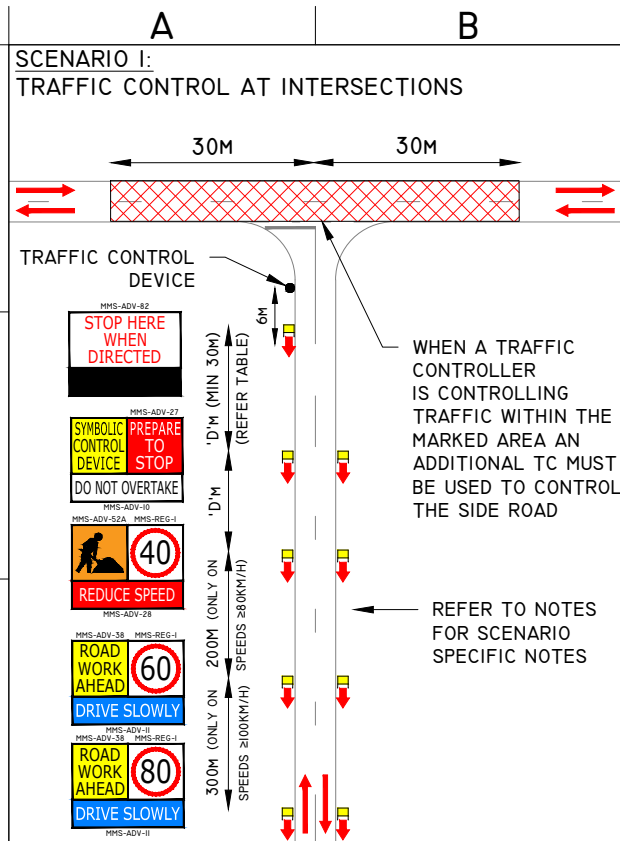

NOTES

TOLERANCES

POSITION OF SIGNS:

MINIMUM 10% LESS THAN THE DISTANCE OR LENGTHS GIVEN.
MAXIMUM 25% MORE THAN THE DISTANCES OR LENGTHS GIVEN.

SPACING OF DELINEATING DEVICES:

MAXIMUM 10% MORE THAN THE SPACING GIVEN.
NO MINIMUM.

AGTTM PART 6 SECTION 6.8.

DOCUMENTATION

ON-SITE VARIATIONS MUST BE APPROVED BY THE TRAFFIC MANAGEMENT SUPERVISOR, THAN AN ON-SITE VARIATION MADE AND CHANGES RECORDED IN THE DAILY DAIRY. FOR MORE INFORMATION REFER TO SECTION 9.3 OF THE TMP.





GENERAL NOTES

1. ALL SIGN LOCATIONS ARE TO BE CHECKED ON SITE PRIOR TO SETOUT AND POSITIONS ADJUSTED AS PER THE 'TOLERANCES'.
2. FOR BOX EDGED SIGN ALTERNATIVES, CONSULT AWTM PRIOR TO IMPLEMENTATION.

SCENARIO I NOTES

1. REFER TO TRAFFIC CONTROL PROCEDURES FOR SYMBOLIC TRAFFIC CONTROL DEVICE SIGNAGE
2. REFER TO TRAFFIC CONTROL PROCEDURES FOR THE SELECTION OF TRAFFIC MANAGEMENT DEVICES

TABLES	
SIGN SPACING	
AGTTM PART 3 - TABLE 2.2	
SPEED LIMIT (KM/H)	DISTANCE ('D')
55 OR LESS	15
56 TO 65	45

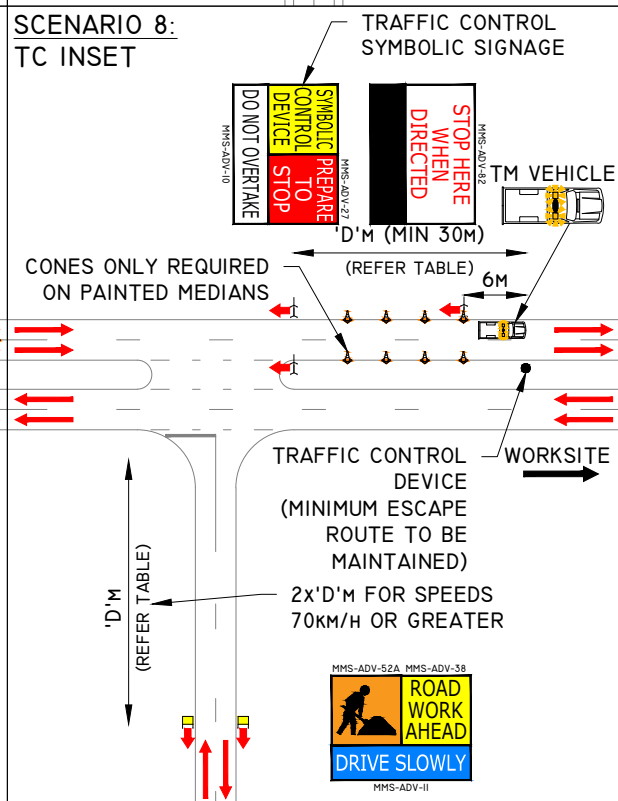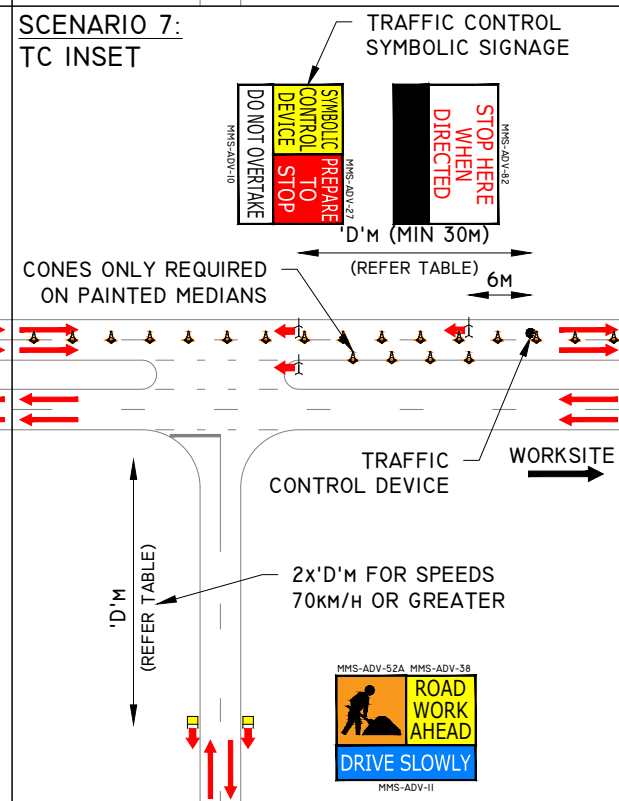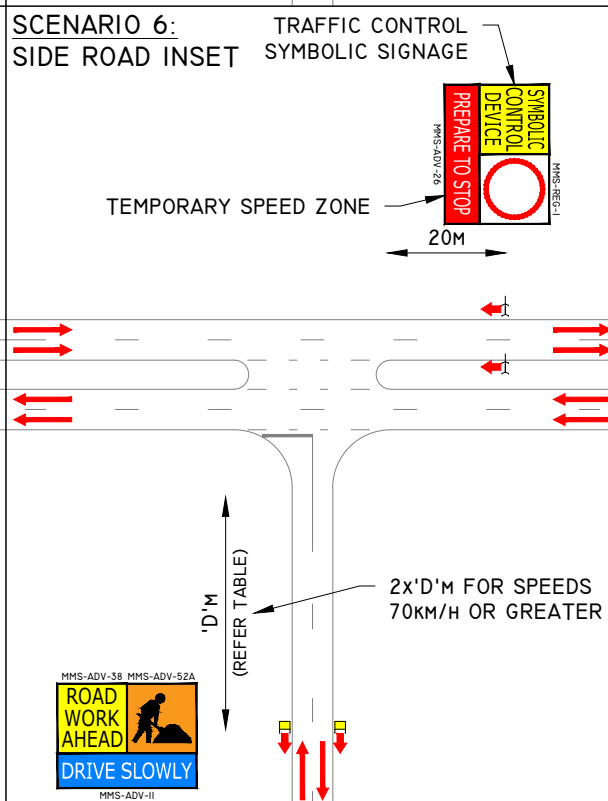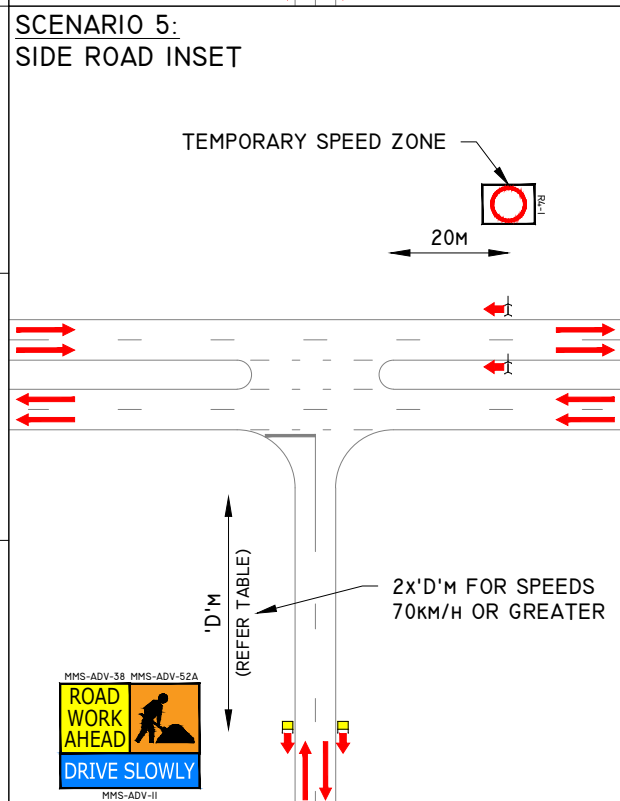


  **mainroads**
WESTERN AUSTRALIA

**METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH**

WATERLOO CRESCENT
TELEPHONE (08) 138 138


EAST PERTH 6004

DATE OF DRAWING 2025 JULY	SCALE -
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -
ROAD AUTHORITY MAIN ROADS WA	WORKSITE SPEED -
CHECKED BY TYLER HARTLEY	SIGNATURE 
ACCREDITATION RTM-0066	SIGNATURE 
DESIGNED BY MICHAEL REED	
ACCREDITATION AWTM-23-11536-02	


GENERIC TRAFFIC GUIDANCE SCHEME TRAFFIC HOLD SETUPS MULTIPLE ROAD CONFIGURATIONS SIDE ROAD INSETS		
DRAWING NO 0922-01531-TH-101	REVISION 6	

TRAFFIC CONTROL PROCEDURES

REFER TO TMP SECTION 4.1.7 PORTABLE TRAFFIC CONTROL DEVICES FOR MORE DETAILS	
MANUAL TRAFFIC CONTROL	

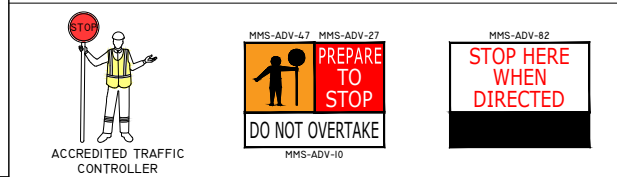

PORTABLE TRAFFIC CONTROL DEVICE (PTCD)

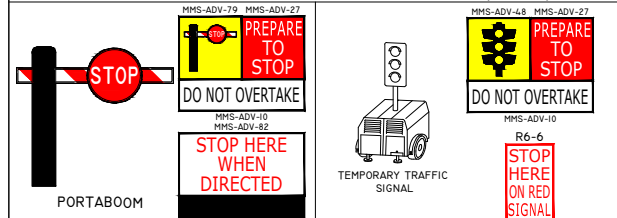

MANUAL TRAFFIC CONTROL IS NOT PERMITTED ON THE MAIN ROADS NETWORK WITH THE EXCEPTIONS LISTED UNDER SECTION 4.1.7 (PORTABLE TRAFFIC CONTROL DEVICES) OF THE TMP AND IN THE MAIN ROADS CODE OF PRACTICE.

ON ALL OTHER ROADS, PTCDS MUST BE USED UNDER THE FOLLOWING CONDITIONS:

- A PERMANENT SPEED LIMIT OF 90KM/H OR MORE AND OVER 2,000vpp; OR
- A PERMANENT SPEED LIMIT OF 80KM/H OR MORE AND OVER 10,000vpp.

PTCDs SHOULD BE CONSIDERED ON ALL WORKS AND ONLY BE SUPPLEMENTED WITH MANUAL TRAFFIC CONTROL UNDER AN AWTM/WTM RISK ASSESSMENT.

