
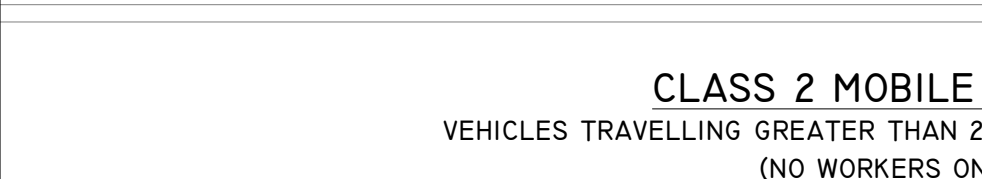
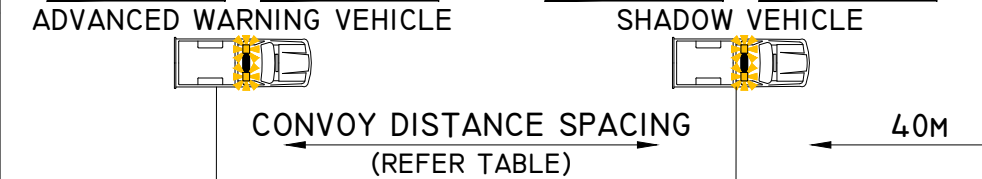
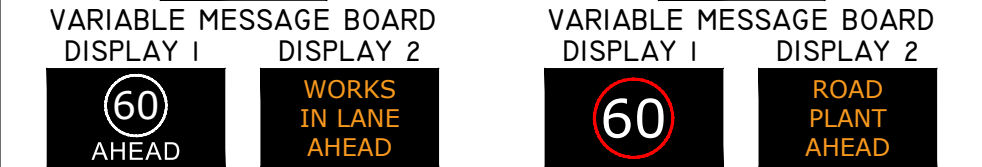








SCENARIO 1:

FRONT FLASHING ARROW BOARD FRONT FLASHING ARROW BOARD




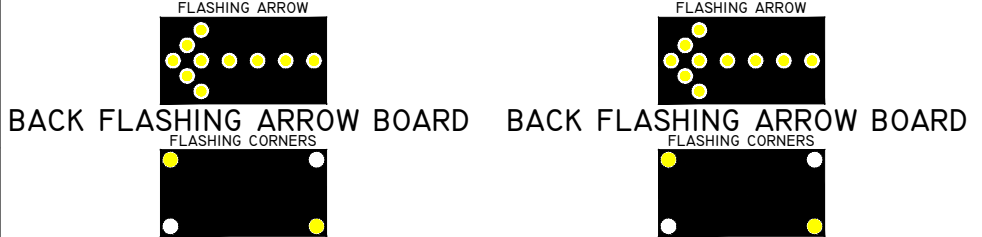


SCENARIO 2:

FRONT FLASHING ARROW BOARD FRONT FLASHING ARROW BOARD

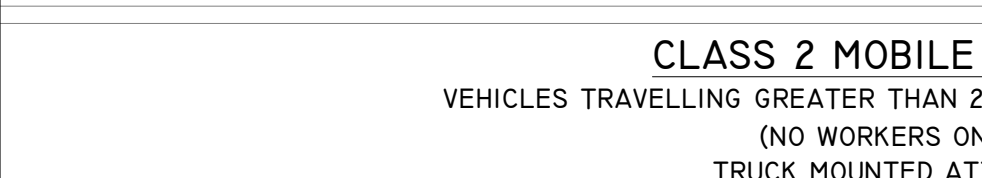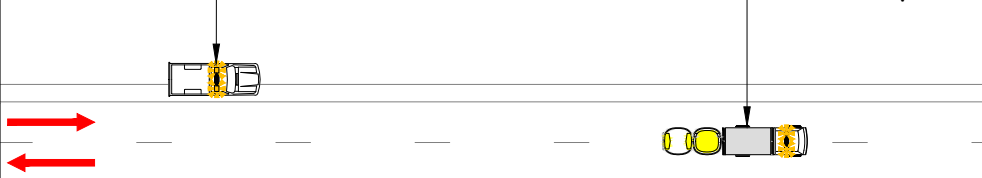
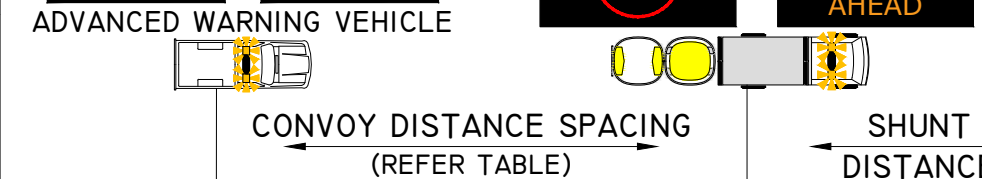
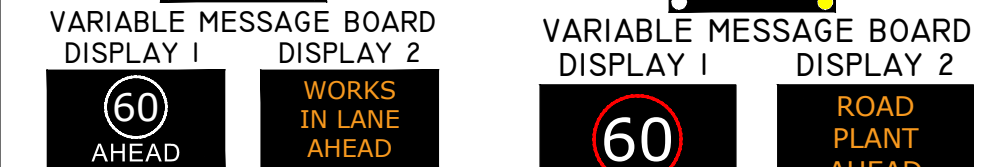
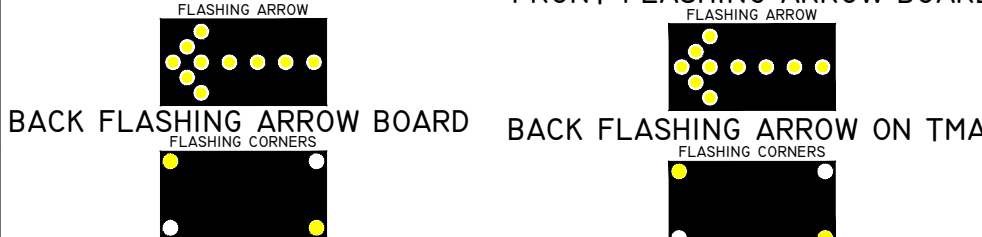


FRONT FLASHING ARROW BOARD

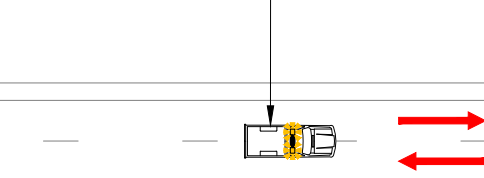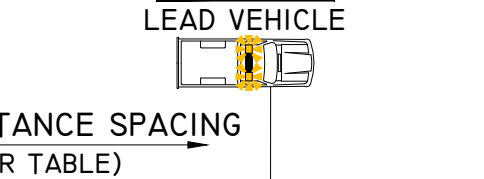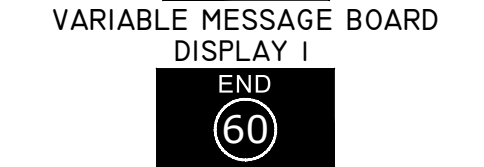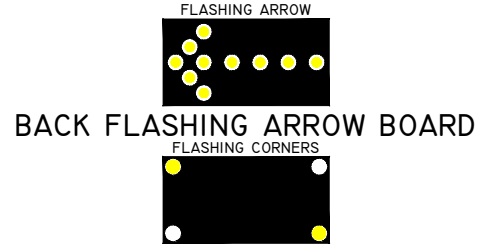

SCENARIO 2:

FRONT FLASHING ARROW BOARD

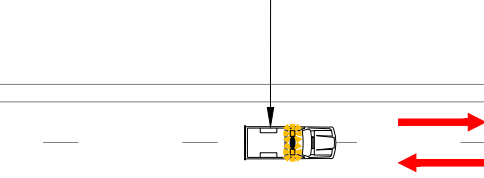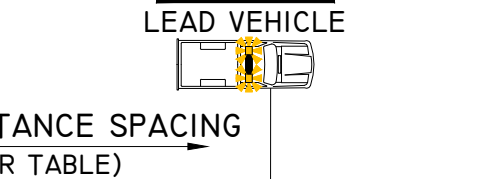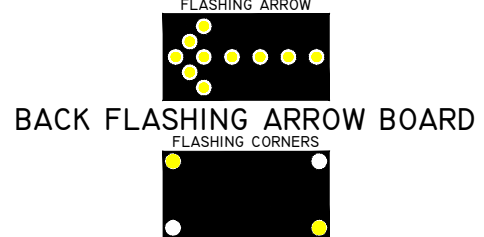

SCENARIO 1:

WORKS PROTECTED BY SHADOW VEHICLE

A RISK ASSESSMENT MAY BE PROVIDED FOR THE USE OF TRUCK MOUNTED ATTENUATOR IN PLACE OF THE SHADOW VEHICLE.

SCENARIO 2:

WORKS PROTECTED BY TMA

REFER TO THE MRWA REQUIREMENTS FOR THE USE OF TRUCK MOUNTED ATTENUATORS IN WA OR SECTION 4.5.1 OF THE TMP.

NOTES

- WHERE WORKSITE CLEARANCES CANNOT BE ACHIEVED, ANOTHER MOBILE SCENARIO OR A STATIC SETUP MAY BE REQUIRED.
- THIS DRAWING IS FOR LARGE PLANT ITEMS ONLY AND THERE MUST BE NO WORKERS ON FOOT. THIS SCENARIO IS TO BE USED FOR CLASS 2 MOBILE WORKS, WHERE MOBILE CONVOY TRAVELS GREATER THAN 20km/h OF TRAFFIC SPEED.
- THE VEHICLE CONVOY MUST BE MOBILE AT ALL TIMES AND MUST NOT STOP IF WITHIN LIVE TRAFFIC LANES.
- PRIOR TO THE IMPLEMENTATION OF ANY MOBILE CONVOYS, A RISK ASSESSMENT IS REQUIRED TO DETERMINE IF THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS.
- WHERE THERE IS POOR SIGHT DISTANCE DUE TO CURVE OR CREST IN THE ROAD THE ADVANCED WARNING VEHICLE MUST STOP PRIOR TO THE REDUCED SIGHT DISTANCE LOCATION WHILE THE REST OF THE CONVOY TRAVEL THROUGH. THE DISTANCE BETWEEN THE LEAD VEHICLE AND THE WORK VEHICLE MAY BE INCREASED TO ACCOMMODATE ADDITIONAL WARNING TO OPPOSING VEHICLES WHERE THERE IS POOR SIGHT DISTANCE ON APPROACH. WHERE THERE IS SIGNIFICANT SECTIONS OF POOR SIGHT DISTANCE AN ADDITIONAL SHADOW VEHICLE MAY BE USED.
- ALL DRIVERS WITHIN MOBILE CONVOY MUST BE ALERT AND AWARE OF APPROACHING VEHICLES AT ALL TIMES.
- ALL VEHICLES WITHIN MOBILE CONVOY MUST HAVE CLEAR COMMUNICATION METHODS USING TWO-WAY RADIO DEVICES.
- VEHICLE LOCATIONS MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS.
- FOR WORKS AROUND ON / OFF RAMP, MAJOR SIDE ROADS OR SIGNALISED INTERSECTIONS A STATIC SETUP SHOULD BE CONSIDERED TO MANAGE VEHICLES PROPERLY. UPON RISK ASSESSMENT, THIS DRAWING MAY BE USED AND SHADOW VEHICLE DISTANCES REDUCED TO PREVENT VEHICLES ENTERING / EXITING THE ROAD IN BETWEEN THE CONVOY VEHICLES.
- REFER TO MANUFACTURING ADVICE FOR SHUNT DISTANCES ON TRUCK MOUNTED ATTENUATORS.
- WHEN A MOBILE CONVOY CONTAINS MORE THAN ONE WORK VEHICLE, EACH VEHICLE MUST BE 40M APART AS A MAXIMUM AND POSITIONED BETWEEN THE SHADOW VEHICLE AND LEAD VEHICLE. WHERE THIS IS NOT PRACTICABLE, EACH WORK VEHICLE MUST BE TREATED AS A SEPARATE MOBILE OPERATION WITH THEIR OWN WORK CONVOY. EACH WORK VEHICLE MUST ADHERE TO THE CLEARANCES TO LIVE TRAFFIC LANE TABLE.
- WHERE SIGNIFICANT CONGESTION OR DELAYS OCCUR BEHIND THE CONVOY, VEHICLES MUST PULL OFF THE ROAD AT A SUITABLE LOCATION OF THE VERGE TO ALLOW TRAFFIC TO PASS. THIS MUST BE COMMUNICATED VIA TWO-WAY RADIO TO ALL VEHICLES WITHIN THE CONVOY BEFORE THE ACTION IS UNDERTAKEN.
- SHADOW VEHICLE AND LEAD VEHICLE TO STRADDLE THE CENTRE LINE WHILST MAINTAINING ENOUGH ROOM FOR OPPOSING VEHICLES TO PASS WITHIN THE EXISTING LANE OR ON THE SHOULDER / VERGE.
- WHEN THE SPEED LIMIT IS REDUCED BY MORE THAN 20KM/H, CONSIDER THE USE OF MULTIPLE ADVANCE WARNING VEHICLES TO DECREASE THE SPEED IN STEPS, WHERE THIS IS NOT IMPLEMENTED A RISK ASSESSMENT MUST BE COMPLETED.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES




DISTANCE BETWEEN VEHICLES IN MOBILE CONVOY - EXCLUDING SHADOW VEHICLE

AGTTM PART 4 - TABLE 3.1

SPEED LIMIT (km/h)	DISTANCE (m)
≤45	50
46-55	70
56-65	90
66-75	110
76-85	140
86-95	160
96-105	200
>106	230

COMPONENTS OF LEAD/ADVANCED WARNING VEHICLE

- FLASHING ARROW BOARD WITH FRONT AND REAR ASPECT BOARDS.
- TWIN FLASHING BEACONS.
- REAR MOUNTED VARIABLE MESSAGE BOARD.
- CONVENTIONAL SIGN MMS FRAME MOUNTED TO FRONT OF VEHICLE. LEAD VEHICLE TO SHOW PROPOSED TEMPORARY SPEED ZONE AND ADVANCED WARNING TO TERMINATE TEMPORARY SPEED ZONE.

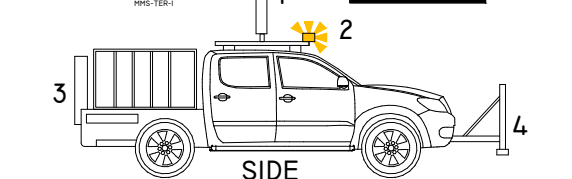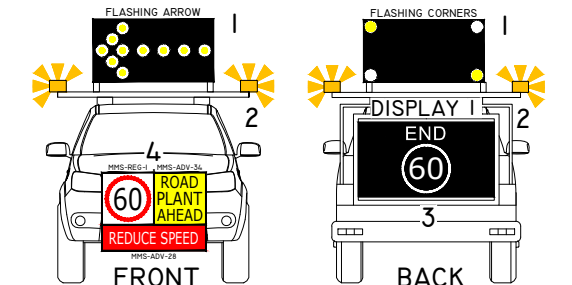

LEGEND

EXISTING ROAD

METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH

WATERLOO CRESCENT
TELEPHONE (08) 138 138

EAST PERTH 6004

DATE OF DRAWING 2025 JULY	SCALE -
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -
ROAD AUTHORITY MAIN ROADS WA	WORKSITE SPEED 60km/h
CHECKED BY TYLER HARTLEY	SIGNATURE
ACCREDITATION RTM-0066	SIGNATURE
DESIGNED BY MICHAEL REED	SIGNATURE
ACCREDITATION AWTM-23-11536-02	SIGNATURE

GENERIC TRAFFIC GUIDANCE SCHEME
CLASS 2 - MOBILE SCENARIOS
TWO WAY ROAD 60km/h
WORK VEHICLE BETWEEN 1.2m AND 3.0m

DRAWING NO 0922-01531-MS2-009	REVISION 6
----------------------------------	---------------