
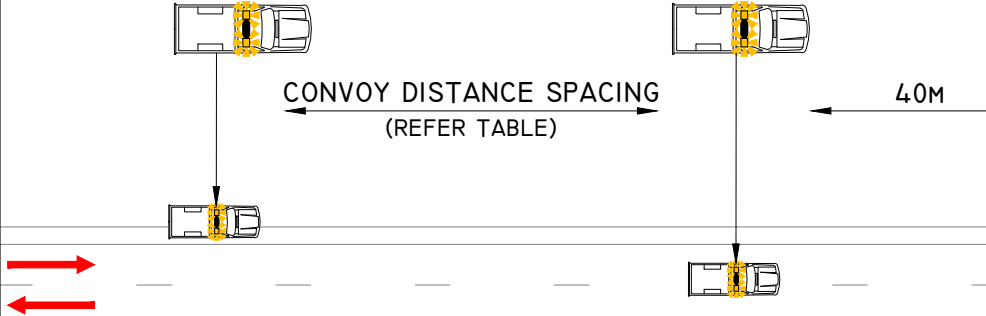
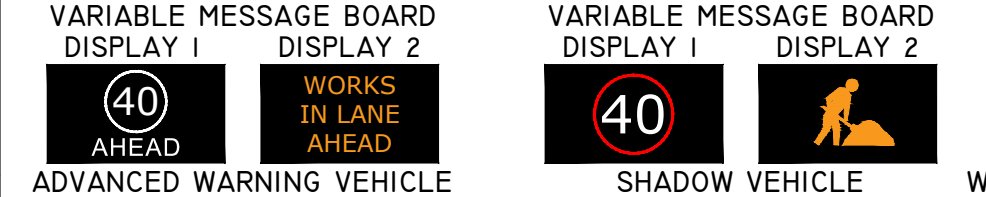


SCENARIO 1:




FRONT FLASHING ARROW BOARD FRONT FLASHING ARROW BOARD

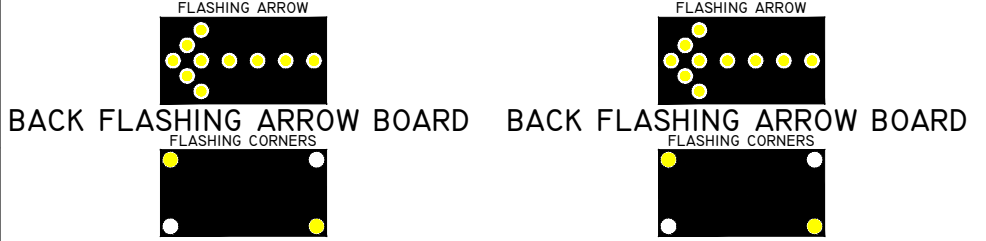

CLASS 3 MOBILE SCENARIO  
WORKERS ON FOOT IN TRAFFIC LANE



SCENARIO 2:

FRONT FLASHING ARROW BOARD FRONT FLASHING ARROW BOARD

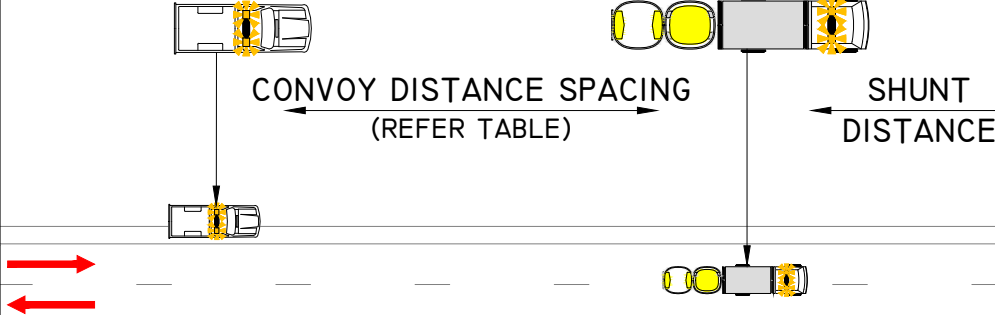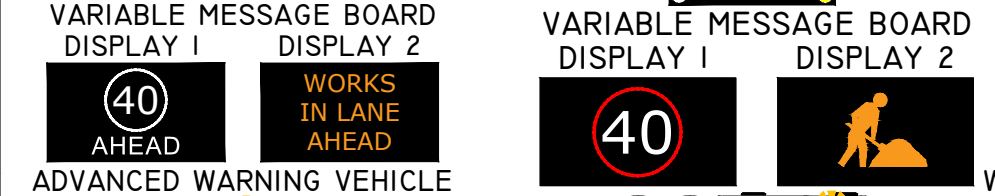
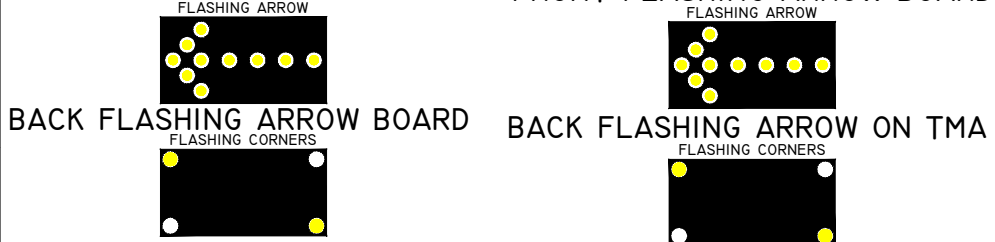


CLASS 3 MOBILE SCENARIO  
WORKERS ON FOOT IN TRAFFIC LANE  
TRUCK MOUNTED ATTENUATOR.

FRONT FLASHING ARROW BOARD

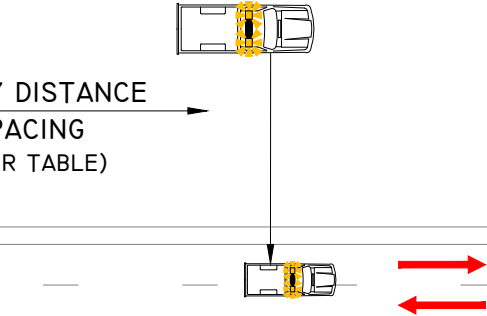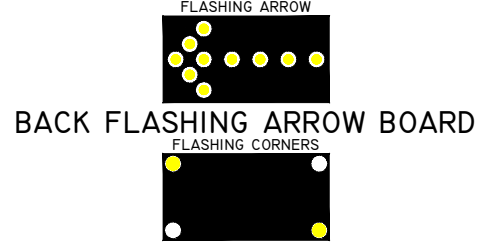

FRONT FLASHING ARROW BOARD

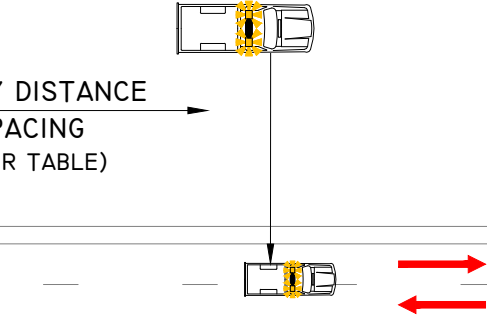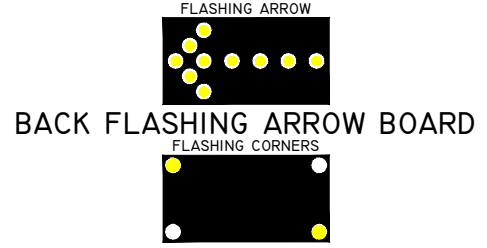

SCENARIO 1:

WORKS PROTECTED BY SHADOW VEHICLE

A RISK ASSESSMENT MAY BE PROVIDED FOR THE USE OF TRUCK MOUNTED ATTENUATOR IN PLACE OF THE SHADOW VEHICLE.

SCENARIO 2:

WORKS PROTECTED BY TMA

REFER TO THE MRWA REQUIREMENTS FOR THE USE OF TRUCK MOUNTED ATTENUATORS IN WA OR SECTION 4.5.1 OF THE TMP.

NOTES

- THIS DRAWING IS FOR SMALL ITEMS OF PLANT OR WORKERS ON FOOT. THIS SCENARIO IS TO BE USED FOR CLASS 3 MOBILE WORKS.
- WHERE WORKSITE CLEARANCES CANNOT BE ACHIEVED, ANOTHER MOBILE SCENARIO OR A STATIC SETUP MAY BE REQUIRED.
- THE VEHICLE CONVOY MUST BE MOBILE AT ALL TIMES AND MUST NOT STOP IF WITHIN LIVE TRAFFIC LANES.
- PRIOR TO THE IMPLEMENTATION OF ANY MOBILE CONVOYS, A RISK ASSESSMENT IS REQUIRED TO DETERMINE IF THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS.
- WHERE THERE IS POOR SIGHT DISTANCE DUE TO CURVE OR CREST IN THE ROAD THE ADVANCED WARNING VEHICLE MUST STOP PRIOR TO THE REDUCED SIGHT DISTANCE LOCATION WHILE THE REST OF THE CONVOY TRAVEL THROUGH. WHERE THERE IS SIGNIFICANT SECTIONS OF POOR SIGHT DISTANCE AN ADDITIONAL SHADOW VEHICLE MAY BE USED.
- ALL DRIVERS AND WORKERS ON FOOT WITHIN MOBILE CONVOY MUST BE ALERT AND AWARE OF APPROACHING VEHICLES AT ALL TIMES.
- ALL VEHICLES AND WORKERS ON FOOT WITHIN MOBILE CONVOY MUST HAVE CLEAR COMMUNICATION METHODS USING TWO-WAY RADIO DEVICES.
- VEHICLE LOCATIONS MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS.
- FOR WORKS AROUND ON / OFF RAMP, MAJOR SIDE ROADS OR SIGNALISED INTERSECTIONS A STATIC SETUP SHOULD BE CONSIDERED TO MANAGE VEHICLES PROPERLY. UPON RISK ASSESSMENT, THIS DRAWING MAY BE USED AND SHADOW VEHICLE DISTANCES REDUCED TO PREVENT VEHICLES ENTERING / EXITING THE ROAD IN BETWEEN THE CONVOY VEHICLES.
- REFER TO MANUFACTURING ADVICE FOR SHUNT DISTANCES ON TRUCK MOUNTED ATTENUATORS.
- WHERE SIGNIFICANT CONGESTION OR DELAYS OCCUR BEHIND THE CONVOY, WORKERS MUST EXIT THE ROAD AND VEHICLES MUST PULL OFF THE ROAD AT A SUITABLE LOCATION OF THE VERGE TO ALLOW TRAFFIC TO PASS. THIS MUST BE COMMUNICATED VIA TWO-WAY RADIO TO ALL WORKERS AND VEHICLES WITHIN THE CONVOY BEFORE THE ACTION IS UNDERTAKEN.
- WHEN A MOBILE CONVOY CONTAINS MORE THAN ONE WORK VEHICLE, EACH VEHICLE MUST BE 40M APART AS A MAXIMUM AND POSITIONED BETWEEN THE SHADOW VEHICLE AND LEAD VEHICLE. WORKERS ON FOOT MUST REMAIN WITHIN 40M OF THE WORK VEHICLE AT ALL TIMES, WHERE THIS IS NOT PRACTICABLE, EACH LOCATION MUST BE TREATED AS A SEPARATE MOBILE OPERATION WITH THEIR OWN WORK CONVOY.
- SHADOW VEHICLE AND LEAD VEHICLE TO STRADDLE THE CENTRE LINE WHILST MAINTAINING ENOUGH ROOM FOR OPPOSING VEHICLES TO PASS WITHIN THE EXISTING LANE OR ON THE SHOULDER / VERGE.
- WHEN THE SPEED LIMIT IS REDUCED BY MORE THAN 20KM/H, CONSIDER THE USE OF MULTIPLE ADVANCE WARNING VEHICLES TO DECREASE THE SPEED IN STEPS, WHERE THIS IS NOT IMPLEMENTED A RISK ASSESSMENT MUST BE COMPLETED.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES



DISTANCE BETWEEN VEHICLES IN MOBILE CONVOY - EXCLUDING SHADOW VEHICLE

AGTTM PART 4 - TABLE 3.1

| SPEED LIMIT (km/h) | DISTANCE (m) |
|--------------------|--------------|
| ≤45                | 50           |
| 46-55              | 70           |
| 56-65              | 90           |
| 66-75              | 110          |
| 76-85              | 140          |
| 86-95              | 160          |
| 96-105             | 200          |
| >106               | 230          |

COMPONENTS OF LEAD/ADVANCED WARNING VEHICLE

- FLASHING ARROW BOARD WITH FRONT AND REAR ASPECT BOARDS.
- TWIN FLASHING BEACONS.
- REAR MOUNTED VARIABLE MESSAGE BOARD.
- CONVENTIONAL SIGN MMS FRAME MOUNTED TO FRONT OF VEHICLE. LEAD VEHICLE TO SHOW PROPOSED TEMPORARY SPEED ZONE AND ADVANCED WARNING TO TERMINATE TEMPORARY SPEED ZONE.

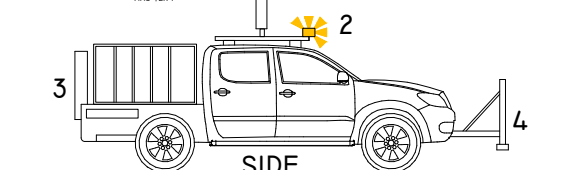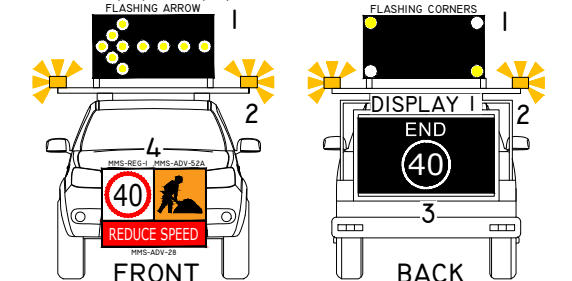

LEGEND

EXISTING ROAD

Logo of Metropolitan Regions Traffic Management Branch, Western Australia. Address: Waterloo Crescent, East Perth 6004. Telephone: (08) 138 138.

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| DATE OF DRAWING<br>2025 JULY      | SCALE<br>-                        |
| LOCAL GOVERNMENT AUTHORITY<br>-   | POSTED SPEED<br>-                 |
| ROAD AUTHORITY<br>MRWA            | WORKSITE SPEED<br>40km/h          |
| CHECKED BY<br>TYLER HARTLEY       | SIGNATURE<br><i>Tyler Hartley</i> |
| ACCREDITATION<br>RTM-0066         | SIGNATURE<br><i>Michael Reed</i>  |
| DESIGNED BY<br>MICHAEL REED       | SIGNATURE<br><i>Michael Reed</i>  |
| ACCREDITATION<br>AWTM-23-11536-02 | SIGNATURE<br><i>Michael Reed</i>  |

GENERIC TRAFFIC GUIDANCE SCHEME  
CLASS 3 - MOBILE SCENARIOS  
TWO WAY ROAD 40KM/H  
WORKSITE WITHIN 1.2M

|                                  |               |
|----------------------------------|---------------|
| DRAWING NO<br>0922-01531-MS3-009 | REVISION<br>6 |
|----------------------------------|---------------|