



SCENARIO I:

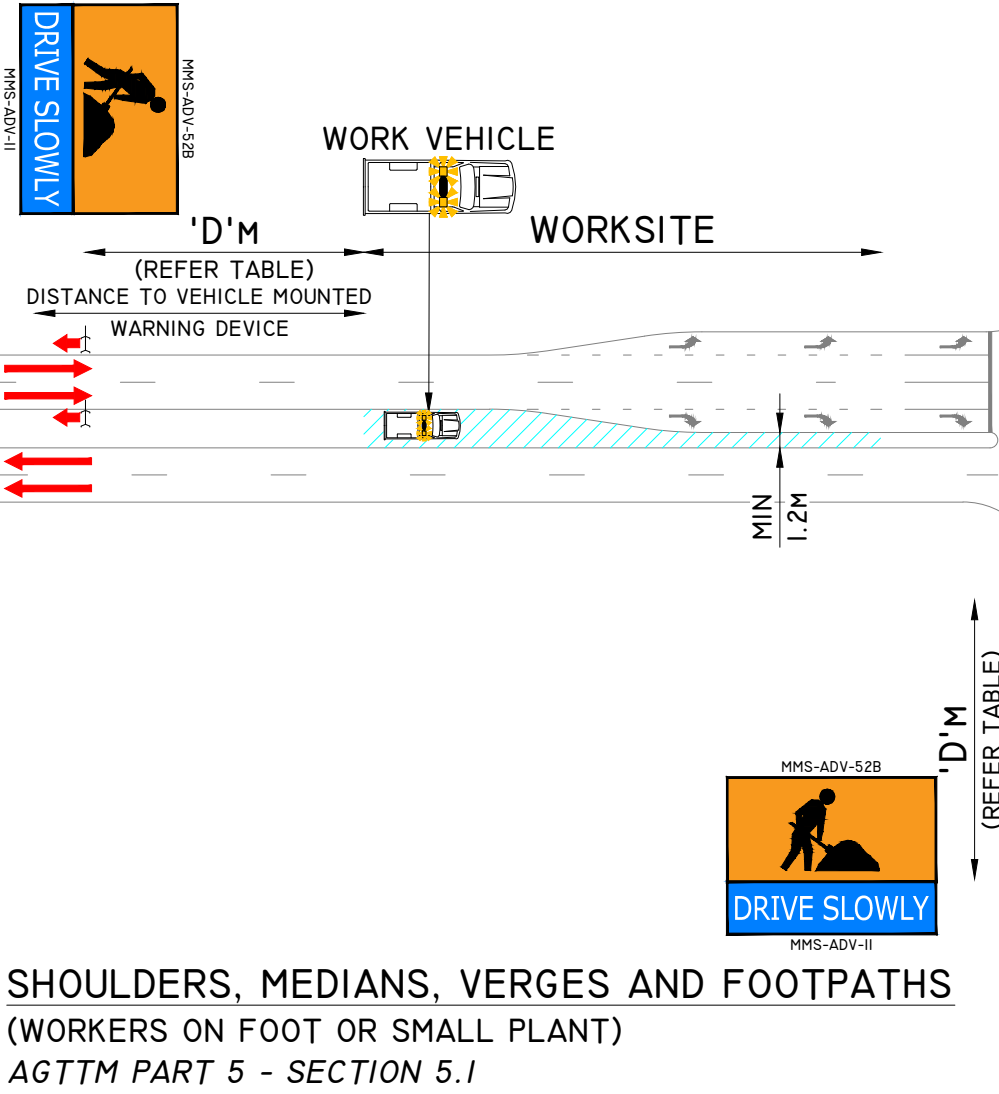

SHOULDERS, MEDIANS, VERGES AND FOOTPATHS
(WORKERS ON FOOT OR SMALL PLANT)
AGTTM PART 5 - SECTION 5.1

SHADOW VEHICLE INSET
(ONLY REQUIRED ON POSTED SPEEDS 80km/h OR GREATER)
SHADOW VEHICLE MAY BE DISPENSED WITH UNDER RISK ASSESSMENT UNDERTAKEN BY AN AWTM AS PART OF THE TM ADVICE OR A WTM ON SITE. IN THE ABSENCE OF SHADOW VEHICLE A LOOKOUT PERSON IS REQUIRED. REFER TO SECTION 4.5 OF THE TMP FOR MORE DETAILS.

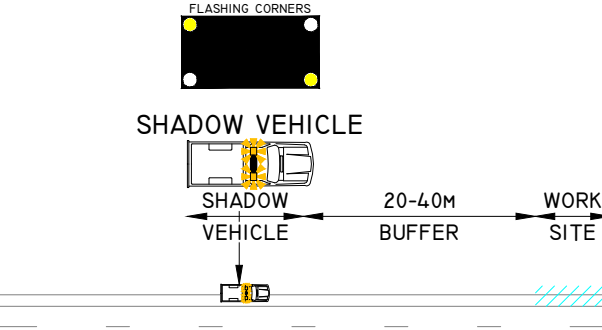

SCENARIO I:
AT INTERSECTION (WORKERS ON FOOT)
NOTES

- VEHICLES MUST BE EQUIPPED WITH A VEHICLE MOUNTED WARNING DEVICE.
- THE VEHICLE MOUNTED WARNING DEVICE SHALL BE MOUNTED AS HIGH AS PRACTICABLE AND NOT BE OBSCURED, E.G BY OVERHANGING VEGETATION OR A RAISED TRUCK BODY.
- THE FOLLOWING MUST BE ADHERED FOR SHOULDER, MEDIANS, VERGES AND FOOTPATHS:
 - THE WORK AREA IS OUTSIDE OF TRAFFIC LANES.
 - CLEARANCE FROM THE WORK AREA IS ONE OF THE FOLLOWING:
 - IF THE SPEED IS 60km/h OR LESS, THE WORK AREA DOES NOT ENCROACH INTO THE LIVE TRAFFIC LANE.
 - IF THE SPEED IS MORE THAN 60km/h BUT EQUAL TO OR LESS THAN 80km/h, THE WORK AREA IS AT LEAST 1.2M CLEAR TO THE EDGE OF THE TRAFFIC LANE.
 - IF THE SPEED IS MORE THAN 80km/h, THE WORK AREA IS AT LEAST 3m CLEAR TO THE EDGE OF THE TRAFFIC LANE.
- PRIOR TO EQUIPMENT OR MATERIALS BEING BROUGHT INTO THE WORK AREA, A DRIVE THROUGH CHECK OF THE WORKSITE TRAFFIC MANAGEMENT SETUP SHOULD BE MADE IN ALL DIRECTIONS, INCLUDING SIDE ROADS.
- PRIOR TO COMMENCEMENT OF WORKS, A RISK ASSESSMENT MUST BE UNDERTAKEN TO ENSURE THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS PRIOR TO SETUP.
- THE WORKS VEHICLE LOCATION MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS.
- EQUIPMENT OR MATERIALS WHICH ARE BROUGHT ONTO THE WORK AREA SHOULD BE UNLOADED FROM THE NON-TRAFFIC SIDE OF A STATIONARY WORK VEHICLE.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES
SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

MINIMUM SIGHT DISTANCE TO VEHICLE MOUNTED WARNING DEVICE
AGTTM PART 5 - TABLE 5.2

SPEED LIMIT (KM/H)	DISTANCE (M)
≤45	80
46-55	100
56-65	120
66-75	140
76-85	160
86-95	180
96-105	200
>105	220

LEGEND

- EXISTING ROAD
- WORK ZONE



METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH

WATERLOO CRESCENT
TELEPHONE (08) 138 138

EAST PERTH 6004

DATE OF DRAWING 2025 JULY	SCALE -
LOCAL GOVERNMENT AUTHORITY -	POSTED SPEED -
ROAD AUTHORITY MRWA	WORKSITE SPEED -

CHECKED BY TYLER HARTLEY	SIGNATURE
ACCREDITATION RTM-0066	
DESIGNED BY MICHAEL REED	SIGNATURE
ACCREDITATION AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME SHORT TERM LOW IMPACT SHOULDER, MEDIANS, VERGES AND PATHS OUTSIDE OF TRAFFIC LANES		8
DRAWING NO 0922-01531-STLI-016	REVISION 6	