SCENARIO 1:

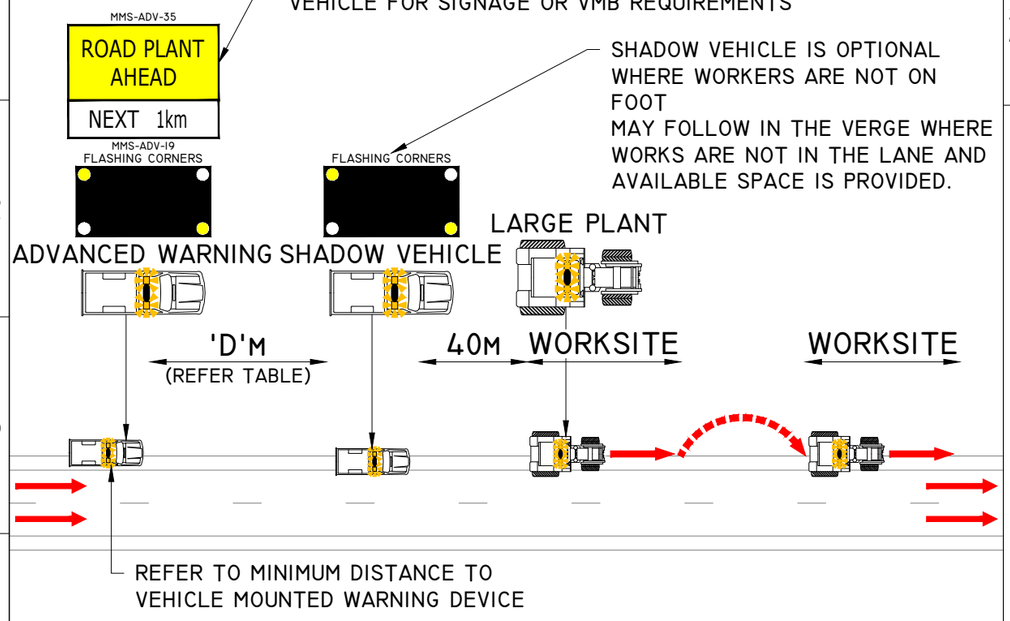

FREQUENTLY CHANGING WORK AREA - IN LANE

(LARGE PLANT ONLY)

AGTTM PART 5 - SECTION 4.4

SCENARIO 2:

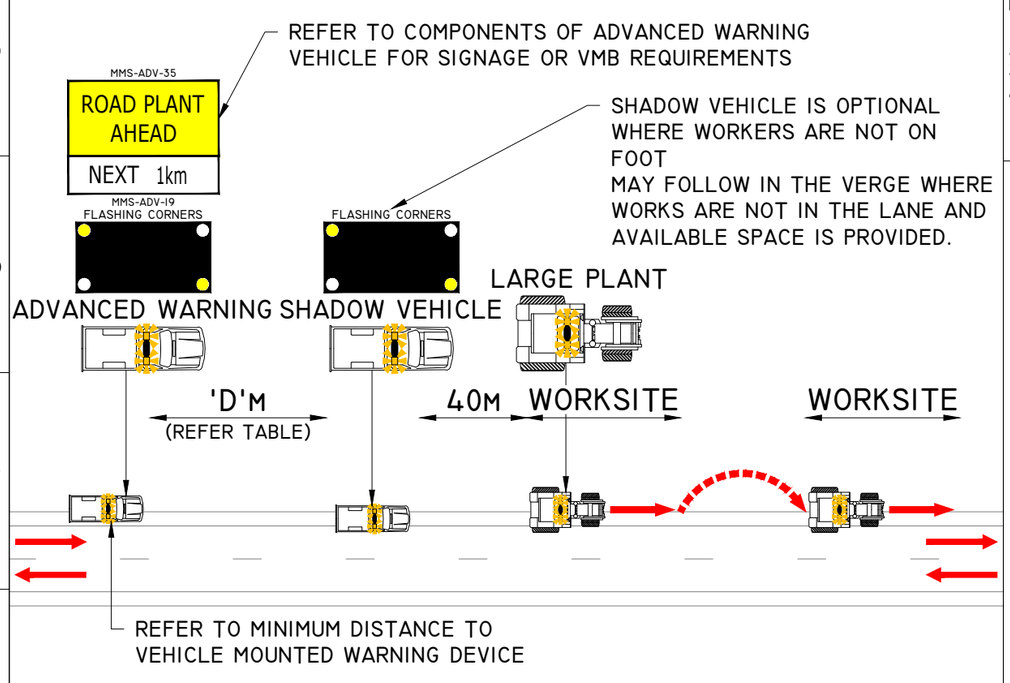

FREQUENTLY CHANGING WORK AREA - IN LANE

(LARGE PLANT ONLY)

AGTTM PART 5 - SECTION 4.4

COMPONENTS OF ADVANCED WARNING VEHICLE

1. FLASHING ARROW BOARD WITH FRONT ASPECT BOARD.
2. TWIN FLASHING BEACONS.
3. REAR MOUNTED VARIABLE MESSAGE BOARD.
4. CONVENTIONAL SIGN MMS FRAME CAN BE MOUNTED TO BACK OF VEHICLE AS AN ALTERNATIVE TO THE VARIABLE MESSAGE BOARD.





DISPLAY 2

NEXT 1km

ALTERNATING MESSAGE DISPLAY FOR VMB





COMPONENTS OF ADVANCED WARNING VEHICLE

1. FLASHING ARROW BOARD WITH FRONT ASPECT BOARD.
2. TWIN FLASHING BEACONS.
3. REAR MOUNTED VARIABLE MESSAGE BOARD.
4. CONVENTIONAL SIGN MMS FRAME CAN BE MOUNTED TO BACK OF VEHICLE AS AN ALTERNATIVE TO THE VARIABLE MESSAGE BOARD.





DISPLAY 2

NEXT 1km

ALTERNATING MESSAGE DISPLAY FOR VMB





SCENARIO 1:

MULTI-LANE ROAD (LARGE PLANT ONLY)

1. WORKS ARE IN ONE LANE OF THE MULTI-LANE ROAD AND THE REMAINING LANES ARE OPEN TO TRAFFIC.
2. WHERE THE LANE IS WIDE AND THE WORK AREA IS IN THE LANE BUT IS MORE THAN 1.2M FROM THE REMAINING TRAFFIC FLOW.

SCENARIO 2:

TWO-WAY CARRIAGEWAY (LARGE PLANT ONLY)

1. WHERE THE LANE IS WIDE AND THE WORK AREA IS IN THE LANE BUT IS MORE THAN 1.2M FROM THE REMAINING TRAFFIC FLOW.
2. WHERE THE WORKS ARE IN A LOW VOLUME ROAD AND THE PRESENCE OF THE WORK VEHICLE AND WORKERS RESULTS IN TRAFFIC OPERATING SIMILAR TO SHUTTLE FLOW.

NOTES

1. ON HIGH SPEED / VOLUME ROADS, SHADOW VEHICLE MUST BE REPLACED WITH A TMA. A TMA MAY BE USED IN ALL OTHER CIRCUMSTANCE SUBJECT TO A RISK ASSESSMENT.
2. VEHICLES MUST BE EQUIPPED WITH A VEHICLE MOUNTED WARNING DEVICE.
3. THE VEHICLE MOUNTED WARNING DEVICE SHALL BE MOUNTED AS HIGH AS PRACTICABLE AND NOT BE OBSCURED, E.G BY OVERHANGING VEGETATION OR A RAISED TRUCK BODY.
4. AS THE WORKS PROGRESS ALONG THE ROAD, THE SHADOW VEHICLE MOVES WITH THE WORK VEHICLE.
5. THE FOLLOWING MUST BE ADHERED FOR FREQUENTLY CHANGING WORK AREA:
   - 5.1. WOKRS MOVE FREQUENTLY BETWEEN SUCCESSIVE LOCATIONS.
   - 5.2. A SHADOW VEHICLE IS AVAILABLE (TMA FOR HIGH SPEED / VOLUME ROADS).
   - 5.3. THERE IS A MINIMUM SIGHT DISTANCE FROM APPROACHING ROAD USERS TO THE SHADOW AND THE WORK VEHICLE MOUNTED WARNING DEVICE OF:
     - 5.3.1. 150M IF THE SPEED IS 60KM/H OR LESS.
     - 5.3.2. 250M IF THE SPEED IS MORE THAN 60KM/H.
   - 5.4. WORKS DO NOT REDUCE THE OVERALL WIDTH TO LESS THAN THE REQUIREMENTS FOR SAFE PASSAGE OF TWO WAY TRAFFIC FLOW, OR ONE WAY TRAFFIC IF THE VOLUME IS LESS THAN 50VPD.
   - 5.5. WORKS DO NO REDUCE ANY TRAFFIC LANE WIDTH ADJACENT TO A BARRIER LINE TO LESS THAN THAT NEEDED TO ALLOW VEHICLES TO PROCEED WITHOUT CROSSING THE LINE.
   - 5.6. THE MAXIMUM WORK PERIOD AT ANY ONE LOCATION IS AS PER THE BELOW:

IN TRAFFIC OR WITHIN 1.2M OF TRAFFIC:

- 5.6.1. 20 MIN WHERE TRAFFIC VOLUME IS ABOVE 40VPH.
- 5.6.2. 1 HOUR WHERE TRAFFIC VOLUMES IS 40VPH OR LESS.

BETWEEN 1.2M AND 3M OF TRAFFIC:

- 5.6.3. 20 MIN WHERE TRAFFIC VOLUMES IS ABOVE 40VPH.
- 5.6.4. 1 HOUR WHERE TRAFFIC VOLUMES IS 40VPH OR LESS.

6. FOR SCENARIOS WHERE THERE ARE WORKERS ON FOOT, REFER TO TGC-TMC-STLI-025.
7. PRIOR TO THE START OF WORKS, A DRIVE THROUGH CHECK OF THE WORKSITE TRAFFIC MANAGEMENT SETUP SHOULD BE MADE IN ALL DIRECTIONS, INCLUDING SIDE ROADS.
8. PRIOR TO COMMENCEMENT OF WORKS, A RISK ASSESSMENT MUST BE UNDERTAKEN TO ENSURE THE WORKS CAN BE COMPLETED SAFELY. REFER TO THE TMP FOR RISK CONSIDERATIONS PRIOR TO SETUP.
9. THE WORKS AND SHADOW VEHICLE LOCATION MUST CONSIDER THE IMPACT ON VULNERABLE ROAD USERS AND CYCLISTS. THE WORK VEHICLE MUST BE LOCATED WITHIN 40M OF THE PROPOSED WORKS.

DOCUMENTATION

DAILY RECORDS OF THE SITE LAYOUT INCLUDING DEVICES, SIGHT DISTANCE, RISK ASSESSMENTS, SIGNS OR TGS, MUST BE KEPT IN A DIARY OR IN WORK SHEETS (DAILY DAIRY). ANY SIGNIFICANT DEPARTURES FROM, OR ADDITIONS TO, THE SIGNS AND DEVICES INCLUDED IN THIS DIAGRAM SHOULD BE NOTED AND APPROVED.

TABLES

SIGN SPACING

AGTTM PART 3 - TABLE 2.2

SPEED LIMIT (KM/H)	DISTANCE ('D') (M)
55 OR LESS	15
56 TO 65	45
GREATER THAN 65	EQUAL TO SPEED OF TRAFFIC IN KM/H

MINIMUM SIGHT DISTANCE TO VEHICLE MOUNTED WARNING DEVICE - NO SPOTTER

AGTTM PART 5 - TABLE 4.2

SPEED LIMIT (KM/H)	DISTANCE (M)
≤45	225
46-55	275
56-65	335
66-75	390
76-85	445
86-95	500
96-110	555
>110	SPOTTER REQUIRED

WORK TASK ≤ 10 SECONDS. WORKER TO FACE ONCOMING TRAFFIC.

LEGEND

EXISTING ROAD

METROPOLITAN REGIONS
TRAFFIC MANAGEMENT BRANCH
WATERLOO CRESCENT EAST PERTH 6004
TELEPHONE (08) 138 138

DATE OF DRAWING: 2025 JULY	SCALE: -
LOCAL GOVERNMENT AUTHORITY: -	POSTED SPEED: -
ROAD AUTHORITY: MRWA	WORKSITE SPEED: -
CHECKED BY: TYLER HARTLEY	SIGNATURE
ACCREDITATION: RTM-0066	
DESIGNED BY: MICHAEL REED	SIGNATURE
ACCREDITATION: AWTM-23-11536-02	

GENERIC TRAFFIC GUIDANCE SCHEME
SHORT TERM LOW IMPACT
FREQUENTLY CHANGING WORK AREA
VMB VEHICLE ADVANCED WARNING

DRAWING NO: 0922-01531-STLI-024	REVISION: 6