

Rockchip DSMC Developer Guide

ID: RK-KF-YF-C05

Release Version: V1.2.0

Release Date: 2025-11-25

Security Level: ☐Top-Secret ☐Secret ☐Internal ☒Public

DISCLAIMER

THIS DOCUMENT IS PROVIDED "AS IS". ROCKCHIP ELECTRONICS CO., LTD. ("ROCKCHIP") DOES NOT PROVIDE ANY WARRANTY OF ANY KIND, EXPRESSED, IMPLIED OR OTHERWISE, WITH RESPECT TO THE ACCURACY, RELIABILITY, COMPLETENESS, MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE OR NON-INFRINGEMENT OF ANY REPRESENTATION, INFORMATION AND CONTENT IN THIS DOCUMENT. THIS DOCUMENT IS FOR REFERENCE ONLY. THIS DOCUMENT MAY BE UPDATED OR CHANGED WITHOUT ANY NOTICE AT ANY TIME DUE TO THE UPGRADES OF THE PRODUCT OR ANY OTHER REASONS.

Trademark Statement

"Rockchip", "瑞芯微", "瑞芯" shall be Rockchip's registered trademarks and owned by Rockchip. All the other trademarks or registered trademarks mentioned in this document shall be owned by their respective owners.

All rights reserved. ©2025. Rockchip Electronics Co., Ltd.

Beyond the scope of fair use, neither any entity nor individual shall extract, copy, or distribute this document in any form in whole or in part without the written approval of Rockchip.

Rockchip Electronics Co., Ltd.

No.18 Building, A District, No.89, software Boulevard Fuzhou, Fujian, PRC

Website: www.rock-chips.com

Customer service Tel: +86-4007-700-590

Customer service Fax: +86-591-83951833

Customer service e-Mail: fae@rock-chips.com

Preface

Overview

This document provides instructions and usage methods for the kernel development of the ROCKHIP DSMC module.

Product Version

Chipset	Kernel Version
RK3576, RK3506, RV1126B	kernel 6.10

Intended Audience

This document (this guide) is mainly intended for:

Technical support engineers

Software development engineers

Revision History

Version	Author	Date	Change Description
V1.0.0	Zhihuan He	2024-06-14	Initial version
V1.0.1	Zhihuan He	2024-11-04	Fixed Chinese character errors
V1.1.0	Zhihuan He	2025-04-22	Add DSMC Note description
V1.1.1	karen Huang	2025-04-27	Modify document ID
V1.2.0	Zhihuan He	2025-11-25	Add DSMC dts attribute description

Contents

Rockchip DSMC Developer Guide

1. Terminology
2. Overview
3. DSMC Driver
 - 3.1 Driver Files
 - 3.2 DTS Configuration
 - 3.3 kernel Configuration
4. Kernel Mode Access to DSMC
 - 4.1 Driver Interface Invocation
 - 4.2 Direct Access
5. User Mode Access to DSMC
 - 5.1 Access through Specific Nodes
 - 5.2 Direct Access
6. DSMC Slave Memory Allocation
 - 6.1 PSRAM
 - 6.2 Local bus
7. DSMC Local bus data interaction between the host and slave
 - 7.1 FIFO
 - 7.2 Register
8. Note
 - 8.1 Interface Frequency on DSMC IO
 - 8.2 Regarding DSMC Bit Width
 - 8.3 System Boot Failure After Enabling DSMC
 - 8.4 DSMC Self-Test Status Abnormal

1. Terminology

- DSMC: Double Data Rate Serial Memory Controller.
- PSRAM: Pseudo static random access memory.
- DPRAM: Dual Port Random Access Memory.

2. Overview

The Double Data Rate Serial Memory Controller(DSMC) features high bandwidth with fewer pins by time-division multiplexing the command, address, and data lines, with data transmitted on both the rising and falling edges. The data width supports x8, x16, and up to 4 chip selects. The protocol supports Hyperbus PSRAM, Xccela PSRAM, and Local bus. If using the Local bus protocol, the slave device must use the rockchips designed slave model or a device with a similar transmission protocol. If using HYPERBUS PSRAM or XCCELA PSRAM protocols, the slave device supports PSRAM chips from manufacturers such as Winbond, AP Memory, Cypress, and ISSI.

3. DSMC Driver

3.1 Driver Files

The DSMC driver file locations:

```
drivers/memory/rockchip/dsmc-host.c          /* Main driver program */
drivers/memory/rockchip/dsmc-controller.c     /* The DSMC controller behavior configuration */
drivers/memory/rockchip/dsmc-lb-device.c      /* The DSMC Local bus device */
```

3.2 DTS Configuration

```
dsmc: dsmc@2a280000 {
    ...
    clock-frequency = <100000000>;          /* DSMC interface frequency */
    ...
    /* Slave device properties */
    slave {
        rockchip,dqs-dll = <0x20 0x20      /* DQS0, DQS1 DLL delay for slave device cs0
*/
```

```

        0x20 0x20          /* DQS0, DQS1 DLL delay for slave device cs1
*/
        0x20 0x20          /* DQS0, DQS1 DLL delay for slave device cs2
*/
        0x20 0x20>;        /* DQS0, DQS1 DLL delay for slave device cs3
*/

/*
 * rockchip,ranges: Base address and size of DSMC access to slave device memory;
 * If different CS have different memory space sizes, configure the largest.
 * rockchip,ranges = <0x0 0x10000000 0x0 0x2000000> means that if the slave is
 * PSRAM, allocate 0x2000000 memory size for each CS;
 * If the slave is Local Bus, allocate 0x2000000 memory size for each region
 */
rockchip,ranges = <0x0 0x10000000 0x0 0x2000000>;
rockchip,slave-dev = <&dsmc_slave>;
};

dsmc_slave: dsmc_slave {
    compatible = "rockchip,dsmc-slave";
    rockchip,clk-mode = <0>;          /* Clock mode, only for Local bus */
    status = "disabled";
    /*
     * Enable the corresponding slave device cs nodes when the slave
     * device is PSRAM (Hyperbus Psram or Xccela Psram).
     */
    psram {
        /*
         * When using PSRAM, there is no need to specify the bit width as
         * the driver automatically adapts it.
         */
        psram0 {
            status = "disabled"; /* If the slave device cs0 is PSRAM, change to "okay"
*/
        };
        psram1 {
            status = "disabled"; /* If the slave device cs1 is PSRAM, change to "okay"
*/
        };
        psram2 {
            status = "disabled"; /* If the slave device cs2 is PSRAM, change to "okay"
*/
        };
        psram3 {
            status = "disabled"; /* If the slave device cs3 is PSRAM, change to "okay"
*/
        };
    };

    /* Enable and configure the corresponding nodes if the slave is a Local bus device
*/
    lb-slave {
        rockchip,io-width = <16>; /* The data width of the local bus slave */

```

```

dsmc_lb_slave0: lb-slave0 {
    rockchip,mtr-timing = <1 0 0 0 0 0 2 2>; /* The core timing, modifiable
according to slave design */
    rockchip,int-en = <0x0>; /* The current cs uses the interrupt sequence
number on the pin */
    status = "disabled";/* If the cs0 slave is a Local bus, change to "okay" */
    dsmc_p0_region: region {
        dsmc_p0_region0: region0 {/* Attributes of this slave region0 */
            rockchip,attribute = "Merged FIFO";/* The region0 is merged FIFO */
            rockchip,ca-addr-width = <0>;/* CA transfer format, 0: 32bit, 1:
16bit */
            rockchip,dummy-clk-num = <1>;/* Write transfer dummy clk cycle
number */
            rockchip,cs0-be-ctrlled = <0>;/* cs0 is controlled by cs1, cs2, cs3
*/
            rockchip,cs0-ctrl = <0>;    /* cs0 controls cs1, cs2, cs3 */
            status = "disabled";
        };
        dsmc_p0_region1: region1 {/* Attributes of this slave region1 */
            rockchip,attribute = "No-Merge FIFO";/* region1 is unmerged FIFO */
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrlled = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p0_region2: region2 {/* Attributes of this slave region2 */
            rockchip,attribute = "DPRA";/* region2 is DPRAM */
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrlled = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p0_region3: region3 {/* Attributes of this slave region3 */
            rockchip,attribute = "Register";/* region3 is register */
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrlled = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
    };
};

dsmc_lb_slave1: lb-slave1 {
    rockchip,mtr-timing = <1 0 0 0 0 0 2 2>; /* The core timing, modifiable
according to slave design */
    rockchip,int-en = <0x1>; /* The current cs uses the interrupt sequence
number on the pin */
    status = "disabled";/* If cs1 slave is a Local bus, change to "okay" */
    dsmc_p1_region: region {
        dsmc_p1_region0: region0 {
            rockchip,attribute = "Merged FIFO";

```

```

        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
    dsmc_p1_region1: region1 {
        rockchip,attribute = "No-Merge FIFO";
        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
    dsmc_p1_region2: region2 {
        rockchip,attribute = "DPRA";
        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
    dsmc_p1_region3: region3 {
        rockchip,attribute = "Register";
        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
};

dsmc_lb_slave2: lb-slave2 {
    rockchip,mtr-timing = <1 0 0 0 0 0 2 2>; /* The core timing, modifiable
according to slave design */
    rockchip,int-en = <0x2>; /* The current cs uses the interrupt sequence
number on the pin */
    status = "disabled"; /* If cs2 slave is a Local bus, change to "okay" */
    dsmc_p2_region: region {
        dsmc_p2_region0: region0 {
            rockchip,attribute = "Merged FIFO";
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrl = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p2_region1: region1 {
            rockchip,attribute = "No-Merge FIFO";
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrl = <0>;
            rockchip,cs0-ctrl = <0>;

```

```

        status = "disabled";
    };
    dsmc_p2_region2: region2 {
        rockchip,attribute = "DPRA";
        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
    dsmc_p2_region3: region3 {
        rockchip,attribute = "Register";
        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrl = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
};

dsmc_lb_slave3: lb-slave3 {
    rockchip,mtr-timing = <1 0 0 0 0 0 2 2>; /* The core timing, modifiable
according to slave design */
    rockchip,int-en = <0x3>; /* The current cs uses the interrupt sequence
number on the pin */
    status = "disabled";/* If cs3 slave is a Local bus, change to "okay" */
    dsmc_p3_region: region {
        dsmc_p3_region0: region0 {
            rockchip,attribute = "Merged FIFO";
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrl = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p3_region1: region1 {
            rockchip,attribute = "No-Merge FIFO";
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrl = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p3_region2: region2 {
            rockchip,attribute = "DPRA";
            rockchip,ca-addr-width = <0>;
            rockchip,dummy-clk-num = <1>;
            rockchip,cs0-be-ctrl = <0>;
            rockchip,cs0-ctrl = <0>;
            status = "disabled";
        };
        dsmc_p3_region3: region3 {
            rockchip,attribute = "Register";

```




```

        rockchip,ca-addr-width = <0>;
        rockchip,dummy-clk-num = <1>;
        rockchip,cs0-be-ctrlrd = <0>;
        rockchip,cs0-ctrl = <0>;
        status = "disabled";
    };
};
};
};
};

```

Based on the type of the actual slave device, the user needs to enable the corresponding node. For PSRAM devices, the corresponding `psramx` node should be enabled based on the sequential number of the CS connected to the PCB. Whether it is Hyperbus or Xccela PSRAM, it will be automatically detected by the driver. When the slave device is an RK-designed DSMC slave, the corresponding `lb_slavex` node should be enabled based on the sequential number of the CS connected to the PCB. Additionally, the configuration of the corresponding region needs to be modified according to the attributes of the slave device. The `clk-mode` parameter controls the three supported clock behaviors: The `clk-mode = 0` indicates no clock during CS high level, but clock is present during CS low level; The `clk-mode = 1` indicates the clock is always present regardless of CS changes, allowing the slave device to use it as a reference clock. However, in this mode, high-frequency operation is not possible and various adjustable AC timing parameters are not available. The `clk-mode = 2` indicates that there is a clock during both CS high and low levels, but several clocks will be disabled before and after the CS transition edge.


For the Local bus device, memory space is as follows:

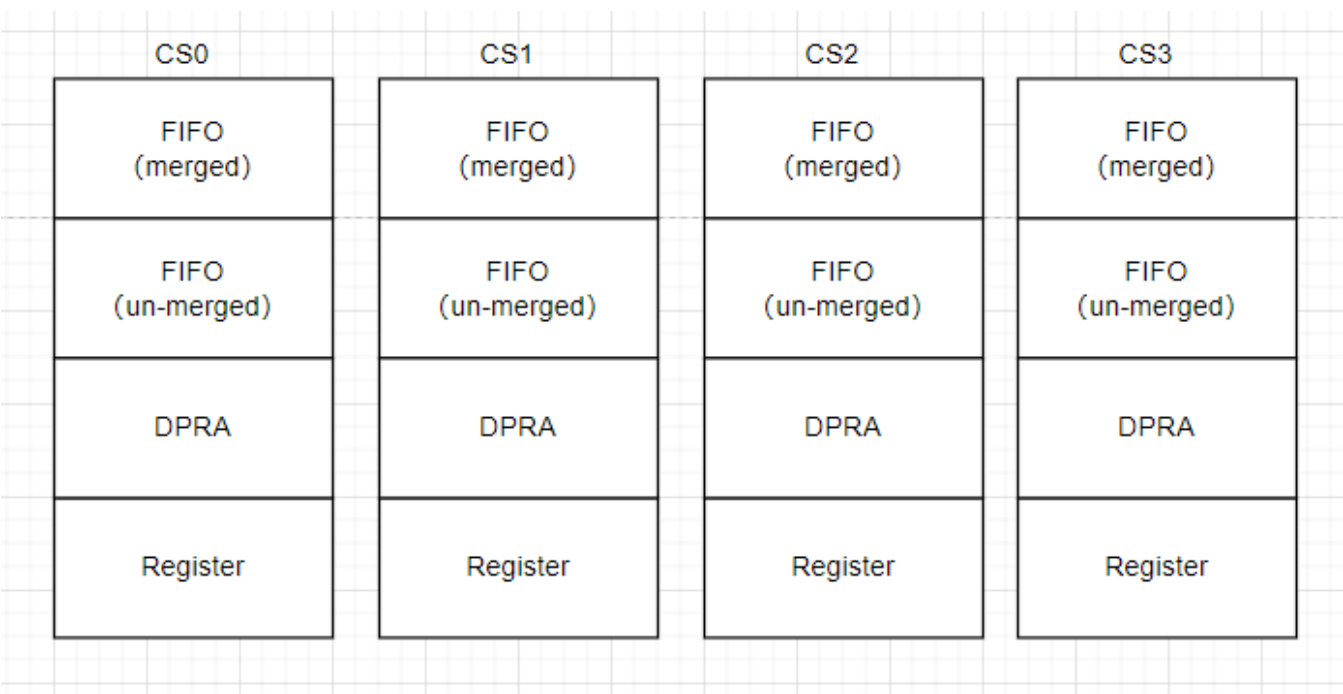


Each slave device's chip select (CS) access space can be divided into 1, 2, or 4 regions (equally divided). Only the corresponding "status" attribute of the region needs to be enabled in the Device Tree Source (DTS) file.

For the `rockchip,ranges` property, such as `rockchip,ranges = <0x0 0x10000000 0x0 0x2000000>` it configures the starting address and size of the memory space in the slave device. The meaning of these values varies depending on the type of peripheral.

If the slave is PSRAM, the `rockchip,ranges` property configures the size of the maximum CS space. The memory space division for each CS is as follows:

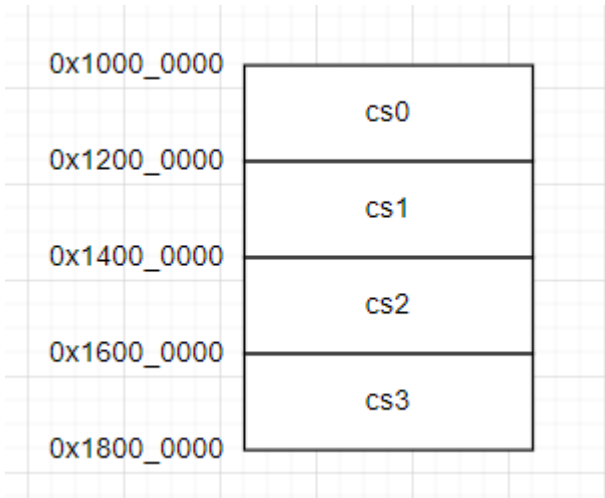

If the slave is Local Bus, the `rockchip,ranges` property configures the size of the maximum region space. In the case of only enabling the Register and merged-FIFO 2 regions, the region space division for each CS is as follows:

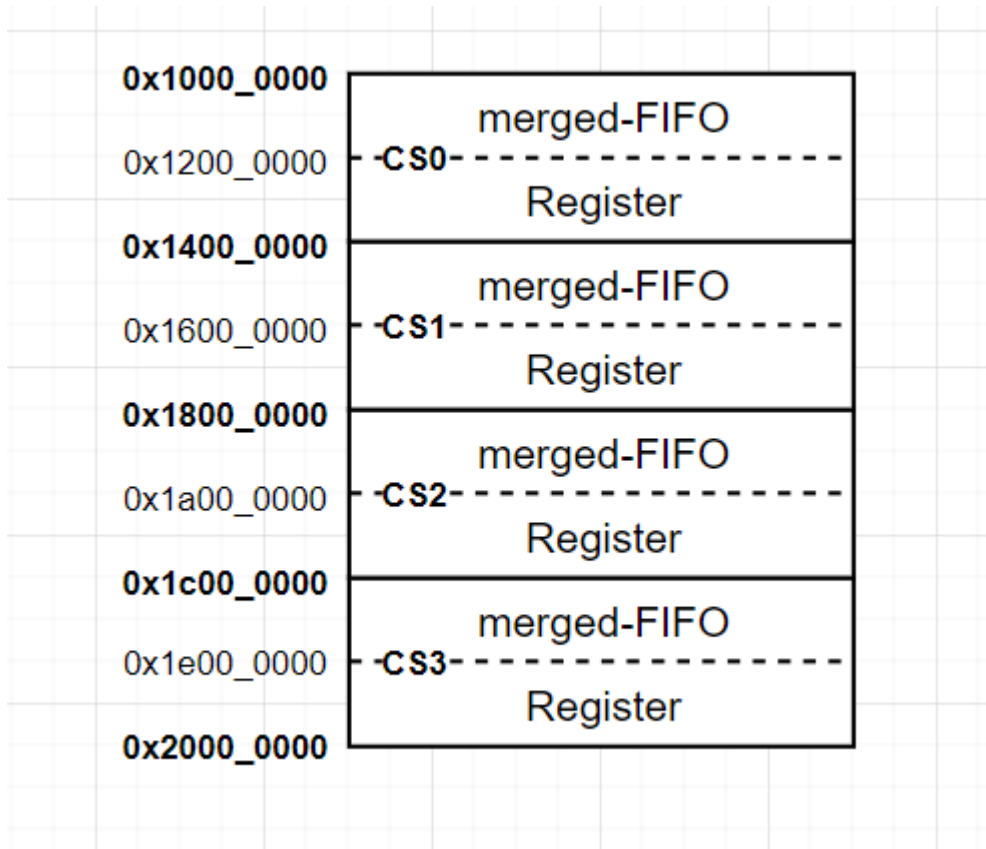

3.3 kernel Configuration

Symbol: ROCKCHIP_DSMC [=y]

|
| Type : bool

|
| Prompt: Rockchip DSMC(Double Data Rate Serial Memory Controller) driver

|
| Depends on: MEMORY [=y]

|
| Location:

|
| -> Device Drivers

|
| -> Memory Controller drivers (MEMORY [=y])

|
| -> Rockchip DSMC(Double Data Rate Serial Memory Controller) driver (ROCKCHIP_DSMC [=y])|

4. Kernel Mode Access to DSMC

4.1 Driver Interface Invocation

The DSMC driver in `drivers/memory/rockchip/dsmc-host.c` implements the following access interfaces:

```
struct rockchip_dsmc_device *rockchip_dsmc_find_dev(void);

static struct dsmc_ops rockchip_dsmc_ops = {
    .read = dsmc_read,
    .write = dsmc_write,
    .copy_from = dsmc_copy_from,
    .copy_from_state = dsmc_copy_from_state,
    .copy_to = dsmc_copy_to,
    .copy_to_state = dsmc_copy_to_state,
};
```

By calling the function `rockchip_dsmc_find_device_by_compat()`, the DSMC device is searched for, and the private parameters of this device are obtained. CPU and DMA access to the DSMC slave device is implemented through `dsmc_dev.ops`. The `ops->read` and `ops->write` are used for CPU read and write operations to the DSMC slave device's memory space. The `ops->copy_from` is used for DMA to read from the slave device memory and write to the host's memory. The `ops->copy_to` is used for DMA to write from the host's memory to the slave device memory.

```
static void test(void)
{
    u32 cs;
    struct rockchip_dsmc_device *dsmc_dev;

    dsmc_dev = rockchip_dsmc_find_device_by_compat(rockchip_dsmc_get_compat(0));
    if (dsmc_dev == NULL){
        printk("error: can not find dsmc device\n");
        return 0;
    }
    for (cs = 0; cs < DSMC_MAX_SLAVE_NUM; cs++) {
        if (dsmc_dev->dsmc.cfg.cs_cfg[i].device_type == DSMC_UNKNOWN_DEVICE)
            continue;
        dsmc_dev->ops->write(dsmc_dev, cs, 0, test_addr, test_data);
        /* TODO */
    }
}
```

4.2 Direct Access

The CPU or master can directly access the DSMC slave memory space (supporting random address access for Byte, half-word, and word; supporting cacheable, uncacheable, and write-combine mapping methods).

5. User Mode Access to DSMC

5.1 Access through Specific Nodes

In the case of Local Bus enabled, the DSMC driver will create 4 slave device chip select (CS) nodes under `/dev/dsmc/`, and under each CS, 4 memory regions will be created, with each attribute corresponding to the descriptions in the DTS. If there is a need to access the merged-FIFO, it corresponds to region0, and the corresponding region node under the respective CS needs to be operated. The process is as follows:

1. Use the `open()` interface to open the corresponding region device node and obtain the file descriptor.
2. Use the `mmap()` system call to map the aforementioned region device memory into the process address space and obtain the mapped address.
3. Read and write device memory.
4. Use `munmap()` to unmap the memory.

5. Use `close()` to close the file descriptor.

The code example is as follows:

```
device_name = "/dev/dsmc/cs0/region0"
wantbytes = 0x200000;
memfd = open(device_name, O_RDWR | O_SYNC);
if (memfd == -1) {
    fprintf(stderr, "failed to open %s for physical memory: %s\n",
        device_name, strerror(errno));
    exit(EXIT_FAILURE);
}
/*
 * Open the file with O_SYNC flag and MAP_LOCKED flag to make the
 * memory space uncached for mmap operation.
 */
buf = (void volatile *) mmap(0, wantbytes, PROT_READ | PROT_WRITE,
    MAP_SHARED | MAP_LOCKED, memfd,
    0x0);

if (buf == MAP_FAILED) {
    fprintf(stderr, "failed to mmap %s for physical memory: %s\n",
        device_name, strerror(errno));
    exit(EXIT_FAILURE);
}
bufsize = wantbytes;
halflen = bufsize / 2;
count = halflen / sizeof(u32);
bufa = (u32v *) buf;
bufb = (u32v *) ((size_t) buf + halflen);

test_dsmc(bufa, bufb, count); /* Read or write DSMC slave memory */

if (munmap((void*)buf, wantbytes) == -1) {
    perror("munmap");
    close(memfd);
    exit(EXIT_FAILURE);
}

close(memfd);
```

5.2 Direct Access


The CPU can directly access the DSMC slave memory space mapped by `dev/mem`. For example, on RK3576, use the `io` command to access region0 of the DSMC slave memory: `io -4 0x10000000`.

6. DSMC Slave Memory Allocation

The allocation of memory space for DSMC slaves is controlled by the `rockchip,ranges` attribute, which configure the starting address and size of the device's memory space.

6.1 PSRAM


For example, if configuring `map, ranges = <0x0 0x10000000 0x0 0x2000000>;` and the slave is PSRAM, the `map, ranges` configuration represents the size of the maximum CS (Chip Select) space. For the DSMC controller, each slave has the same capacity. If different slaves are populated with PSRAM of different capacities, it is important to pay attention to the boundaries when accessing them. The memory space allocation for each slave is as follows:

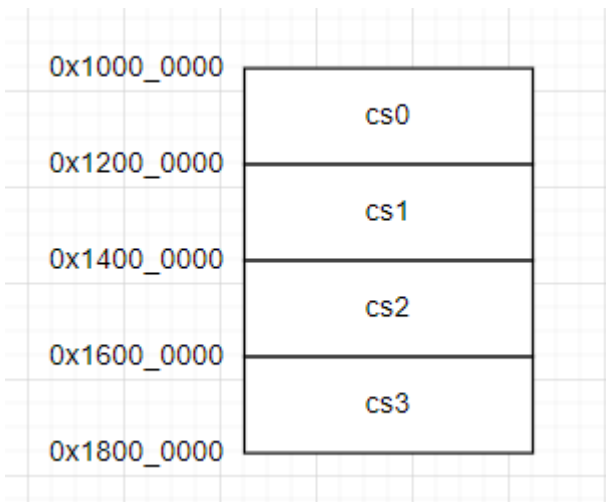

Note: In theory, DSMC supports different slave with PSRAM from different manufacturers, allowing for different capacities. However, the bit width (x8 or x16) of different slave must be the same.


6.2 Local bus

If the slave is the Local Bus, each slave has the same capacity for the DSMC controller as well. Each slave can be divided into 1, 2, or 4 regions, with each region having attributes such as DPRAM, Register, merged FIFO, and un-merged FIFO. If the actual capacities of the regions in each slave are different, attention should be paid to the boundaries when accessing them.

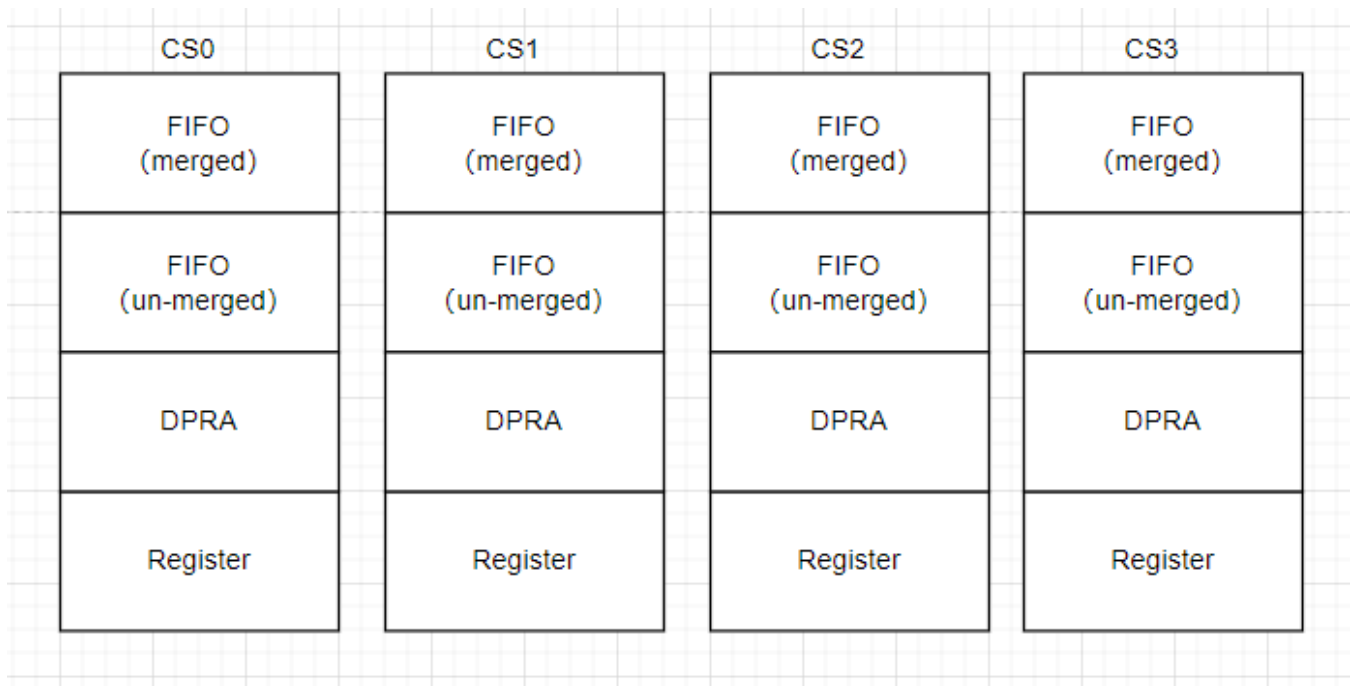

For the Local Bus, the `map, ranges` configuration represents the size of the maximum region space.

If the slave has 2 regions enabled, the size of each region is determined by the DTS (Device Tree Source) with `map, ranges = 0x0 0x10000000 0x0 0x2000000` for the DSMC node of the slave device. The memory space allocation for each region in each CS is as follows:

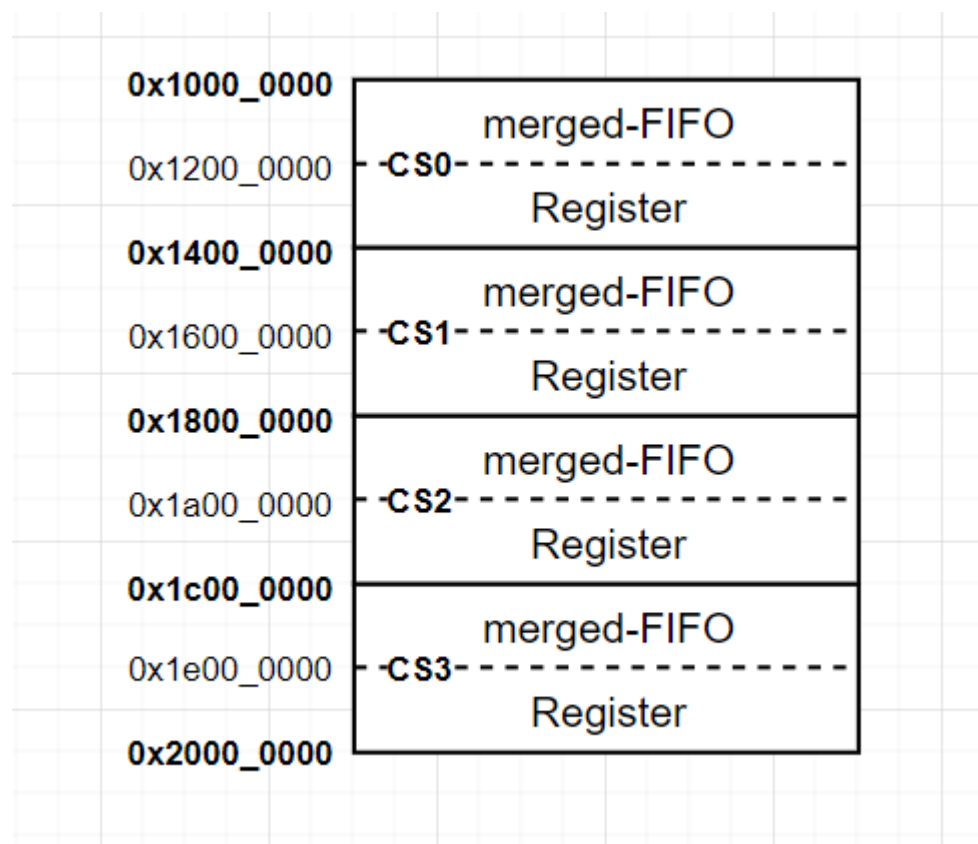

7. DSMC Local bus data interaction between the host and slave


7.1 FIFO

When the DSMC uses the Local bus protocol and is connected to an rockchips designed slave, the slave has a FIFO. When accessing a region with the attributes "merged-FIFO" or "un-merged FIFO", the data transmitted from the host passes through the FIFO and is then written into the slave's memory, such as DDR or SRAM. This FIFO is not visible, and for the DSMC host, the memory space of the slave's DDR or SRAM is considered the slave's memory space. Any data written through DSMC will ultimately be written into the slave's memory. It is important to manage the slave's memory space and ensure data consistency when using it.

7.2 Register

When the DSMC uses the Local bus protocol and is connected to an rockchips designed slave, there is a register called "SLAVE_CSR Register". When accessing a region with the attribute "Register", it refers to accessing this segment of the SLAVE_CSR Register. This segment can be used for fast information exchange between the host and slave.

The registers available for information exchange:

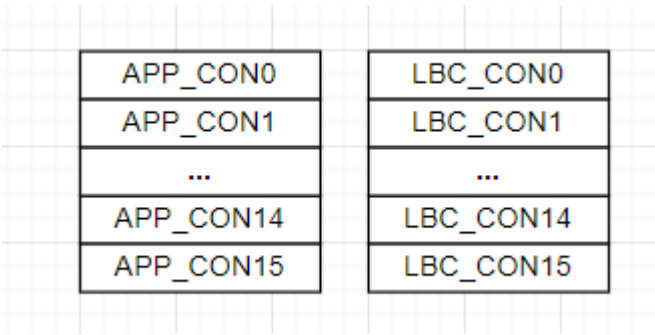

Among them, the APP_CONx registers have read and write permissions for the slave, while the host only has read permissions. The LBC_CONx registers have read permissions for the slave, while the host has read and write permissions.

- When the host writes to the LBC_CONx registers, it triggers a host2slave interrupt to the slave's CPU, which is used to process the data transmitted from the host.
- When the slave writes to the APP_CONx registers, it triggers a slave2host interrupt through the INT pin, which is then received by the host. The host's CPU can also respond to the interrupt and retrieve the data passed from the slave. After receiving the INT signal, DSMC can also initiate a DMA hardware request to start data transfer (DMA needs to be configured in advance).

Typical Scenario 1

The host writes information to the LBC_CONx registers, triggering a host2slave interrupt. The slave reads the information from the LBC_CONx registers. The slave writes information to the APP_CONx registers, triggering a slave2host interrupt. The host reads the information from the APP_CONx registers.

Typical Scenario 2

After the DSMC and DMA on the host side are configured, the host notifies the slave by writing to the LBC_CONx registers. The slave then writes to the APP_CONx registers to return a valid signal to the host through the INT pin. After receiving this signal, DSMC host initiates a DMA hardware request to start the data transfer.

Note: APP_CON15 and LBC_CON15 are already in use. The DSMC driver for DMA hardware request has been implemented. When the host's DMA configuration is completed, the host writes the original value of LBC_CON15 plus 1 to the LBC_CON15 register. The slave, upon receiving this data, writes 1 to the APP_CON15 register to trigger a slave2host interrupt. DSMC host automatically initiates a certain number of DMA hardware requests upon receiving this interrupt, initiating the data transfer.

8. Note

8.1 Interface Frequency on DSMC IO

1. It is configured by the parameter `clock-frequency = <100000000>;` in the `dsmc` node of the dts. However, the actual frequency may not exactly match the target frequency due to dependencies on the PLL or crystal oscillator output of the current platform. The final frequency will be set to the closest achievable value.
2. The DSMC controller has an inherent **fixed 2-divider**, meaning the frequency provided by the PLL or crystal oscillator to the DSMC controller is twice the frequency on the DSMC IO interface.

8.2 Regarding DSMC Bit Width

1. The bit width of an externally connected **DSMC slave** cannot be auto-detected. By default, the code assumes a **x16** bit width. If an **RK3506** is connected as a DSMC slave (which only supports **x8** bit width), the bit width must be manually corrected.

In the new version, the io-width of the slave can be modified in the dts.

```
&dsmc_slave {
    status = "okay";
    lb-slave {
        rockchip,io-width = <8>;
        ...
    };
};
```

For the old version, it needs to be modified in the code.

```
diff --git a/drivers/memory/rockchip/dsmc-host.c b/drivers/memory/rockchip/dsmc-host.c
index 44182923acc9..5214c9128320 100644
--- a/drivers/memory/rockchip/dsmc-host.c
+++ b/drivers/memory/rockchip/dsmc-host.c
@@ -782,7 +782,7 @@ static void dsmc_data_init(struct rockchip_dsmc *dsmc)
        cs_cfg->rd_bdr_xfer_en = 1;
        cs_cfg->wr_bdr_xfer_en = 1;
    } else {
-        cs_cfg->io_width = MCR_IOWIDTH_X16;
+        cs_cfg->io_width = MCR_IOWIDTH_X8;
        cs_cfg->wrap_size = DSMC_BURST_WRAPSIZE_16CLK;
        cs_cfg->wrap2incr_en = 1;
        cs_cfg->acs = 1;
    }
}
```

2. If connected to **PSRAM**, the bit width is auto-detected and does not require manual modification. If the PSRAM supports both **x8** and **x16** modes, the **x16** mode is used by default.

8.3 System Boot Failure After Enabling DSMC

After DSMC is enabled, it attempts to read/write from/to the slave. If an access error occurs (e.g., no DQS signal returned during read), DSMC reports an error to the bus, causing the system to enter an exception state. A typical error log is as follows:

```
...
[ 1.391589] dsmc 21ca0000.dsmc: init cs0 LB device # After being loaded, the DSMC driver
will access the slave.
[ 1.394238] 8<--- cut here ---
[ 1.394243] Unhandled fault: external abort on non-linefetch (0x1008) at 0xf0600100
[ 1.394250] [f0600100] *pgd=40b0f811, *pte=10000653, *ppte=10000453
[ 1.394267] Internal error: Oops - BUG: 1008 [#1] PREEMPT SMP THUMB2
...
```

If this issue occurs, check the **hardware connectivity between the DSMC master and slave**.

Note: During DSMC master initialization, **the slave must already be powered on and initialized**; otherwise, access exceptions may occur.

8.4 DSMC Self-Test Status Abnormal

After the DSMC driver initialization is completed, it checks the DSMC status registers to confirm whether any abnormalities occurred during initialization. When the following abnormal messages appear, it indicates that there was an exception during initialization.

```
dsmc ff8b0000.dsmc: DSMC: csr status error(0x800)! #The specific status error value may vary
dsmc ff8b0000.dsmc: DSMC status error, please check hardware matched(io, slave etc.)
```

If this issue occurs, check the **hardware connectivity between the DSMC master and slave**.

Note: During DSMC master initialization, **the slave must already be powered on and initialized**; otherwise, access exceptions may occur.