

IBRAHIM ROGERS

MECHANICAL ENGINEERING | TEST SYSTEMS & METROLOGY | HARDWARE DEVELOPMENT

B.S. Mechanical Engineering, Northeastern University · Expected May 2028
rogers.ib@northeastern.edu · (914) 334-5598 · [linkedin.com/in/ibrahim-rogers](https://www.linkedin.com/in/ibrahim-rogers) · github.com/irogers5890/systems-portfolio

SELECTED WORK

01	Liquid Valve Endurance Tester & Leak-Test Fixture	Parker Hannifin · 2026
02	Contamination Root-Cause Investigations	Parker Hannifin · 2026
03	Packaging Redesign & Machine-Vision Inspection	Parker Hannifin · 2026
04	Refreshable Braille Tactile Display	Forge · 2026
05	Vision-Guided Pan/Tilt Tracking System	Independent · 2025-26
06	Gamma Shielding Test System	Melagen Labs · 2024
07	Technical Skills & Additional Projects	

Liquid Valve Endurance Tester & Leak-Test Fixture

Quality & Sustaining Engineering Co-op — Parker Hannifin, Precision Fluidics · Hollis, NH · May 2026 – Present

OVERVIEW

Context: Precision fluid-control valves for medical and life-science systems. My work spans test-system design, fixture design, and root-cause investigation on returned product.

My Role: Requirements definition and hydraulic architecture for a closed-loop endurance tester; mechanical design of a supplier-side leak-test fixture.

CLOSED-LOOP DI-WATER VALVE ENDURANCE TESTER

Consolidated conflicting inputs from quality, manufacturing, and engineering into a single defined test-system scope, then developed the architecture and produced build-ready drawings, schematics, and P&IDs to match.

Test capacity	30–60 valves cycled simultaneously
Flow per valve / aggregate	0.5 L/min / 15–30 L/min
Operating pressure	120 psig
Fluid temperature control	±5°F of ambient
Working fluid	DI water, continuous recirculation

Sized pump, chiller, reservoir, manifold, and instrumentation, and integrated pressure control, relief protection, filtration, and a chiller bypass loop for thermal management under continuous recirculation. The loop is fluid-agnostic downstream of the reservoir, so the test rack does not need redesign if the working fluid changes.

PRESSURE-DECAY LEAK-TEST FIXTURE

Designed a fixture in Autodesk Inventor for supplier-side incoming inspection of a molded fluid-control component.

Leak resolution	Below 0.1 sccm at the orifice
Trapped volume	Under 0.5 cc
Method selected	Pressure decay
Seal architecture	Guarded three-port
Probe sizing basis	Worst-case tolerance (±0.001 in) + MMC/LMC

DESIGN REASONING

I selected pressure decay over steady-state make-up flow because commercially available flow instrumentation could not resolve the sub-0.1 sccm requirement at acceptable cost. Locating and sealing functions are separated so the probe seals against the orifice without over-constraining a molded part that carries real dimensional variation.

Contamination Root-Cause Investigations

Quality & Sustaining Engineering Co-op — Parker Hannifin, Precision Fluidics · Hollis, NH · May 2026 – Present

OVERVIEW

Led two independent root-cause investigations into recurring return failures on precision fluid-control valves. Each involved a distinct contamination mechanism and a separate population of returned parts.

INVESTIGATION A — ORIFICE CORROSION

Scope	500+ returned valve bodies
Variables isolated	Supplier, stock, cleaning, floor process
Outcome	Contamination source isolated; mitigation validated

I designed isolation experiments across each candidate variable instead of inspecting finished returns alone. That let the investigation separate a supplier-side cause from a downstream cleaning or floor-process cause.

INVESTIGATION B — FOREIGN-OBJECT CONTAMINATION

Scope	100+ returned units
Method	Teardown and comparative inspection against conforming parts

A separate contamination mechanism from Investigation A. It required its own teardown protocol and comparison baseline; the corrosion investigation's isolation variables did not transfer.

WHAT I TOOK FROM IT

- **Two investigations, not one.** Treating these as a single "contamination" bucket would have averaged two different mechanisms into one wrong answer. Splitting them is what let each get isolated correctly.
- **Comparative inspection needs a real baseline.** Conforming parts had to be inspected alongside the returns to make "different" mean anything.
- **Mitigation validation is a process.** Confirming a fix takes sustained data, not a single passing result.

Packaging Redesign & Machine-Vision Inspection

Quality & Sustaining Engineering Co-op — Parker Hannifin, Precision Fluidics · Hollis, NH · May 2026 – Present

PACKAGING REDESIGN — TRANSIT DAMAGE ON A LOW-VOLUME COMPONENT

Trigger	Field-reported transit damage
Part profile	Low-volume, high-value
Constraint	Fixed cost ceiling set by unit economics

The binding constraint here was economic, not technical. A packaging fix that eliminated damage but cost more than the value it protected would never have shipped, so the design had to converge on something effective enough to stop the transit failure mode while staying inside the cost ceiling. Most of the work went into finding where those two curves crossed.

MACHINE-VISION INSPECTION SYSTEM — IN DEVELOPMENT

Goal	Flag defects on a production cell before shipment
Stack	Python, OpenCV
Status	In development

This extends the computer-vision work from my pan/tilt tracking system (Project 05) into a production application. A production inspection system has to run unattended against real part variation, which is a harder detection problem than tracking a fiducial marker under controlled lighting.

Refreshable Braille Tactile Display

Hardware Product Lab — Forge, Northeastern University · Jan 2026 – Jun 2026

OVERVIEW


Challenge: Design a low-cost, mechanically actuated Braille cell that survives thousands of actuation cycles while holding pin position accurately enough to stay tactilely readable.

My Role: Mechanical design of the actuation mechanism and enclosure, full drawing package, clearance and tolerance-stack iteration, prototype fabrication, and cycle testing.

Approach: A motor-driven rack advances a stepped cam profile that lifts six dome-topped pins through an inner letter-housing insert. The outer enclosure carries the motor, gear, rack, and guide structure around that insert. Modeled in Onshape and released as a full imperial drawing package, with clearances refined iteratively against physical failure modes.

Scale: the drawing package on the following pages is an enlarged proof-of-concept build, sized so the actuation train could be assembled, instrumented, and cycled by hand. The production target is the compact $31 \times 49 \times 19$ mm letter-housing insert.

FULL ASSEMBLY — EXPLODED & ISOMETRIC

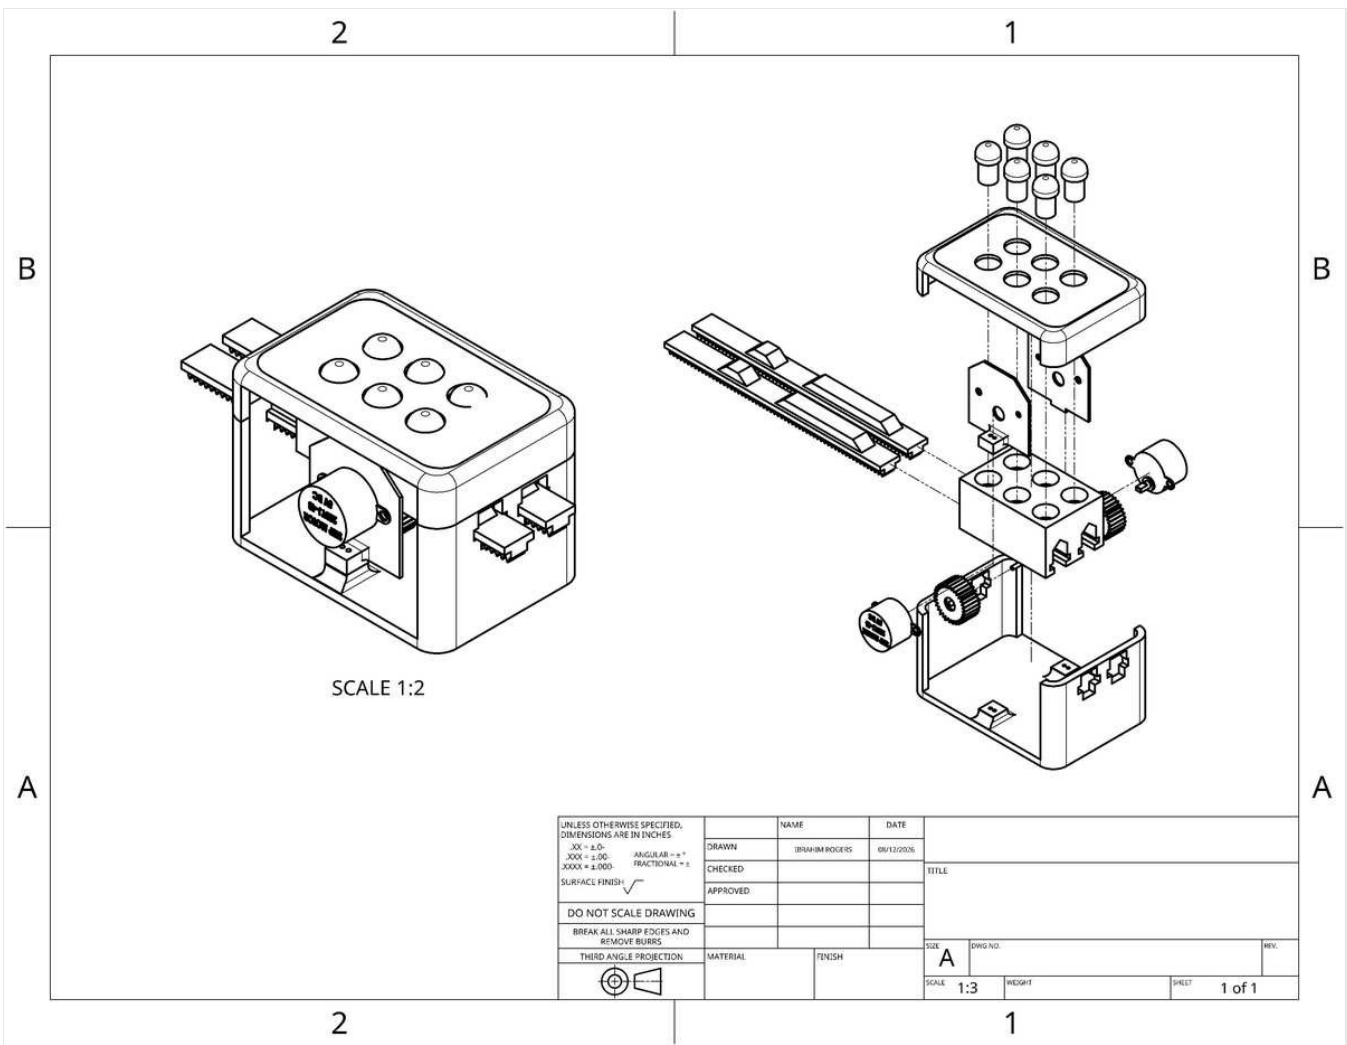

Top-level assembly drawing. Left: assembled enclosure (Scale 1:2). Right: exploded view (Scale 1:3) showing the six dome pins, letter-housing insert, guide bracket, pin-guide block, drive motor and pinion, rack, and enclosure top/bottom. Self-authored release drawing, dimensioned in inches per standard third-angle projection.

Technical drawing of a mechanical part, showing a front view and a top view. The front view is a cylinder with a hemispherical top. Dimensions are given in inches:

- Overall height: .635
- Radius of the hemispherical top: R.250
- Height of the cylindrical body: .400
- Height of the hemispherical top: .650
- Width of the cylindrical body: .485
- Height of the base: .100
- Angle of the base: .1 X 70°

The top view shows a circular cross-section with a small central hole.

TABLE 1

DATE	BY	CHKD	APP'D

DO NOT SCALE DRAWING

REVISIONS

NO.	DATE	BY	CHKD	APP'D
1				

THESE DIMENSIONS ARE IN INCHES

UNIT: INCHES

SCALE: 1" = 1"

1

Technical drawing of a gear with a 1.000 inch pitch diameter and 24 teeth. The drawing includes a front view, a side view, and a cross-section A-A. The front view shows a gear with a pitch diameter of 1.000 inch, a root diameter of 0.775 inch, and a tooth thickness of 0.160 inch. The side view shows a gear with a pitch diameter of 1.000 inch, a root diameter of 0.775 inch, and a tooth thickness of 0.160 inch. The cross-section A-A shows a gear with a pitch diameter of 1.000 inch, a root diameter of 0.775 inch, and a tooth thickness of 0.160 inch. The drawing is labeled with dimensions and section lines.

Technical drawing of a mechanical part, likely a bracket or base plate, showing top, side, and isometric views with dimensions and a title block.

Top View Dimensions:

- Overall width: 1.750
- Distance from left edge to first hole center: 1.000
- Distance between hole centers: 2.404
- Distance from second hole center to right edge: 1.750
- Overall height: .400
- Bottom flange thickness: .150

Side View Dimensions:

- Top flange thickness: .480
- Distance from top edge to hole center: .680
- Distance from hole center to right edge: .380
- Overall height: 1.30

Isometric View: SCALE 1:2


Title Block:

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		DATE	BY
ALL DIMENSIONS	UNLESS NOTED OTHERWISE	DESIGNED	APPROVED
SURFACE FINISH		SCALE	
DO NOT SCALE DRAWING		A	
MAKE ALL DIMENSIONS READ FROM DRAWING		Sheet	
THIRD ANGLE PROJECTION		1 of 1	


[illegible]

Guide dowel. Ø.100 in × 1.400 in ground pin. Locates the pin-guide block against the enclosure and keeps rack travel aligned under side load.


ENCLOSURE & GUIDE STRUCTURE

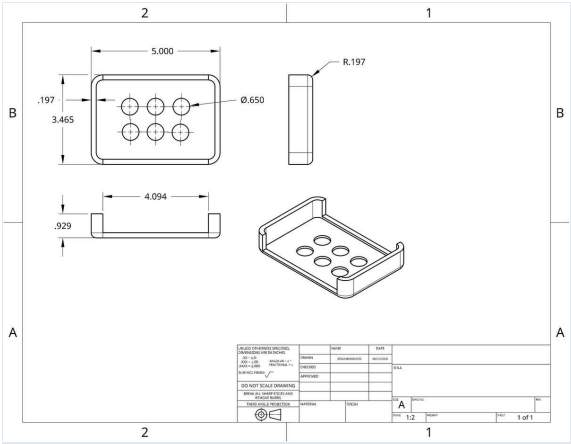


Enclosure top cover. 5.000 × 3.465 in with six Ø.650 in access holes for the dome pins and R.197 in corner fillets. Mounting flange at .929/4.094 in locates the cover to the bottom chassis.

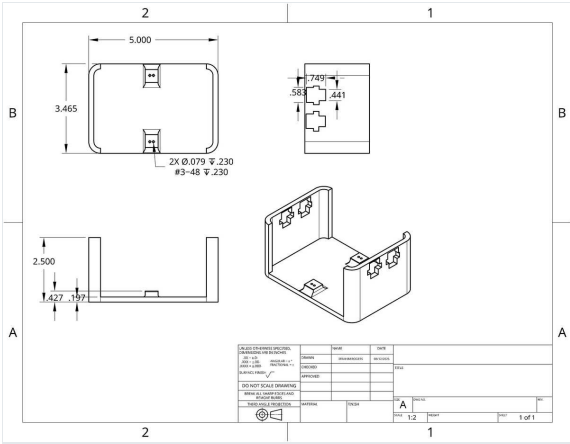

Enclosure bottom chassis. Matching 5.000 × 3.465 × 2.500 in shell with keyed mounting tabs (2× Ø.079 in thru, #3-48 thru) for the pin-guide block and motor mount.

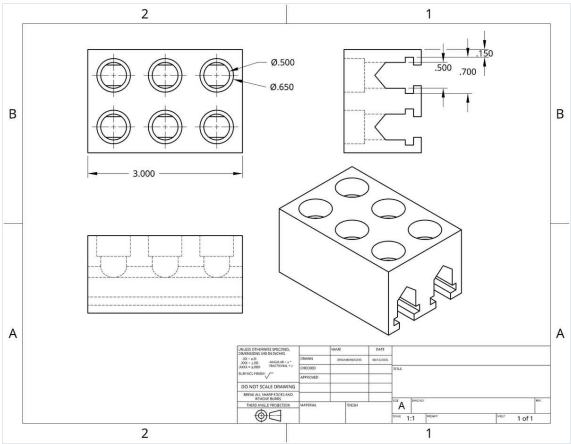

Pin-guide block. 3.000 in wide manifold with six bores (Ø.500 in through, Ø.650 in counterbore) carrying the dome pins, and snap-fit tabs (.150/.500/.700 in) that key it to the enclosure.

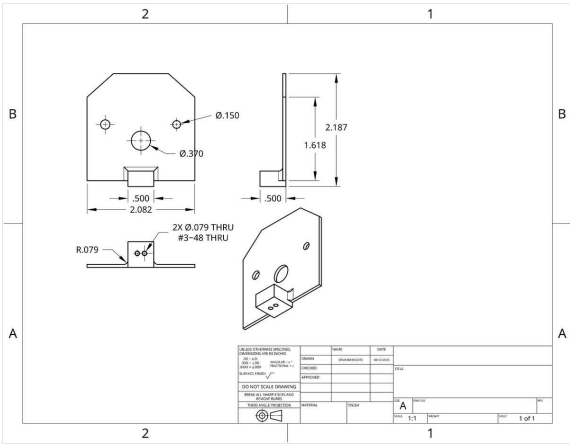

Motor-side bracket. L-bracket locating the drive motor relative to the pin-guide block, with Ø.370 in motor-shaft clearance and two Ø.150 in mounting holes on a .500 in tab.

The drawings above are the enlarged proof-of-concept build. The production target is the compact letter-housing insert at 31 × 49 × 19 mm on 6.25 mm cell pitch: the mechanism geometry scales down to it directly, the clearance strategy does not, which is the open problem for the at-size build.

KEY PROBLEM — TOLERANCE STACK-UP UNDER CYCLIC LOADING

Early prototypes jammed when actuated under side load. Failure tracking isolated two compounding causes:


- Guide-channel clearance too tight at 0.1 mm nominal, leaving insufficient margin once print tolerance and side deflection stacked.
- Dimensional creep in PLA after sustained cycling, drifting clearances further out of spec.

Fix: opened guide clearance to 0.15 mm, added lead-in chamfers, and moved to PETG. **Result:** jam rate fell from roughly 15% to under 2% across 2,000+ test cycles. The released drawing package on the preceding pages reflects this fix directly, including the Ø.500 in pin bore sized to hold that clearance under load.


WHAT I TOOK FROM IT

- **Clearance is not just a manufacturing number.** It has to absorb print tolerance and accumulated wear, not only nominal fit.
- **Material choice is a lifecycle decision.** PLA was fine for form checks and wrong for cyclic loading, and that only showed up in testing.
- **Track failures, don't guess.** Logging jam events by condition pointed at side-load binding specifically, which made the fix targeted.
- **Design for assembly.** Consolidating cam and guide features cut part count from 12 to 8 and simplified the assembly sequence.
- **Cross-domain constraint.** Worked with the electrical side to keep actuation force inside servo torque limits while still meeting tactile force requirements.

PHYSICAL PROTOTYPE

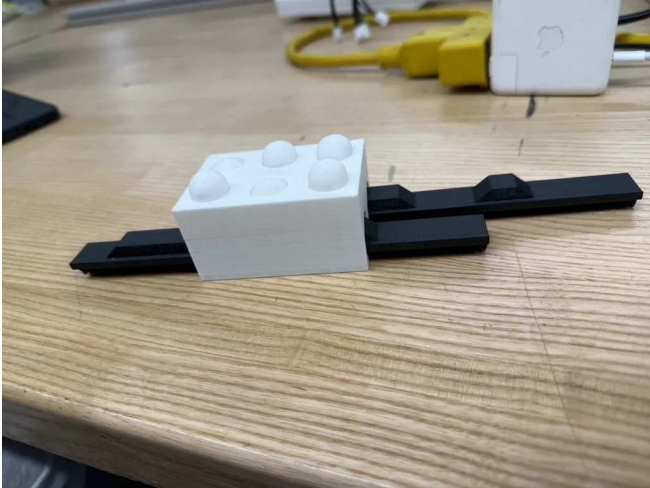

Assembled prototype — side view. White housing carries the pin actuation mechanism and rides on the black guide rails, which provide lateral constraint. Shows rail engagement and the travel available to the rack.

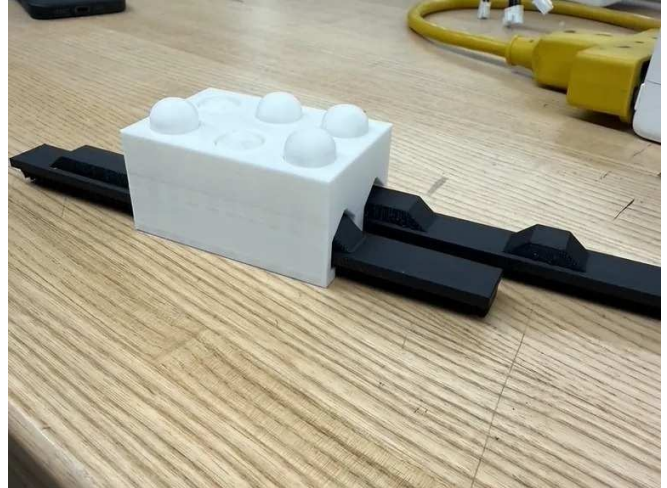

Front three-quarter view. Shows the six-dot face and the housing-to-rail interface where side-load binding originated. Lead-in chamfers on the rails were added at this interface to ease pin entry.

This PLA/PETG prototype predates the released drawing package on the preceding pages and is the build that surfaced the side-load binding described there.


Vision-Guided Pan/Tilt Tracking System

Independent Project · Dec 2025 – Present


OVERVIEW

Goal: Build a closed-loop target tracking platform — mechanical gimbal, electronics, and control software — that holds a marker centered in frame and recovers on its own when the target is lost.

System: Raspberry Pi 5, camera module, PCA9685 servo driver, dual-servo pan/tilt gimbal, OpenCV ArUco detection, Python control logic, Flask live video stream.

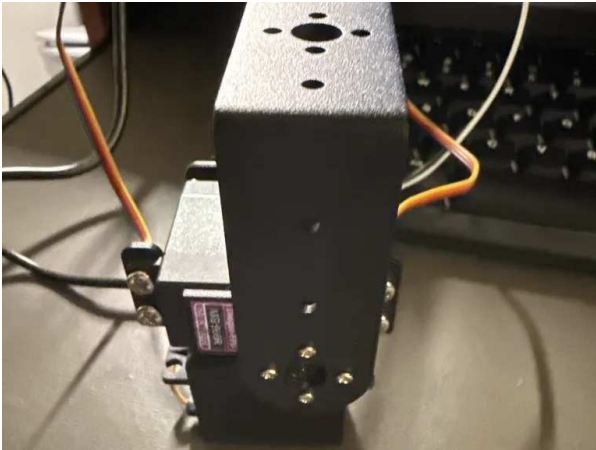

Pan/tilt gimbal. Custom two-axis 3D-printed housing with direct-drive servo coupling. No gear train, which removes backlash from the positioning path.

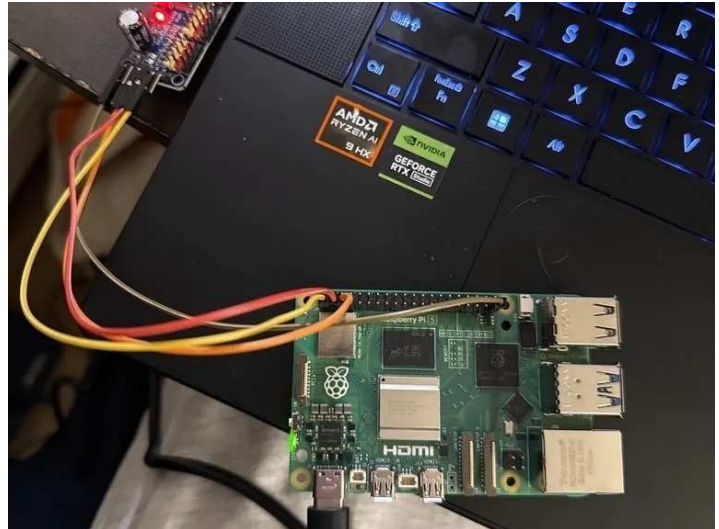

Electronics integration. Raspberry Pi 5 driving the PCA9685 servo controller over I²C, with servo power on a separate rail from compute power to keep actuation transients off the Pi.

MECHANICAL DESIGN DECISIONS

- **Backlash:** direct-drive servo coupling with a press-fit interface, eliminating gear-train slop from the control loop.
- **Center of mass:** camera placement chosen to reduce servo torque load and improve response during fast target movement.
- **Rigidity:** gimbal frame reinforced to limit flex under rapid acceleration so the camera stays aligned during dynamic tracking.
- **Cable routing:** integrated to avoid wire interference across the full pan/tilt range.

INTEGRATION DEBUG — CAMERA NOT ENUMERATING

PROBLEM

No frame acquisition and no video feed. From the outside the whole system looked dead, with no indication whether the fault was mechanical, electrical, or software.

PROCESS

- Used `raspistill` to separate camera hardware faults from software faults.
- Verified I²C device enumeration to confirm the Pi was seeing devices on the bus.
- Found improper CSI ribbon seating compounded by outdated camera firmware — two independent faults presenting as one symptom.
- Updated firmware and added error handling in Python for graceful frame-drop recovery.

LESSON

Integration bugs concentrate at interface boundaries. Isolating with diagnostic tools beat guessing at the failure location, especially with two faults stacked.

CONTROL IMPLEMENTATION

- PID loop on pan and tilt axes to smooth servo motion and suppress oscillation around the target; gains tuned empirically on hardware.
- Automated re-acquisition via spiral search when the marker leaves frame or is occluded.
- Error handling for dropped frames, I²C communication failures, and servo limit violations.

WHAT I TOOK FROM IT

- **Stage the integration.** Camera alone, then servos alone, then detection, then full loop. Bringing it up in stages saved hours over debugging everything at once.
- **Textbook PID isn't enough.** Real servo dynamics, friction, and loop latency meant the gains had to come from testing.
- **Cross-domain debugging is the actual skill.** Mechanical slop, power distribution, and software timing all produced similar-looking tracking errors.

Gamma Shielding Test System

Co-Founder & COO — Melagen Labs, VC-backed aerospace materials startup · Jan 2024 – Sep 2024

OVERVIEW

Challenge: Validate the shielding effectiveness of a melanin-HDPE composite against an aluminum reference using gamma radiation, with limited lab equipment and a startup budget.

My Role: Co-designed the test fixture, developed the experimental protocol for repeatable measurement, ran the testing, and performed the statistical analysis.

Key Result: Attenuation comparable to aluminum at roughly one-third the density, supported by ANOVA.

TEST SYSTEM & SETUP



Complete test system. Fixed-geometry fixture holds a repeatable Cs-137 source-to-detector distance. A modular sample holder allows quick swaps between composite thicknesses without disturbing the measurement geometry.

DESIGN REQUIREMENTS

- **Repeatability:** fixed source-to-detector positioning to minimize geometric variation between runs, the dominant error source in this measurement.
- **Modularity:** quick-change sample mounting to test multiple thicknesses and compositions efficiently.
- **Safety:** Cs-137 source containment and shielding per lab safety protocol.
- **Low-cost fabrication:** built from lab-available materials within startup budget.

SAMPLE PREPARATION & MEASUREMENT




Material preparation. Melanin powder measured to a controlled mass so concentration stayed consistent batch to batch.



Sample fabrication. Composite cast in aluminum pans for consistent thickness, under controlled material-handling protocol.



Test specimens. Composite plates at varying thickness, measured and tested against aluminum references.



Radiation measurement. Calibrated Geiger counter at fixed distance from the shielded source, logging count rate for each shielding condition against an aluminum baseline.

ENGINEERING PROCESS

- **Fixture design for repeatability:** hand-positioning produced unacceptable run-to-run measurement scatter. Adding fixed mechanical alignment features cut that variation substantially and was the single biggest improvement to data quality.
- **Rapid iteration under constraints:** when the first fixture drifted after repeated sample changes, redesigned the mounting within days using available shop tools.
- **Statistical validation:** ANOVA across material types and thicknesses, with regression modeling of shielding effectiveness against melanin concentration.
- **Uncertainty analysis:** documented contributions from source activity calibration, detector efficiency, and geometric positioning so the results held up to outside review.
- **Technical communication:** translated the data into engineering presentations used in fundraising.

WHAT I TOOK FROM IT

- **Fixture design drives data quality.** In experimental work, repeatability is the whole game. Small mechanical improvements to alignment had far more impact on confidence in the result than anything downstream in the analysis.
- **Constraints force decisions.** Limited budget and equipment meant choosing what actually mattered to measure well.

Technical Skills

Tools and methods I can speak to in detail and have applied on the work in this portfolio

CAD & DESIGN

Autodesk Inventor · SolidWorks · Onshape · AutoCAD
GD&T (MMC/LMC) · worst-case tolerance stack-up · interference analysis · fixture design · engineering drawings · P&ID development

PROGRAMMING & ANALYSIS

Python (OpenCV, machine-vision inspection, pandas) · C++ · MATLAB · Excel
ANOVA / regression · I²C and PWM interfaces · Raspberry Pi · Arduino · hardware–software integration

QUALITY & VALIDATION

Failure analysis · root-cause investigation · FMEA · dimensional inspection and metrology · experimental test design · nonconformance investigation · validation and test documentation

FLUID & TEST SYSTEMS

Hydraulic/pneumatic architecture · pressure regulation and relief · closed-loop recirculation · pump and chiller sizing · manifold design · pressure-decay and flow-based leak test methods · test-stand architecture

MANUFACTURING & PROTOTYPING

FDM 3D printing (PLA, PETG) · SLA/resin printing · rapid prototyping · mechanical assembly · fixture fabrication · design for manufacturing · design for assembly

ENGINEERING COMMUNICATION

Failure-analysis reporting · design reviews · cross-functional requirements definition · vendor and supplier coordination · technical presentations to non-technical audiences

ADDITIONAL PROJECT EXPERIENCE

Assistive Sweeper Robot

Cornerstone II, London · Jan–Apr 2025

Co-designed an RC sweeper in SolidWorks, working drivetrain geometry against motor torque and ground clearance constraints. Iterated through a rapid prototyping sprint for operator usability and assembly.

Autonomous Maze Robot

Cornerstone I, Oakland · Sep–Dec 2024

Programmed sensor-based autonomous navigation logic. Diagnosed drivetrain binding and electrical contact failures through systematic root-cause analysis across a two-week test cycle.

Hydrogen Fuel Cell RC Vehicle

TKS Innovation Fellow · 2023–24

Designed a hydrogen fuel cell power system, managing power distribution and integration. Won a Google-sponsored pitch competition for the technical proposal.