


NİĞTAŞ 5

PRODUCTION SITE	Nigde / TURKEY Certified ISO 22000-2005, ISO 22716-2007 OHSAS 1801-200	7 ISO 10002-201 <i>4</i> IS	SO 1401-2015 ISO 9001-2015	
PRODUCT SPECIFICATION	Micronized natural calcium carbonate at high purity and whiteness is originated from natural sources.			
CHEMICAL ANALYSIS	CaCO ₃ MgO SiO ₂ Fe ₂ O ₃ HCI Insoluble	99,35 ± 0,2 0,3 ± 0,1 < 0,1 0,04 ± 0,01 < 0,1	(%) (%) (%) (%) (%)	
TECHNICAL DATA	Whiteness (L) (ASTM E-313) Elrepho 450x Brightness (Ry C/2) (DIN 6174) Elrepho 450x Moisture, Factory Depart (ISO 787-2) pH value (ISO 787-9) Hardness by (Moh's) Specific Gravity (ISO 787-10)	> 98,30 > 96,00 < 0,3 8,5 ± 1,0 3 2,70	(%) (%) (%) Mohs gr/cm ³	
	Dop Absorbtion (ISO 787-5) Oil Absorbtion (ISO 787-5) Refractive Index Tap Density	30 16 1,57 1,0	gr/100gr gr/100gr gr/ml	

APPLICATIONS

- Powder Paints
- Interior and Exterior Emulsion Paints
- **Emulsion Ceiling Paints**
- Automotive Paints
- PVC Dirty Water Pipes and Hoses
- PVC, Caoutchouc, Polyurethane Shoe Soles
- Polyolefins
- Sponges
- CTP and Metal Based Compozites
- TPE Compounds
- Paper and Paperboard Sector
- **Plasters**
- Silicon and Mastics
- Faux Leathers

Malvern Mastersizer 2000 Particle Size Distribution

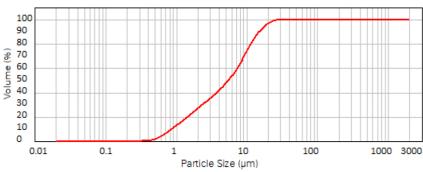

PARTICLE SIZE DISTRIBUTION

Parameters	Mastersizer 2000	Value
Mean Grain Size , D50	$5,40 \pm 0,40$	(µ)
Top – Cut, D97	21,50 ± 1,50	(µ)
Volume % of particles below 2µ	$27,00 \pm 3,0$	(%)
Specific Surface Area	$2,40 \pm 0,20$	(m ² /cm ³)
Sieve Residue on 45µ (ISO 787-7)	< 0,01	(%)

PACKING

25 kg kraft / PP sack+1.250/1.000 kg big bag Or bulk in 1.250/1.000 kg big bag (palletized)

These information are related to specific material defined above that they are based on technical measuring data that Nigtas belives to be reliable. Responsibility of appreciate and determine the suitability of this product before any use belongs to customer or corporation.