

Aluminum Beam – one web

Section Properties

- Cross-sectional Area (A)= 12.78 cm²
- Perimeter = 70.70 cm
- Beam depth= 15 cm
- Beam width= 8 cm

Moments of Inertia


- $I_x = 404.81 \text{ cm}^4$
- $I_y = 52.70 \text{ cm}^4$

Section modulus

- $Z = 51.70 \text{ cm}^3$

Modulus of Elasticity

- $E = 7,000 \text{ Kn/cm}^2$

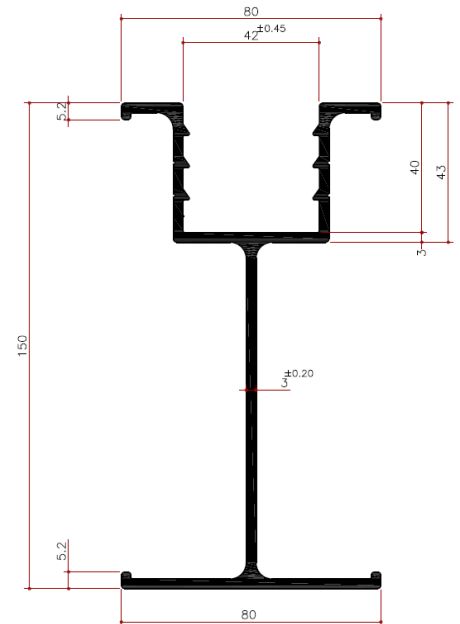

- **Maximum Bending Moment (Hog) = 6.00 Kn.m**
- **Maximum Shear Force (Q_{max})= 25.00 Kn**
- **Max. allowable deflection = Span/400**



Legend of Aluminum Beam for Decking

Aluminum Beam H15cm, L=6.00m

Aluminum Beam H15cm, L=5.00m

Aluminum Beam H15cm, L=4.00m

Aluminum Beam H15cm, L=3.50m

Aluminum Beam H15cm, L=3.00m

Aluminum Beam H15cm, L=2.50m

Aluminum Beam H15cm, L=2.00m

Head Office

Factory: Wady Houf, Helwan

Tel: (+202) 23254532 / 23254519

(+20223254534

Fax: (+202) 23671 347

E-mail: sales@acrow.co

