N83 K = 16,627 prebuilt signed-Frobenius base

Date: 2026-10-17 UTC. **Curve:** `icv1-f2m83-tm6151469093347-debefd74`. The frozen construction protocol is `PROTOCOL.md`; the separate memory-peak recovery was preregistered in `PEAK_RECOVERY_PROTOCOL.md`. Full commands, source and object digests, raw receipts and limitations are in `RUN_REPORT.md`.

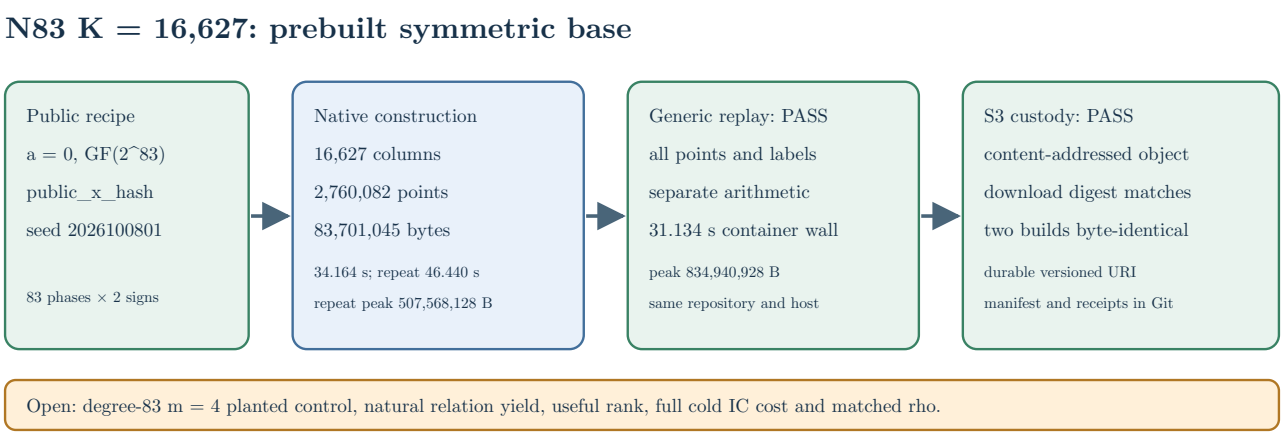

Native construction and checks

Phase	Measured record	Outcome
First construction	34.164 s L0 internal	16,627 columns; 2,760,082 points
Byte-identity repeat	46.440 s L0 internal; 507,568,128 B peak	exact object match
Generic replay	31.134 s container wall; 834,940,928 B peak	PASS on every point
S3 upload/download	83,701,045 compressed bytes	digest match; PASS

The public `public_x_hash` policy used seed `2026100801`, with 83 Frobenius phases and both signs. Both builds used the same native arm64 Linux binary, one CPU, 4 GiB memory, zero swap, no network and hard wall caps. The compressed BLAKE3 is `1aa70cc1571f4cb25af42936699378329128a869f2ae8ad35efb375663d4e59d`. The replay used generic multi-limb arithmetic rather than the producer's `Gf2_128`, on the same host and repository. The native uploader downloaded the versioned S3 object and rehashed it. The first construction's memory peak was not recorded; the displayed peak belongs to its byte-identical repeat. Shared-host L0 wall times do not establish a speed comparison.

Claim boundary and next gate

K = 16,627 is the first declared size where the uniform-target m = 4 multiset counting ceiling reaches one and becomes uninformative. This run measured no natural relation, rank increment, target extraction or complete cold IC cost. The next gate is a native m = 4 capacity check on this exact object with a degree-83 planted relation positive control, followed by a matched base and same-point rho comparison. The IC scoreboard is unchanged.