



stdf2xls5 User Manual
February 26, 2020

Revision History

Version	Author	Date	Changes
1.0	Eric West	2/26/20	Initial Release

Contents

1	Introduction	3
2	Getting the program	3
3	Installation	3
3.1	GNU/Linux Installation	3
3.2	Windows Installation	4
4	Usage	4
4.1	-s or --genSpreadsheets	5
4.1.1	-a or --extract-pin	5
4.1.2	-p or --pinDelimiter	5
4.1.3	-i or --ignoreSerialMarker	6
4.1.4	-S or --so	6
4.1.5	-r or --rotate	6
4.1.6	-c or --1kcol	6
4.1.7	-Y or --noDynamicLimits	6
4.1.8	-t or --channel-type	7
4.1.9	-m or --modify	7
4.1.10	--sortType	11
4.2	-d or --dumptext	12
4.3	-b or --dumpBytes	13
4.4	-D or --digest	13
4.5	-m or --modify	14
4.6	-o or --outputDir	14
4.7	-g or --generateRCFile	15
4.7.1	Logo Configuration	21
4.8	User Supplied Header and Data Values	22
4.8.1	Customizing the Spreadsheet Header Information	22
4.8.2	User-defined Header fields	22
4.9	User-defined Data Values	23
5	Wafermaps	23
5.1	-w or --genWafermaps	23
5.1.1	-A or --dumpAscii	23
5.1.2	-f or --wformat	24
5.1.3	-P or --pattern	24
5.1.4	-R or --rotateWafer	24
5.1.5	-N or --showNum	24
6	Histograms	25
6.1	-h or --genHistograms	25
6.1.1	-B or --manualBins	25
6.1.2	-C or --cutOutlier	25

1 Introduction

stdf2xls 5.0 is a program that converts STDF files into spreadsheets, wafermaps, and/or histograms. It is natively compiled from the D-language and therefore it uses much less memory than the previous stdf2xls 4.0 java program, and is significantly faster too. It has many new features:

- Spreadsheet and ASCII wafermaps
- Spreadsheet histograms
- Ability to display hex, integer, and string data values in the spreadsheet
- New algorithm correctly orders tests even if the testflow varies from device to device
- Spreadsheet colors and fonts are now customizable
- Improved spreadsheet layout
- Many ways to sort and order device data, including by timestamp
- Ability to modify any STDF text field with regular expressions
- Ability to write out STDF files
- Multiple different devices types can be processed simultaneously

There are a couple of minor regressions though:

- No more support for big-endian CPUs. It seems that most testers today are using the Intel CPU architecture, so why pay for the performance penalty if you don't need it.
- Logo scaling is more difficult. This is because of the new xlsx library being used which makes image handling a little more difficult.

2 Getting the program

The source code is available on github. The source code can be downloaded from github with git, or just the executable for Windows or GNU/Linux may be downloaded from the github web page. This manual may also be copied from the github webpage.

To download the software with git use the following command:

```
git clone https://github.com/itestinc/stdf2xls.git
```

To compile the source code on GNU/Linux you also need dub, gcc and dmd (dmd is the D compiler).

3 Installation

To just install the executable, the program can be downloaded from github.com.

3.1 GNU/Linux Installation

For GNU/Linux go to <https://github.com/itestinc/stdf2xls>, click on the dist folder, then click on the stdf2xls file, then press the Download button. After the file has downloaded put it in a directory that in in your executable search path.

3.2 Windows Installation

First, you must have the Windows SDK installed on your computer. It can be obtained at: <https://developer.microsoft.com/en-us/windows/downloads/windows-10-sdk> The program will also work on Windows7.

For Windows go to <https://github.com/itestinc/stdf2xls>, click on the dist folder, then click on the stdf2xls.exe file, then press the Download button. After the file has downloaded put it in a directory that in in your executable search path.

4 Usage

A summary of the command line options can be printed by running the program with the '--help' option. More detailed information about the command line options is given in this manual.

```
stdf2xls --help or stdf2xls -h
```

gives the following output:

```
Options:
-a      --extract-pin Extract pin name from test name suffix (default delimiter = '@')
-b      --dumpBytes dump the STDF in ascii byte form
-d      --dumptext dump the STDF in text form
-m      --modify modify a string field in specified record type.
Example: -m 'MIR TST\_TEMP "TEMPERATURE :"' "TEMPERATURE:"
-o      --outputDir write out the STDF to this directory. Specifying this will cause the STDF to be written back out.
-p      --pin-delimiter Delimiter character that separates pin name from test name (Default = '@')
-i      --ignoreSerialMarker Ignore the serial marker and use STDF part ID instead
-D      --digest Summarize file contents
-s      --genSpreadsheets Generate spreadsheet(s)
-S      --so Spreadsheet output filename(s); name may contain variables for device, and/or lot
Default = %device%\_lot%.xlsx
-r      --rotate Transpose spreadsheet so there is one device per column instead of one device per row
        --sortType Specify device sort order. Default: by alphanumeric serial number, then by time. See the manual for valid sort types
-c      --lcol limit to 1000 columns for libreoffice - default is 16360 columns
-Y      --noDynamicLimits Don't check for and show dynamic limits
-w      --genWafermaps Generate wafer map(s)
-W      --wo Wafermap output filename(s); name may contain variables for device, wafer, and/or lot
Default = %device%\_lot%\_wafer%.xlsx
-A      --dumpAscii dump the wafer map in ASCII form
-f      --wformat Specify the wafermap format for the ASCII dump (default:ASY)
-P      --pattern fill wafermap bins with patterns instead of colors
-R      --rotateWafer Rotate the wafer map clockwise in degrees: +/- 0|90|180|270
-N      --showNum Show the bin numbers on the wafer map, along with colors or patterns.
-h      --genHistograms Generate histogram(s)
-H      --ho Histogram output filename(s); name may contain variables for device, step, lot, and/or testID
Default = %device%\_histograms.pdf
--binCategory Specify if bins should be divided by SITE, LOT, TEMPerature or NONE. Default = NONE
Note: if --ho contains %lot% then dividing bins by lot does not make sense
-B      --manualBins Manually set the number of bins across all histograms. Set to 0 (zero) for automatic.
-C      --cutOutlier Define how much of the outliers to cut off, in terms of standard deviation. Set to 0 (zero) for no cutoff.
-g      --generateRCFile Generate a default ".stdf2xlsrxc" file
-t      --channel-type Channel type: AUTO, CHANNEL, PHYSICAL, or LOGICAL. Only use this if you know what you are doing.
-v      --verbose Verbosity level. Default is 1 which means print only warnings. 0 means don't print anything
-V      --verify Verify written STDF; only useful if --outputDir is specified. For testing purposes only.
--noIgnoreMiscHeader Don't ignore custom user header items when comparing headers from different STDF files
-h      --help This help information.
```

There are nine primary operations that can be done with the program, and they may be done individually or simultaneously:

- -s or --genSpreadsheets will generate spreadsheets for the STDF measurement data
- -h or --genHistograms will generate histograms for the STDF measurement data
- -w or --genWafermaps will generate wafermaps for the STDF bin data

- -d or --dumpText will generate an ASCII dump of the STDF file(s)
- -b or --dumpBytes will generate an ASCII dump of all of the bytes in the STDF file(s)
- -D or --digest will dump each unique set of header information found in the STDF file(s)
- -m or --modify '<record> <field> "<fromRegex>" : "<toRegex>" ' will modify any text field in any record type
- -g or --generateRCFile will generate an "rc" file in the home directory called ".stdf2xlsrc" which contains all the default color, font, and logo settings. This file, if it exists, is loaded on startup and used to configure the output.
- -o or --outputDir <folder_name> will cause the STDF files that are read in to be written out to this folder

Each of these major options have several more options to refine their behavior, and their usage and options will be discussed in the following sections.

4.1 -s or --genSpreadsheets

Spreadsheet generation has nine options that control aspects of how the spreadsheet is generated. You must give the -s or --genSpreadsheet option to get a datalog spreadsheet.

- -a --extract-pin Extract pin name from test name suffix (default delimiter = '@')
- -p --pin-delimiter Delimiter character that separates pin name from test name (Default = '@')
- -i --ignoreSerialMarker Ignore the serial marker and use STDF part ID instead
- -S --so Spreadsheet output filename(s); name may contain variables for device, and/or lot
- -r --rotate Transpose spreadsheet so there is one device per column instead of one device per row
- -c --1kcol limit to 1000 columns for libreoffice - default is 16360 columns
- -Y --noDynamicLimits Don't check for and show dynamic limits
- -t --channel-type Channel type: AUTO, CHANNEL, PHYSICAL, or LOGICAL.
- -m --modify modify a string field in specified record type.
- --sortType <SORT_TYPE> sort devices in various ways (see below).

4.1.1 -a or --extract-pin

Some testers like the Advantest 93K will append a pin name on to the end of a test name to indicate the pin that is being tested. By default it uses an '@' to delimit the test name from the pin name. For example "myTestName@VCC". This option will remove the delimiter and pin name from the test name, and put the pin name in the pin column or row of the spreadsheet. You may use any character for the delimiter, but '@' is used by default. See next section.

4.1.2 -p or --pinDelimiter

This option allows you to specify the delimiter that is used to separate the test name and pin name. It is only necessary to use this option if the delimiter is not '@'.

4.1.3 -i or -ignoreSerialMarker

There are two ways to specify a serial number for a device. If you do nothing then stdf2xls will use the PART_ID field in the PRR record as the serial number. This field is set by the tester automatically. However if you want to assign your own alpha-numeric serial numbers you can put them into a Datalog Text Record using a special format. To put your own serial numbers in to the STDF, print a string to the datalogger using this format:

```
TEXT_DATA : S/N : <serial_id>
```

For example,

```
TEXT_DATA : S/N : A1
```

On the Advantest 93K a Datalog Text Record is generated by using the PUT_DATALOG() function. The stdf2xls program will prioritize the Datalog Text Record serial marker over the PART_ID field in the PRR record. If you want to prioritize the PART_ID field over the Datalog Text Record serial marker, then use this option. Generally you won't want to use this option.

4.1.4 -S or -so

This option is used to specify the spreadsheet filename. It is not necessary to use this option. By default the spreadsheet filename will be <deviceName>_<lot_id>.xlsx. Note that you can process multiple device types simultaneously and each device and lot will be sent to a different spreadsheet file. With this option you can specify the datalog spreadsheet filename, and you can use variables to specify the lot and/or device in the filename. For example:

```
-S device_%device%_lot_%lot%.xlsx
```

If your device was 8087 and your lot number was N5432S, then this would give filename of "device_8087_lot_N5432S.xlsx"

Note that if the actual lot or device number contains a '/' character, then the '/' will be replaced with a '%' character because you can't have slashes in a filename. If the lot or device number contains a space character, then the space will be replaced with a '_' character. This is because spaces in filenames are evil.

4.1.5 -r or -rotate

By default the datalog spreadsheet is generated with tests in columns and devices in rows. This option will transpose the spreadsheet so that devices are in columns and tests are in rows.

4.1.6 -c or -1kcol

Use this option if you are using Libreoffice or openoffice.org. This limits the number of columns to 1000. Libreoffice and openoffice.org will truncate any data beyond 1024 columns. By default 32K columns will be used for MS Excel. In any case if the number of columns exceeds these limits then the data will be continued on another tab in the workbook.

4.1.7 -Y or -noDynamicLimits

By default all parametric tests are scanned for non-constant limits. If non-constant limits are detected for certain tests, then the spreadsheet is formatted differently for those tests such that each test result is surrounded by the limits used for that test. If you don't want this behavior then use this option, but realize the limits will not be accurate.

4.1.8 -t or --channel-type

For Multiple Parametric Test Records the pin information is obtained from the Pin Map Records which map a pin index number to a pin name. Unfortunately the Pin Map Record has three fields where a pin name *might* be stored. Most of the time stdf2xls will use the correct field to get the correct pin name, but occasionally a new tester may use the wrong field. In that case this option can be used to force stdf2xls to use the correct field. If your pin names are not coming out correctly for Multiple Parametric Test Result records, then do an ASCII dump of the STDF file, and look at the Pin Map Records, and it should be obvious which field to specify with this option.

4.1.9 -m or --modify

This option can be used to modify a string field in any STDF record. It uses a powerful regular-expression engine that is documented at https://dlang.org/phobos/std_regex.html. This option has the form:

```
--modify '<record> <field> "<fromRegex>" "<toFormatString>"'
```

Note that the single quotes, and double quotes are needed so that the shell interprets the command line correctly. Note that you can also specify this option multiple times on the command line to do several edits simultaneously.

Here are a couple of examples. First just remove the space in "TEMPERATURE :" that occurs in any Datalog Text Record:

```
-m 'DTR TEXT_DAT "TEMPERATURE :" "TEMPERATURE:"'
```

This will affect every Datalog Text Record that contains the string "TEMPERATURE :".

For a more complex example, assume you have test names in a Functional Test Record that have the form: "Output_OVPT_Setup_T040:Functional[1]". Suppose you want to change the colon to an 'X', but only if the name starts with "Output_", and 'T' is followed by three digits:

```
-m 'FTR TEST_TXT "Output_(.*T)(\d\d\d):(.*)" "Output_-$1$2X$3"'
```

In this case "Output_OVPT_Setup_T040:Functional[1]" will be replaced with "Output_OVPT_Setup_T040XFunctional[1]". Note that the parenthesis in the regular expression are not characters, but instead indicate match groups. The content of the first pair of parenthesis is accessed in the <toFormatString> with \$1, and the content of the second pair of parenthesis is accessed in the <toFormatString> with \$2, and so on.

The <record> parameter is the three-letter record name as it is specified in the STDF specification. The <field> parameter is the field name as given in the STDF specification. The valid record and field names that may be modified are shown below:

- Record ATR
 - Field Name: "CMD_LINE"
- Record BPS
 - Field Name: "SEQ_NAME"
- Record DTR
 - Field Name: "TEXT_DAT"
- Record FTR

- Field Name: "VECT_NAM"
- Field Name: "TIME_SET"
- Field Name: "OP_CODE"
- Field Name: "TEST_TXT"
- Field Name: "ALARM_ID"
- Field Name: "PROG_TXT"
- Field Name: "RSLT_TXT"
- Record HBR
 - Field Name: "HBIN_NAM"
- Record MIR
 - Field Name: "LOT_ID"
 - Field Name: "PART_TYP"
 - Field Name: "NODE_NAM"
 - Field Name: "TSTR_TYP"
 - Field Name: "JOB_NAM"
 - Field Name: "JOB_REV"
 - Field Name: "SBLOT_ID"
 - Field Name: "OPER_NAM"
 - Field Name: "EXEC_TYP"
 - Field Name: "EXEC_VER"
 - Field Name: "TEST_COD"
 - Field Name: "TST_TEMP"
 - Field Name: "USER_TXT"
 - Field Name: "AUX_FILE"
 - Field Name: "PKG_TYP"
 - Field Name: "FAMILY_ID"
 - Field Name: "DATE_COD"
 - Field Name: "FACIL_ID"
 - Field Name: "FLOOR_ID"
 - Field Name: "PROC_ID"
 - Field Name: "OPER_FRQ"
 - Field Name: "SPEC_NAM"
 - Field Name: "SPEC_VER"
 - Field Name: "FLOW_ID"
 - Field Name: "SETUP_ID"
 - Field Name: "DSGN_REV"
 - Field Name: "ENG_ID"
 - Field Name: "ROM_COD"

- Field Name: "SERL_NUM"
 - Field Name: "SUPR_NAM"
- Record MPR
 - Field Name: "TEST_TXT"
 - Field Name: "ALARM_ID"
 - Field Name: "UNITS"
 - Field Name: "C_RESFMT"
 - Field Name: "C_LLMFMT"
 - Field Name: "UNITS_IN"
 - Field Name: "C_HLMFMT"
- Record MRR
 - Field Name: "USR_DESC"
 - Field Name: "EXC_DESC"
- Record PGR
 - Field Name: "GRP_NAME"
- Record PLR
 - Field Name: "PGM_CHAR"
 - Field Name: "RTN_CHAR"
 - Field Name: "PGM_CHAL"
 - Field Name: "RTN_CHAL"
- Record PMR
 - Field Name: "CHAN_NAM"
 - Field Name: "PHY_NAM"
 - Field Name: "LOG_NAM"
- Record PRR
 - Field Name: "PART_ID"
 - Field Name: "PART_TXT"
- Record PTR
 - Field Name: "TEST_TXT"
 - Field Name: "ALARM_ID"
 - Field Name: "UNITS"
 - Field Name: "C_RESFMT"
 - Field Name: "C_LLMFMT"
 - Field Name: "C_HLMFMT"
- Record SBR

- Field Name: "SBIN_NAM"
- Record SDR
 - Field Name: "HAND_TYP"
 - Field Name: "HAND_ID"
 - Field Name: "CARD_TYP"
 - Field Name: "CARD_ID"
 - Field Name: "LOAD_TYP"
 - Field Name: "LOAD_ID"
 - Field Name: "DIB_TYP"
 - Field Name: "DIB_ID"
 - Field Name: "CABL_TYP"
 - Field Name: "CABL_ID"
 - Field Name: "CONT_TYP"
 - Field Name: "CONT_ID"
 - Field Name: "LASR_TYP"
 - Field Name: "LASR_ID"
 - Field Name: "EXTR_TYP"
 - Field Name: "EXTR_ID"
- Record TSR
 - Field Name: "TEST_NAM"
 - Field Name: "SEQ_NAME"
 - Field Name: "TEST_LBL"
- Record WIR
 - Field Name: "WAFER_ID"
- Record WRR
 - Field Name: "WAFER_ID"
 - Field Name: "FABWF_ID"
 - Field Name: "FRAME_ID"
 - Field Name: "MASK_ID"
 - Field Name: "USR_DESC"
 - Field Name: "EXC_DESC"

4.1.10 --sortType

There are 32 different ways to sort devices. 16 of the ways remove duplicate serial numbers, and 16 of the ways do not remove duplicate serial numbers. For example:

```
--sortType SN_UP_TIME_UP_NO_DUPS
```

In this case the devices are sorted first by ascending alphanumeric serial number, then by the ascending time of test. Then the duplicates are removed. When duplicates are removed, the first occurrence in the sorted list is kept, and the rest are removed. In this example, since time is sorted in ascending order, the first time a device is tested will be kept, and the rest will be discarded. Generally you would want to keep the last time a device was tested, so in that case you would use a sort type of SN_UP_TIME_DOWN_NO_DUPS. Note in the following list serial number is abbreviated either as SN or SNN. SN implies an alpha-numeric sort of the serial numbers and SNN implies a numeric sort of the serial numbers.

Possible sortType options are:

1. SN_UP_TIME_UP_NO_DUPS
2. SN_DOWN_TIME_UP_NO_DUPS
3. SN_UP_TIME_DOWN_NO_DUPS
4. SN_DOWN_TIME_DOWN_NO_DUPS
5. SNN_UP_TIME_UP_NO_DUPS
6. SNN_DOWN_TIME_UP_NO_DUPS
7. SNN_UP_TIME_DOWN_NO_DUPS
8. SNN_DOWN_TIME_DOWN_NO_DUPS
9. TIME_UP_SN_UP_NO_DUPS
10. TIME_UP_SN_DOWN_NO_DUPS
11. TIME_DOWN_SN_UP_NO_DUPS
12. TIME_DOWN_SN_DOWN_NO_DUPS
13. TIME_UP_SNN_UP_NO_DUPS
14. TIME_UP_SNN_DOWN_NO_DUPS
15. TIME_DOWN_SNN_UP_NO_DUPS
16. TIME_DOWN_SNN_DOWN_NO_DUPS
17. SN_UP_TIME_UP
18. SN_DOWN_TIME_UP
19. SN_UP_TIME_DOWN
20. SN_DOWN_TIME_DOWN
21. SNN_UP_TIME_UP
22. SNN_DOWN_TIME_UP

- 23. SNN_UP_TIME_DOWN
- 24. SNN_DOWN_TIME_DOWN
- 25. TIME_UP_SN_UP
- 26. TIME_UP_SN_DOWN
- 27. TIME_DOWN_SN_UP
- 28. TIME_DOWN_SN_DOWN
- 29. TIME_UP_SNN_UP
- 30. TIME_UP_SNN_DOWN
- 31. TIME_DOWN_SNN_UP
- 32. TIME_DOWN_SNN_DOWN

The default sort type is SN_UP_TIME_UP.

4.2 **-d or --dumptext**

This option prints the contents of the STDF file(s) in ASCII form to the standard output.

4.3 -b or --dumpBytes

This option prints the bytes of the STDF file(s) in an easy to read format. The output is sent to the standard output. Below is an example of this output format:

```
reclen = 2
type = FAR
[
02 00 00 0A 02 04 ]
reclen = 48
type = ATR
[
30 00 00 14 9E 69 FA 5B 2B 43 72 65 64 65 6E 63 65 20 53 79 73 74 65 6D
73 20 44 69 61 6D 6F 6E 64 20 53 65 72 69 65 73 20 2D 20 52 65 6C 65 61
73 65 20 31 ]
reclen = 110
type = MIR
[
6E 00 01 0A 56 5A FA 5B 9E 69 FA 5B 00 20 20 20 FF FF 20 09 4C 31 31 31
38 30 36 36 30 0D 4C 65 74 68 65 35 20 46 54 35 30 30 30 05 44 31 30 2D
32 04 44 2D 31 30 07 46 54 5F 35 30 30 30 00 00 06 31 30 30 32 39 35 07
64 6D 64 5F 65 78 65 0B 76 32 2E 31 2E 31 5F 42 4C 44 34 00 00 00 00 03
51 46 4E 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 ]
reclen = 45
type = SDR
[
2D 00 01 50 00 00 04 00 01 02 03 0F 45 70 73 6F 6E 20 4E 53 20 53 65 72
69 65 73 07 36 30 34 30 2D 30 36 00 00 00 00 00 00 00 00 00 00 00 00
00 ]
reclen = 69
type = PMR
[
45 00 01 3C 01 00 01 00 03 58 49 4E 36 52 65 73 6F 75 72 63 65 3A 20 53
33 5F 44 49 47 49 54 41 4C 2C 20 43 68 61 73 73 69 73 3A 20 30 2C 20 53
6C 6F 74 3A 20 33 2C 20 43 68 61 6E 6E 65 6C 3A 20 38 34 03 58 49 4E 00
00 ]
...
```

4.4 -D or --digest

This option prints each unique header information for all STDF files that are loaded. stdf2xls uses the header information to decide when generate a new worksheet, or a new workbook. The stdf loader attempts to load a header structure with the following information:

- device name
- traveler step number
- temperature
- Lot ID
- Sublot ID

- Wafer ID
- A list of user-defined header items

Not all of this information is available in every STDF file, so some of these fields will be empty. By default, the list of user-defined header items is ignored when comparing this data with the data from another file. If you don't want to ignore the user-defined header data when deciding to create a new worksheet, then use the `--noIgnoreMiscHeader` option.

4.5 **-m or --modify**

This option may be used when generating a spreadsheet, however it can also be used to modify an STDF file if it is used with the `--outputDir` option. The STDF file can be modified and then written back out in another directory.

4.6 **-o or --outputDir**

If this option is used, each STDF file is written back out in STDF binary format. If no modifications are done using the `--modify` option, then the STDF that is written out will be identical with the original STDF file. This option, without the `--modify` option is mainly used for testing the STDF reader.

4.7 -g or --generateRCFile

This option is used to generate and initialization file. The file must be placed in the user's home directory, and it must be named ".stdf2xls5rc". When this option is used, the file generated will have the correct name and be written to the home directory, so it will overwrite an existing version of this file. The file contents contains the following text:

```
# font styles: normal | bold | italic | underline | bold_italic | bold_underline |
#               italic_underline | bold_italic_underline
# supported fonts: Times | Arial | Courier
# legal font sizes: 6 to 31
monitor_x_dpi          96
monitor_y_dpi          96
ss.logo.x_scale        0.0
ss.logo.y_scale        0.0
ss.logo.file_path
ss.logo.text
ss.logo.bg_color       NONE
ss.logo.text_color     000000
ss.logo.font_name      Arial
ss.logo.font_size      8
ss.logo.font_style     normal

ss.title.bg_color      15B8D7
ss.title.text_color    FFFFFFFF
ss.title.font_name     Arial
ss.title.font_size     16
ss.title.font_style    bold

ss.header.name.bg_color F6F9D4
ss.header.name.text_color 000000
ss.header.name.font_name Arial
ss.header.name.font_size 8
ss.header.name.font_style bold

ss.header.value.bg_color F6F9D4
ss.header.value.text_color 000000
ss.header.value.font_name Arial
ss.header.value.font_size 8
ss.header.value.font_style normal
```

ss.test_name.header.bg_color	DEE6EF
ss.test_name.header.text_color	000000
ss.test_name.header.font_name	Arial
ss.test_name.header.font_size	8
ss.test_name.header.font_style	bold
ss.test_name.value.bg_color	FFE994
ss.test_name.value.text_color	000000
ss.test_name.value.font_name	Arial
ss.test_name.value.font_size	12
ss.test_name.value.font_style	normal
ss.test_number.header.bg_color	DEE6EF
ss.test_number.header.text_color	000000
ss.test_number.header.font_name	Arial
ss.test_number.header.font_size	8
ss.test_number.header.font_style	bold
ss.test_number.value.bg_color	FFE994
ss.test_number.value.text_color	000000
ss.test_number.value.font_name	Arial
ss.test_number.value.font_size	8
ss.test_number.value.font_style	normal
ss.duplicate.header.bg_color	DEE6EF
ss.duplicate.header.text_color	000000
ss.duplicate.header.font_name	Arial
ss.duplicate.header.font_size	8
ss.duplicate.header.font_style	bold
ss.duplicate.value.bg_color	FFE994
ss.duplicate.value.text_color	000000
ss.duplicate.value.font_name	Arial
ss.duplicate.value.font_size	8
ss.duplicate.value.font_style	normal
ss.lo_limit.header.bg_color	DEE6EF
ss.lo_limit.header.text_color	000000
ss.lo_limit.header.font_name	Arial
ss.lo_limit.header.font_size	8
ss.lo_limit.header.font_style	bold
ss.lo_limit.value.bg_color	FFE994
ss.lo_limit.value.text_color	000000
ss.lo_limit.value.font_name	Arial
ss.lo_limit.value.font_size	8
ss.lo_limit.value.font_style	normal

ss.hi_limit.header.bg_color	DEE6EF
ss.hi_limit.header.text_color	000000
ss.hi_limit.header.font_name	Arial
ss.hi_limit.header.font_size	8
ss.hi_limit.header.font_style	bold
ss.hi_limit.value.bg_color	FFE994
ss.hi_limit.value.text_color	000000
ss.hi_limit.value.font_name	Arial
ss.hi_limit.value.font_size	8
ss.hi_limit.value.font_style	normal
ss.dyn_lo_limit.header.bg_color	FFE994
ss.dyn_lo_limit.header.text_color	000000
ss.dyn_lo_limit.header.font_name	Arial
ss.dyn_lo_limit.header.font_size	8
ss.dyn_lo_limit.header.font_style	bold
ss.dyn_lo_limit.value.bg_color	FFFFB4
ss.dyn_lo_limit.value.text_color	000000
ss.dyn_lo_limit.value.font_name	Arial
ss.dyn_lo_limit.value.font_size	8
ss.dyn_lo_limit.value.font_style	normal
ss.dyn_hi_limit.header.bg_color	FFE994
ss.dyn_hi_limit.header.text_color	000000
ss.dyn_hi_limit.header.font_name	Arial
ss.dyn_hi_limit.header.font_size	8
ss.dyn_hi_limit.header.font_style	bold
ss.dyn_hi_limit.value.bg_color	FFFFB4
ss.dyn_hi_limit.value.text_color	000000
ss.dyn_hi_limit.value.font_name	Arial
ss.dyn_hi_limit.value.font_size	8
ss.dyn_hi_limit.value.font_style	normal
ss.pin.header.bg_color	DEE6EF
ss.pin.header.text_color	000000
ss.pin.header.font_name	Arial
ss.pin.header.font_size	8
ss.pin.header.font_style	bold
ss.pin.value.bg_color	FFE994
ss.pin.value.text_color	000000
ss.pin.value.font_name	Arial
ss.pin.value.font_size	8
ss.pin.value.font_style	normal

ss.units.header.bg_color	DEE6EF
ss.units.header.text_color	000000
ss.units.header.font_name	Arial
ss.units.header.font_size	8
ss.units.header.font_style	bold
ss.units.value.bg_color	FFE994
ss.units.value.text_color	000000
ss.units.value.font_name	Arial
ss.units.value.font_size	8
ss.units.value.font_style	normal
ss.sn_xy.header.bg_color	DEE6EF
ss.sn_xy.header.text_color	000000
ss.sn_xy.header.font_name	Arial
ss.sn_xy.header.font_size	8
ss.sn_xy.header.font_style	bold
ss.sn_xy.value.bg_color	FFE994
ss.sn_xy.value.text_color	000000
ss.sn_xy.value.font_name	Arial
ss.sn_xy.value.font_size	8
ss.sn_xy.value.font_style	normal
ss.temp.header.bg_color	DEE6EF
ss.temp.header.text_color	000000
ss.temp.header.font_name	Arial
ss.temp.header.font_size	8
ss.temp.header.font_style	bold
ss.temp.value.bg_color	FFE994
ss.temp.value.text_color	000000
ss.temp.value.font_name	Arial
ss.temp.value.font_size	8
ss.temp.value.font_style	normal
ss.time.header.bg_color	DEE6EF
ss.time.header.text_color	000000
ss.time.header.font_name	Arial
ss.time.header.font_size	8
ss.time.header.font_style	bold
ss.time.value.bg_color	FFE994
ss.time.value.text_color	000000
ss.time.value.font_name	Arial
ss.time.value.font_size	8
ss.time.value.font_style	normal

ss.hw_bin.header.bg_color	DEE6EF
ss.hw_bin.header.text_color	000000
ss.hw_bin.header.font_name	Arial
ss.hw_bin.header.font_size	8
ss.hw_bin.header.font_style	bold
ss.hw_bin.value.bg_color	FFE994
ss.hw_bin.value.text_color	000000
ss.hw_bin.value.font_name	Arial
ss.hw_bin.value.font_size	8
ss.hw_bin.value.font_style	normal
ss.sw_bin.header.bg_color	DEE6EF
ss.sw_bin.header.text_color	000000
ss.sw_bin.header.font_name	Arial
ss.sw_bin.header.font_size	8
ss.sw_bin.header.font_style	bold
ss.sw_bin.value.bg_color	FFE994
ss.sw_bin.value.text_color	000000
ss.sw_bin.value.font_name	Arial
ss.sw_bin.value.font_size	8
ss.sw_bin.value.font_style	normal
ss.site.header.bg_color	DEE6EF
ss.site.header.text_color	000000
ss.site.header.font_name	Arial
ss.site.header.font_size	8
ss.site.header.font_style	bold
ss.site.value.bg_color	FFE994
ss.site.value.text_color	000000
ss.site.value.font_name	Arial
ss.site.value.font_size	8
ss.site.value.font_style	normal
ss.result.header.bg_color	DEE6EF
ss.result.header.text_color	000000
ss.result.header.font_name	Arial
ss.result.header.font_size	8
ss.result.header.font_style	bold
ss.result.pass.value.bg_color	FFE994
ss.result.pass.value.text_color	000000
ss.result.pass.value.font_name	Arial
ss.result.pass.value.font_size	8
ss.result.pass.value.font_style	normal

ss.result.fail.value.bg_color	FF0000
ss.result.fail.value.text_color	000000
ss.result.fail.value.font_name	Arial
ss.result.fail.value.font_size	8
ss.result.fail.value.font_style	normal
ss.pass.data.float.value.bg_color	NONE
ss.pass.data.float.value.text_color	000000
ss.pass.data.float.value.font_name	Courrier
ss.pass.data.float.value.font_size	10
ss.pass.data.float.value	normal
ss.pass.data.int.value.bg_color	NONE
ss.pass.data.int.value.text_color	000000
ss.pass.data.int.value.font_name	Courrier
ss.pass.data.int.value.font_size	10
ss.pass.data.int.value	normal
ss.pass.data.hex.value.bg_color	NONE
ss.pass.data.hex.value.text_color	000000
ss.pass.data.hex.value.font_name	Courrier
ss.pass.data.hex.value.font_size	10
ss.pass.data.hex.value	normal
ss.pass.data.string.value.bg_color	NONE
ss.pass.data.string.value.text_color	000000
ss.pass.data.string.value.font_name	Courrier
ss.pass.data.string.value.font_size	10
ss.pass.data.string.value	normal
ss.fail.data.value.bg_color	FF0000
ss.fail.data.value.text_color	000000
ss.fail.data.value.font_name	Courrier
ss.fail.data.value.font_size	10
ss.fail.data.value	normal
wafer.fail.bg_color	BF0000
wafer.empty.bg_color	666666
wafer.pass.bg_color	22C600

4.7.1 Logo Configuration

Most of the fields in the preceding section should be self-explanatory. However, configuring your own logo to fit correctly in the spreadsheet is not easy. It is very dependent on how the image was created, and the resolution of your monitor. So it is a trial and error situation to get your logo to fit correctly. By default you will get the iTest logo, and you can also specify text instead of a logo. If you want to use your own logo, you must supply the path of the logo file in the rc file, and then you must scale it. To scale the logo first set the `monitor_x_dpi` and `monitor_y_dpi` to match your monitor. Then adjust the `ss.logo.x_scale` and the `ss.logo.y_scale` until the logo correctly fits in the spreadsheet.

<code>monitor_x_dpi</code>	96
<code>monitor_y_dpi</code>	96
<code>ss.logo.x_scale</code>	0.0
<code>ss.logo.y_scale</code>	0.0
<code>ss.logo.file_path</code>	
<code>ss.logo.text</code>	
<code>ss.logo.bg_color</code>	NONE
<code>ss.logo.text_color</code>	000000
<code>ss.logo.font_name</code>	Arial
<code>ss.logo.font_size</code>	8
<code>ss.logo.font_style</code>	normal

4.8 User Supplied Header and Data Values

By default header information in the spreadsheet is obtained from standard STDF fields. For example the lot number is obtained from the LOT_ID field of the Master Information Record. Header information is lot specific, so it includes things like traveler step number, wafer number, temperature, etc. Some of this information can be obtained from standard fields in the STDF, but sometimes the tester does not fill in these fields, so they can be override by printing text to the datalogger. Note that printing to the datalogger must generate a Datalog Text Record in the STDF for this to work.

4.8.1 Customizing the Spreadsheet Header Information

The standard header fields that can be obtained from STDF are:

- Temperature (MIR.TST_TEMP)
- Lot number (MIR.LOT_ID)
- Sublot number (MIR.SBLOT_ID)
- Wafer number (WIR.WAFER_ID)
- Device Name (MIR.PART_TYP)

Additionally the program also uses a traveler STEP number to identify a unique lot, but there doesn't seem to be an STDF field that corresponds to this. The above fields, including the STEP number can be overridden using Datalog Text Records. The above fields can be override by using the following syntax with Datalog Text Records:

Standard Header Text Records

Header Field	Datalog Text Format
Temperature	">>>TEMPERATURE : <temperature_value>"
Lot number	">>>LOT # : <lot_number>"
Sublot number	">>>SUBLOT # : <sublot_number>"
Wafer number	">>>WAFER # : <wafer_number>"
Device Name	">>>DEVICE_NUMBER : <device_number>"
Step number	">>>STEP # : <step_number>"

4.8.2 User-defined Header fields

In addition to the standard header fields, the user may add custom header fields with Datalog Text Records. By default, user-defined header fields are not used to identify a unique lot, however, this behavior can be overridden with the --nolgnoreMiscHeader command-line option. The format for a user-defined header item is:

```
>>> <header_name> : <header\_value>
```

There is limited space in the spreadsheet for user-defined header items, so if there are too many header items, the list will get truncated. Additionally older versions of stdf2xls supported a legacy format for header items. The legacy format is still supported, but it is no longer documented.

4.9 User-defined Data Values

Text records may also be used to define psuedo-tests. These tests don't have limits, but can specify test results with formats other than float. A Datalog Text Record containing text data in a specific format will result in a test result showing up in the spreadsheet. The format is as follows:

```
TEXT_DATA : <test_name> : <value> [<units>] : <test_number> : <site_number> : <format> [ : <head_number>]
```

Values in square brackets are optional. The <format> can be one of the four literal values: "FLOAT", "HEX_INT", "DEC_INT", or "STRING". Example:

```
TEXT_DATA : my_test : 0xFF3A : 1234 : 1 : STRING
```

5 Wafermaps

This operation creates a wafer map in an excel spreadsheet where each hardware bin is represented by a cell.

5.1 -w or --genWafermaps

Wafermap generation has the following associated options:

- -A or --dumpAscii to display the wafer map in plain ASCII
- -P or --pattern to fill the cells with different patterns per bin
- -R or --rotateWafer to rotate the wafer
- -N or --showNum to show bin numbers in excel

5.1.1 -A or --dumpAscii

This option outputs the wafer map in plain ASCII into the stream, as well as generating the excel wafer map. The default wafermap format is ASY (see next section). Good dies are labeled as '1' and the rest of the bins are simply 'X's.

```
wafer_id: WAFERID1234
lot_id: LOTID1234
sublot_id: SUBLOTID1234
device_name: MyDevice.1a
temperature: 25
step: 1.0
row: 11
col: 19
rotation: 0
good_bins: 102
bad_bins: 69
total_bins: 171
.....X11XX11.....
..XX11X1X1X1X1X1...
.XXX11X1XX1X11X1XX.
X1XX11111XX1111X1XX
```

```

X1X1111X1111X11X111
XX1111111X11X11111X
XX1XX11111X111X1111
X11X1XX111111XX111X
.XX111X1XX1X11X1XX.
..X111X1X1X11XX1...
.....X11XX11.....

```

You can save the ASCII output by redirecting the stream into a text file.

```
./stdf2xls -w -A datalog.stdf > wafermap.txt
```

5.1.2 **-f or --wformat**

This option is used together with `dumpAscii` to specify the format type. The default format, unless otherwise specified, is ASY. Supported formats are:

- ASY
- SINF
- SINF_SENTONS (a variant of SINF specifically for Sentons)

5.1.3 **-P or --pattern**

This option fills in the cells with patterns instead of colors to distinguish the binning.

5.1.4 **-R or --rotateWafer**

By default, the x and y coordinates of wafer dies are translated directly into rows and columns of the spreadsheet. Therefore, the origin point is located at the top-left corner of a map. This option allows the map to be rotated by 90, 180, and 270 degrees clockwise around the origin. Negative (counter-clockwise) rotation is also allowed.

5.1.5 **-N or --showNum**

This option shows the corresponding bin number on top of each colored/patterned cell. By default this option is off. It is not recommended to use this option along with patterns since they make it very difficult to read the numbers.

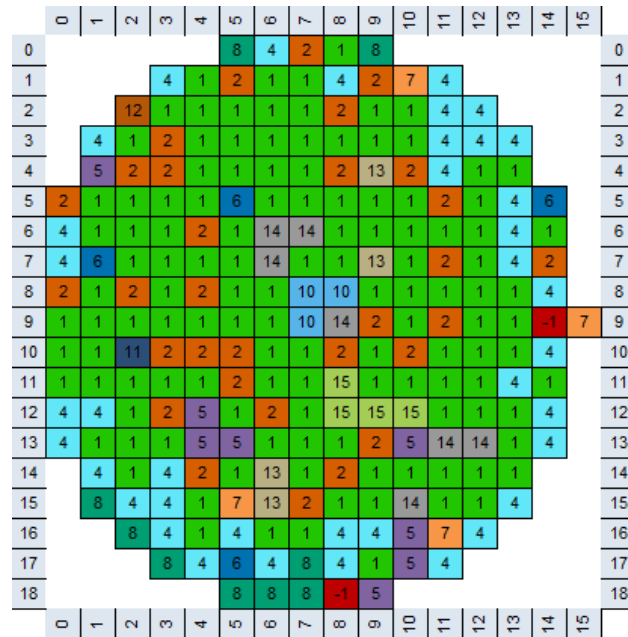


Figure 1: Bin numbers visible with showNum

6 Histograms

This operation creates histograms for each parametric or multiple-result test. Histograms are stored in excel, where each histogram is in its own chartsheet. The first excel sheet contains the list of all tests with histograms, and their sheet number.

6.1 -h or --genHistograms

6.1.1 -B or --manualBins

By default, the number of bins for each histogram is automatically calculated using a modified version of Scott's normal reference rule. Manually setting this value will apply the same number of bins across all histograms, except for the graphs that only have one bin.

6.1.2 -C or --cutOutlier

This defines how much of the outlier data should be excluded from histogram view, in terms of standard deviation. By default the cutoff is 1.5, which means that any data outside the range of $\text{mean} \pm 1.5\sigma$ is excluded. To disable cutoff altogether, set this option to 0.