PT. YONGJIN JAVASUKA GARMENT

Standard Operating Procedure (SOP)
For Automated Machine (Auto Pattern and Head Turning)

Update 03 March 2021



INDEX

1. Machine Status
   1) Quantity Machine
   2) Layout Machine

2. Operator Status

3. Automated machine Process
   1) PP Meeting
   2) Po Acrylic
   3) Setting Machine and Acrylic Pattern
   4) Make Mock Up
   5) Quality and Details Checking
   6) Bulk Start
   7) Quality Checking
   8) Send to Sewing

4. Quality Management
   1) Sample Quality Stitching
   2) Stitching-SPI
   3) Sample Reject Automated Machine


5. Machine Management
   1) Clean Machine
   2) Noodle
   3) RPM
   4) Oil Control

1. Machine Status

1) Qty Machine

BRAND	TYPE	SIZE	TOTAL
JEEHE	HEAD TURNING	SMALL	25
		LARGE	14
	AUTO TURNING	LARGE	11
	AUTO PATTERN	SMALL	16
		LARGE	14
SUNSTAR	AUTO PATTERN	LARGE	8
UNICORN	AUTO PATTERN	LARGE	7
TOTAL			95

2) Layout Machine

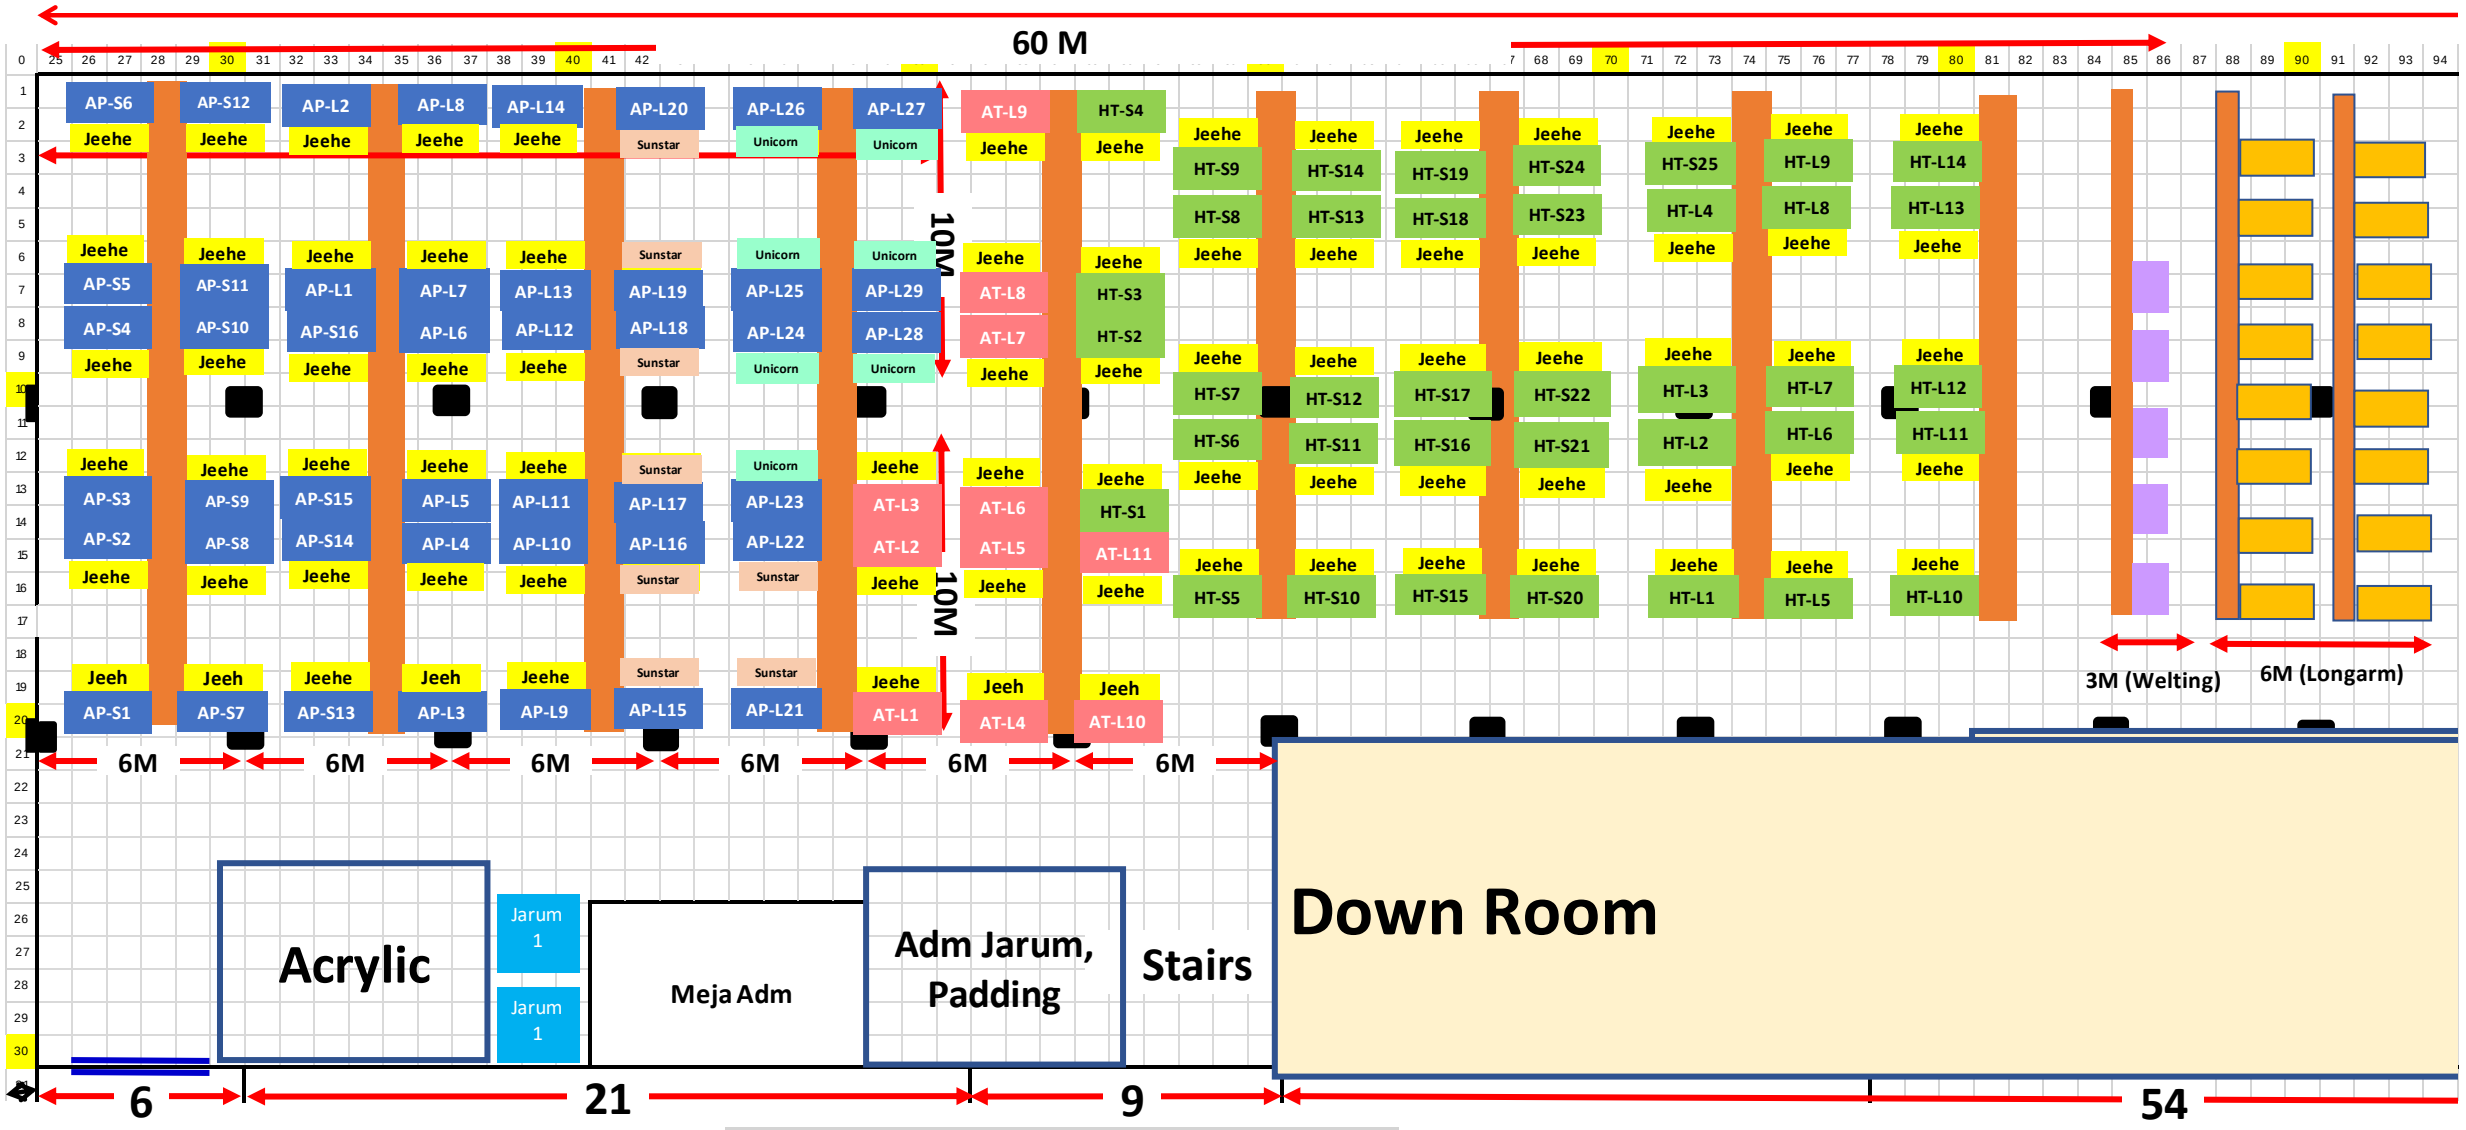

2. Operator Status

Sewing		TO						Actual							Balance
		Assistant	ADM	Welting	Mechanic	Operator	Total	Assistant	ADM	Welting	Mechanic	Operator	NonSift (Hamil)	Total	
Sewing 1	Pagi	**2**	2	3	3	48	58	**2**	2	3	3	42	6	58	0
	Malam	**2**		3	3	48	56	**2**		3	3	32		40	-16
Sub-Total Sewing 1		4	2	6	6	96	114	4	2	6	6	74	6	98	-16
Sewing 2	Pagi	**2**	2	2	2	48	56	**2**	2	2	2	47	47	102	46
	Malam	**2**		2	2	48	54	**2**		2	2	48	48	102	48
Sub-Total Sewing 2		4	2	4	4	96	110	4	2	4	4	95	95	204	94
TOTAL		**8**	**4**	**10**	**10**	**192**	**224**	**8**	**4**	**10**	**10**	**169**	**101**	**302**	**78**

3. Automated Machine Process



1) PP Meeting

- PP Meeting to find out the detail style and process that will be run on the Automation Machine
- To find out the priority color and priority size that will be running.
- To find out Material status and comment stitching.



2) PO Acrylic

Request acrylic for the acrylic manufacturing process at the Yongjin3, Form Request Acrylic :

ACRYLIC PATTERN REQUEST

Request by	Sewing Manager	Acrylic SPV	Manager
Ulfa	BS KIM	UJANG	SC.KANG

Buyer :	TNF	Size Order :	XS, S, M, L, XL, 2XL
Season :	F19	Factory :	YJ2-1
File No :	H2-9930DEF9	Acrylic Set Qty :	2 set
Style No :	A3YSR	Line :	18
Buy :	DEC	Add Line :	
Program :	PRODUCTION	Rrequest Date :	Maret 13 2019
Order Qty :	3,684 PCS	Rrequest Del :	Maret 15 2019
Description :	W DOWN SIERRA LONG JACKET		
Remark :			

PATTERN SKETCH


Details

Working Area :	Front	Back	Placket	Collar

Manager (chief) Comment


2) Setting Machine and Acrylic Pattern

1

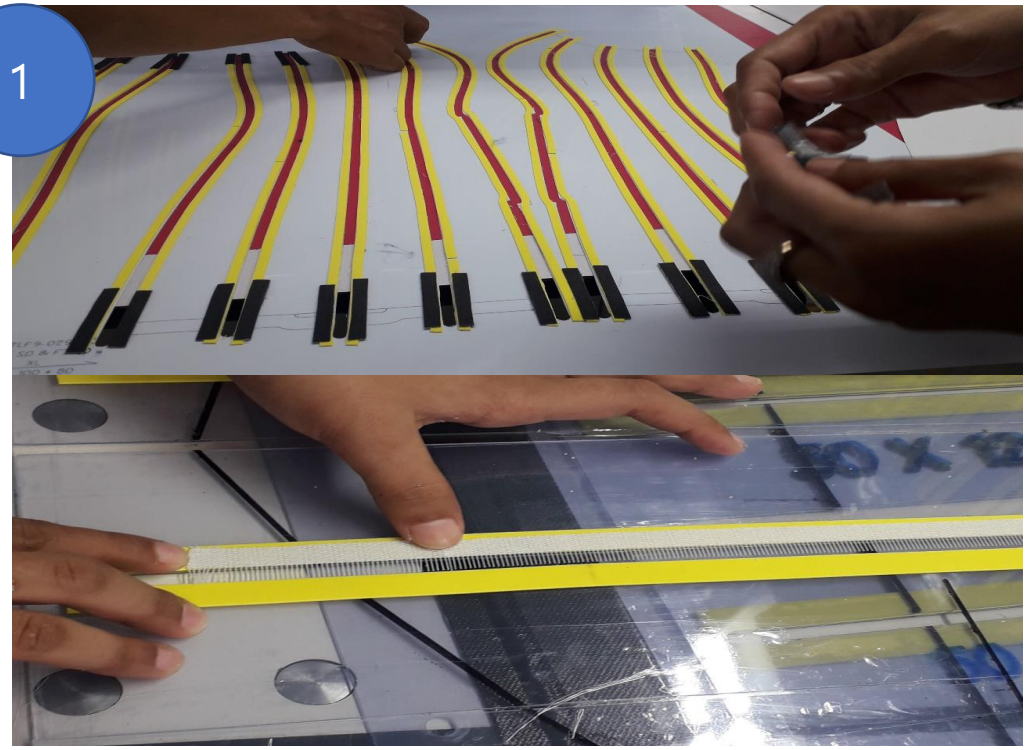


Install sandpaper, white brush and double tape on the top and bottom of the acrylic so that when installing the panel it is easier and does not change when the machine is sewing.

2

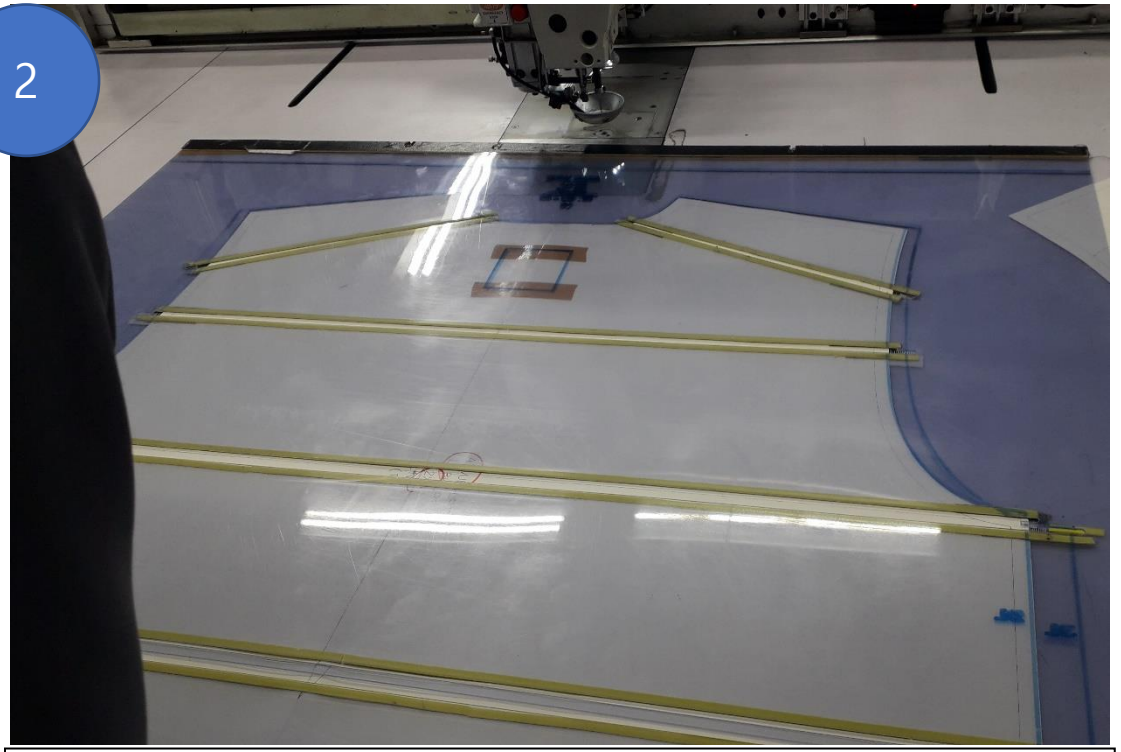

Adjust acrylic with pattern sewing

3

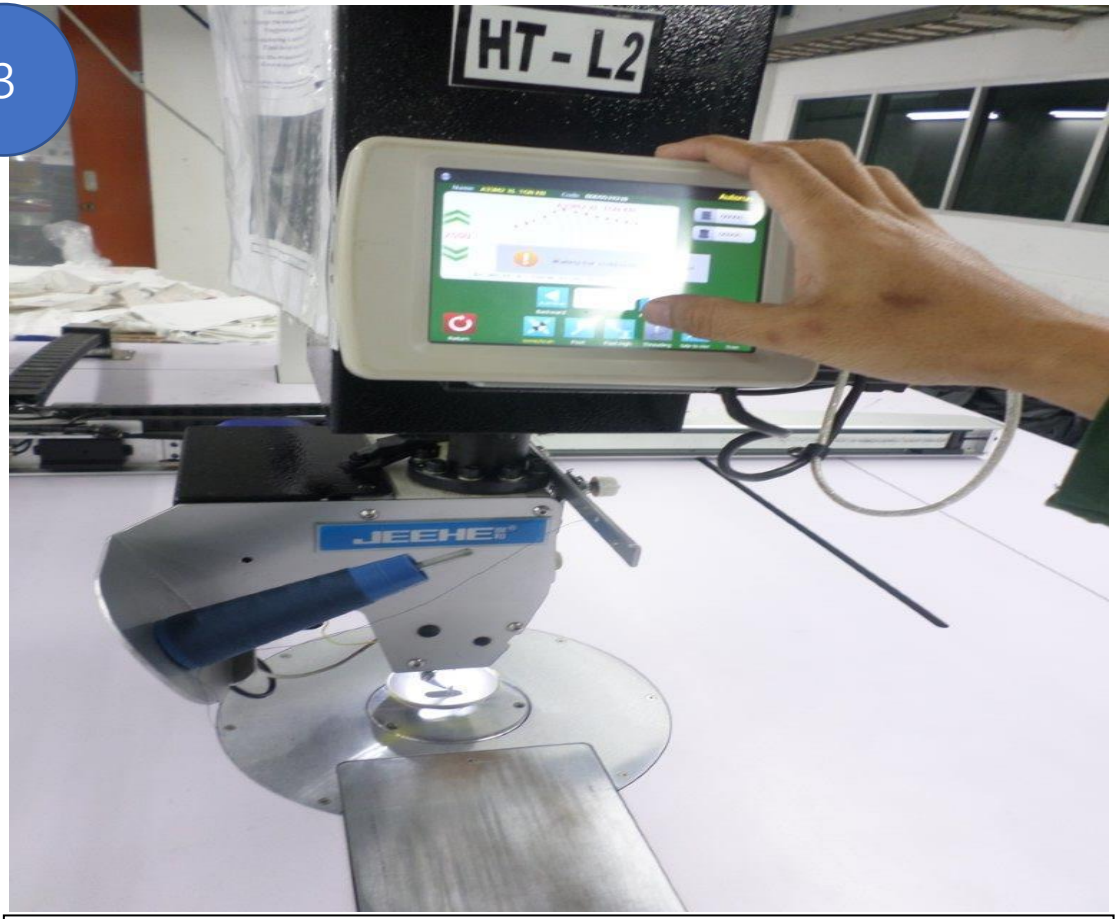

Setting file using the file received from Yongjin3

4



Adjust File setting with acrylic

4) Setting Machine and Acrylic Pattern

Make 1pcs panel with good standard quality as reference for operator before the bulk start.






Mock Up

5) Quality and Details Checking

Check quality of the stitches to the QA Manager and check Details of the panel to the MD, then reset if there are problems with the mock up and adjust according to demand. If the mock up is Approved then the QA Manager and MD will sign the mo ck up form.



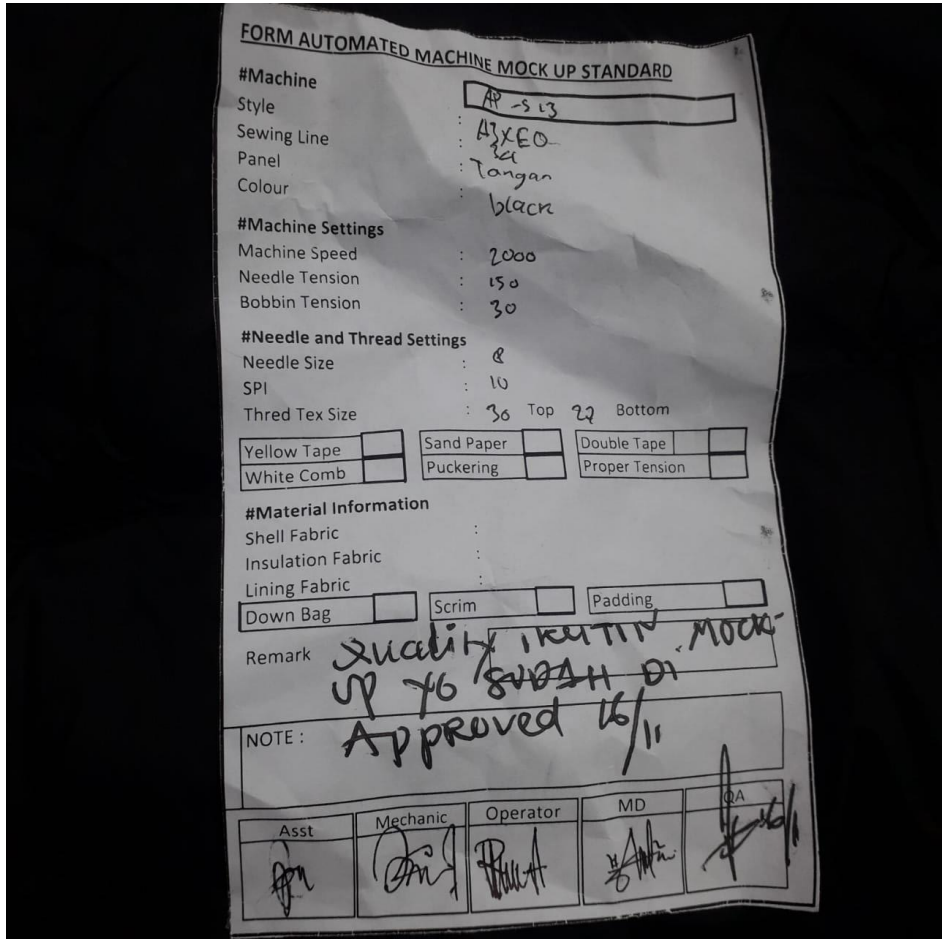

FORM AUTOMATED MACHINE MOCK UP STANDARD

#Machine
Style : AP -S 13
Sewing Line : A7XEO
Panel : Tangan
Colour : black

#Machine Settings
Machine Speed : 2000
Needle Tension : 150
Bobbin Tension : 30

#Needle and Thread Settings
Needle Size : 8
SPI : 10
Thred Tex Size : 30 Top 27 Bottom

Yellow Tape | Sand Paper | Double Tape
White Comb | Puckering | Proper Tension

#Material Information
Shell Fabric :
Insulation Fabric :
Lining Fabric :

Down Bag | Scrim | Padding

Remark : Quality Routine Mock Up To Sudah Di Approved 16/11

NOTE :

Asst	Mechanic	Operator	MD	QA


6) Bulk Start

If the Mock up has been approved, bulk production can be working with operator



5) Quality Checking

Check the stitches, if there is a problem the operator must check the machine with Mechanic. Reject Panel, give adm helper to replace panel.

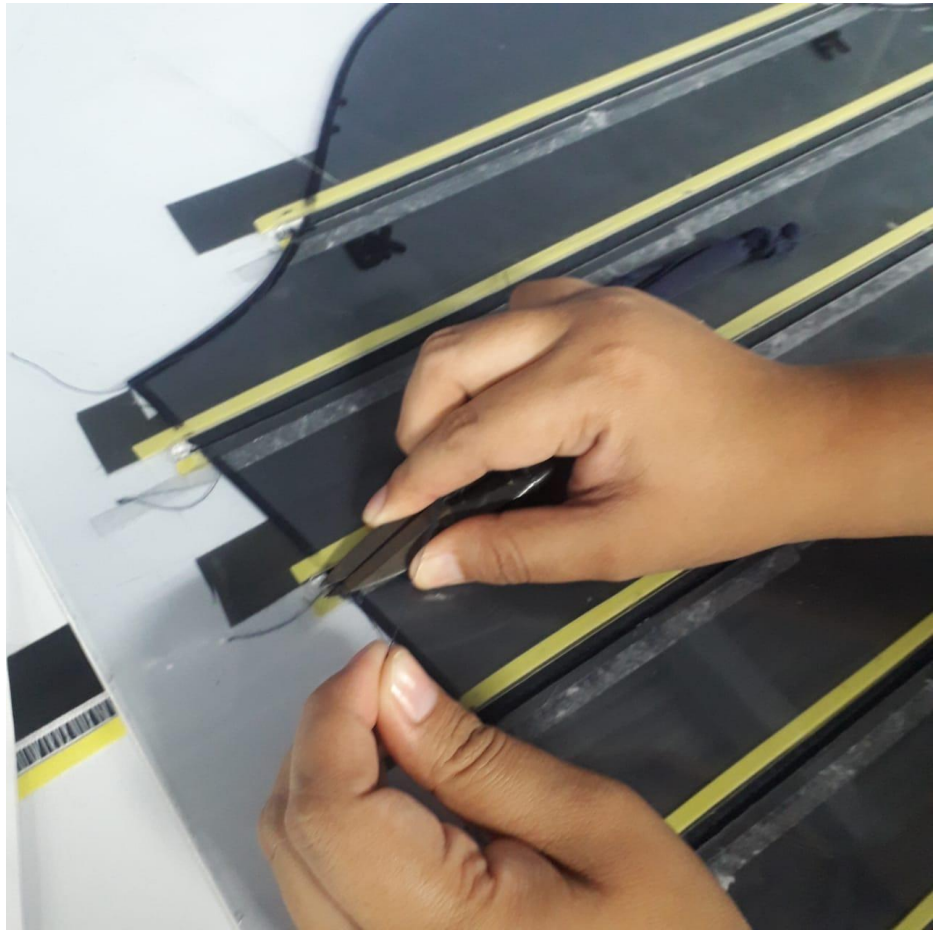



4. Quality Management

1) Sample Quality Stitching



Good Quality Sewing



Puckering Stitching



Broken Stitching

2) Stitching – SPI Standard

Buyer : TNF
Over Lock / Obras : 14 per Inch
Top Stitching / Jahitan Atas : 9-10 per Inch
Top Stitching down / Padding : 8-9 per Inch
Stay Stitcing / Jahitan Bantu : 10-11 per Inch

Buyer : Gap Athleta
Top Stitching / Jahitan Atas : 10-11 per Inch
Over Lock / Obras (Benang 5) : 14 per Inch


Buyer : Under Armour
Top Stitching : 10-11 per Inch
Joining Stitch : 11-12 per Inch
Over Lock / Obras : 12-14 per Inch


Buyer : Berghaus
Top Stitching : 10-11 per Inch
Join Stitch : 10-11 per Inch
Over Lock / Obras : 12-13 per Inch


Buyer : Oakley
Top Stitching : 9-10 per Inch
Joining Stitching : 10-12 per Inch
Duck Down Top Stitching : 10-12 per Inch
Over Lock / Obras : 12-14 per Inch

Buyer : Hojeon / Korea Orders
Over Lock / Obras : 14 per Inch
Top Stitching : 9-10 per Inch
Top Stitching Down / Padding : 8-9 per Inch
Stay Stitching / Jahitan Bantu : 10-11 per Inch


3) Sample Reject Automated Machine

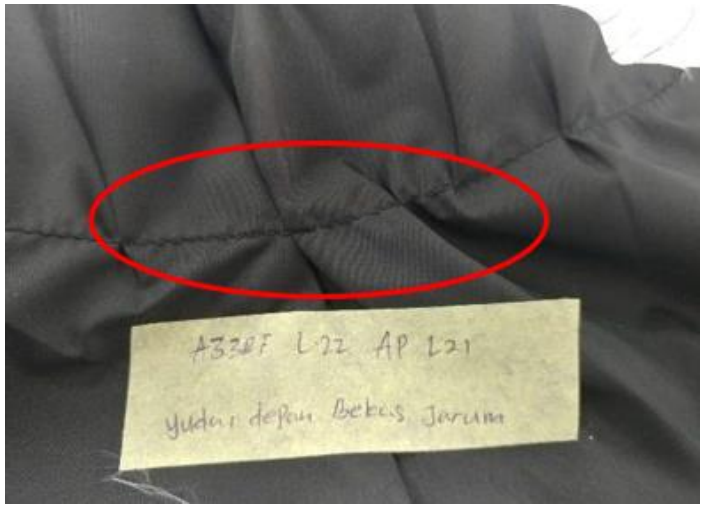


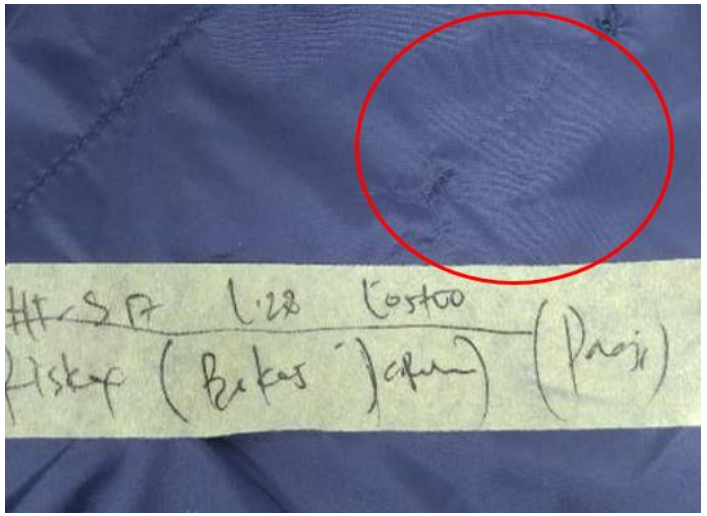

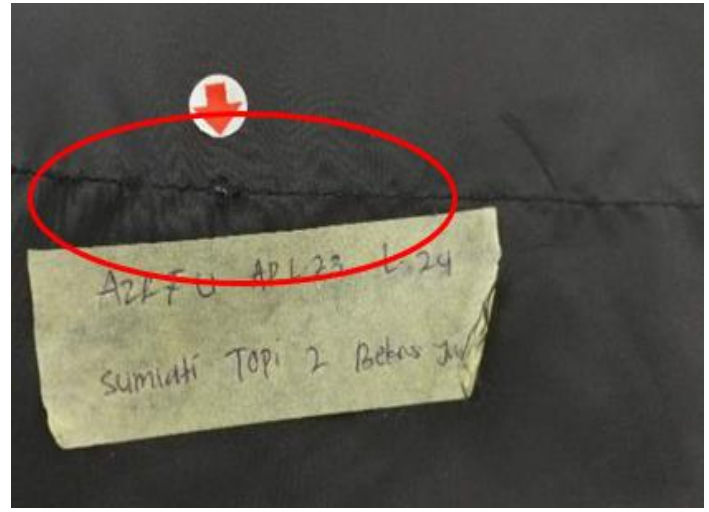




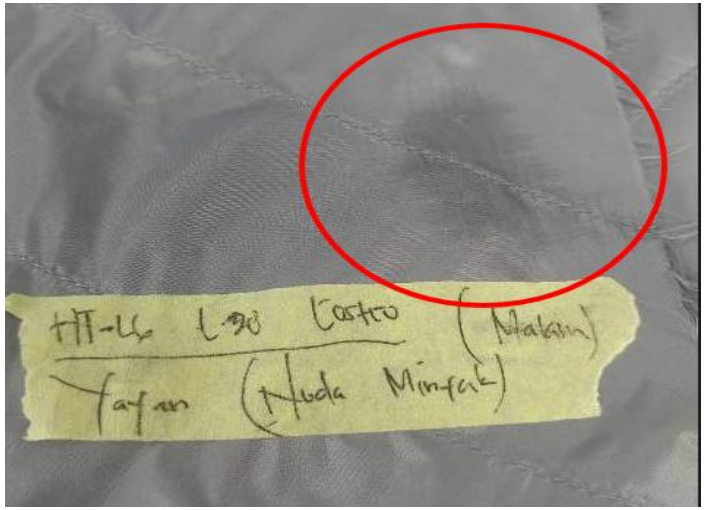

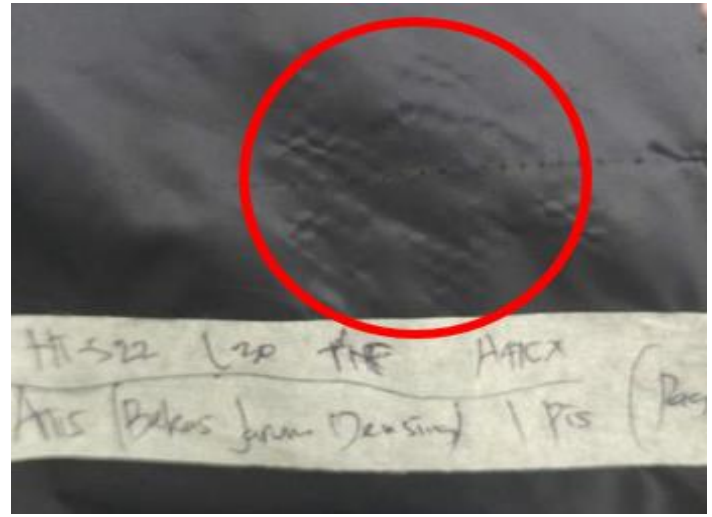

1. Machine Management

1) Clean every part of the machine and bobbin using a wind hose

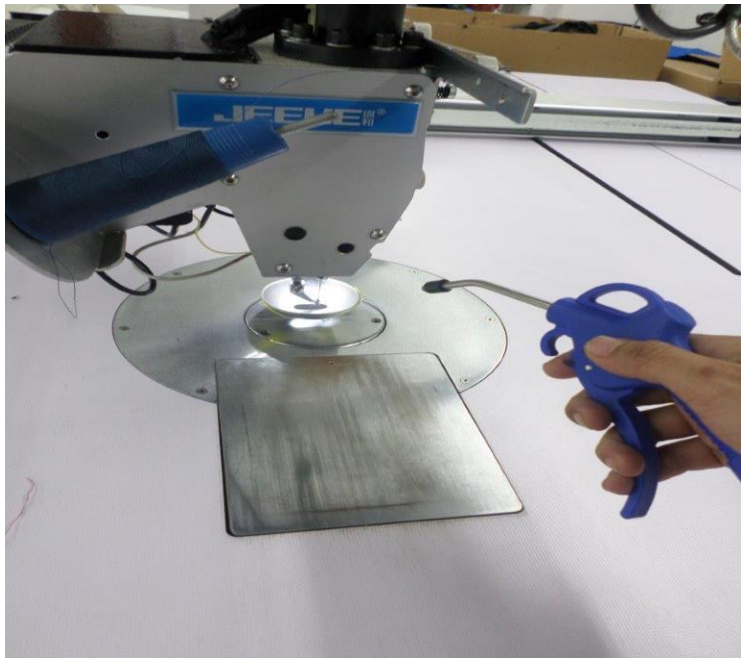






- Change the needle a maximum of 2 hours. When exchanging needless, the “Catatan Pengawasan Penukaran Ja rum / 2 Jam” form must be filled.
- Use small and sharp ball point needle # 7-8 to avoid down or pelon leakage



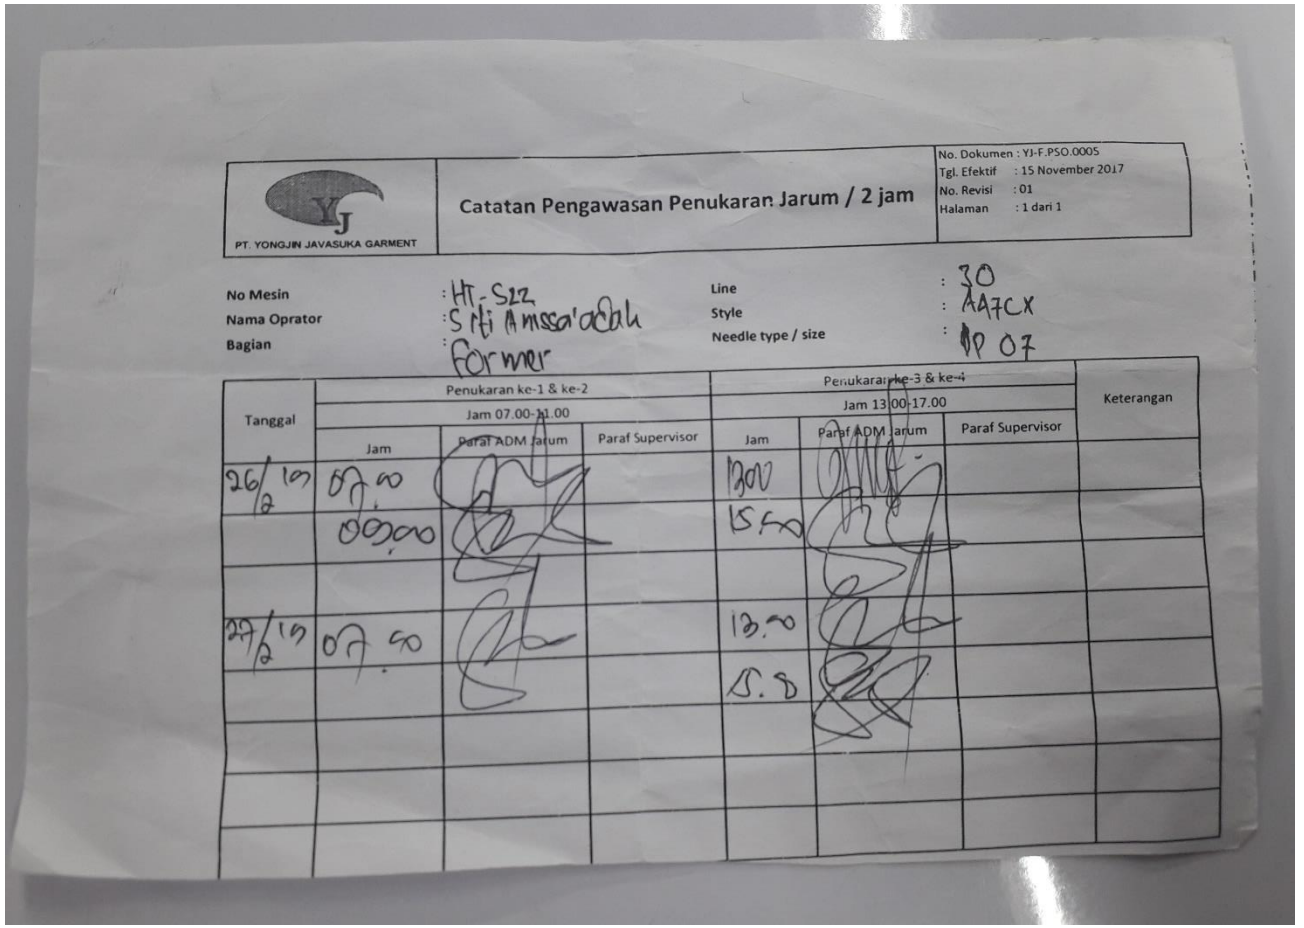

PT. YONGJIN JAVASUKA GARMENT

Catatan Pengawasan Penukaran Jarum / 2 jam


No. Dokumen : YJ-F.PSO.0005
Tgl. Efektif : 15 November 2017
No. Revisi : 01
Halaman : 1 dari 1

No Mesin : HT-S12
Nama Oprator : Siti Amisa'adah
Bagian : former
Line : 30
Style : AA7CX
Needle type / size : DP 07

Tanggal	Penukaran ke-1 & ke-2 Jam 07.00-11.00			Penukaran ke-3 & ke-4 Jam 13.00-17.00			Keterangan
	Jam	Paraf ADM Jarum	Paraf Supervisor	Jam	Paraf ADM Jarum	Paraf Supervisor	
26/12'19	07.00			13.00			
	09.00			15.00			
27/12'19	07.00			13.00			
				15.00			

3) RPM to know the machine speed

Speed Auto Machine Standard For All Buyer

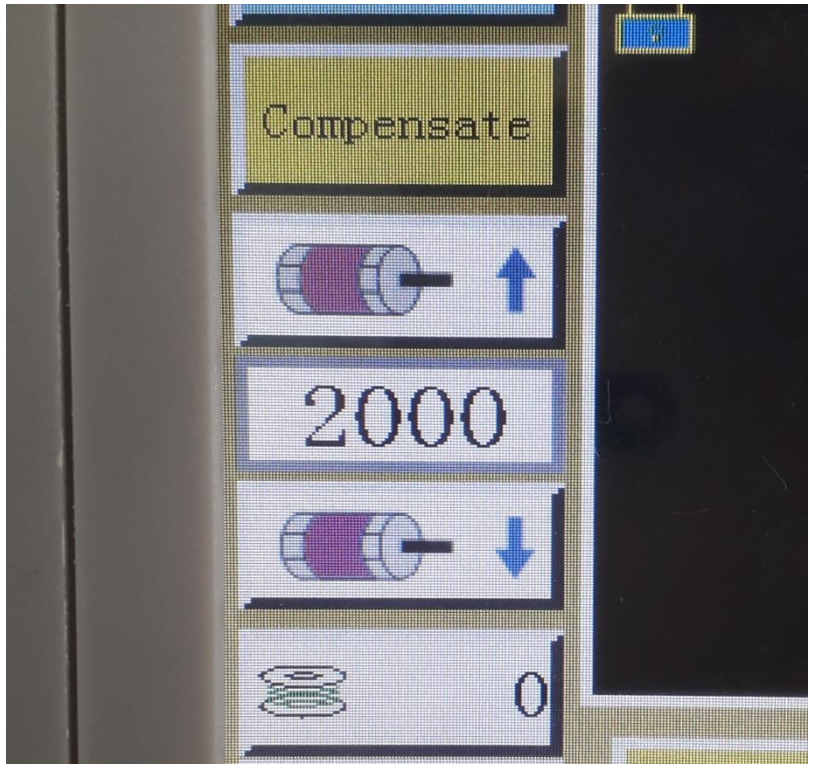

No.	Buyer	Speed Machine Setting (Rpm)	
		Duck Down	Padded / Thermo Ball / Wellon (Blanded Fiber)
1	TNF	2500-2800 RPM	2800-3000 RPM
2	GAP	2500-2800 RPM	2800-3000 RPM
3	Under Amour	2500-2800 RPM	2800-3000 RPM
4	Berghahus	2500-2800 RPM	2800-3000 RPM
5	Oakley	2500-2800 RPM	2800-3000 RPM
6	K-Jus	2500-2800 RPM	2800-3000 RPM
6	COSTCO	2500-2800 RPM	2800-3000 RPM

4) Control Oil

Check the control oil periodically so that it is not dry and not exposed to the garment to be stitch.



