
# EcoFilter — water treatment right on site

We treat almost any water — the treatment train is designed from your water analysis. EcoFilter is the pre-treatment; where needed we add standard ultrafiltration, nanofiltration and reverse-osmosis stages.

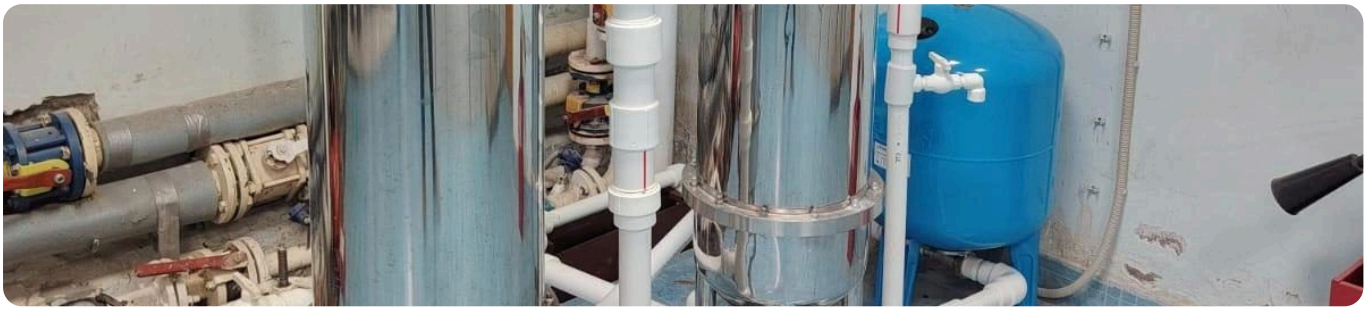

### Ozone made on site

The oxidant is generated in the unit. The base configuration needs no continuous dosing of chlorine-containing reagents or coagulants.

### Cavitation and microfiltration

Self-cleaning microfiltration: backwash during operation; backwash water is accounted for.

### Digital log

Pressure, flow, backwash; sensor set matched to the site.

### No shutdown

Bypass, drain, sampling and emergency stop — in the design.

## Stages — matched to your task

**EcoFilter**
ozone, cavitation, self-cleaning microfiltration

**Ultrafiltration**
suspended solids, colloids, microorganisms

**Nanofiltration**
hardness, colour, organics

**Reverse osmosis**
dissolved salts — desalination

**Lab report**
before-and-after analysis, accredited laboratory

Membrane stages are standard commercial equipment. Stage selection, backwash water and concentrate are defined in the project.

## Where we apply it

### Wells and villages

Iron, manganese, turbidity, colour.

### Before reverse osmosis

Pre-treatment ahead of membranes.

### Plants and boiler houses

Water for your process.

### Cities

Point-of-use polishing, chlorine before and after.

Ecological Technologies LLC (ECOTECH LLC) · TIN 5032370758 · PSRN 1235000143278

**+7 916 278-87-84 · info@ecotechnew.ru · ecotechnew.ru/global/en**

# Before and after: accredited laboratory reports

## Well water · 18.06.2026 MEASURED

| PARAMETER | BEFORE | AFTER | UNIT |
|---|---|---|---|
| Total iron | 0.92 | 0.05 | mg/L |
| Turbidity | 9.7 | < 1.0 | FTU |
| Colour | 12 | 3 | deg. |

Reports Пц-3012-1/26, Пц-3012-2/26 · Water Quality Analytical Centre (accreditation AAC.A.00109). After treatment — compliant with SanPiN 1.2.3685-21 for the parameters tested.

## Surface water · 11.06.2025 MEASURED

| PARAMETER | BEFORE | AFTER | UNIT |
|---|---|---|---|
| Total iron | 6.0 | 0.26 | mg/L |
| Turbidity | 90 | 2.5 | FTU |
| Manganese | 0.110 | 0.052 | mg/L |

Reports Пц-3372-1/25, Пц-3372-2/25 · Water Quality Analytical Centre.

## Domestic wastewater · 27.08.2025 MEASURED

| PARAMETER | BEFORE | AFTER | UNIT |
|---|---|---|---|
| $BOD_5$ | 74 | 2.8 | mg/L |
| COD | 169 | 6.2 | mgO/L |
| Suspended solids | 52 | 4.0 | mg/L |
| Total phosphorus | 24.4 | 0.85 | mg/L |
| Total nitrogen | > 100 | 21.2 | mg/L |
| Petroleum products | 7.6 | 0.20 | mg/L |

Reports No. 5094, No. 5095 · Lab24 LLC, accreditation RA.RU.21AH50. Limits — for discharge to municipal sewers (RF Government Decree No. 644).

## How we work

**Task**
water analysis

**Survey**
connection and measurement points

**Programme**
parameters, laboratory, timeline

**Trial**
8–12 weeks, sample series

**Decision**
scale up after lab reports

## Documents

- EAEU Declaration of Conformity N RU Д-RU.PA06.B.32770/25 (TR CU 010/2011), valid until 23.07.2030
- Technical Specification ТУ 28.29.12-001-70473237-2025
- Technology Readiness Level (TRL) 7 — company assessment
- Deposit certificates (2019–2025) and a preliminary patentability opinion

## Send your water analysis — we'll pick the treatment train

No analysis yet? Describe the source and the task. Every proposal is tailored to your site.

Version 1.0 · 13.10.2026. Results apply to the samples tested; the configuration is selected from the raw-water analysis of each specific site.

Ecological Technologies LLC (ECOTECH LLC) · TIN 5032370758 · PSRN 1235000143278

**+7 916 278-87-84 · info@ecotechnew.ru · ecotechnew.ru/global/en**