





This video shows the replacement procedure of a similar car part on another vehicle

(i) Important!

This replacement procedure can be used for:

BMW 5 Saloon (E39) 520i 2.0, BMW 5 Saloon (E39) 525tds 2.5, BMW 5 Saloon (E39) 523i 2.5, BMW 5 Saloon (E39) 528i 2.8, BMW 5 Saloon (E39) 540i 4.4, BMW 5 Saloon (E39) 535i 3.5, BMW 5 Saloon (E39) 525td 2.5, BMW 5 Saloon (E39) 530d 3.0, BMW 5 Saloon (E39) M5, BMW 5 Saloon (E39) 525d 2.5, BMW 5 Saloon (E39) 520i 2.2, BMW 5 Saloon (E39) 525i 2.5, BMW 5 Saloon (E39) 530i 3.0


The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: BMW 3 Touring (E46) 330d 3.0

CLUB.AUTODOC.CO.UK 1–10



REPLACEMENT: ENGINE MOUNTS – BMW 5 SALOON (E39). TOOLS YOU NEED:

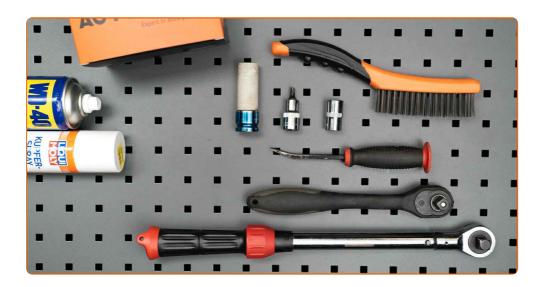

- Wire brush
- WD-40 spray
- Copper grease
- HEX bit No.H5.
- Drive socket # 16
- Wheel impact socket #17

- Ratchet wrench
- Torque wrench
- Crow bar
- Fender cover
- Hydraulic transmission jack
- Wheel chock

Buy tools

CLUB.AUTODOC.CO.UK 2-10





Replacement: engine mounts – BMW 5 Saloon (E39). AUTODOC experts recommend:

• All work should be done with the engine stopped.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

- Open the bonnet.
- Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.
- Secure the wheels with chocks.



Loosen the wheel mounting bolts. Use wheel impact socket #17.



- Lift the car using a jack or place it over an inspection pit.
- 6 Unscrew the wheel bolts.



CLUB.AUTODOC.CO.UK 3-10







Replacement: engine mounts – BMW 5 Saloon (E39). AUTODOC recommends:

• To avoid injury, hold up the wheel when unscrewing the bolts.



10



Detach the vacuum hose from the engine mount.



Treat the lower fastener of the engine mount. Use WD-40 spray.



Unscrew the lower fastener of the engine mount. Use a drive socket #16.



CLUB.AUTODOC.CO.UK 4-10





11

14

Detach the air duct housing from the air filter housing.



Unscrew the upper fastener of the engine mount. Use a drive socket #16. Use a ratchet wrench.



Support the engine in the oil pan area. Use a hydraulic transmission jack.



Replacement: engine mounts – BMW 5 Saloon (E39). Tip:

• Make sure that the engine is supported.

CLUB.AUTODOC.CO.UK 5-10








15 Remove the engine mount. Use a crowbar.



Replacement: engine mounts – BMW 5 Saloon (E39). AUTODOC experts recommend:

• Carefully check the other engine mounts and replace them if necessary.





Remove the support from under the engine.

17



AUTODOC recommends:


• Replacement: engine mounts – BMW 5 Saloon (E39). Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.

CLUB.AUTODOC.CO.UK 6-10



O

Tighten the upper fastener of the engine mount. Use a drive socket #16. Use a torque wrench. Tighten it to 65 Nm torque.

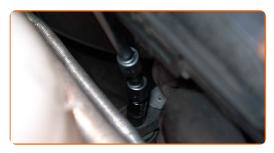

19 Install the air duct housing.



Secure the fastener of the air intake duct. Use HEX No.H5. Use a ratchet wrench.



Tighten the lower fastener of the engine mount. Use a drive socket #16. Use a torque wrench. Tighten it to 65 Nm torque.



CLUB.AUTODOC.CO.UK 7-10







Attach the vacuum hose to the engine mount.



Treat the engine mount fasteners. Use copper grease.



Remove the fender protection cover.



Clean the wheel rim mounting seat. Use a wire brush. Treat the contacting surface. Use copper grease.



26 Install the wheel.

25



CLUB.AUTODOC.CO.UK 8-10







AUTODOC recommends:

• To avoid injury, hold up the wheel when screwing in the fastening bolts.





Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 120 Nm 28 torque.



Remove the jacks and chocks. 29



Close the hood. 30



VIEW MORE TUTORIALS

CLUB.AUTODOC.CO.UK 9-10