

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

BMW Z4 Roadster (E85) 2.5 i, BMW Z4 Roadster (E85) 2.2 i, BMW Z4 Roadster (E85) 2.0 i

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: BMW 3 Convertible (E46) 318Ci 2.0

REPLACEMENT: BRAKE DISCS – BMW Z4 ROADSTER (E85). TOOLS YOU NEED:



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Drive socket # 16
- HEX bit No.H7.
- Torx bit T30
- Wheel impact socket #17
- Brake caliper wind back tool
- Ratchet wrench
- Torque wrench
- Tap wrench
- Crow bar
- Impact screwdriver
- Rubber mallet
- Wheel chock

Buy tools

Replacement: brake discs – BMW Z4 Roadster (E85). AUTODOC recommends:

- Replace the brake disks on the car BMW Z4 Roadster (E85) in complete set for each axis. Regardless of the state of components. This will ensure even braking.
- The replacement procedure is identical for both brake disks on the same axle.
- When changing the brake discs, always replace the brake pads.
- All work should be done with the engine stopped.


REPLACEMENT: BRAKE DISCS – BMW Z4 ROADSTER (E85). USE THE FOLLOWING PROCEDURE:

1 Open the bonnet. Unscrew the brake fluid reservoir cap.

2 Secure the wheels with chocks.




3 Loosen the wheel mounting bolts. Use wheel impact socket #17.

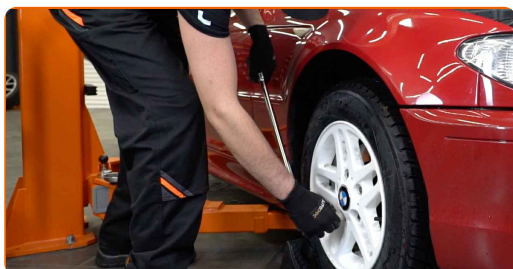

4 Raise the front of the car and secure on supports.

5 Unscrew the wheel bolts.

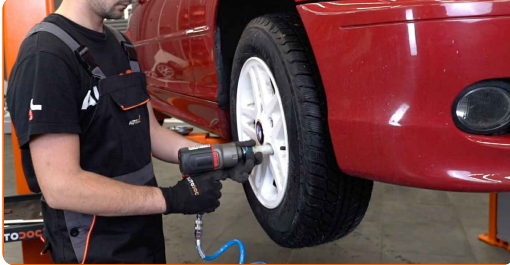

Replacement: brake discs – BMW Z4 Roadster (E85). Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.

6 Remove the wheel.



7 Spread the brake pads. Use a crowbar.



8

Remove the dust boot caps of the brake caliper guide pins. Use a crowbar.




9

Unscrew the brake caliper fastening. Use HEX No.H7. Use a ratchet wrench.




10

Detach the brake caliper retaining spring. Use a crowbar.

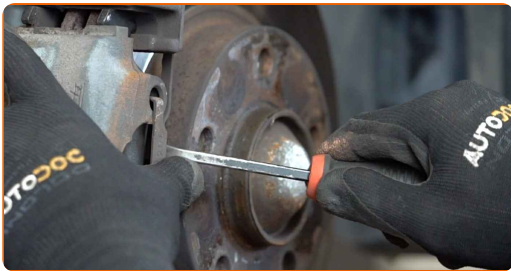

11

Remove the brake caliper.

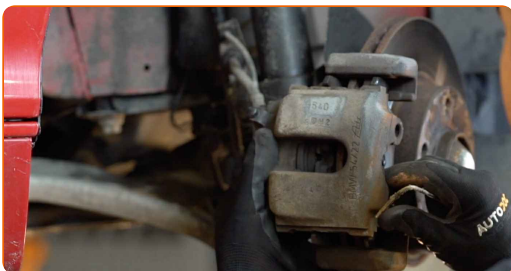

Replacement: brake discs – BMW Z4 Roadster (E85). AUTODOC experts recommend:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.


12

Remove the brake pads.



13

Clean the brake caliper bracket fasteners. Use a wire brush. Use WD-40 spray.

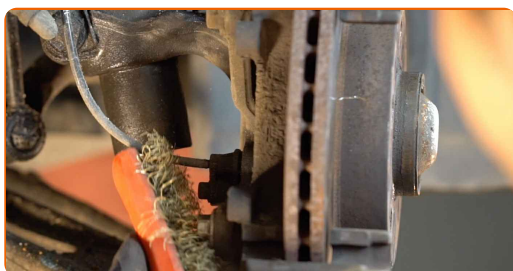


14

Unscrew the caliper bracket fastening. Use a drive socket #16. Use a tap wrench. Use a ratchet wrench.




15

Remove the caliper bracket.

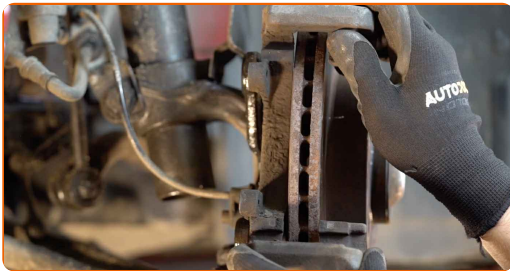

16

Clean the brake disk surface. Use a wire brush. Use WD-40 spray.

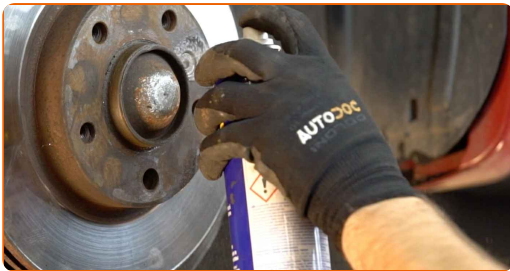

17

Unscrew the brake disc fastening. Use Torx T30. Use an impact screwdriver.




Replacement: brake discs – BMW Z4 Roadster (E85). Tip from AUTODOC:

- If necessary, use a rubber mallet.

18 Remove the brake disc.



19 Clean the hub. Use a wire brush. Treat the contacting surface. Use copper grease.

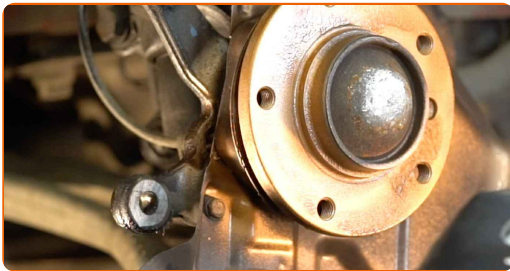

20 Install the brake disc.




21 Tighten the brake disc fastening. Use Torx T30. Use a torque wrench. Tighten it to 16 Nm torque.



22 Install the brake caliper bracket.



23 Tighten the brake caliper bracket. Use a drive socket #16. Use a torque wrench. Tighten it to 110 Nm torque.

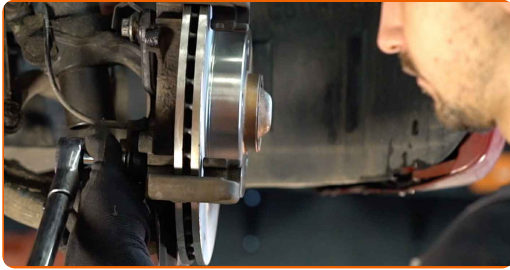

24 Clean the mounting seats of the caliper and its bracket. Use a wire brush. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake discs – BMW Z4 Roadster (E85). After applying the spray, wait a few minutes.

25 Install the brake pads in the brake caliper bracket.



26

Treat the brake caliper piston. Use a brake cleaner.




AUTODOC recommends:

- After applying the spray, wait a few minutes.

27

Press in the brake caliper piston. Use brake caliper wind back tool.

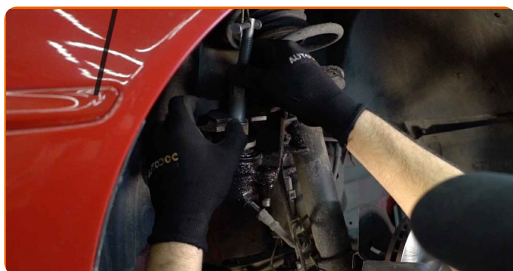

28

Install the brake pads in the brake caliper.



29

Install the brake caliper and fix it. Use HEX No.H7. Use a torque wrench. Tighten it to 30 Nm torque.

