CA-202 Spine

NOTES

1. Hole sizes are the printed sizes from the PETG tolerance table (backend/cad/model.py TOL). Print CA-900 first and adjust TOL if a fit is off.
2. Screws thread straight into the printed pilots (HF kit #67675, no nuts).
3. Datum = the part's bounding-box corner (min X, Y, Z), lower left of the front and top views. Hole centres: (X, Y) for Z holes, (X, Z) for Y holes, (Y, Z) for X holes. ×k = k holes stacked along the axis; +n = n more positions (see the STEP file).
4. Shown in its assembly orientation; the STEP file defines all other geometry.



TOP VIEW

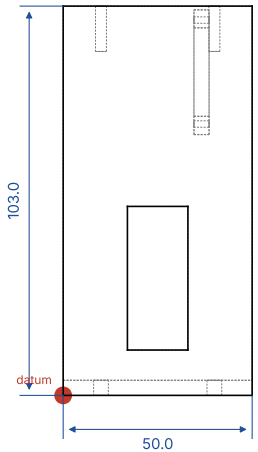

FRONT VIEW

RIGHT VIEW

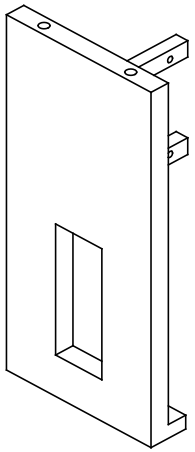
ISOMETRIC (not to scale)

HOLE TABLE (letters mark hole centres on the view along that axis)

	Ø (mm)	×	axis	depth	centres from datum (mm)	fit / feature
A	3.90	2	Z	4.0	(10.0, 8.0); (40.0, 8.0)	#6-32 clearance / running
B	2.90	2	Z	12.0	(10.0, 3.0); (40.0, 3.0)	#6-32 pilot (self-threading)
C	1.70	2	X	4.0	(18.0, 71.8); (18.0, 99.3)	servo-bag screw pilot

PART NO.	**CA-202**
TITLE	**Spine**
MATERIAL	PETG printed, 0.4 mm nozzle
MASS	22.4 g (CAD, 60 % fill)
QTY	1 per robot
SCALE	1:2
UNITS	mm · general tolerance ±0.2
SOURCE	cad/step/parts/spine.step (from backend/cad/model.py)
PROJECTION	Third angle ⊕◁
SHEET	5 of 13
DRAWN	ME 2331 Project 2 team 2026-11-02