




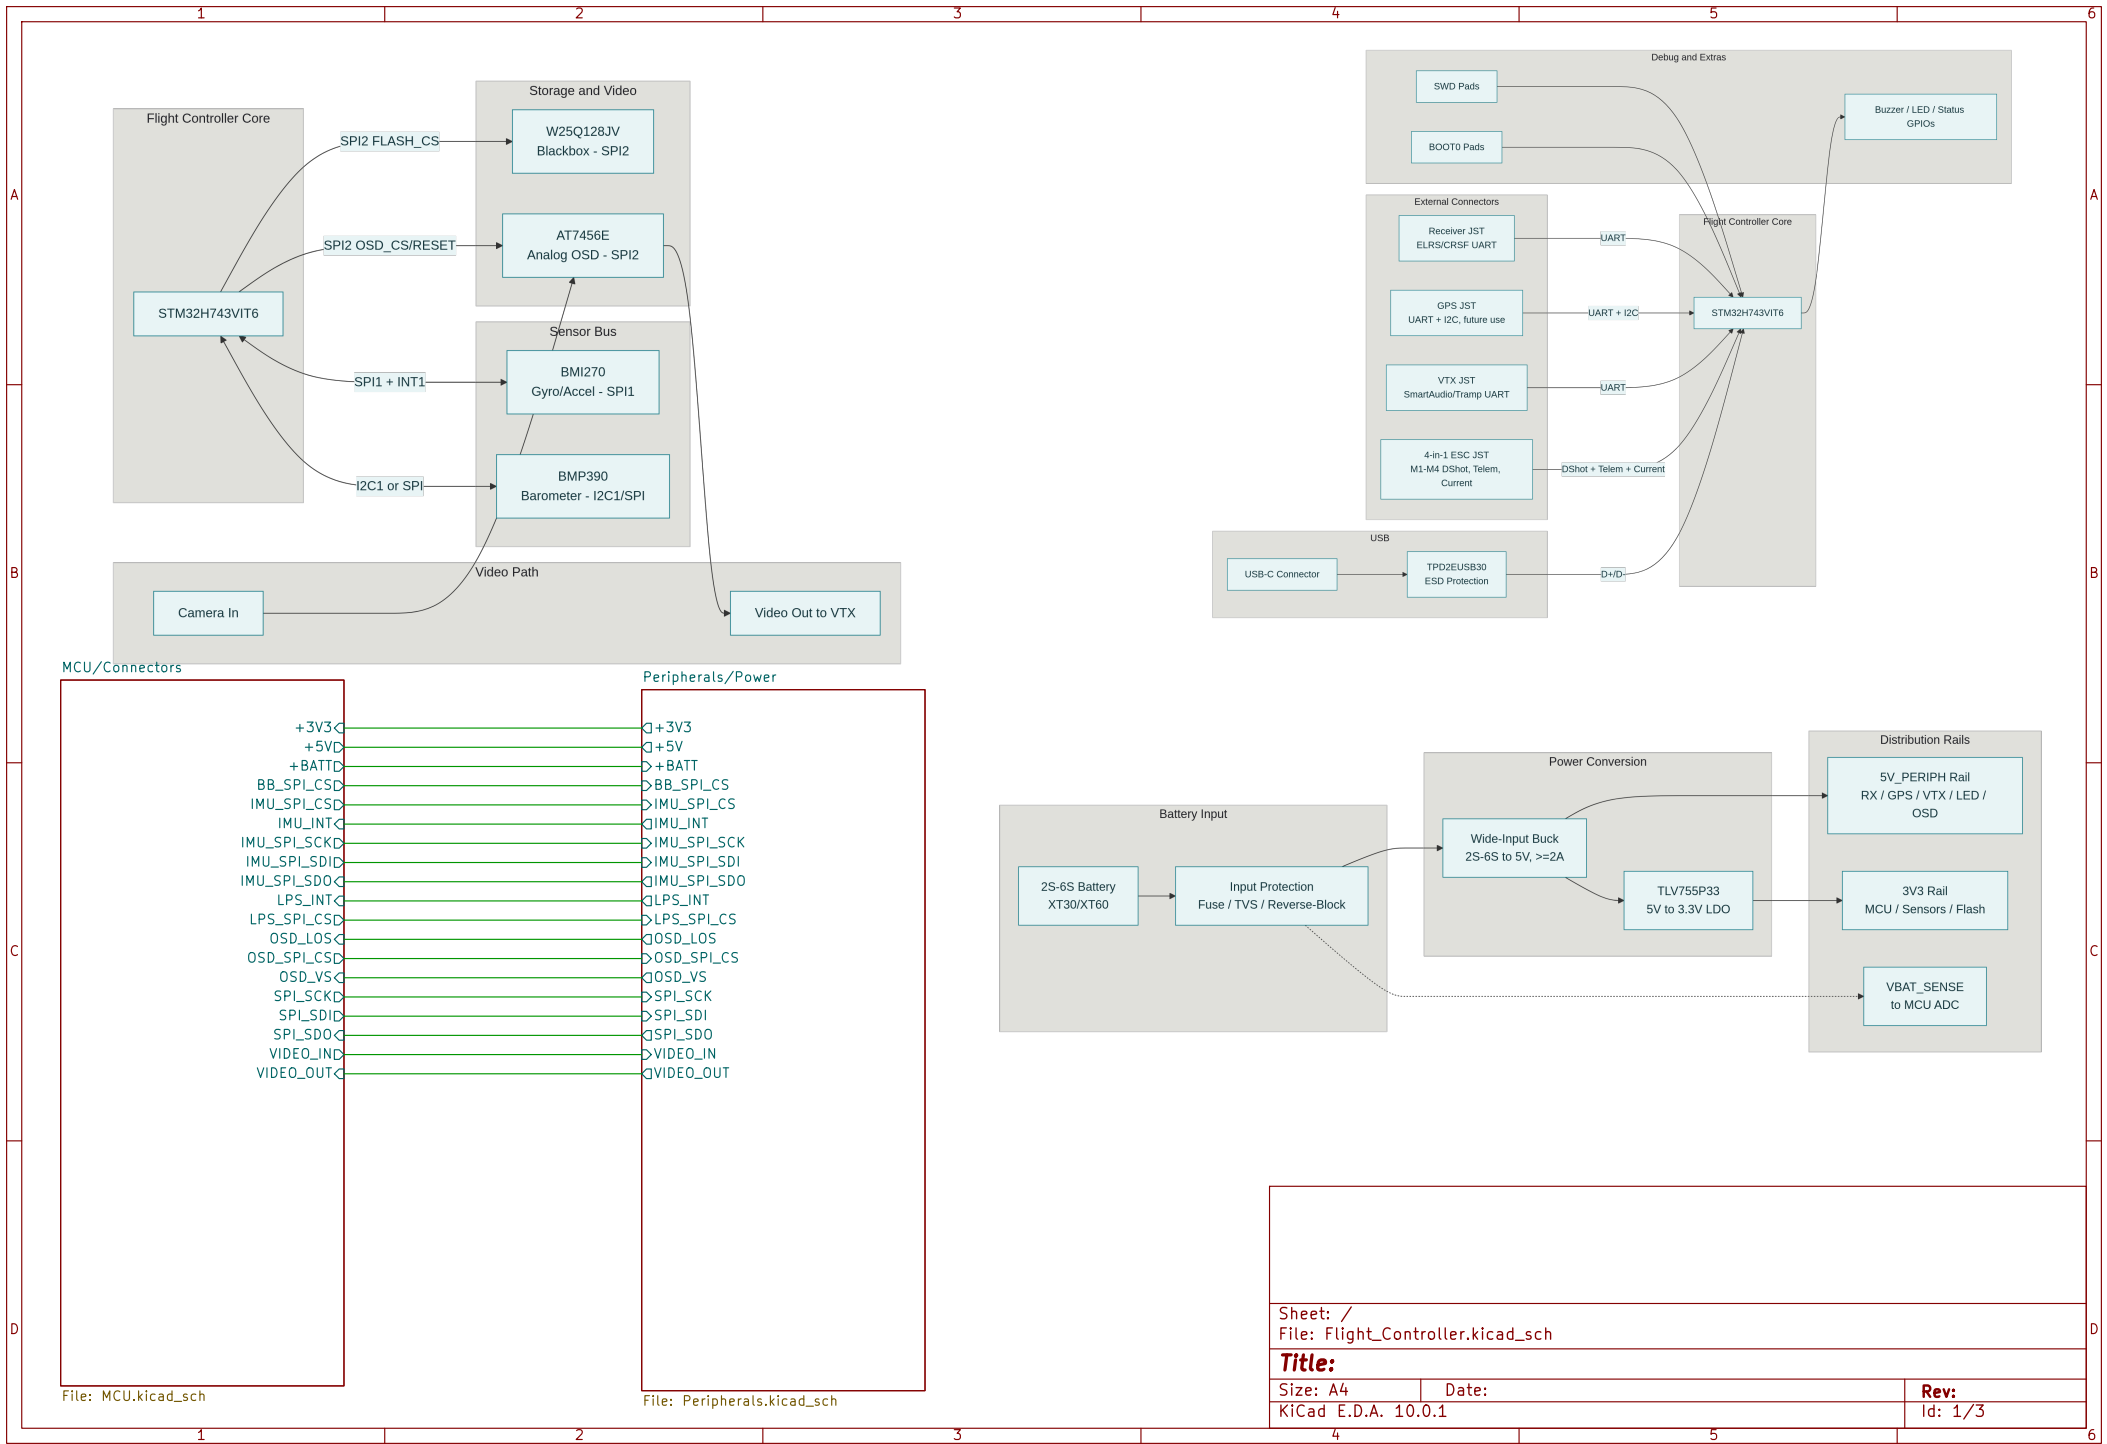

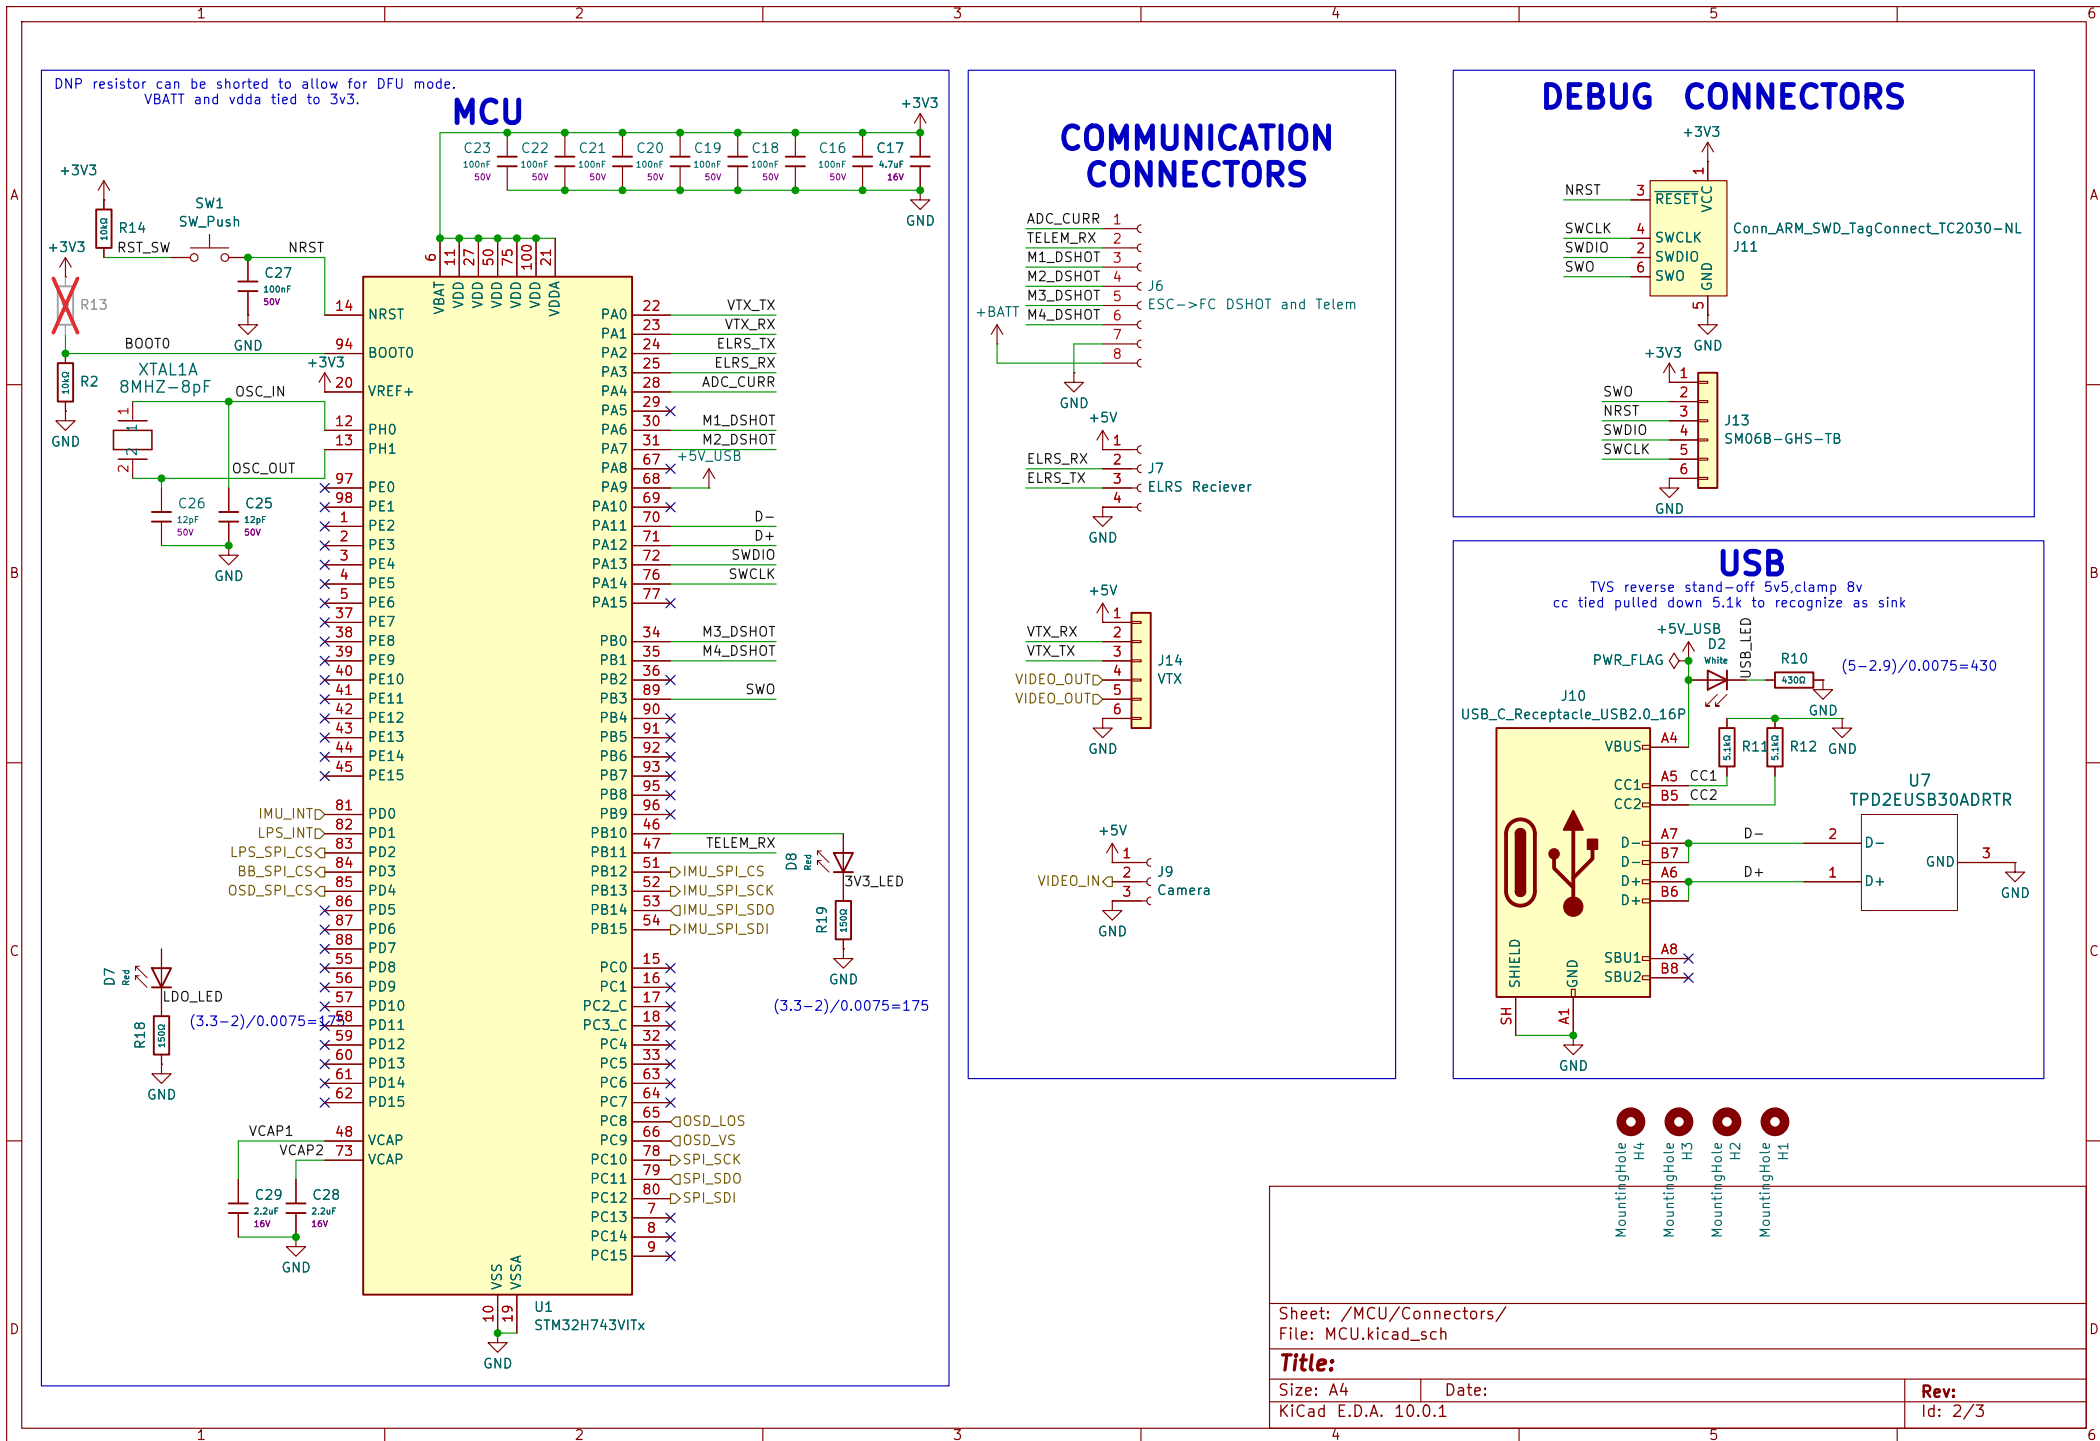


IMU

IMU on separete SPI bus for lower latency

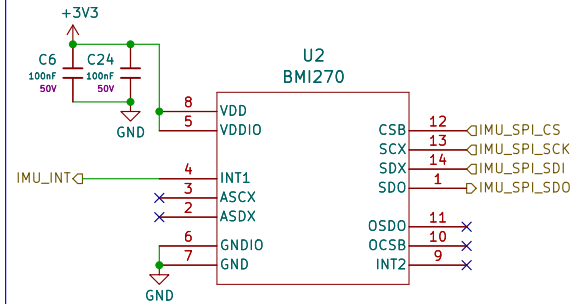


BAROMETER

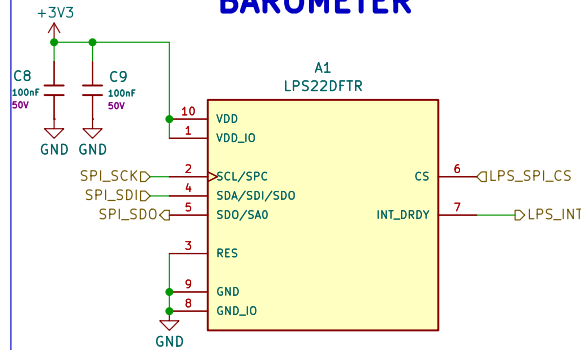


BLACKBOX

Can swap to QSPI later if hogging SPI bus
CS pulled to vdd to prevent memory corruption on startup

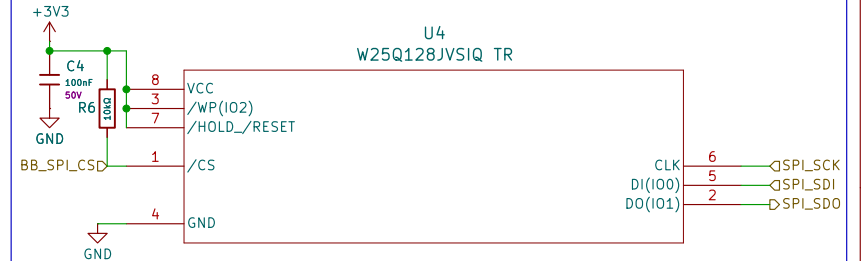



OSD

Power and ground signals seperated to ensure clean signal on display

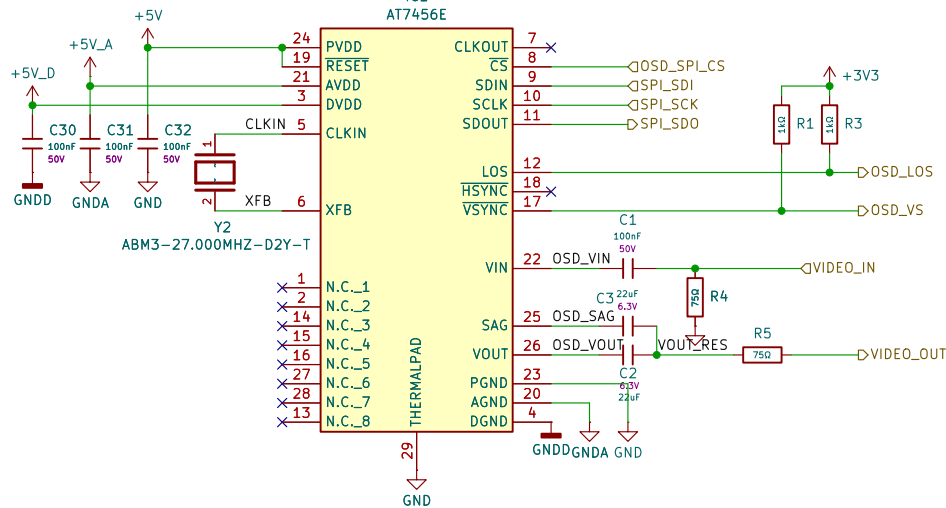

POWER

Inductor max curr of 2.8A should have lots of headroom

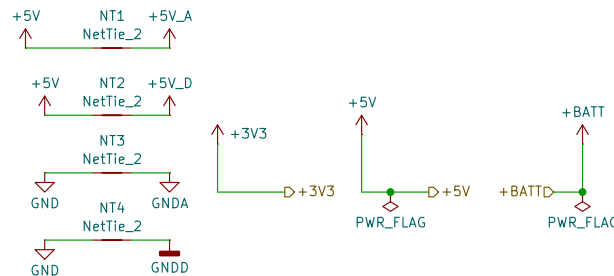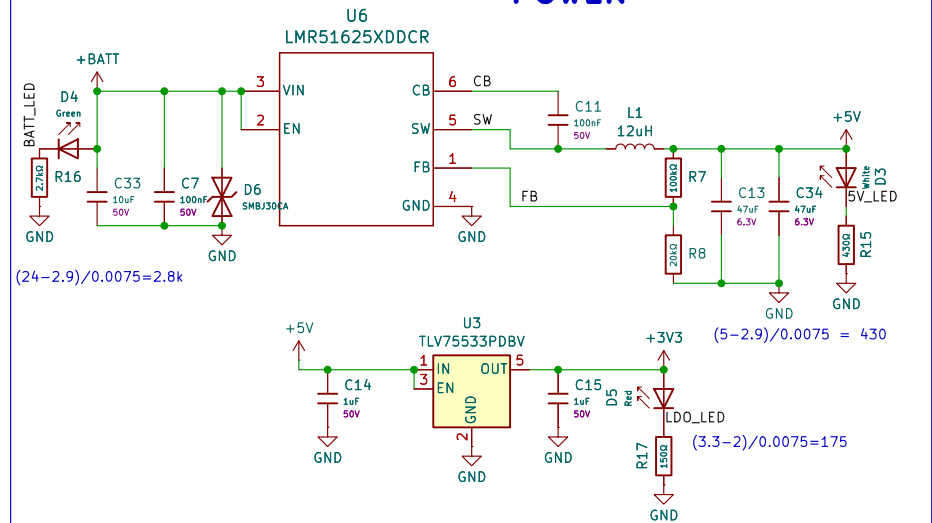

Sheet: /Peripherals/Power/
File: Peripherals.kicad_sch

Title:

Size: A4 Date:

KiCad E.D.A. 10.0.1

Rev:

Id: 3/3