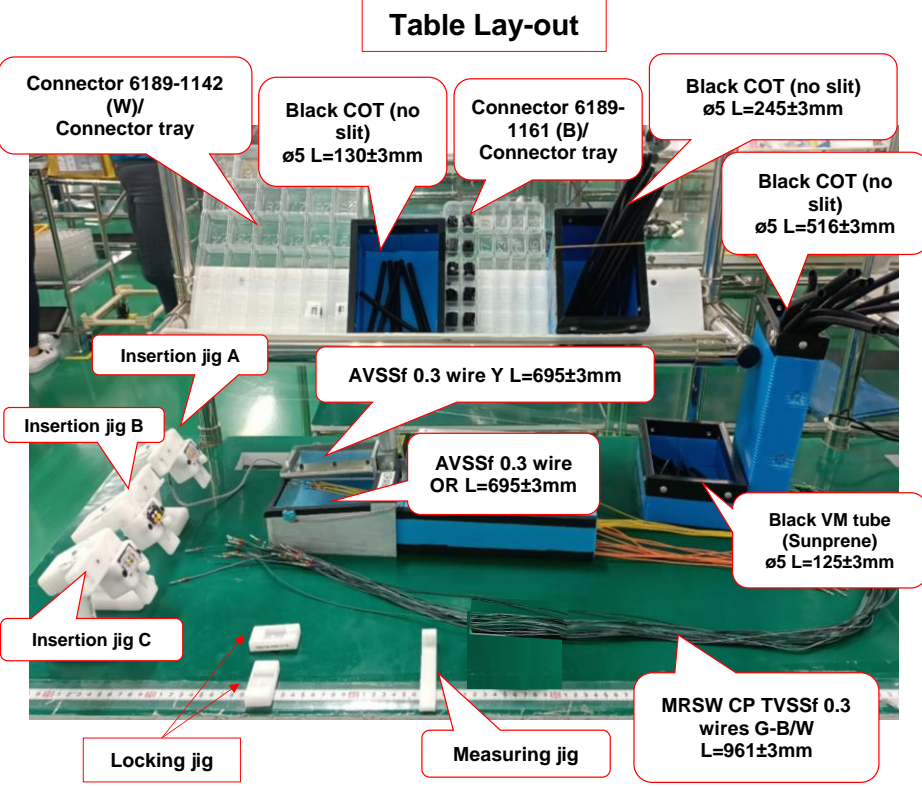
	WORK INSTRUCTION				Effectivity Date:		September 10, 2024	
	Process Name/Title: TAPING ASSEMBLY PROCESS				Validity Date:		n/a	
	Model code/Part number: 920B / 7R0118-7025		Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.:		WI-ENG-PDE-996A	
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO				Revision No.:		1	Page No.: 1 of 8

PARTS:	1. Connector 6189-1142 (W); AVSSf 0.3 wires Y-OR L=695±3mm; Black COT (no slit) ø5 L=516±3mm; Black COT (no slit) ø5 L=130±3mm; Connector 6189-1161 (B); Black VM tube (Sunprene) ø5 L=125±3mm; Black COT (no slit) ø5 L=245±3mm; MRSW CP TVSSf 0.3 wires G-B/W L=961±3mm; Green tape			JIG:	1. Insertion jig with switch cover 2. Insertion jig 3. Locking jig 4. Measuring jig
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION		TOOLS/PPE	QUALITY POINTERS
1	P1	<div><p>Table Lay-out</p></div>		<div><p>Safety Instruction Be sure to wear prescribed personal protective equipment during operation (gloves, finger cots, etc.)</p><p>Housekeeping 1. Maintain and always practice 5's. 2. Personal things on the workplace is prohibited. Keep it in your locker.</p><p>Alert level For any trouble, inform the Assembly Assistant Supervisor or Line Leader for immediate corrective action.</p></div>	<div><p>1. No missing parts/tools 2. No excess parts/tools</p><p>Document reference/s: 1. Refer to WI-PRO-CNC-017 for Wire and Strip Length Tolerance. 2. WI-PRO-KIT-005 Wire Taping without Vinyl Tube.</p></div>


Revision History				Prepared by	Reviewed by	Approved by	Noted by
09/10/24	1	Change from Pre-launch to Masspro. Update Visual inspection/Quality checkpoints.	D.Castillo	C.Villanueva	A. Arañes	N/A	
08/12/24	0	Initial issue.	D.Castillo	C.Villanueva	A. Arañes	N/A	
Eff. Date	Rev. No	Details of Change	Revised	Reviewed	Approved	Noted	Est. Date: August 12, 2024

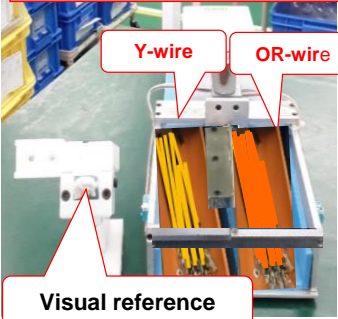
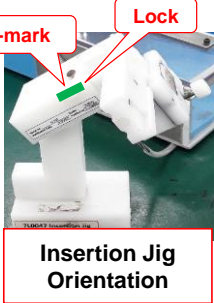
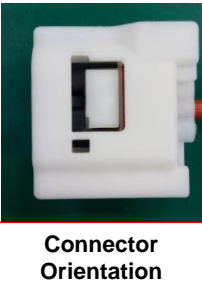
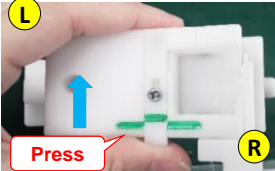
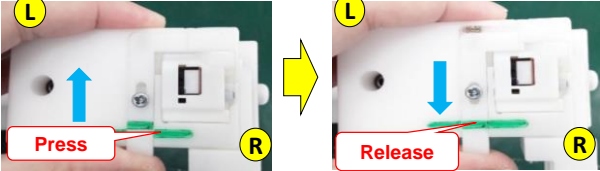



CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)

MASTER COPY

DCC Stamp

	WORK INSTRUCTION				Effectivity Date:	September 10, 2024		
	Process Name/Title: TAPING ASSEMBLY PROCESS				Validity Date:	n/a		
	Model code/Part number: 920B / 7R0118-7025		Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.:	WI-ENG-PDE-996A		
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO				Revision No.:	1	Page No.:	2 of 8


PARTS:	1. Connector 6189-1142 (W)			JIG:	1. Insertion jig with switch cover			
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION			TOOLS/PPE	QUALITY POINTERS		
2	P1 Connector setting to Insertion jig 6189-1142 (W)	<div><div><p>Insertion Jig with Switch Cover</p><p>Y-wire OR-wire</p><p>Visual reference</p></div><div><p>I-mark Lock</p><p>Insertion Jig Orientation</p></div><div><p>Connector Orientation</p></div><div><p>Press</p></div><div><p>Press Release</p></div><div><p></p></div></div> <div><p>1. Press the insertion jig lock using left hand.</p><p>2. Get the connector 6189-1142 (W) using right hand and insert to insertion jig. Release the lock after insertion. Note: Follow the connector orientation.</p><p>3. Push the guide using right hand. The slot for Y wire will be opened.</p></div> <td>n/a</td> <td colspan="3"><div><p>CONNECTOR ORIENTATION ILLUSTRATION</p><p>I-mark is align 1 hole is open</p><p>GOOD</p></div><div><p>1. Use the provided jig per model</p><p>2. No wrong orientation of connector</p><p>3. No wrong use of connector</p><p>4. No damaged connector</p></div></td>			n/a	<div><p>CONNECTOR ORIENTATION ILLUSTRATION</p><p>I-mark is align 1 hole is open</p><p>GOOD</p></div> <div><p>1. Use the provided jig per model</p><p>2. No wrong orientation of connector</p><p>3. No wrong use of connector</p><p>4. No damaged connector</p></div>		



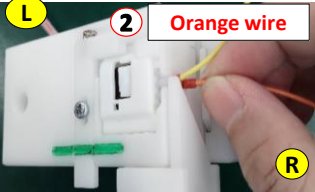





CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)

MASTER COPY

DCC Stamp


	WORK INSTRUCTION			Effectivity Date:	September 10, 2024		
	Process Name/Title: TAPING ASSEMBLY PROCESS			Validity Date:	n/a		
	Model code/Part number: 920B / 7R0118-7025		Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.: WI-ENG-PDE-996A		
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO			Revision No.:	1	Page No.:	3 of 8

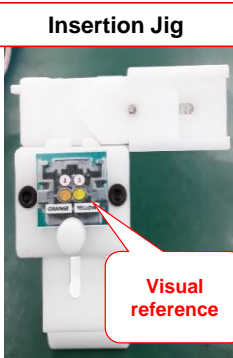
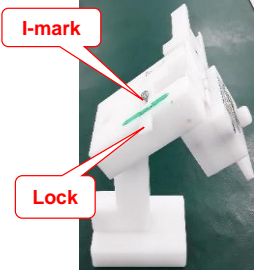
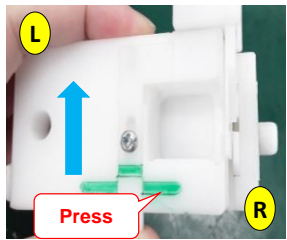
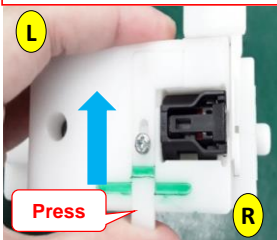
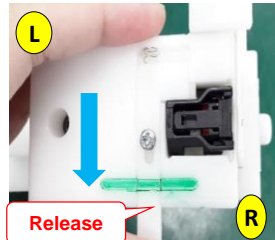




PARTS:	1. AVSSf 0.3 wire Y-OR L=695±3mm 2. Black Corrugated tube ø5 L=516±3mm (no slit) 3. Black Corrugated tube ø5 L=130±3mm (no slit)			JIG:	1. Insertion Jig
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION		TOOLS/PPE	QUALITY POINTERS
3	P1 Wire Insertion to connector 6189-1142 (W)	<div> Wire facing</div> <div> 1 Yellow wire</div> <div> 2 Orange wire</div> <div> Press</div> <div> Press</div> <div><p>1. Hold the insertion jig using left hand. Get the Yellow wire then insert to terminal slot 1 using right hand.</p><p>2. Press the button using right thumb. Slot for Orange wire will be opened.</p><p>3. Get the Orange wire then insert to terminal slot 2 using right hand.</p><p>4. After insertion, push the lock using left thumb and then hold the wires and gently pull out the connector from jig using right hand.</p></div>		n/a	<div><p>1. No loose insertion 2. No wrong insertion 3. One by one insertion 4. No deformed terminal 5. No wrong wire facing</p><div>Note: During insertion, hold the wire not rubber seal to prevent sagging.</div><p>Important reminders/Note/s:</p><p>1. Please hold the wire near terminal. 2. Make sure wires are properly inserted. Conduct Pull-Push-Pull-Push after insertion. Do not exert extra force.</p><p>Document references:</p><p>1. Refer to GL-PRO-ASY-029 for Pull-Push procedure.</p></div>
4	Wire insertion to COT (no slit) ø5 L=516±3mm ø5 L=130±3mm	<div> 1. Get the Corrugated tube ø5 L=516±3mm (no slit) using right hand then insert the Y-OR wires.</div> <div> 2. Get the Corrugated tube ø5 L=130±3mm (no slit) using right hand then insert the Y-OR wires.</div>			<div><p>1. No wrong use of parts 2. No deformed terminal</p></div>

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)
MASTER COPY

DCC Stamp

	WORK INSTRUCTION			Effectivity Date:	September 10, 2024		
	Process Name/Title: TAPING ASSEMBLY PROCESS			Validity Date:	n/a		
	Model code/Part number: 920B / 7R0118-7025		Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.:	WI-ENG-PDE-996A	
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO			Revision No.:	1	Page No.:	4 of 8

PARTS:	1. Connector 6189-1161 (B)			JIG:	1. Insertion jig			
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION			TOOLS/PPE	QUALITY POINTERS		
5	P1	<div><div><div>Insertion Jig</div><div>Visual reference</div></div><div><div>Lock</div><div>Lock</div></div><div><div>Insertion Jig Orientation</div><div>Press</div></div><div><div>Press</div><div>Press</div></div><div><div>Release</div><div>Release</div></div><div><div>Connector Orientation</div><div>I-mark</div></div><div><div>1. Press the insertion jig lock using left hand.</div></div><div><div>2. Get the connector 6189-1161 (B) using right hand and insert to insertion jig. Release the lock after insertion. Note: Follow the connector orientation.</div></div><div><div>3. Push the guide using right hand. The slot for Y wire will be opened.</div></div></div> <div><div>GOOD</div><div>I-mark is align</div><div>1 hole is open</div></div> <div><div>NG</div><div>I-mark is not align</div><div>1 hole is open</div></div> <div><div>1. Use the provided jig per model</div><div>2. No wrong orientation of connector</div><div>3. No wrong use of connector</div><div>4. No damaged connector</div></div>			n/a			

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)

MASTER COPY

DCC Stamp

**WORK INSTRUCTION**

Process Name/Title:

TAPING ASSEMBLY PROCESS

Effectivity Date:

September 10, 2024

Model code/Part number:

920B / 7R0118-7025

Customer:

TRMX

Car Model:

TOYOTA TACOMA

Document No.:

WI-ENG-PDE-996A

Purpose:


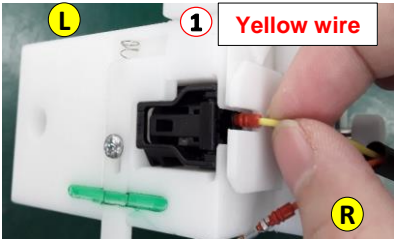
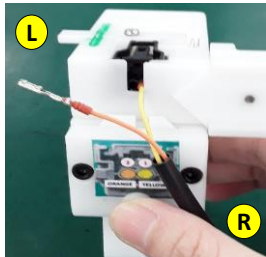
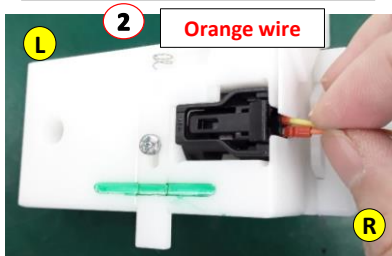
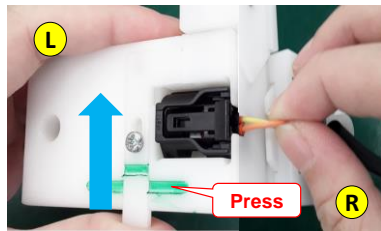
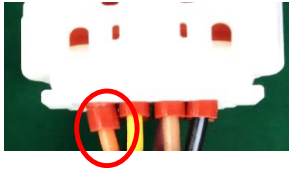
☐ PROTOTYPE☐ PRE-LAUNCH☒ MASSPRO

Revision No.:

1

Page No.:


5 of 8







PARTS:	1. Assy parts ; Connector 6189-1161 (B)		JIG:	1. Insertion jig
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION	TOOLS/PPE	QUALITY POINTERS
6	P1 Wire insertion to connector 6189-1161 (B)	<div><div>Wire facing</div></div> <div><div><div>1 Yellow wire</div></div><div><div>2 Press the button using right thumb. Slot for Orange wire will be opened.</div></div></div> <div><div><div>2 Orange wire</div></div><div><div>Press</div></div></div> <div><div>1. Hold the insertion jig using left hand. Get the Yellow wire then insert to terminal slot 1 using right hand.</div><div>2. Press the button using right thumb. Slot for Orange wire will be opened.</div><div>3. Get the Orange wire then insert to terminal slot 2 using right hand.</div><div>4. After insertion, push the lock using left thumb and then hold the wires and gently pull out the connector from jig using right hand.</div></div>	n/a	<div><div>1. No loose insertion 2. No wrong insertion 3. One by one insertion 4. No deformed terminal 5. No wrong wire facing</div><div>Note: During insertion, hold the wire not <u>rubber seal</u> to prevent sagging.</div><div></div><div>Important reminders/Note/s: 1. Please hold the wire near terminal. 2. Make sure wires are properly inserted. Conduct Pull-Push-Pull-Push after insertion. Do not exert extra force.</div><div>Document references: 1. Refer to GL-PRO-ASY-029 for Pull-Push procedure.</div></div>

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.


NBC (Philippines)
MASTER COPY

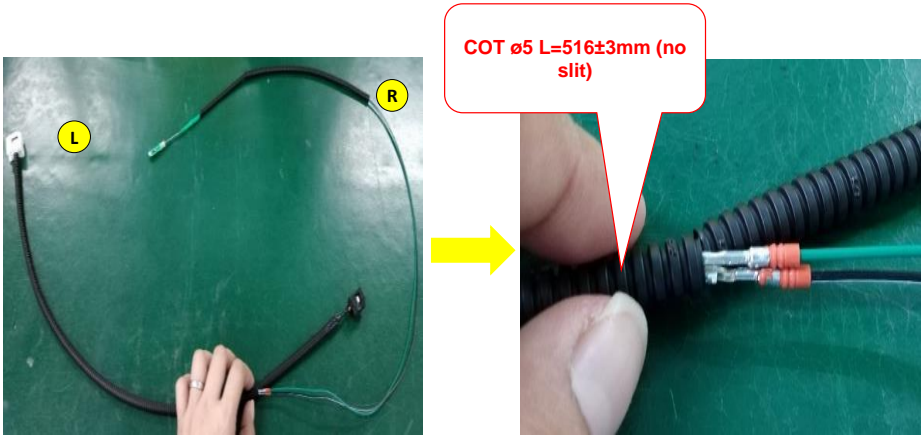
DCC Stamp

	WORK INSTRUCTION			Effectivity Date:	September 10, 2024		
	Process Name/Title: TAPING ASSEMBLY PROCESS			Validity Date:	n/a		
	Model code/Part number: 920B / 7R0118-7025	Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.:	WI-ENG-PDE-996A		
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO			Revision No.:	1	Page No.:	6 of 8

PARTS:	1. Assy parts 2. Black VM tube (Sunprene) ø5 L=125±3mm 3. MRSW CP TVSSf 0.3 wires G-B/W L=961±3mm 4. Black COT (no slit) ø5 L=245±3mm			JIG:	1. Locking jig
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION		TOOLS/PPE	QUALITY POINTERS
7	Connector lock	<div>  </div> <div> <p>Put the connector into locking jig using right hand then press 2x using both hands. Check the connector lock if properly lock.</p> </div> <div>  <div> <div>Before Pressing</div> <div>After Pressing</div> </div> <div>  <div> <div>NG</div> <div>NG</div> <div>GOOD</div> </div> <div> <div>Unlock Condition</div> <div>Half lock Condition</div> <div>Full lock Condition</div> </div> </div> </div>		<div> <div>Locking jig</div>  </div>	1. Use the provided jig per connector 2. No unlock/half-locked connector Important reminders/Note/s: 1. MANUAL LOCKING MAY CAUSE DAMAGED CONNECTOR. 2. SET ASIDE THE ASSY PARTS.
8	P1 Wire insertion to Black VM tube (Sunprene) ø5 L=125±3mm	<div>  </div> <div> 1. Get the Black VM tube (Sunprene) ø5 L=125±3mm using right hand then insert the MRSW CP TVSSf 0.3 wires G-B/W L=961±3mm using left hand. </div>		n/a	1. No wrong usage of parts Document reference/s: 1. Refer to WI-PRO-CNC-017 for Wire and Strip Length Tolerance.
9	Wire insertion to COT (no slit) ø5 L=245±3mm	<div>  </div> <div> 1. Get the corrugated tube (no slit) ø5 L=245±3mm using right hand then insert the G-B/W wires using left hand. </div>			1. No wrong use of parts 2. No deformed terminal

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.	<div> <div>NBC (Philippines)</div> <div>MASTER COPY</div> </div>	DCC Stamp
--	--	-----------

	WORK INSTRUCTION				Effectivity Date:		September 10, 2024	
	Process Name/Title: TAPING ASSEMBLY PROCESS				Validity Date:		n/a	
	Model code/Part number: 920B / 7R0118-7025		Customer: TRMX	Car Model: TOYOTA TACOMA	Document No.:		WI-ENG-PDE-996A	
	Purpose: <input type="checkbox"/> PROTOTYPE <input type="checkbox"/> PRE-LAUNCH <input checked="" type="checkbox"/> MASSPRO				Revision No.:		1	Page No.: 7 of 8

PARTS:		1. Assy parts		JIG:	n/a
NO.	PROCESS NAME	WORK PROCEDURE/ ILLUSTRATION	TOOLS/PPE	QUALITY POINTERS	
10	P1	Wire insertion to assy parts (Combined)  <div>1. Get the assy parts using left hand then insert the G-B/W wires to COT (no slit) ø5 L=516±3mm using right hand.</div>	n/a	1. No wrong insertion 2. No deformed terminal	

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)
MASTER COPY

DCC Stamp

**WORK INSTRUCTION**

Process Name/Title:

TAPING ASSEMBLY PROCESS

Effectivity Date:

September 10, 2024

Validity Date:

n/a

Model code/Part number:

920B / 7R0118-7025

Customer:

TRMX

Car Model:

TOYOTA TACOMA

Document No.:

WI-ENG-PDE-996A

Purpose:

☐ PROTOTYPE☐ PRE-LAUNCH☒ MASSPRO

Revision No.:

1

Page No.:

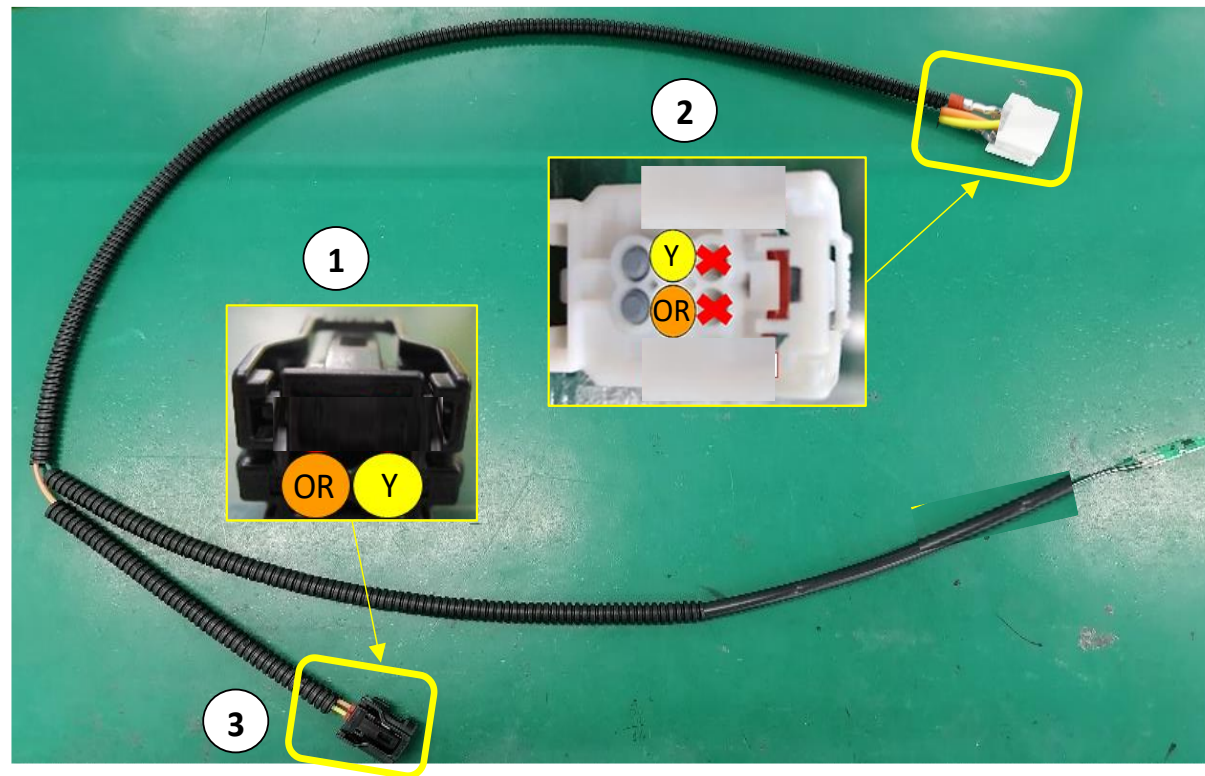
8 of 8

PARTS:

1. Assy parts

JIG:

n/a

VISUAL INSPECTION/ QUALITY CHECKPOINTS**TAPING - P1****7R0118-7025**

- ① ② **No WRONG INSERT**
- ③ **No UNLOCKED/ HALF-LOCKED CONNECTOR**
- ④ **No TERMINAL BACKING OUT**
- ⑤ **No MISSING PARTS**

CONFIDENTIAL: Any misuse or misappropriation, including unauthorized copying, reproduction in any form, disclosure or publishing of this document or any information herein is strictly prohibited.

NBC (Philippines)
MASTER COPY

DCC Stamp