


Simulink®

Graphical User Interface

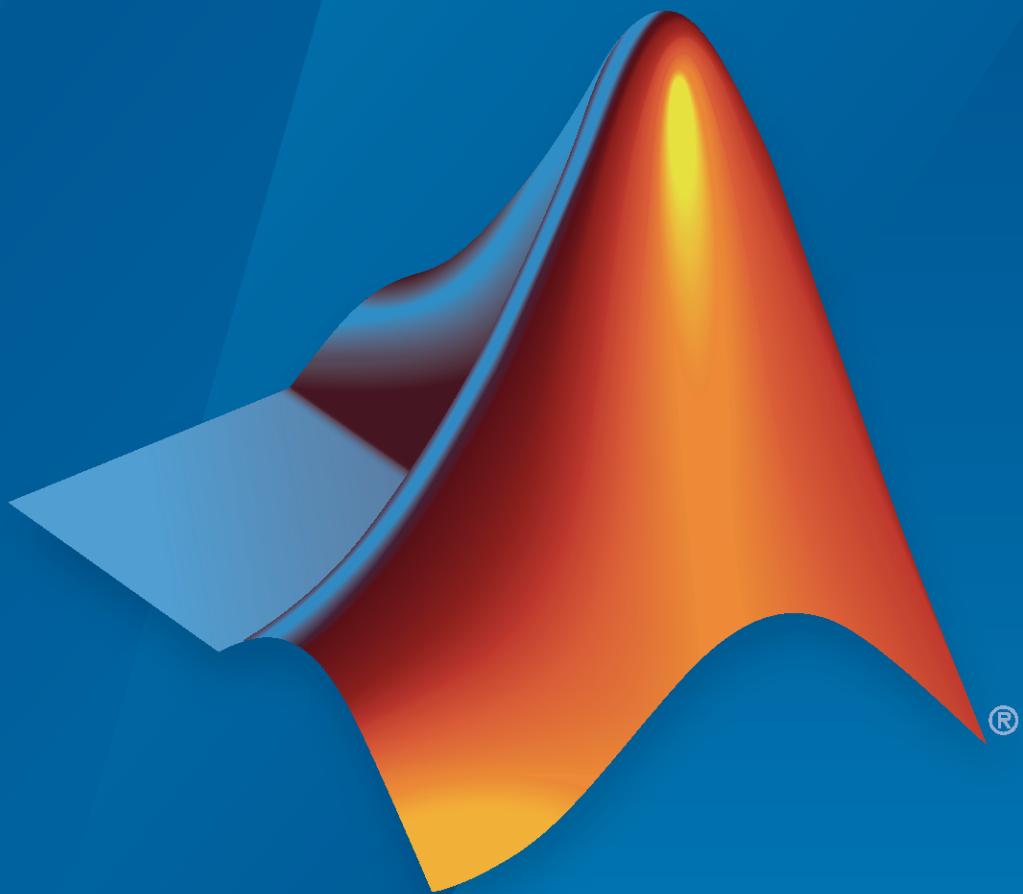

MATLAB® & SIMULINK®

R2020b

 MathWorks®

How to Contact MathWorks



Latest news: www.mathworks.com
Sales and services: www.mathworks.com/sales_and_services
User community: www.mathworks.com/matlabcentral
Technical support: www.mathworks.com/support/contact_us
Phone: 508-647-7000



The MathWorks, Inc.
1 Apple Hill Drive
Natick, MA 01760-2098

Simulink® Graphical User Interface

© COPYRIGHT 1990–2020 by The MathWorks, Inc.

The software described in this document is furnished under a license agreement. The software may be used or copied only under the terms of the license agreement. No part of this manual may be photocopied or reproduced in any form without prior written consent from The MathWorks, Inc.

FEDERAL ACQUISITION: This provision applies to all acquisitions of the Program and Documentation by, for, or through the federal government of the United States. By accepting delivery of the Program or Documentation, the government hereby agrees that this software or documentation qualifies as commercial computer software or commercial computer software documentation as such terms are used or defined in FAR 12.212, DFARS Part 227.72, and DFARS 252.227-7014. Accordingly, the terms and conditions of this Agreement and only those rights specified in this Agreement, shall pertain to and govern the use, modification, reproduction, release, performance, display, and disclosure of the Program and Documentation by the federal government (or other entity acquiring for or through the federal government) and shall supersede any conflicting contractual terms or conditions. If this License fails to meet the government's needs or is inconsistent in any respect with federal procurement law, the government agrees to return the Program and Documentation, unused, to The MathWorks, Inc.

Trademarks

MATLAB and Simulink are registered trademarks of The MathWorks, Inc. See www.mathworks.com/trademarks for a list of additional trademarks. Other product or brand names may be trademarks or registered trademarks of their respective holders.

Patents

MathWorks products are protected by one or more U.S. patents. Please see www.mathworks.com/patents for more information.

Revision History

September 2007	Online only	New for Simulink 7.0 (Release 2007b)
March 2008	Online only	Revised for Simulink 7.1 (Release 2008a)
October 2008	Online only	Revised for Simulink 7.2 (Release 2008b)
March 2009	Online only	Revised for Simulink 7.3 (Release 2009a)
September 2009	Online only	Revised for Simulink 7.4 (Release 2009b)
March 2010	Online only	Revised for Simulink 7.5 (Release 2010a)
September 2010	Online only	Revised for Simulink 7.6 (Release 2010b)
April 2011	Online only	Revised for Simulink 7.7 (Release 2011a)
September 2011	Online only	Revised for Simulink 7.8 (Release 2011b)
March 2012	Online only	Revised for Simulink 7.9 (Release 2012a)
September 2012	Online only	Revised for Simulink 8.0 (Release 2012b)
March 2013	Online only	Revised for Simulink 8.1 (Release 2013a)
September 2013	Online only	Revised for Simulink 8.2 (Release 2013b)
March 2014	Online only	Revised for Simulink 8.3 (Release 2014a)
October 2014	Online only	Revised for Simulink 8.4 (Release 2014b)
March 2015	Online only	Revised for Simulink 8.5 (Release 2015a)
September 2015	Online only	Revised for Simulink 8.6 (Release 2015b)
October 2015	Online only	Rereleased for Simulink 8.5.1 (Release 2015aSP1)
March 2016	Online only	Revised for Simulink 8.7 (Release 2016a)
September 2016	Online only	Revised for Simulink 8.8 (Release 2016b)
March 2017	Online only	Revised for Simulink 8.9 (Release 2017a)
September 2017	Online only	Revised for Simulink 9.0 (Release 2017b)
March 2018	Online only	Revised for Simulink 9.1 (Release 2018a)
September 2018	Online only	Revised for Simulink 9.2 (Release 2018b)
March 2019	Online only	Revised for Simulink 9.3 (Release 2019a)
September 2019	Online only	Revised for Simulink 10.0 (Release 2019b)
March 2020	Online only	Revised for Simulink 10.1 (Release 2020a)
September 2020	Online only	Revised for Simulink 10.2 (Release 2020b)

Configuration Parameters Dialog Box

1

Model Configuration Pane	1-2
Model Configuration Overview	1-2
Name	1-2
Description	1-2
Configuration Parameters	1-3

Simulink Configuration Parameters: Advanced

2

Test hardware is the same as production hardware	2-2
Description	2-2
Settings	2-2
Tip	2-2
Dependency	2-2
Recommended settings	2-2
Test device vendor and type	2-3
Description	2-3
Settings	2-3
Tips	2-6
Dependencies	2-13
Command-Line Information	2-13
Recommended Settings	2-13
Number of bits: char	2-15
Description	2-15
Settings	2-15
Tip	2-15
Dependencies	2-15
Command-Line Information	2-15
Recommended Settings	2-15
Number of bits: short	2-17
Description	2-17
Settings	2-17
Tip	2-17
Dependencies	2-17
Command-Line Information	2-17
Recommended Settings	2-17

Number of bits: int	2-19
Description	2-19
Settings	2-19
Tip	2-19
Dependencies	2-19
Command-Line Information	2-19
Recommended Settings	2-19
Number of bits: long	2-21
Description	2-21
Settings	2-21
Tip	2-21
Dependencies	2-21
Command-Line Information	2-21
Recommended Settings	2-21
Number of bits: long long	2-23
Description	2-23
Settings	2-23
Tips	2-23
Dependencies	2-23
Command-Line Information	2-23
Recommended Settings	2-23
Number of bits: float	2-25
Description	2-25
Settings	2-25
Command-Line Information	2-25
Recommended Settings	2-25
Number of bits: double	2-26
Description	2-26
Settings	2-26
Command-Line Information	2-26
Recommended Settings	2-26
Number of bits: native	2-27
Description	2-27
Settings	2-27
Tip	2-27
Dependencies	2-27
Command-Line Information	2-27
Recommended Settings	2-27
Number of bits: pointer	2-29
Description	2-29
Settings	2-29
Dependencies	2-29
Command-Line Information	2-29
Recommended Settings	2-29
Number of bits: size_t	2-30
Description	2-30
Settings	2-30
Dependencies	2-30

Command-Line Information	2-30
Recommended Settings	2-30
Number of bits: ptrdiff_t	2-32
Description	2-32
Settings	2-32
Dependencies	2-32
Command-Line Information	2-32
Recommended Settings	2-32
Largest atomic size: integer	2-34
Description	2-34
Settings	2-34
Tip	2-34
Dependencies	2-34
Command-Line Information	2-34
Recommended Settings	2-35
Largest atomic size: floating-point	2-36
Description	2-36
Settings	2-36
Tip	2-36
Dependencies	2-36
Command-Line Information	2-36
Recommended Settings	2-36
Byte ordering	2-38
Description	2-38
Settings	2-38
Dependencies	2-38
Command-Line Information	2-38
Recommended Settings	2-38
Signed integer division rounds to	2-40
Description	2-40
Settings	2-40
Tips	2-40
Dependency	2-40
Command-Line Information	2-41
Recommended settings	2-41
Shift right on a signed integer as arithmetic shift	2-42
Description	2-42
Settings	2-42
Tips	2-42
Dependency	2-42
Command-Line Information	2-42
Recommended settings	2-42
Support long long	2-44
Description	2-44
Settings	2-44
Tips	2-44
Dependencies	2-44
Command-Line Information	2-44

Recommended Settings	2-44
Allowed unit systems	2-46
Description	2-46
Settings	2-46
Tip	2-46
Command-Line Information	2-47
Units inconsistency messages	2-48
Description	2-48
Settings	2-48
Command-Line Information	2-48
Allow automatic unit conversions	2-49
Description	2-49
Settings	2-49
Command-Line Information	2-49
Dataset signal format	2-50
Description	2-50
Settings	2-50
Comparison of Formats	2-50
Tips	2-52
Command-Line Information	2-52
Recommended Settings	2-53
Array bounds exceeded	2-54
Description	2-54
Settings	2-54
Tips	2-54
Command-Line Information	2-54
Recommended Settings	2-55
Model Verification block enabling	2-56
Description	2-56
Settings	2-56
Dependency	2-56
Command-Line Information	2-56
Recommended Settings	2-56
Check runtime output of execution context	2-58
Description	2-58
Settings	2-58
Tips	2-58
Dependency	2-59
Command-Line Information	2-59
Recommended Settings	2-59
Check undefined subsystem initial output	2-61
Description	2-61
Settings	2-61
Tips	2-61
Dependency	2-62
Command-Line Information	2-62
Recommended Settings	2-63

Detect multiple driving blocks executing at the same time step	2-64
Description	2-64
Settings	2-64
Tips	2-64
Command-Line Information	2-64
Recommended Settings	2-64
Underspecified initialization detection	2-66
Description	2-66
Settings	2-66
Tips	2-66
Dependencies	2-66
Command-Line Information	2-67
Recommended Settings	2-67
Solver data inconsistency	2-68
Description	2-68
Settings	2-68
Tips	2-68
Command-Line Information	2-68
Recommended Settings	2-69
Ignored zero crossings	2-70
Description	2-70
Settings	2-70
Tips	2-70
Command-Line Information	2-70
Recommended Settings	2-71
Masked zero crossings	2-72
Description	2-72
Settings	2-72
Tips	2-72
Command-Line Information	2-72
Recommended Settings	2-72
Block diagram contains disabled library links	2-73
Description	2-73
Settings	2-73
Tip	2-73
Command-Line Information	2-73
Recommended Settings	2-73
Block diagram contains parameterized library links	2-75
Description	2-75
Settings	2-75
Tips	2-75
Command-Line Information	2-75
Recommended Settings	2-75
Initial state is array	2-76
Description	2-76
Settings	2-76
Tips	2-76
Command-Line Information	2-76

Recommended Settings	2-76
Insufficient maximum identifier length	2-78
Description	2-78
Settings	2-78
Command-Line Information	2-78
Recommended Settings	2-78
Compiler optimization level	2-80
Description	2-80
Settings	2-80
Tips	2-80
Command-Line Information	2-80
Recommended Settings	2-80
Verbose accelerator builds	2-82
Description	2-82
Settings	2-82
Command-Line Information	2-82
Recommended Settings	2-82
Implement logic signals as Boolean data (vs. double)	2-83
Description	2-83
Settings	2-83
Tips	2-83
Dependencies	2-83
Command-Line Information	2-84
Recommended Settings	2-84
Block reduction	2-85
Description	2-85
Settings	2-85
Tips	2-85
Command-Line Information	2-86
Recommended Settings	2-86
Conditional input branch execution	2-88
Description	2-88
Settings	2-88
Command-Line Information	2-88
Recommended Settings	2-88
Ensure responsiveness	2-90
Description	2-90
Settings	2-90
Command-Line Information	2-90
Recommended Settings	2-90
Compile-time recursion limit for MATLAB functions	2-91
Description	2-91
Settings	2-91
Command-Line Information	2-91
Enable run-time recursion for MATLAB functions	2-92
Description	2-92

Settings	2-92
Command-Line Information	2-92
Dynamic memory allocation in MATLAB functions	2-93
Description	2-93
Settings	2-93
Dependency	2-93
Tips	2-93
Command-Line Information	2-93
Recommended Settings	2-94
Dynamic memory allocation threshold in MATLAB functions	2-95
Description	2-95
Settings	2-95
Dependency	2-95
Command-Line Information	2-95
Recommended Settings	2-95
Echo expressions without semicolons	2-97
Description	2-97
Settings	2-97
Tip	2-97
Command-Line Information	2-97
Recommended Settings	2-97
Ensure memory integrity	2-98
Description	2-98
Settings	2-98
Tips	2-98
Command-Line Information	2-98
Recommended Settings	2-98
Generate typedefs for imported bus and enumeration types	2-100
Description	2-100
Settings	2-100
Tips	2-100
Command-Line Information	2-100
Use local custom code settings (do not inherit from main model)	2-101
Description	2-101
Settings	2-101
Dependency	2-101
Command-Line Information	2-101
Recommended Settings	2-101
Allow symbolic dimension specification	2-102
Description	2-102
Settings	2-102
Command-Line Information	2-102
Recommended Settings	2-102
Enable decoupled continuous integration	2-103
Description	2-103
Settings	2-103
Command-Line Information	2-103

Recommended Settings	2-103
Enable minimal zero-crossing impact integration	2-104
Settings	2-104
Dependencies	2-104
Tips	2-104
Command-Line Information	2-104
Recommended Settings	2-104
Detect ambiguous custom storage class final values	2-105
Description	2-105
Settings	2-105
Tip	2-105
Command-Line Information	2-105
Recommended Settings	2-106
Detect non-reused custom storage classes	2-107
Description	2-107
Settings	2-107
Tip	2-108
Command-Line Information	2-108
Recommended Settings	2-108
Combine output and update methods for code generation and simulation	2-109
Description	2-109
Settings	2-109
Tips	2-109
Command-Line Information	2-109
Recommended Settings	2-110
Include custom code for referenced models	2-111
Description	2-111
Settings	2-111
Tips	2-111
Command-Line Information	2-111
Recommended Settings	2-111
Behavior when pregenerated library subsystem code is missing	2-112
Description	2-112
Settings	2-112
Tip	2-112
Command-Line Information	2-112
Recommended Settings	2-112
Arithmetic operations in variant conditions	2-114
Description	2-114
Settings	2-114
Command-Line Information	2-114
Recommended Settings	2-114
FMU Import blocks	2-116
Description	2-116
Settings	2-116
Command-Line Information	2-116

Recommended Settings	2-116
Variant condition mismatch at signal source and destination	2-117
Description	2-117
Settings	2-117
Command-Line Information	2-117
Recommended Settings	2-117
Prevent Creation of Unused Variables for Lenient Variant Choices	2-119
Prevent Creation of Unused Variables for Unconditional and Conditional Variant Choices	2-122

Data Import/Export Parameters

3

Model Configuration Parameters: Data Import/Export	3-2
Data Import/Export Overview	3-4
Configuration	3-4
Tips	3-4
To get help on an option	3-4
Input	3-5
Description	3-5
Settings	3-5
Tips	3-5
Command-Line Information	3-5
Recommended Settings	3-6
Initial state	3-7
Description	3-7
Settings	3-7
Tips	3-7
Command-Line Information	3-8
Recommended Settings	3-8
Time	3-9
Description	3-9
Settings	3-9
Tips	3-9
Command-Line Information	3-9
Recommended Settings	3-10
States	3-11
Description	3-11
Settings	3-11
Tips	3-11
Command-Line Information	3-11
Recommended Settings	3-12

Output	3-13
Description	3-13
Settings	3-13
Tips	3-13
Command-Line Information	3-14
Recommended Settings	3-14
Final states	3-15
Description	3-15
Settings	3-15
Tips	3-15
Command-Line Information	3-15
Recommended Settings	3-16
Format	3-17
Description	3-17
Settings	3-17
Tips	3-17
Command-Line Information	3-18
Recommended Settings	3-18
Limit data points	3-19
Description	3-19
Settings	3-19
Tips	3-19
Command-Line Information	3-19
Recommended Settings	3-19
Decimation	3-21
Description	3-21
Settings	3-21
Tips	3-21
Command-Line Information	3-21
Recommended Settings	3-21
Save complete SimState in final state	3-22
Description	3-22
Settings	3-22
Tips	3-22
Dependencies	3-22
Command-Line Information	3-22
Recommended Settings	3-22
Save final operating point	3-24
Description	3-24
Settings	3-24
Tips	3-24
Dependencies	3-24
Command-Line Information	3-24
Recommended Settings	3-24
Signal logging	3-26
Description	3-26
Settings	3-26
Tips	3-26

Dependencies	3-27
Command-Line Information	3-27
Recommended Settings	3-27
Data stores	3-28
Description	3-28
Settings	3-28
Tips	3-28
Command-Line Information	3-28
Recommended Settings	3-28
Log Dataset data to file	3-30
Description	3-30
Settings	3-30
Tips	3-30
Command-Line Information	3-31
Recommended Settings	3-31
Output options	3-32
Description	3-32
Settings	3-32
Tips	3-32
Dependencies	3-32
Command-Line Information	3-32
Recommended Settings	3-33
Refine factor	3-34
Description	3-34
Settings	3-34
Tip	3-34
Dependency	3-34
Command-Line Information	3-34
Recommended Settings	3-34
Output times	3-35
Description	3-35
Settings	3-35
Tips	3-35
Dependency	3-35
Command-Line Information	3-35
Recommended Settings	3-35
Single simulation output	3-37
Description	3-37
Settings	3-37
Tips	3-37
Command-Line Information	3-37
Recommended Settings	3-37
Logging intervals	3-39
Description	3-39
Settings	3-39
Tips	3-39
Dependency	3-40
Command-Line Information	3-40

Recommended Settings	3-40
----------------------------	------

Record logged workspace data in Simulation Data Inspector	3-41
Description	3-41
Settings	3-41
Tips	3-41
Command-Line Information	3-41
Recommended Settings	3-41

Diagnostics Parameters: Compatibility

4

Model Configuration Parameters: Compatibility Diagnostics	4-2
Compatibility Diagnostics Overview	4-3
Configuration	4-3
Tips	4-3
To get help on an option	4-3
S-function upgrades needed	4-4
Description	4-4
Settings	4-4
Command-Line Information	4-4
Recommended Settings	4-4
Block behavior depends on frame status of signal	4-5
Description	4-5
Settings	4-5
Tips	4-5
Command-Line Information	4-5
Recommended Settings	4-6
SimState object from earlier release	4-7
Description	4-7
Settings	4-7
Command-Line Information	4-7
Recommended Settings	4-7

Diagnostics Parameters: Connectivity

5

Model Configuration Parameters: Connectivity Diagnostics	5-2
Connectivity Diagnostics Overview	5-4
Configuration	5-4
Tips	5-4
To get help on an option	5-4

Signal label mismatch	5-5
Description	5-5
Settings	5-5
Command-Line Information	5-5
Recommended Settings	5-5
Unconnected block input ports	5-6
Description	5-6
Settings	5-6
Command-Line Information	5-6
Recommended Settings	5-6
Unconnected block output ports	5-7
Description	5-7
Settings	5-7
Command-Line Information	5-7
Recommended Settings	5-7
Unconnected line	5-8
Description	5-8
Settings	5-8
Command-Line Information	5-8
Recommended Settings	5-8
Unspecified bus object at root Outport block	5-9
Description	5-9
Settings	5-9
Command-Line Information	5-9
Recommended Settings	5-9
Element name mismatch	5-10
Description	5-10
Settings	5-10
Tips	5-10
Command-Line Information	5-10
Recommended Settings	5-10
Bus signal treated as vector	5-12
Description	5-12
Settings	5-12
Tips	5-12
Command-Line Information	5-12
Recommended Settings	5-13
Non-bus signals treated as bus signals	5-14
Description	5-14
Settings	5-14
Command-Line Information	5-14
Recommended Settings	5-14
Repair bus selections	5-16
Description	5-16
Settings	5-16
Command-Line Information	5-16
Recommended Settings	5-16

Context-dependent inputs	5-17
Description	5-17
Settings	5-17
Tips	5-17
Command-Line Information	5-17
Recommended Settings	5-17

Diagnostics Parameters: Data Validity

6

Model Configuration Parameters: Data Validity Diagnostics	6-2
Data Validity Diagnostics Overview	6-5
Configuration	6-5
Tips	6-5
To get help on an option	6-5
Signal resolution	6-6
Description	6-6
Settings	6-6
Tips	6-6
Command-Line Information	6-7
Recommended Settings	6-7
Division by singular matrix	6-8
Description	6-8
Settings	6-8
Tips	6-8
Command-Line Information	6-8
Recommended Settings	6-8
Underspecified data types	6-10
Description	6-10
Identify and Resolve Underspecified Data Types	6-10
Settings	6-10
Command-Line Information	6-11
Recommended Settings	6-11
Simulation range checking	6-12
Description	6-12
Settings	6-12
Tips	6-12
Command-Line Information	6-12
Recommended Settings	6-12
String truncation checking	6-14
Description	6-14
Settings	6-14
Command-Line Information	6-14
Recommended Settings	6-14

Wrap on overflow	6-15
Description	6-15
Settings	6-15
Tips	6-15
Command-Line Information	6-15
Recommended Settings	6-16
Saturate on overflow	6-17
Description	6-17
Settings	6-17
Tips	6-17
Command-Line Information	6-17
Recommended Settings	6-17
Underspecified dimensions	6-19
Description	6-19
Settings	6-19
Command-Line Information	6-19
Recommended Settings	6-19
Inf or NaN block output	6-20
Description	6-20
Settings	6-20
Tips	6-20
Command-Line Information	6-20
Recommended Settings	6-21
"rt" prefix for identifiers	6-22
Description	6-22
Settings	6-22
Tips	6-22
Command-Line Information	6-22
Recommended Settings	6-22
Detect downcast	6-24
Description	6-24
Settings	6-24
Tips	6-24
Command-Line Information	6-24
Recommended Settings	6-24
Detect overflow	6-26
Description	6-26
Settings	6-26
Tips	6-26
Command-Line Information	6-26
Recommended Settings	6-27
Detect underflow	6-28
Description	6-28
Settings	6-28
Tips	6-28
Command-Line Information	6-28
Recommended Settings	6-28

Detect precision loss	6-30
Description	6-30
Settings	6-30
Tips	6-30
Command-Line Information	6-30
Recommended Settings	6-31
Detect loss of tunability	6-32
Description	6-32
Settings	6-32
Tips	6-32
Command-Line Information	6-32
Recommended Settings	6-32
Detect read before write	6-34
Description	6-34
Settings	6-34
Command-Line Information	6-34
Recommended Settings	6-35
Detect write after read	6-36
Description	6-36
Settings	6-36
Command-Line Information	6-36
Recommended Settings	6-37
Detect write after write	6-38
Description	6-38
Settings	6-38
Command-Line Information	6-38
Recommended Settings	6-39
Multitask data store	6-40
Description	6-40
Settings	6-40
Tips	6-40
Command-Line Information	6-40
Recommended Settings	6-40
Duplicate data store names	6-42
Description	6-42
Settings	6-42
Tip	6-42
Command-Line Information	6-42
Recommended Settings	6-42

Diagnostics Parameters: Model Referencing

Model Referencing Diagnostics Overview	7-3
Configuration	7-3
Tips	7-3
To get help on an option	7-3
Model block version mismatch	7-4
Description	7-4
Settings	7-4
Tips	7-4
Command-Line Information	7-4
Recommended Settings	7-4
Port and parameter mismatch	7-6
Description	7-6
Settings	7-6
Tips	7-6
Command-Line Information	7-6
Recommended Settings	7-6
Invalid root Import/Outport block connection	7-8
Description	7-8
Settings	7-8
Tips	7-8
Command-Line Information	7-10
Recommended Settings	7-11
Unsupported data logging	7-12
Description	7-12
Settings	7-12
Tips	7-12
Command-Line Information	7-12
Recommended Settings	7-12
No explicit final value for model arguments	7-14
Description	7-14
Settings	7-14
Command-Line Information	7-14
Recommended Settings	7-14

8

Diagnostics Parameters: Sample Time

Model Configuration Parameters: Sample Time Diagnostics	8-2
Sample Time Diagnostics Overview	8-4
Configuration	8-4
Tips	8-4
To get help on an option	8-4
Source block specifies -1 sample time	8-5
Description	8-5
Settings	8-5

Tips	8-5
Command-Line Information	8-5
Recommended Settings	8-5
Multitask data transfer	8-7
Description	8-7
Settings	8-7
Tips	8-7
Command-Line Information	8-7
Recommended Settings	8-7
Single task data transfer	8-9
Description	8-9
Settings	8-9
Tips	8-9
Command-Line Information	8-9
Recommended Settings	8-9
Multitask conditionally executed subsystem	8-11
Description	8-11
Settings	8-11
Tips	8-11
Command-Line Information	8-11
Recommended Settings	8-12
Tasks with equal priority	8-13
Description	8-13
Settings	8-13
Tips	8-13
Command-Line Information	8-13
Recommended Settings	8-13
Enforce sample times specified by Signal Specification blocks	8-15
Description	8-15
Settings	8-15
Tips	8-15
Command-Line Information	8-15
Recommended Settings	8-15
Exported tasks rate transition	8-17
Description	8-17
Settings	8-17
Command-Line Information	8-17
Recommended Settings	8-17
Sample hit time adjusting	8-18
Description	8-18
Settings	8-18
Tips	8-18
Command-Line Information	8-18
Recommended Settings	8-18
Unspecified inheritability of sample time	8-20
Description	8-20
Settings	8-20

Tips	8-20
Command-Line Information	8-20
Recommended Settings	8-20

Diagnostics Parameters

9

Model Configuration Parameters: Diagnostics	9-2
Solver Diagnostics Overview	9-5
Configuration	9-5
Tips	9-5
To get help on an option	9-5
Algebraic loop	9-6
Description	9-6
Settings	9-6
Tips	9-6
Command-Line Information	9-6
Recommended Settings	9-7
Minimize algebraic loop	9-8
Description	9-8
Settings	9-8
Tips	9-8
Command-Line Information	9-8
Recommended Settings	9-8
Block priority violation	9-10
Description	9-10
Settings	9-10
Tips	9-10
Command-Line Information	9-10
Recommended Settings	9-10
Min step size violation	9-12
Description	9-12
Settings	9-12
Tips	9-12
Command-Line Information	9-12
Recommended Settings	9-12
Consecutive zero-crossings violation	9-14
Description	9-14
Settings	9-14
Tips	9-14
Dependency	9-14
Command-Line Information	9-14
Recommended Settings	9-14
Automatic solver parameter selection	9-16
Description	9-16

Settings	9-16
Tips	9-16
Command-Line Information	9-16
Recommended Settings	9-16
Extraneous discrete derivative signals	9-18
Description	9-18
Settings	9-18
Tips	9-18
Dependency	9-18
Command-Line Information	9-18
Recommended Settings	9-19
State name clash	9-20
Description	9-20
Settings	9-20
Tips	9-20
Command-Line Information	9-20
Recommended Settings	9-20
SimState interface checksum mismatch	9-21
Description	9-21
Settings	9-21
Command-Line Information	9-21
Recommended Settings	9-21
Operating point interface checksum mismatch	9-22
Description	9-22
Settings	9-22
Command-Line Information	9-22
Recommended Settings	9-22

10

Diagnostics Parameters: Stateflow

Model Configuration Parameters: Stateflow Diagnostics	10-2
Stateflow Diagnostics Overview	10-4
Configuration	10-4
Tips	10-4
To get help on an option	10-4
Unused data, events, messages, and functions	10-5
Description	10-5
Settings	10-5
Tip	10-5
Command-Line Information	10-5
Recommended Settings	10-5
Unexpected backtracking	10-7
Description	10-7
Settings	10-7

Tip	10-7
Command-Line Information	10-7
Recommended Settings	10-7
Invalid input data access in chart initialization	10-9
Description	10-9
Settings	10-9
Tip	10-9
Command-Line Information	10-9
Recommended Settings	10-9
No unconditional default transitions	10-11
Description	10-11
Settings	10-11
Command-Line Information	10-11
Recommended Settings	10-11
Transition outside natural parent	10-12
Description	10-12
Settings	10-12
Command-Line Information	10-12
Recommended Settings	10-12
Undirected event broadcasts	10-13
Description	10-13
Settings	10-13
Command-Line Information	10-13
Recommended Settings	10-13
Transition action specified before condition action	10-14
Description	10-14
Settings	10-14
Command-Line Information	10-14
Recommended Settings	10-14
Read-before-write to output in Moore chart	10-15
Description	10-15
Settings	10-15
Command-Line Information	10-15
Recommended Settings	10-15
Absolute time temporal value shorter than sampling period	10-16
Description	10-16
Settings	10-16
Command-Line Information	10-16
Recommended Settings	10-16
Self transition on leaf state	10-17
Description	10-17
Settings	10-17
Command-Line Information	10-17
Recommended Settings	10-17
Execute-at-Initialization disabled in presence of input events	10-18
Description	10-18

Settings	10-18
Command-Line Information	10-18
Recommended Settings	10-18
Use of machine-parented data instead of Data Store Memory	10-19
Description	10-19
Settings	10-19
Command-Line Information	10-19
Recommended Settings	10-19
Unreachable execution path	10-20
Description	10-20
Settings	10-21
Command-Line Information	10-21
Recommended Settings	10-21

Diagnostics Parameters: Type Conversion

11

Model Configuration Parameters: Type Conversion Diagnostics	11-2
Type Conversion Diagnostics Overview	11-3
Configuration	11-3
Tips	11-3
To get help on an option	11-3
Unnecessary type conversions	11-4
Description	11-4
Settings	11-4
Command-Line Information	11-4
Recommended Settings	11-4
Vector/matrix block input conversion	11-5
Description	11-5
Settings	11-5
Tips	11-5
Command-Line Information	11-5
Recommended Settings	11-5
32-bit integer to single precision float conversion	11-7
Description	11-7
Settings	11-7
Tip	11-7
Command-Line Information	11-7
Recommended Settings	11-7
Detect underflow	11-8
Description	11-8
Settings	11-8
Tips	11-8
Dependency	11-8
Command-Line Information	11-8

Recommended Settings	11-8
----------------------------	------

Detect precision loss	11-10
Description	11-10
Settings	11-10
Tips	11-10
Dependency	11-10
Command-Line Information	11-10
Recommended Settings	11-10
Detect overflow	11-12
Description	11-12
Settings	11-12
Tips	11-12
Dependency	11-12
Command-Line Information	11-12
Recommended Settings	11-12

Model Referencing Parameters

12

Model Configuration Parameters: Model Referencing	12-2
Model Referencing Pane Overview	12-4
Configuration	12-4
Tips	12-4
To get help on an option	12-4
Rebuild	12-5
Description	12-5
Settings	12-5
Definitions	12-6
Tips	12-7
Dependency	12-8
Command-Line Information	12-8
Recommended Settings	12-8
Compatibility Considerations	12-8
Never rebuild diagnostic	12-10
Description	12-10
Settings	12-10
Tip	12-10
Dependency	12-10
Command-Line Information	12-10
Recommended Settings	12-11
Enable parallel model reference builds	12-12
Description	12-12
Settings	12-12
Dependency	12-12
Tip	12-12
Command-Line Information	12-12

Recommended Settings	12-12
MATLAB worker initialization for builds	12-14
Description	12-14
Settings	12-14
Limitation	12-14
Dependency	12-14
Command-Line Information	12-14
Recommended Settings	12-14
Enable strict scheduling checks for referenced models	12-16
Description	12-16
Settings	12-16
Command-Line Information	12-16
Total number of instances allowed per top model	12-17
Description	12-17
Settings	12-17
Command-Line Information	12-17
Recommended Settings	12-17
Pass fixed-size scalar root inputs by value for code generation	12-18
Description	12-18
Settings	12-18
Tips	12-18
Command-Line Information	12-18
Recommended Settings	12-19
Minimize algebraic loop occurrences	12-20
Description	12-20
Settings	12-20
Tips	12-20
Command-Line Information	12-20
Recommended Settings	12-20
Propagate all signal labels out of the model	12-22
Description	12-22
Settings	12-22
Tips	12-22
Command-Line Information	12-23
Recommended Settings	12-23
Propagate sizes of variable-size signals	12-25
Description	12-25
Settings	12-25
Command-Line Information	12-26
Recommended Settings	12-26
Model dependencies	12-27
Description	12-27
Settings	12-27
Tips	12-27
Command-Line Information	12-28
Recommended Settings	12-28

Model Configuration Parameters: Simulation Target	13-2
Simulation Target: General Tab Overview	13-5
Configuration	13-5
Tip	13-5
To get help on an option	13-5
Language	13-6
Description	13-6
Settings	13-6
Command-Line Information	13-6
Recommended Settings	13-6
GPU Acceleration	13-8
Description	13-8
Settings	13-8
Command-Line Information	13-8
Recommended Settings	13-8
Import custom code	13-9
Description	13-9
Settings	13-9
Command-Line Information	13-10
Recommended Settings	13-10
Enable custom code analysis	13-11
Description	13-11
Settings	13-11
Command-Line Information	13-11
Recommended Settings	13-11
Source file	13-12
Description	13-12
Settings	13-12
Command-Line Information	13-12
Recommended Settings	13-12
Header file	13-13
Description	13-13
Settings	13-13
Tips	13-13
Command-Line Information	13-13
Recommended Settings	13-13
Initialize function	13-14
Description	13-14
Settings	13-14
Tip	13-14
Command-Line Information	13-14
Recommended Settings	13-14

Terminate function	13-15
Description	13-15
Settings	13-15
Tip	13-15
Command-Line Information	13-15
Recommended Settings	13-15
Include directories	13-16
Description	13-16
Settings	13-16
Command-Line Information	13-16
Recommended Settings	13-16
Source files	13-18
Description	13-18
Settings	13-18
Limitation	13-18
Tip	13-18
Command-Line Information	13-18
Recommended Settings	13-18
Libraries	13-19
Description	13-19
Settings	13-19
Limitation	13-19
Tip	13-19
Command-Line Information	13-19
Recommended Settings	13-19
Reserved names	13-20
Description	13-20
Settings	13-20
Tips	13-20
Command-Line Information	13-20
Recommended Settings	13-20
Defines	13-22
Description	13-22
Settings	13-22
Command-Line Information	13-22
Recommended Settings	13-22
Default function array layout	13-23
Description	13-23
Settings	13-23
Command-Line Information	13-23
Recommended Settings	13-23
Undefined Function Handling	13-25
Description	13-25
Settings	13-25
Command-Line Information	13-25
Recommended Settings	13-25

Enable custom code globals as function interface	13-27
Description	13-27
Settings	13-27
Command-Line Information	13-27
Recommended Settings	13-27
Specify by function	13-28
Description	13-28
Settings	13-28
Command-Line Information	13-28
Example	13-28
Recommended Settings	13-28

Solver Parameters

14

Solver Pane	14-2
Solver Overview	14-5
Configuration	14-5
Tips	14-5
To get help on an option	14-5
Start time	14-7
Description	14-7
Settings	14-7
Command-Line Information	14-7
Stop time	14-8
Description	14-8
Settings	14-8
Command-Line Information	14-8
Type	14-9
Description	14-9
Settings	14-9
Dependencies	14-9
Command-Line Information	14-10
Solver	14-11
Description	14-11
Settings	14-11
Tips	14-14
Dependencies	14-14
Command-Line Information	14-16
Max step size	14-17
Description	14-17
Settings	14-17
Tips	14-17
Dependencies	14-17
Command-Line Information	14-17

Recommended Settings	14-18
Initial step size	14-19
Description	14-19
Settings	14-19
Tips	14-19
Dependencies	14-19
Command-Line Information	14-19
Recommended Settings	14-19
Min step size	14-21
Description	14-21
Settings	14-21
Tips	14-21
Dependencies	14-21
Command-Line Information	14-21
Recommended Settings	14-21
Relative tolerance	14-23
Description	14-23
Settings	14-23
Tips	14-23
Dependencies	14-23
Command-Line Information	14-23
Recommended Settings	14-24
Absolute tolerance	14-25
Description	14-25
Settings	14-25
Tips	14-25
Dependencies	14-26
Command-Line Information for Configuration Parameters	14-26
Recommended Settings	14-26
Shape preservation	14-27
Description	14-27
Settings	14-27
Tips	14-27
Dependencies	14-27
Command-Line Information	14-27
Recommended Settings	14-27
Maximum order	14-29
Description	14-29
Settings	14-29
Tips	14-29
Dependencies	14-29
Command-Line Information	14-29
Recommended Settings	14-30
Solver reset method	14-31
Description	14-31
Settings	14-31
Tips	14-31
Dependencies	14-31

Command-Line Information	14-31
Recommended Settings	14-31
Number of consecutive min steps	14-33
Description	14-33
Settings	14-33
Dependencies	14-33
Command-Line Information	14-33
Recommended Settings	14-33
Solver Jacobian Method	14-35
Description	14-35
Settings	14-35
Tips	14-35
Dependencies	14-35
Command-Line Information	14-35
Recommended Settings	14-35
Treat each discrete rate as a separate task	14-37
Description	14-37
Settings	14-37
Tips	14-37
Dependency	14-37
Command-Line Information	14-37
Recommended Settings	14-38
Automatically handle rate transition for data transfer	14-39
Description	14-39
Settings	14-39
Tips	14-39
Command-Line Information	14-39
Recommended Settings	14-39
Deterministic data transfer	14-41
Description	14-41
Dependencies	14-41
Command-Line Information	14-41
Recommended Settings	14-42
Higher priority value indicates higher task priority	14-43
Description	14-43
Settings	14-43
Command-Line Information	14-43
Recommended Settings	14-43
Zero-crossing control	14-44
Description	14-44
Settings	14-44
Tips	14-44
Dependencies	14-44
Command-Line Information	14-44
Recommended Settings	14-45
Time tolerance	14-46
Description	14-46

Settings	14-46
Tips	14-46
Dependencies	14-46
Command-Line Information	14-47
Recommended Settings	14-47
Number of consecutive zero crossings	14-48
Description	14-48
Settings	14-48
Tips	14-48
Dependencies	14-48
Command-Line Information	14-48
Recommended Settings	14-48
Algorithm	14-50
Description	14-50
Settings	14-50
Tips	14-50
Dependencies	14-50
Command-Line Information	14-50
Recommended Settings	14-50
Signal threshold	14-52
Description	14-52
Settings	14-52
Tips	14-52
Dependency	14-52
Command-Line Information	14-52
Recommended Settings	14-52
Periodic sample time constraint	14-54
Description	14-54
Settings	14-54
Tips	14-54
Dependencies	14-55
Command-Line Information	14-55
Recommended Settings	14-55
Fixed-step size (fundamental sample time)	14-56
Description	14-56
Settings	14-56
Dependencies	14-56
Command-Line Information	14-56
Recommended Settings	14-56
Sample time properties	14-58
Description	14-58
Settings	14-58
Tips	14-58
Dependencies	14-59
Command-Line Information	14-59
Extrapolation order	14-60
Description	14-60
Settings	14-60

Tip	14-60
Dependencies	14-60
Command-Line Information	14-60
Recommended Settings	14-60
Number of Newton's iterations	14-62
Description	14-62
Settings	14-62
Dependencies	14-62
Command-Line Information	14-62
Recommended Settings	14-62
Allow tasks to execute concurrently on target	14-63
Description	14-63
Settings	14-63
Command-Line Information	14-63
Recommended Settings	14-63
Auto scale absolute tolerance	14-65
Description	14-65
Settings	14-65
Command-Line Information	14-65
Recommended Settings	14-65
Integration method	14-67
Description	14-67
Settings	14-67
Command-Line Information	14-67
Recommended Settings	14-67

Hardware Implementation Parameters

15

Hardware Implementation Pane	15-2
Hardware Implementation Overview	15-5
See Also	15-5
Hardware board	15-6
Settings	15-6
Tips	15-6
Dependencies	15-6
Command-Line Information	15-6
Recommended Settings	15-7
See Also	15-7
Code Generation system target file	15-8
Device vendor	15-9
Settings	15-9
Tips	15-9
Dependencies	15-9

Command-Line Information	15-9
Recommended Settings	15-10
See Also	15-10
Device type	15-11
Settings	15-11
Tips	15-13
Dependencies	15-20
Command-Line Information	15-21
Recommended Settings	15-21
See Also	15-21
Number of bits: char	15-22
Description	15-22
Settings	15-22
Tip	15-22
Dependencies	15-22
Command-Line Information	15-22
Recommended Settings	15-22
See Also	15-23
Number of bits: short	15-24
Description	15-24
Settings	15-24
Tip	15-24
Dependencies	15-24
Command-Line Information	15-24
Recommended Settings	15-24
See Also	15-25
Number of bits: int	15-26
Description	15-26
Settings	15-26
Tip	15-26
Dependencies	15-26
Command-Line Information	15-26
Recommended Settings	15-26
See Also	15-27
Number of bits: long	15-28
Description	15-28
Settings	15-28
Tip	15-28
Dependencies	15-28
Command-Line Information	15-28
Recommended Settings	15-28
See Also	15-29
Number of bits: long long	15-30
Description	15-30
Settings	15-30
Tips	15-30
Dependencies	15-30
Command-Line Information	15-30
Recommended Settings	15-30

See Also	15-31
Number of bits: float	15-32
Description	15-32
Settings	15-32
Command-Line Information	15-32
Recommended Settings	15-32
See Also	15-32
Number of bits: double	15-33
Description	15-33
Settings	15-33
Command-Line Information	15-33
Recommended Settings	15-33
See Also	15-33
Number of bits: native	15-34
Description	15-34
Settings	15-34
Tip	15-34
Dependencies	15-34
Command-Line Information	15-34
Recommended Settings	15-34
See Also	15-35
Number of bits: pointer	15-36
Description	15-36
Settings	15-36
Dependencies	15-36
Command-Line Information	15-36
Recommended Settings	15-36
See Also	15-36
Number of bits: size_t	15-38
Description	15-38
Settings	15-38
Dependencies	15-38
Command-Line Information	15-38
Recommended Settings	15-38
See Also	15-38
Number of bits: ptrdiff_t	15-40
Description	15-40
Settings	15-40
Dependencies	15-40
Command-Line Information	15-40
Recommended Settings	15-40
See Also	15-40
Largest atomic size: integer	15-42
Description	15-42
Settings	15-42
Tip	15-42
Dependencies	15-42
Command-Line Information	15-42

Recommended Settings	15-43
See Also	15-43
Largest atomic size: floating-point	15-44
Description	15-44
Settings	15-44
Tip	15-44
Dependencies	15-44
Command-Line Information	15-44
Recommended Settings	15-44
See Also	15-45
Byte ordering	15-46
Description	15-46
Settings	15-46
Dependencies	15-46
Command-Line Information	15-46
Recommended Settings	15-46
See Also	15-47
Signed integer division rounds to	15-48
Description	15-48
Settings	15-48
Tips	15-48
Dependency	15-48
Command-Line Information	15-49
Recommended settings	15-49
See Also	15-49
Shift right on a signed integer as arithmetic shift	15-50
Description	15-50
Settings	15-50
Tips	15-50
Dependency	15-50
Command-Line Information	15-50
Recommended settings	15-50
See Also	15-51
Support long long	15-52
Description	15-52
Settings	15-52
Tips	15-52
Dependencies	15-52
Command-Line Information	15-52
Recommended Settings	15-52
See Also	15-53

Library Browser

16

Use the Library Browser	16-2
Libraries Pane	16-2

Blocks Pane	16-2
Search for Blocks in the Library Browser	16-3

Signal Properties Dialog Box

17

Signal Properties Dialog Box Overview	17-2
Signal Properties Controls	17-3
Signal name	17-3
Signal name must resolve to Simulink signal object	17-3
Show propagated signals	17-3
Logging and Accessibility Options	17-5
Log signal data	17-5
Test point	17-5
Logging name	17-5
Data	17-6
Data Transfer Options for Concurrent Execution	17-7
Specify data transfer settings	17-7
Data transfer handling option	17-7
Extrapolation method (continuous-time signals)	17-7
Initial condition	17-7
Documentation Options	17-8
Description	17-8
Document link	17-8

Simulink Preferences Window

18

Set Simulink Preferences	18-2
Simulink Preferences Window Overview	18-2
Simulink Preferences General Pane	18-3
Simulink General Preferences Overview	18-3
Folders for Generated Files	18-3
Simulation cache folder	18-3
Code generation folder	18-4
Code generation folder structure	18-4
Background Color	18-5
Print	18-5
Export	18-5
Clipboard	18-6
Warn when opening Model blocks with Normal Mode Visibility set to off	18-6
Show callback tracing	18-7

Open the sample time legend when the sample time display is changed	18-8
Simulink Preferences Model File Pane	18-9
Simulink Model File Preferences Overview	18-9
File format for new models and libraries	18-9
Save a thumbnail image inside SLX files	18-9
Change Notification	18-10
Updating or simulating the model	18-10
Action	18-11
First editing the model	18-12
Saving the model	18-12
Autosave Options	18-13
Save before updating or simulating the model	18-13
Save backup when overwriting a file created in an older version of Simulink	18-14
Notify when loading an old model	18-15
Do not load models created with a newer version of Simulink	18-15
Do not load models that are shadowed on the MATLAB path	18-16
Verify digital signature of protected model before opening	18-17
Notify when opening a model in an unopened project	18-17
Simulink Preferences Editor Pane	18-19
Simulink Editor Preferences Overview	18-19
Use classic diagram theme	18-19
Line crossing style	18-19
Scroll wheel controls zooming	18-20
Content preview displays for new hierarchical elements	18-20
Enable smart editing features	18-21
Edit key parameter when adding new blocks	18-22
Toolbar Configuration	18-22
File Toolbar	18-22
Print	18-23
Cut/Copy/Paste	18-23
Undo/Redo	18-24
Browse Back/Forward/Up	18-24
Library/Model Configuration/Model Explorer	18-25
Refresh Blocks	18-25
Update Diagram	18-26
Simulation	18-26
Fast Restart	18-26
Debug Model	18-27
Model Advisor	18-27
Build	18-28
Find	18-28
Font Styles for Models	18-30
Font Styles Overview	18-30

Mask Editor Overview	19-2
Icon & Ports Pane	19-2
Parameters & Dialog Pane	19-10
Initialization Pane	19-21
Documentation Pane	19-23
Additional Options	19-25
Dialog Control Operations	19-27
Moving dialog controls in the Dialog box	19-27
Cut, Copy, and Paste Controls	19-27
Delete nodes	19-28
Error Display	19-28
Specify Data Types Using DataTypeStr Parameter	19-30
Associate Data Types to Edit Parameter	19-30
View DataTypeStr Programmatically	19-34
Design a Mask Dialog Box	19-36

Concurrent Execution Window

Concurrent Execution Window: Main Pane	20-2
Concurrent Execution Window Overview	20-2
Enable explicit model partitioning for concurrent behavior	20-3
Data Transfer Pane	20-5
Data Transfer Pane Overview	20-5
Periodic signals	20-5
Continuous signals	20-6
Extrapolation method	20-6
Automatically handle rate transition for data transfer	20-7
CPU Pane	20-8
CPU Pane Overview	20-8
Name	20-8
Hardware Node Pane	20-9
Hardware Node Pane Overview	20-9
Name	20-9
Clock Frequency [MHz]	20-9
Color	20-9
Periodic Pane	20-11
Periodic Pane Overview	20-11
Name	20-11
Periodic Trigger	20-11
Color	20-12

Template	20-12
Task Pane	20-13
Task Pane Overview	20-13
Name	20-13
Period	20-14
Color	20-14
Interrupt Pane	20-15
Interrupt Pane Overview	20-15
Name	20-15
Color	20-16
Aperiodic trigger source	20-16
Signal number [2,SIGRTMAX-SIGRTMIN-1]	20-17
Event name	20-17
System Tasks Pane	20-18
System Tasks Pane Overview	20-18
System Task Pane	20-19
System Task Pane Overview	20-19
Name	20-19
Period	20-19
Color	20-20
System Interrupt Pane	20-21
System Interrupt Pane Overview	20-21
Name	20-21
Color	20-21
Profile Report Pane	20-23
Profile Report Pane Overview	20-23
Number of time steps	20-23

Simulink Simulation Stepper

21

Simulation Stepping Options	21-2
Simulation Stepping Options Overview	21-2
Enable stepping back	21-3
Maximum number of saved back steps	21-3
Interval between stored back steps	21-4
Move back/forward by	21-4

Simulink Variant Manager

22

Variant Manager Overview	22-2
Variant Configuration Data	22-3

Model Hierarchy	22-8
Log	22-12

Math and Data Types

23

Math and Data Types Pane	23-2
Math and Data Types Overview	23-3
Configuration	23-3
Tip	23-3
To get help on an option	23-3
Simulation behavior for denormal numbers	23-4
Description	23-4
Settings	23-4
Tips	23-4
Command-Line Information	23-4
Dependency	23-4
Default for underspecified data type	23-5
Description	23-5
Settings	23-5
Tips	23-5
Command-Line Information	23-5
Recommended Settings	23-5
Use division for fixed-point net slope computation	23-7
Description	23-7
Settings	23-7
Tips	23-7
Dependency	23-7
Command-Line Information	23-8
Recommended Settings	23-8
Gain parameters inherit a built-in integer type that is lossless	23-9
Description	23-9
Settings	23-9
Tips	23-9
Dependencies	23-9
Command-Line Information	23-9
Recommended Settings	23-9
Use floating-point multiplication to handle net slope corrections	23-11
Description	23-11
Settings	23-11
Tips	23-11
Dependencies	23-11
Command-Line Information	23-11
Recommended Settings	23-11

Application lifespan (days)	23-13
Description	23-13
Settings	23-13
Tips	23-13
Command-Line Information	23-14
Recommended Settings	23-14
Use algorithms optimized for row-major array layout	23-15
Description	23-15
Settings	23-15
Tips	23-15
Command-Line Information	23-16
Recommended Settings	23-16

Model Parameter Configuration Dialog Box

24

Model Parameter Configuration Dialog Box	24-2
Source list	24-2
Refresh list	24-2
Add to table	24-3
New	24-3
Storage class	24-3
Storage type qualifier	24-3

Configuration Parameters Dialog Box

Model Configuration Pane

In this section...

- “Model Configuration Overview” on page 1-2
- “Name” on page 1-2
- “Description” on page 1-2
- “Configuration Parameters” on page 1-3

Model Configuration Overview

View or edit the name and description of your configuration set.

In the Model Explorer you can edit the name and description of your configuration sets.

In the Model Explorer or Simulink Preferences window you can edit the description of your template configuration set, Model Configuration Preferences. Go to the Model Configuration Preferences to edit the template Configuration Parameters to be used as defaults for new models.

When editing the Model Configuration preferences, you can click **Restore to Default Preferences** to restore the default configuration settings for creating new models. These underlying defaults cannot be changed.

For more information about configuration sets, see “Manage Configuration Sets for a Model”.

Name

Specify the name of your configuration set.

Settings

Default: Configuration (for Active configuration set) or Configuration Preferences (for default configuration set).

Edit the name of your configuration set.

In the Model Configuration Preferences, the name of the default configuration is always Configuration Preferences, and cannot be changed.

Description

Specify a description of your configuration set.

Settings

No Default

Enter text to describe your configuration set.

Configuration Parameters

No further help documentation is available for this parameter.

Simulink Configuration Parameters: Advanced

Test hardware is the same as production hardware

Description

Specify whether the test hardware differs from the production hardware.

Category: Hardware Implementation

Settings

Default: On



On

Specifies that the hardware used to test the code generated from the model is the same as the production hardware, or has the same characteristics.



Off

Specifies that the hardware used to test the code generated from the model has different characteristics than the production hardware.

Tip

You can generate code that runs on the test hardware but behaves as if it had been generated for and executed on the deployment hardware.

Dependency

Enables test hardware parameters.

Recommended settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	On

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Test device vendor and type

Description

Select the manufacturer and type of the hardware to use to test the code generated from the model.

Category: Hardware Implementation

Settings

Default: Intel, x86–64 (Windows64)

- AMD
- ARM Compatible
- Altera
- Analog Devices
- Atmel
- Freescale
- Infineon
- Intel
- Microchip
- NXP
- Renesas
- STMicroelectronics
- Texas Instruments
- ASIC/FPGA
- Custom Processor

AMD® options:

- Athlon 64
- K5/K6/Athlon
- x86–32 (Windows 32)
- x86–64 (Linux 64)
- x86–64 (macOS)
- x86–64 (Windows64)

ARM® options:

- ARM 10
- ARM 11
- ARM 7
- ARM 8
- ARM 9

- ARM Cortex-A
- ARM Cortex-M
- ARM Cortex-R
- ARM Cortex
- ARM 64-bit (LP64)
- ARM 64-bit (LLP64)

Altera® options:

- SoC (ARM CortexA)

Analog Devices® options:

- ADSP-CM40x (ARM Cortex-M)
- Blackfin
- SHARC
- TigerSHARC

Atmel® options:

- AVR
- AVR (32-bit)
- AVR (8-bit)

Freescale™ options:

- 32-bit PowerPC
- 68332
- 68HC08
- 68HC11
- ColdFire
- DSP563xx (16-bit mode)
- HC(S)12
- MPC52xx
- MPC5500
- MPC55xx
- MPC5xx
- MPC7xxx
- MPC82xx
- MPC83xx
- MPC85xx
- MPC86xx
- MPC8xx
- S08

- S12x
- StarCore

Infineon® options:

- C16x, XC16x
- TriCore

Intel® options:

- x86-32 (Windows32)
- x86-64 (Linux 64)
- x86-64 (macOS)
- x86-64 (Windows64)

Microchip options:

- PIC18
- dsPIC

NXP options:

- Cortex-M0/M0+
- Cortex-M3
- Cortex-M4

Renesas® options:

- M16C
- M32C
- R8C/Tiny
- RH850
- RL78
- RX
- RZ
- SH-2/3/4
- V850

STMicroelectronics®:

- ST10/Super10

Texas Instruments™ options:

- C2000
- C5000
- C6000
- MSP430

- Stellaris Cortex-M3
- TMS470
- TMS570 Cortex-R4

ASIC/FPGA options:

- ASIC/FPGA

Tips

- Before you select the device type, select the device vendor.
- Selecting a device type specifies the hardware device to define system constraints:
 - Default hardware properties appear as the initial values.
 - You cannot change parameters with only one possible value.
 - Parameters with more than one possible value provide a list of valid values.

The following table lists values for each device type.

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits										Largest atomic size		Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	_t	size_t	ptrdif_f_t	int	float				
AMD																
Athlon 64	8	16	32	64	64	64	64	64	64	64	Char	None	Little Endian	Zero	✓	□
K5/K6/Athlon	8	16	32	32	64	32	32	32	32	32	Char	None	Little Endian	Zero	✓	□
x86-32 (Windows32)	8	16	32	32	64	32	32	32	32	32	Char	Float	Little Endian	Zero	✓	□
x86-64 (Linux 64)	8	16	32	64	64	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	□
x86-64 (macOS)	8	16	32	64	64	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	□

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits										Largest atomic size		Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	size_t	ptrdif_f_t	int	float					
x86-64 (Windows64)	8	16	32	32	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	□	
ARM Compatible																
ARM 7/8/9/10	8	16	32	32	64	32	32	32	32	Long	Float	Little Endian	Zero	✓	□	
ARM 11	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
ARM Cortex	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
ARM 64-bit (LP64)	8	16	32	64	64	64	64	64	64	Long	Double	Little Endian	Zero	✓	✓	
ARM 64-bit (LLP64)	8	16	32	32	64	64	64	64	64	Long	Double	Little Endian	Zero	✓	✓	
Altera																
SoC (ARM Cortex A)	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□	
Analog Devices																
ADSP-CM40x(ARM Cortex-M)	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
Blackfin	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
SHARC	32	32	32	32	64	32	32	32	32	Long	Double	Big Endian	Zero	✓	□	

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits											Largest atomic size	Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	_size_t	ptrdif_f_t	int	float					
TigerSHARC	32	32	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
Atmel																
AVR	8	16	16	32	64	8	16	16	16	Char	None	Little Endian	Zero	✓	□	
AVR (32-bit)	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□	
AVR (8-bit)	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□	
Freescale																
32-bit PowerPC	8	16	32	32	64	32	32	32	32	Long	Double	Big Endian	Zero	✓	□	
68332	8	16	32	32	64	32	32	32	32	Char	None	Big Endian	Zero	✓	□	
68HC08	8	16	16	32	64	8	8	16	8	Char	None	Big Endian	Zero	✓	□	
68HC11	8	16	16	32	64	8	8	16	16	Char	None	Big Endian	Zero	✓	□	
ColdFire	8	16	32	32	64	32	32	32	32	Char	None	Big Endian	Zero	✓	□	
DSP563xx (16-bit mode)	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□	

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits										Largest atomic size		Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	size_t	ptrdif_f_t	int	float					
DSP5685x	8	16	16	32	64	16	16	16	16	Char	Float	Little Endian	Zero	✓	□	
HC(S)12	8	16	16	32	64	16	16	16	16	Char	None	Big Endian	Zero	✓	□	
MPC52xx, MPC500, MPC55xx, MPC5xx, PC5xx, MPC7xxx, MPC82xx, MPC83xx, MPC86xx, MPC8xx	8	16	32	32	64	32	32	32	32	Long	None	Big Endian	Zero	✓	□	
MPC85xx	8	16	32	32	64	32	32	32	32	Long	Double	Big Endian	Zero	✓	□	
S08	8	16	16	32	64	16	16	16	16	Char	None	Big Endian	Zero	✓	□	
S12x	8	16	16	32	64	16	16	16	16	Char	None	Big Endian	Zero	✓	□	
StarCore	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□	
Infineon																
C16x, XC16x	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□	
TriCore	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□	

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits										Largest atomic size		Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	size_t	ptrdiff_t	int	float					
Intel																
x86-32 (Windows32)	8	16	32	32	64	32	32	32	32	Char	Float	Little Endian	Zero	✓	<input type="checkbox"/>	
x86-64 (Linux 64)	8	16	32	64	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	<input type="checkbox"/>	
x86-64 (macOS)	8	16	32	64	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	<input type="checkbox"/>	
x86-64 (Windows64)	8	16	32	32	64	64	64	64	64	Char	Float	Little Endian	Zero	✓	<input type="checkbox"/>	
Microchip																
PIC18	8	16	16	32	64	8	8	24	24	Char	None	Little Endian	Zero	✓	<input type="checkbox"/>	
dsPIC	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	<input type="checkbox"/>	
NXP																
Cortex-M0/M0+	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	<input type="checkbox"/>	
Cortex-M3	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	<input type="checkbox"/>	
Cortex-M4	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	<input type="checkbox"/>	
Renesas																

Key:	float and double (not listed) always equal 32 and 64, respectively														
	Round to = Signed integer division rounds to														
	Shift right = Shift right on a signed integer as arithmetic shift														
	Long long = Support long long														
Device vendor / Device type	Number of bits										Largest atomic size	Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	size_t	ptrdif_f_t	int	float				
M16C	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□
M32C	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□
R8C/Tiny	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□
RH850	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□
RL78	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□
RX	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□
RZ	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□
SH-2/3/4	8	16	32	32	64	32	32	32	32	Char	None	Big Endian	Zero	✓	□
V850	8	16	32	32	64	32	32	32	32	Char	None	Little Endian	Zero	✓	□
STMicroelectronics															
ST10/ Super10	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□
Texas Instruments															

Key:	float and double (not listed) always equal 32 and 64, respectively															
	Round to = Signed integer division rounds to															
	Shift right = Shift right on a signed integer as arithmetic shift															
	Long long = Support long long															
Device vendor / Device type	Number of bits											Largest atomic size	Byte ordering	Round to	Shift right	Long long
	char	short	int	long	long long	native	pointer	size_t	ptrdif_f_t	int	float	int	float	Zero	✓	□
C2000	16	16	16	32	64	16	32	16	16	Int	None	Little Endian	Zero	✓	□	
C5000	16	16	16	32	64	16	16	16	16	Int	None	Big Endian	Zero	✓	□	
C6000	8	16	32	40	64	32	32	32	32	Int	None	Little Endian	Zero	✓	□	
MSP430	8	16	16	32	64	16	16	16	16	Char	None	Little Endian	Zero	✓	□	
Stellaris Cortex-M3	8	16	32	32	6	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
TMS470	8	16	32	32	64	32	32	32	32	Long	Double	Little Endian	Zero	✓	□	
TMS570 Cortex-R4	8	16	32	32	64	32	32	32	32	Long	Double	Big Endian	Zero	✓	□	
ASIC/FPGA																
ASIC/FPGA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	

- If your hardware does not match one of the listed types, select **Custom**.
- The **Device vendor** and **Device type** fields share the command-line parameter `TargetHWDeviceType`. When specifying this parameter at the command line, separate the device vendor and device type values by using the characters `->`. For example: '`Intel->x86-64 (Linux 64)`'.
- If you have a Simulink Coder™ license and you want to add **Device vendor** and **Device type** values to the default set, see "Register New Hardware Devices" (Simulink Coder).

Dependencies

The **Device vendor** and **Device type** parameter values reflect available device support for the selected hardware board.

Menu options that are available depend on the **Device vendor** parameter setting.

With the exception of device vendor ASIC/FPGA, selecting a device type sets the following parameters:

- **Number of bits: char**
- **Number of bits: short**
- **Number of bits: int**
- **Number of bits: long**
- **Number of bits: long long**
- **Number of bits: float**
- **Number of bits: double**
- **Number of bits: native**
- **Number of bits: pointer**
- **Number of bits: size_t**
- **Number of bits: ptrdiff_t**
- **Largest atomic size: integer**
- **Largest atomic size: floating-point**
- **Byte ordering**
- **Signed integer division rounds to**
- **Shift right on a signed integer as arithmetic shift**
- **Support long long**

Whether you can modify the value of a device-specific parameter varies according to device type.

Command-Line Information

Parameter: TargetHWDeviceType

Type: character vector

Value: any valid value (see tips)

Default: 'Intel ->x86-64 (Windows64)'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact

Application	Setting
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- “Hardware board” on page 15-6
- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: char

Description

Describe the character bit length for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: 8

Minimum: 8

Maximum: 32

Enter an integer value between 8 and 32.

Tip

All values must be a multiple of 8.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerChar

Type: integer

Value: any valid value

Default: 8

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: short

Description

Describe the data bit length for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: 16

Minimum: 8

Maximum: 32

Enter an integer value between 8 and 32.

Tip

All values must be a multiple of 8.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerShort

Type: integer

Value: any valid value

Default: 16

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: int

Description

Describe the data integer bit length of the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: 32

Minimum: 8

Maximum: 32

Enter an integer value between 8 and 32.

Tip

All values must be a multiple of 8.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerInt

Type: integer

Value: any valid value

Default: 32

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: long

Description

Describe the data bit lengths for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: 32

Minimum: 32

Maximum: 64

Enter an integer value between 32 and 64. (The value 64 is selected by default if you run MATLAB® software on a 64-bit host computer and select the MATLAB host as the test hardware — that is, TargetHWDeviceType equals 'Generic->MATLAB Host Computer'.)

Tip

All values must be a multiple of 8 and between 32 and 64.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerLong

Type: integer

Value: any valid value

Default: 32

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: long long

Description

Describe the length in bits of the C `long long` data type that the test hardware supports.

Category: Hardware Implementation

Settings

Default: 64

Minimum: 64

Maximum: 128

The number of bits that represent the C `long long` data type.

Tips

- Use the `long long` data type only if your C compiler supports `long long`.
- You can change the value for custom targets only. For custom targets, all values must be a multiple of 8 and between 64 and 128.

Dependencies

- **Enable long long** enables use of this parameter.
- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- The value of this parameter must be greater than or equal to the value of **Number of bits: long**.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerLongLong

Type: integer

Value: any valid value

Default: 64

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific

Application	Setting
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: float

Description

Describe the bit length of floating-point data for the hardware that you use to test code (read only).

Category: Hardware Implementation

Settings

Default: 32

Always equals 32.

Command-Line Information

Parameter: TargetBitPerFloat

Type: integer

Value: 32 (read-only)

Default: 32

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: double

Description

Describe the bit-length of **double** data for the hardware that you use to test code (read only).

Category: Hardware Implementation

Settings

Default: 64

Always equals 64.

Command-Line Information

Parameter: TargetBitPerDouble

Type: integer

Value: 64 (read only)

Default: 64

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: native

Description

Describe the microprocessor native word size for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: 32

Minimum: 8

Maximum: 64

Enter a value between 8 and 64. (The value 64 is selected by default if you run MATLAB software on a 64-bit host computer and select the MATLAB host as the test hardware — that is, TargetHWDeviceType equals 'Generic->MATLAB Host Computer'.)

Tip

All values must be a multiple of 8.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetWordSize

Type: integer

Value: any valid value

Default: 32

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: pointer

Description

Describe the bit-length of pointer data for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: Device-specific value (see Dependencies)

Minimum: 8

Maximum: 64

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetBitPerPointer

Type: integer

Value: any valid value

Default: device dependent

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Number of bits: size_t

Description

Describe the bit-length of `size_t` data for the hardware that you use to test code.

If `ProdEqTarget` is off, an Embedded Coder® processor-in-the-loop (PIL) simulation checks this setting with reference to the target hardware. If `ProdEqTarget` is on, the PIL simulation checks the `ProdBitPerSizeT` setting.

Category: Hardware Implementation

Settings

Default: Device-specific value (see Dependencies)

Value must be 8, 16, 24, 32, 40, 64, or 128 and greater or equal to the value of int.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: `TargetBitPerSizeT`

Type: integer

Value: any valid value

Default: device dependent

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)

- “Hardware Implementation Pane” on page 15-2
- “Verification of Code Generation Assumptions” (Embedded Coder)

Number of bits: ptrdiff_t

Description

Describe the bit-length of `ptrdiff_t` data for the hardware that you use to test code.

If `ProdEqTarget` is off, an Embedded Coder processor-in-the-loop (PIL) simulation checks this setting with reference to the target hardware. If `ProdEqTarget` is on, the PIL simulation checks the `ProdBitPerPtrDiffT` setting.

Category: Hardware Implementation

Settings

Default: Device-specific value (see Dependencies)

Value must be 8, 16, 24, 32, 40, 64, or 128 and greater or equal to the value of int.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: `TargetBitPerPtrDiffT`

Type: integer

Value: any valid value

Default: device dependent

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)

- “Hardware Implementation Pane” on page 15-2
- “Verification of Code Generation Assumptions” (Embedded Coder)

Largest atomic size: integer

Description

Specify the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: Char

Char

Specifies that `char` is the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

Short

Specifies that `short` is the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

Int

Specifies that `int` is the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

Long

Specifies that `long` is the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

LongLong

Specifies that `long long` is the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.

Tip

Use this parameter, where possible, to remove unnecessary double-buffering or unnecessary semaphore protection, based on data size, in generated multirate code.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.
- You can set this parameter to `LongLong` only if the hardware used to test the code supports the C `long long` data type and you have selected **Enable long long**.

Command-Line Information

Parameter: `TargetLargestAtomicInteger`

Value: `'Char' | 'Short' | 'Int' | 'Long' | 'LongLong'`

Default: `'Char'`

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Support long long” on page 2-44
- “Hardware Implementation Pane” on page 15-2

Largest atomic size: floating-point

Description

Specify the largest floating-point data type that can be atomically loaded and stored on the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: None

Float

Specifies that float is the largest floating-point data type that can be atomically loaded and stored on the hardware that you use to test code.

Double

Specifies that double is the largest floating-point data type that can be atomically loaded and stored on the hardware that you use to test code.

None

Specifies that there is no applicable setting or not to use this parameter in generating multirate code.

Tip

Use this parameter, where possible, to remove unnecessary double-buffering or unnecessary semaphore protection, based on data size, in generated multirate code.

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetLargestAtomicFloat

Value: 'Float' | 'Double' | 'None'

Default: 'None'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific

Application	Setting
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Byte ordering

Description

Describe the byte ordering for the hardware that you use to test code.

Category: Hardware Implementation

Settings

Default: Unspecified

Unspecified

Specifies that the code determines the endianness of the hardware. This choice is the least efficient.

Big Endian

The most significant byte comes first.

Little Endian

The least significant byte comes first.

Note For guidelines about configuring **Production hardware** controls for code generation, see Hardware Implementation Options (Simulink Coder).

Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetEndianess

Value: 'Unspecified' | 'LittleEndian' | 'BigEndian'

Default: 'Unspecified'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Signed integer division rounds to

Description

Describe how your compiler for the test hardware rounds the result of dividing two signed integers.

Category: Hardware Implementation

Settings

Default: Undefined

Undefined

Choose this option if neither `Zero` nor `Floor` describes the compiler behavior, or if that behavior is unknown.

Zero

If the quotient is between two integers, the compiler chooses the integer that is closer to zero as the result.

Floor

If the quotient is between two integers, the compiler chooses the integer that is closer to negative infinity.

Tips

- Use the **Integer rounding mode** parameter on your model's blocks to simulate the rounding behavior of the C compiler that you use to compile code generated from the model. This setting appears on the **Signal Attributes** pane of the parameter dialog boxes of blocks that can perform signed integer arithmetic, such as the Product block.
- For most blocks, the value of **Integer rounding mode** completely defines rounding behavior. For blocks that support fixed-point data and the `Simplest` rounding mode, the value of **Signed integer division rounds to** also affects rounding. For details, see “Rounding” (Fixed-Point Designer).
- For information on how this option affects code generation, see Hardware Implementation Options (Simulink Coder).
- This table illustrates the compiler behavior described by the options for this parameter.

N	D	Ideal N/D	Zero	Floor	Undefined
33	4	8.25	8	8	8
-33	4	-8.25	-8	-9	-8 or -9
33	-4	-8.25	-8	-9	-8 or -9
-33	-4	8.25	8	8	8 or 9

Dependency

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.

- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetIntDivRoundTo
Value: 'Floor' | 'Zero' | 'Undefined'
Default: 'Undefined'

Recommended settings

Application	Setting
Debugging	No impact for simulation or during development. Undefined for production code generation.
Traceability	No impact for simulation or during development. Zero or Floor for production code generation.
Efficiency	No impact for simulation or during development. Zero for production code generation.
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Shift right on a signed integer as arithmetic shift

Description

Describe how your compiler for the test hardware fills the sign bit in a right shift of a signed integer.

Category: Hardware Implementation

Settings

Default: On

On

Generates simple, efficient code whenever the Simulink model performs arithmetic shifts on signed integers.

Off

Generates fully portable but less efficient code to implement right arithmetic shifts.

Tips

- Select this parameter if your C compiler implements a signed integer right shift as an arithmetic right shift.
- An arithmetic right shift fills bits vacated by the right shift with the value of the most significant bit, which indicates the sign of the number in twos complement notation. It is equivalent to dividing the number by 2.
- This setting affects only code generation.

Dependency

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

Command-Line Information

Parameter: TargetShiftRightIntArith

Value: 'on' | 'off'

Default: 'on'

Recommended settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	On

Application	Setting
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Hardware Implementation Pane” on page 15-2

Support long long

Description

Specify that your C compiler supports the C `long long` data type. Most C99 compilers support `long long`.

Category: Hardware Implementation

Settings

Default: Off



On

Enables use of C `long long` data type on the test hardware.



Off

Disables use of C `long long` data type on the test hardware.

Tips

- This parameter is enabled only if the selected test hardware supports the C `long long` data type.
- If your compiler does not support C `long long`, do not select this parameter.

Dependencies

This parameter enables **Number of bits: long long**.

Command-Line Information

Parameter: TargetLongLongMode

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Target specific
Safety precaution	No impact when Test hardware is the same as production hardware is selected. If it is not selected, no recommendation.

See Also

Related Examples

- Specifying Test Hardware Characteristics (Simulink Coder)
- Hardware Implementation Options (Simulink Coder)
- “Number of bits: long long” on page 2-23
- “Hardware Implementation Pane” on page 15-2

Allowed unit systems

Description

Specify unit systems allowed in the model.

Category: Diagnostics

Settings

Default: all

all or comma-separated list of one or more of:

SI

International System of Units.

SI (extended)

International System of Units (extended).

English


English units.

CGS

Centimetre-gram-second system of units.

Tip

As an alternative to the text box, click the **Set Allowed Unit Systems** button.

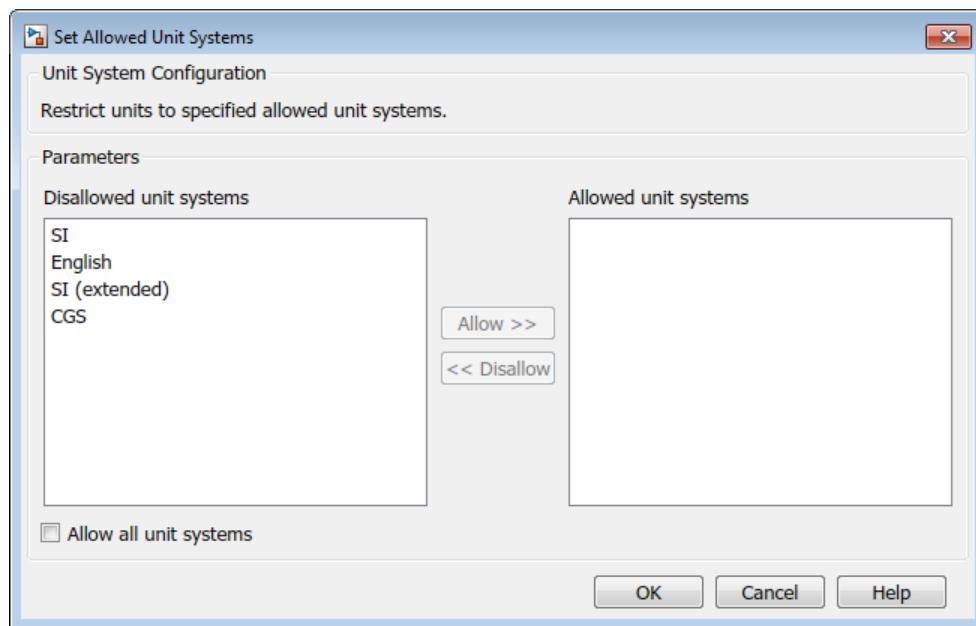

- To allow all unit systems, select the **Allow all unit systems** check box.

- Use the **Allow** and **Disallow** buttons to allow or disallow selected unit systems.

Command-Line Information

Parameter: AllowedUnitSystems

Type: character vector

Value: SI | SI (extended) | English | CGS in a comma-delimited list or all, without quotation marks

Default: all

See Also

Related Examples

- “Unit Specification in Simulink Models”
- Solver Diagnostics on page 9-2

Units inconsistency messages

Description

Specify if unit inconsistencies should be reported as warnings. Select the diagnostic action to take when the Simulink software detects unit inconsistencies.

Category: Diagnostics

Settings

Default: warning

`warning`

Display unit inconsistencies as warnings.

`none`

Display nothing for unit inconsistencies (do not report unit inconsistencies).

Command-Line Information

Parameter: UnitsInconsistencyMsg

Value: 'warning' | 'none'

Default: 'warning'

See Also

Related Examples

- “Unit Specification in Simulink Models”
- Solver Diagnostics on page 9-2

Allow automatic unit conversions

Description

Allow automatic unit conversions in the model.

Category: Diagnostics

Settings

Default: On



On

Enables automatic unit conversions in cases where units have a known mathematical relationship. For more information, see “Converting Units”.



Off

Disables automatic unit conversions in cases where units have a known mathematical relationship. To convert, you must insert a Unit Conversion block between the differing ports.

Command-Line Information

Parameter: AllowAutomaticUnitConversions

Value: 'on' | 'off'

Default: 'on'

See Also

Related Examples

- “Unit Specification in Simulink Models”
- “Converting Units”
- Solver Diagnostics on page 9-2

Dataset signal format

Description

Format for logged Dataset leaf elements.

Category: Data Import/Export

Settings

Default: timeseries

timeseries

Save Dataset element values in MATLAB `timeseries` format.

timetable

Save Dataset element values in MATLAB `timetable` format.

Comparison of Formats

The `timetable` format enables easier merging of logged data from multiple simulations.

Property Display

The `timeseries` format displays one field for time properties (`TimeInfo`) and a second field for data properties (`DataInfo`). For example, here are the properties of a `timeseries` object for a nonscalar signal.

```
ts
timeseries

Common Properties:
    Name: ''
    Time: [1001x1 double]
    TimeInfo: [1x1 tsdata.timemetadata]
    Data: [1001x1 double]
    DataInfo: [1x1 tsdata.datametadata]
```

When you enter the name of a `timetable` object (for example, `tt`) and query the properties, you see all of the properties.

```
tt.Properties
ans =
struct with fields:

    Description: ''
    UserData: []
    DimensionNames: {'Time' 'Variables'}
    VariableDescriptions: {}
    VariableNames: ['temperature' 'WindSpeed' 'WindDirection']
```

```

VariableUnits: {}
VariableContinuity: ['continuous']
RowTimes: [64x1 duration]

```

Data Access

To access data logged in the `timeseries` format, use the `Data` property for a signal. For example, for a `timeseries` object `ts` (only first five values shown):

```

ts = yout{1}.Values;
ts.Data

```

```
ans =
```

```

0
-0.0002
-0.0012
-0.0062
-0.0306

```

The `timetable` format for logged `Dataset` data produces a table with one time column, called `Time`, and one data column, called `Data`. The `Time` column is the simulation time vector for a given signal, stored as a duration type, with the setting of seconds to match the units of simulation time, starting with the simulation start time (typically set to `0 sec`). The Simulink signal dimensions of `[n]` and `[nx1]` are treated equivalently in the `timetable` representation. For example, for a `timetable` object `tt` (only first five values shown):

```

tt = yout{1}.Values;
tt.Data

```

Time	Data
0 sec	[1x3x2 double]
0.1 sec	[1x3x2 double]
0.2 sec	[1x3x2 double]
0.3 sec	[1x3x2 double]
0.4 sec	[1x3x2 double]

The number of samples is the first dimension in the `Data` column of the `timetable` object, but it is the last dimension in the data field of logged `timeseries` data that is `nonscalar`. Therefore, when you access data in `timetable` format, you may need to reshape the data when each sample is a `nonscalar` array. One option is to use the `squeeze` function. For example, to access the first data row in the dataset, you can use a command like this:

```
squeeze(tt.Data{1,1})
```

```
ans =
1     2
3     4
5     6
```

If a signal is a bus or array of buses, the signal values are logged as a structure of `timetable` objects, with each leaf of the structure corresponding to the logged result of each leaf signal in the bus.

Units

For data logged in Simulink, the `timeseries` format displays units for time values in the `Units` property. Units can be specified as any value of any class. Timeseries logging sets the units to a `Simulink.SimulationData.Unit` object, if the logged signal has units specified. For loading, units are honored only if they are of type `Simulink.SimulationData.Unit`; otherwise, they are ignored.

For the `timetable` format, Simulink does not support units for logged data.

Data Interpolation

The `timeseries` format `Interpolation` property displays whether the interpolation method is `linear` (default) or `zoh`.

The `timetable` format `VariableContinuity` property characterizes variables as continuous or discrete. The possible values for simulation data are:

- `continuous` – Corresponds to the `timeseries` property `Interpolation` setting of `linear`. Simulink uses this setting for filling continuous sample times.
- `step` – Corresponds to the `timeseries` property `Interpolation` setting of `zoh`.

Simulink uses this setting for filling discrete sample times.

Uniform and Nonuniform Time

The `timeseries` format displays whether the time data is uniform or nonuniform. For data logged for continuous sample times (linear interpolation), the `TimeInfo` property indicates that the time is nonuniform and gives the length. For a discrete sample times (zero-order hold interpolation), the `TimeInfo` property indicates that the time is uniform and gives the length and increment.

The `timetable` format does not have a property for uniform and nonuniform time data.

For data in `timeseries` or `timetable` format, you can use the MATLAB `isregular` function to get this time information.

Signal Name

The `timeseries` format stores the name of a logged signal in a `Simulink.SimulationData.Element` wrapper object, as well as in the `timeseries` object itself.

The `timetable` format stores the name of a logged signal in a `Simulink.SimulationData.Element` wrapper object, but not in the `timetable` object itself.

Tips

- The **Dataset signal format** parameter has no effect when using Scope blocks to log data.

Command-Line Information

Parameter: `DatasetSignalFormat`
Value: `'timeseries'` | `'timetable'`
Default: `'timeseries'`

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- “Model Configuration Parameters: Data Import/Export” on page 3-2
- “Log Data to Persistent Storage”

Array bounds exceeded

Description

Ensure that Simulink-allocated memory used in S-functions does not write beyond its assigned array bounds when writing to its outputs, states, or work vectors.

Category: Diagnostics

Settings

Default: none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

Tips

- Use this option to check whether execution of each instance of a block during model simulation writes data to memory locations not allocated to the block. This can happen only if your model includes a user-written S-function that has a bug.
- Enabling this option slows down model execution considerably. Thus, you should enable it only if you suspect that your model contains a user-written S-function that has a bug.
- This option causes Simulink software to check whether a block writes outside the memory allocated to it during simulation. Typically this can happen only if your model includes a user-written S-function that has a bug.
- See Checking Array Bounds in “Handle Errors in S-Functions” for more information on using this option.
- For models referenced in Accelerator mode, Simulink ignores the **Array bounds exceeded** parameter setting if you set it to a value other than **None**.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration parameter settings during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
- 2 Select **By Task**.
- 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.

Command-Line Information

Parameter: `ArrayBoundsChecking`

Value: `'none' | 'warning' | 'error'`

Default: 'none'

Recommended Settings

Application	Setting
Debugging	warning
Traceability	No impact
Efficiency	none
Safety precaution	No impact

See Also

Related Examples

- Diagnosing Simulation Errors
- Data Validity Diagnostics on page 6-2

Model Verification block enabling

Description

Enable model verification blocks in the current model either globally or locally.

Category: Diagnostics

Settings

Default: Use local settings

Use local settings

Enables or disables blocks based on the value of the **Enable assertion** parameter of each block. If a block's **Enable assertion** parameter is on, the block is enabled; otherwise, the block is disabled.

Enable All

Enables all model verification blocks in the model regardless of the settings of their **Enable assertion** parameters.

Disable All

Disables all model verification blocks in the model regardless of the settings of their **Enable assertion** parameters.

Dependency

Simulation and code generation ignore the **Model Verification block enabling** parameter when model verification blocks are inside a S-function.

Command-Line Information

Parameter: AssertControl

Value: 'UseLocalSettings' | 'EnableAll' | 'DisableAll'

Default: 'UseLocalSettings'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	EnableAll for simulation or during development DisableAll for production code generation

See Also

Related Examples

- Diagnosing Simulation Errors
- Data Validity Diagnostics on page 6-2

Check runtime output of execution context

Description

Specify whether to display a warning if Simulink software detects potential output differences from previous releases.

Category: Diagnostics

Settings

Default: Off

On

Displays a warning if Simulink software detects potential output differences from previous releases.


Off


Does not display a warning.

Tips

- This diagnostic is triggered if the model contains a block that meets the following conditions:
 - The block has a tunable parameter.
 - The block is connected to an output of a conditionally executed subsystem.
 - The block inherits its execution context from that subsystem.
 - The Outport to which it is connected has an undefined initial condition, i.e., the Outport block's **Initial output** parameter is set to [].
- Models with blocks that meet these criteria can produce results when the parameter is tuned in the current release that differ from results produced in Release 13 or earlier releases.


Consider for example the following model.

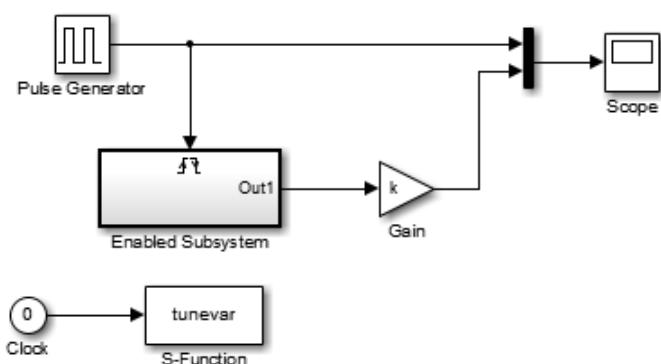



In this model, the `tunevar` S-function changes the value of the Gain block's `k` parameter and updates the diagram at simulation time 7 (i.e., it simulates tuning the parameter).

The following figure compares the superimposed output of the model's Pulse Generator block and its Gain block in Release 13 and the current release.

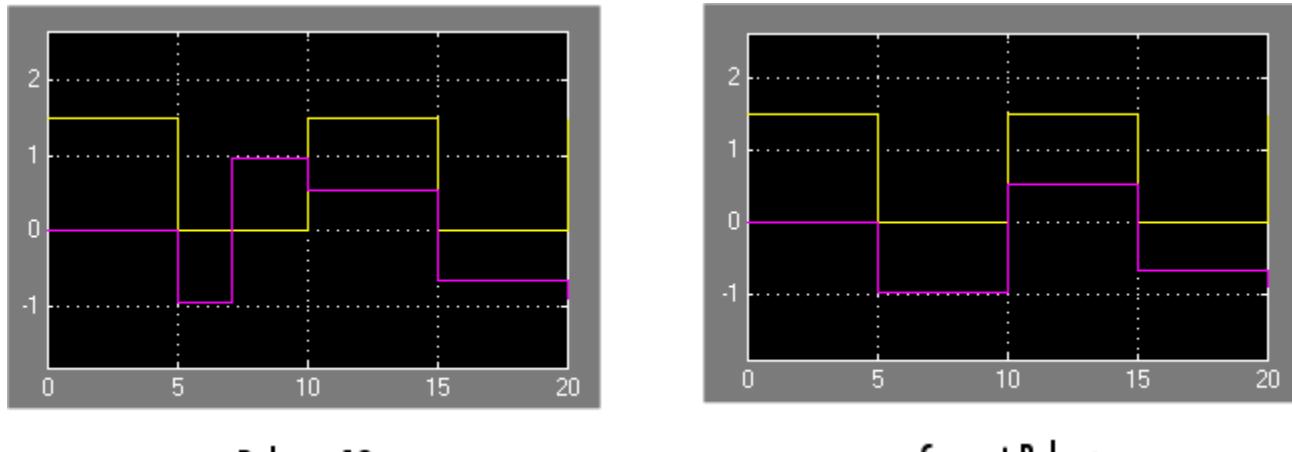

Release 13

Current Release

Note that the output of the Gain block changes at time 7 in Release 13 but does not change in the current release. This is because in Release 13, the Gain block belongs to the execution context of the root system and hence executes at every time step whereas in the current release, the Gain block belongs to the execution context of the triggered subsystem and hence executes only when the triggered subsystem executes, i.e., at times 5, 10, 15, and 20.

Dependency

This parameter is enabled only if **Underspecified initialization detection** is set to **Classic**.

Command-Line Information

Parameter: `CheckExecutionContextRuntimeOutputMsg`
Value: 'on' | 'off'
Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact

Application	Setting
Traceability	No impact
Efficiency	No impact
Safety precaution	On

See Also

Related Examples

- Diagnosing Simulation Errors
- “Underspecified initialization detection” on page 2-66
- “Model Configuration Parameters: Diagnostics” on page 9-2

Check undefined subsystem initial output

Description

Specify whether to display a warning if the model contains a conditionally executed subsystem in which a block with a specified initial condition drives an Outport block with an undefined initial condition

Category: Diagnostics

Settings

Default: On



On

Displays a warning if the model contains a conditionally executed subsystem in which a block with a specified initial condition drives an Outport block with an undefined initial condition.



Off


Does not display a warning.


Tips

- This situation occurs when a block with a specified initial condition, such as a Constant, Initial Condition, or Delay block, drives an Outport block with an undefined initial condition (**Initial output** parameter is set to []).
- Models with such subsystems can produce initial results (i.e., before initial activation of the conditionally executed subsystem) in the current release that differ from initial results produced in Release 13 or earlier releases.

Consider for example the following model.


 ex_check_undefined_subsys_initial_output ▶

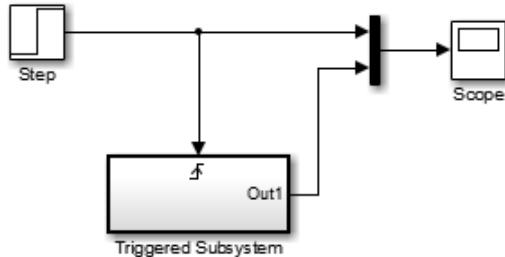

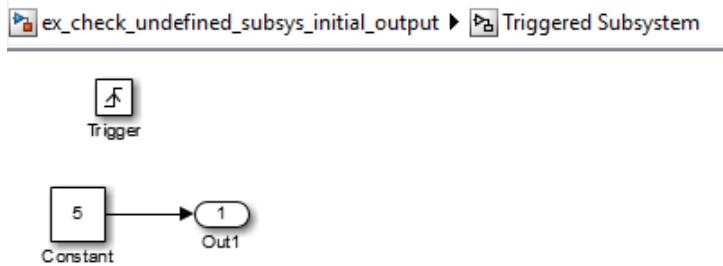

This model does not define the initial condition of the triggered subsystem's output port.

The following figure compares the superimposed output of this model's Step block and the triggered subsystem in Release 13 and the current release.

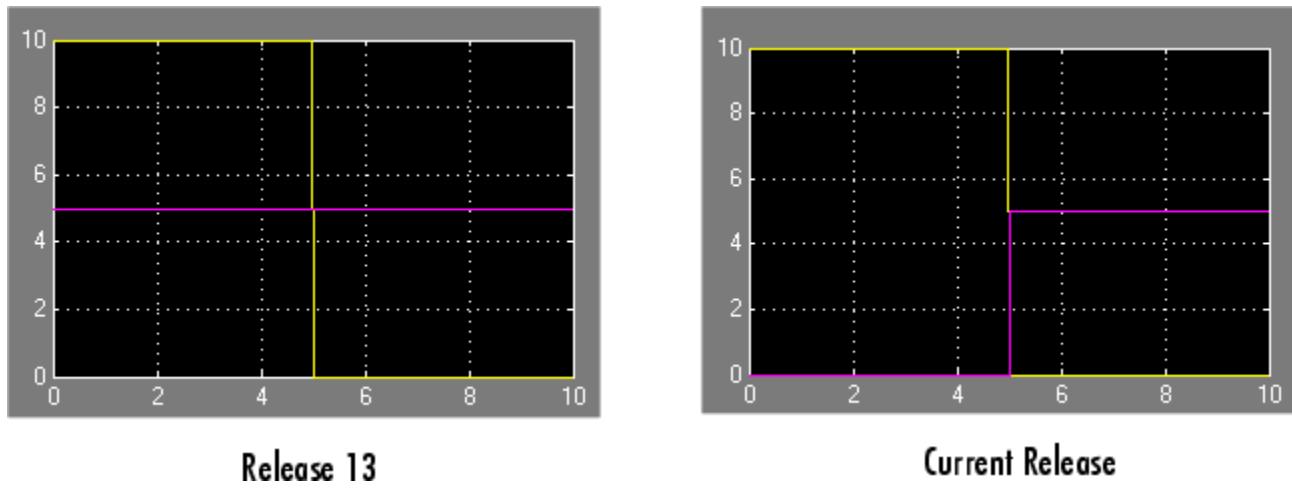

Notice that the initial output of the triggered subsystem differs between the two releases. This is because Release 13 and earlier releases use the initial output of the block connected to the output port (i.e., the Constant block) as the triggered subsystem's initial output. By contrast, this release outputs 0 as the initial output of the triggered subsystem because the model does not specify the port's initial output.

Dependency

This parameter is enabled only if **Underspecified initialization detection** is set to **Classic**.

Command-Line Information

Parameter: CheckSSInitialOutputMsg
Value: 'on' | 'off'
Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	On

See Also

Related Examples

- Diagnosing Simulation Errors
- “Conditionally Executed Subsystems and Models”
- “Underspecified initialization detection” on page 2-66
- “Model Configuration Parameters: Diagnostics” on page 9-2

Detect multiple driving blocks executing at the same time step

Description

Select the diagnostic action to take when the software detects a Merge block with more than one driving block executing at the same time step.

Category: Diagnostics

Settings

Default: error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink terminates the simulation and displays an error message only if the execution order of the driving blocks is not explicitly defined.

Tips

- Connecting the inputs of a Merge block to multiple driving blocks that execute at the same time step can lead to inconsistent results for both simulation and generated code. Set **Detect multiple driving blocks executing at the same time step** to **error** to avoid such situations.

Command-Line Information

Parameter: MergeDetectMultiDrivingBlocksExec

Value: 'none' | 'warning' | 'error'

Default: 'error'

Recommended Settings

Application	Setting
Debugging	error
Traceability	error
Efficiency	No impact
Safety precaution	error

See Also

Merge

Related Examples

- Diagnosing Simulation Errors
- “Check usage of Merge blocks”
- “Underspecified initialization detection” on page 2-66
- Data Validity Diagnostics on page 6-2

Underspecified initialization detection

Description

Select how Simulink software handles initialization of initial conditions for conditionally executed subsystems, Merge blocks, subsystem elapsed time, and Discrete-Time Integrator blocks.

Category: Diagnostics

Settings

Default: Simplified

Classic

Initial conditions are initialized the same way they were prior to R2008b.

Simplified

Initial conditions are initialized using the enhanced behavior, which can improve the consistency of simulation results.

Tips

- Use Classic to ensure compatibility with previous releases of Simulink. Use Simplified to improve the consistency of simulation results, especially for models that do not specify initial conditions for conditional subsystem output ports, and for models that have conditionally executed subsystem output ports connected to S-functions. For more information, see “Simplified Initialization Mode” and “Classic Initialization Mode”.
- For existing models, MathWorks® recommends using the Model Advisor to migrate your model to the new settings. To migrate your model to simplified initialization mode, run the following Model Advisor checks:
 - “Check usage of Merge blocks”
 - “Check usage of Outport blocks”
 - “Check usage of Discrete-Time Integrator blocks”
 - “Check model settings for migration to simplified initialization mode”

For more information, see “Convert from Classic to Simplified Initialization Mode”.

- When using Simplified initialization mode, you must set “Bus signal treated as vector” on page 5-12 to error on the Connectivity Diagnostics pane.

Dependencies

Selecting Classic enables the following parameters:

- **Check undefined subsystem initial output**
- **Check runtime output of execution context**

Selecting Simplified disables these parameters.

Command-Line Information

Parameter: UnderspecifiedInitializationDetection
Value: 'Classic' | 'Simplified'
Default: 'Simplified'

Recommended Settings

Application	Setting
Debugging	Simplified
Traceability	Simplified
Efficiency	Simplified
Safety precaution	Simplified

See Also

Merge | Discrete-Time Integrator

Related Examples

- “Convert from Classic to Simplified Initialization Mode”
- “Conditional Subsystem Initial Output Values”
- “Conditionally Executed Subsystems and Models”
- “Simplified Initialization Mode”
- “Classic Initialization Mode”
- “Conditional Subsystem Output Values When Disabled”
- Diagnosing Simulation Errors
- Data Validity Diagnostics on page 6-2

Solver data inconsistency

Description

Select the diagnostic action to take if Simulink software detects S-functions that have continuous sample times, but do not produce consistent results when executed multiple times.

Category: Diagnostics

Settings

Default: none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

Tips

- Consistency checking can cause a significant decrease in performance (up to 40%).
- Consistency checking is a debugging tool that validates certain assumptions made by Simulink ODE solvers. Use this option to:
 - Validate your S-functions and ensure that they adhere to the same rules as Simulink built-in blocks.
 - Determine the cause of unexpected simulation results.
 - Ensure that blocks produce constant output when called with a given value of t (time).
- Simulink software saves (caches) output, the zero-crossing, the derivative, and state values from one time step for use in the next time step. The value at the end of a time step can generally be reused at the start of the next time step. Solvers, particularly stiff solvers such as `ode23s` and `ode15s`, take advantage of this to avoid redundant calculations. While calculating the Jacobian matrix, a stiff solver can call a block's output functions many times at the same value of t .
- When consistency checking is enabled, Simulink software recomputes the appropriate values and compares them to the cached values. If the values are not the same, a consistency error occurs. Simulink software compares computed values for these quantities:
 - Outputs
 - Zero crossings
 - Derivatives
 - States

Command-Line Information

Parameter: `ConsistencyChecking`

Value: 'none' | 'warning' | 'error'
Default: 'none'

Recommended Settings

Application	Setting
Debugging	warning
Traceability	No impact
Efficiency	none
Safety precaution	No impact

See Also

Related Examples

- Diagnosing Simulation Errors
- Choosing a Solver
- Solver Diagnostics on page 9-2

Ignored zero crossings

Description

Select the diagnostic action to take if Simulink detects zero-crossings that are being ignored.

Category: Diagnostics

Settings

Default: none

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

Tips

- Consistency checking can cause a significant decrease in performance (up to 40%).
- Consistency checking is a debugging tool that validates certain assumptions made by Simulink ODE solvers. Use this option to:
 - Validate your S-functions and ensure that they adhere to the same rules as Simulink built-in blocks.
 - Determine the cause of unexpected simulation results.
 - Ensure that blocks produce constant output when called with a given value of t (time).
- Simulink software saves (caches) output, the zero-crossing, the derivative, and state values from one time step for use in the next time step. The value at the end of a time step can generally be reused at the start of the next time step. Solvers, particularly stiff solvers such as `ode23s` and `ode15s`, take advantage of this to avoid redundant calculations. While calculating the Jacobian matrix, a stiff solver can call a block's output functions many times at the same value of t .
- When consistency checking is enabled, Simulink software recomputes the appropriate values and compares them to the cached values. If the values are not the same, a consistency error occurs. Simulink software compares computed values for these quantities:
 - Outputs
 - Zero crossings
 - Derivatives
 - States

Command-Line Information

Parameter: IgnoredZcDiagnostic

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	warning
Traceability	No impact
Efficiency	none
Safety precaution	No impact

See Also

Related Examples

- Solver Diagnostics on page 9-2

Masked zero crossings

Description

Select the diagnostic action to take if Simulink detects zero-crossings that are being masked.

Category: Diagnostics

Settings

Default: none

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

Tips

Command-Line Information

Parameter: MaskedZcDiagnostic

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	warning
Traceability	No impact
Efficiency	none
Safety precaution	No impact

See Also

Related Examples

- Solver Diagnostics on page 9-2

Block diagram contains disabled library links

Description

Select the diagnostic action to take when saving a model containing disabled library links.

Category: Diagnostics

Settings

Default: warning

none

Simulink software takes no action.

warning

Simulink software displays a warning and saves the block diagram. The diagram may not contain the information you had intended.

error

Simulink software displays an error message. The model is not saved.

Tip

Use the Model Advisor Identify disabled library links check to find disabled library links.

Command-Line Information

Parameter: SaveWithDisabledLinksMsg

Value: 'none' | 'warning' | 'error'

Default: 'warning'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- “Disable or Break Links to Library Blocks”
- “Identify disabled library links”
- Saving a Model

- Solver Diagnostics on page 9-2

Block diagram contains parameterized library links

Description

Select the diagnostic action to take when saving a model containing parameterized library links.

Category: Diagnostics

Settings

Default: warning

none

Simulink software takes no action.

warning

Simulink software displays a warning and saves the block diagram. The diagram may not contain the information you had intended.

error

Simulink software displays an error message. The model is not saved.

Tips

- Use the Model Advisor Identify parameterized library links check to find parameterized library links.

Command-Line Information

Parameter: SaveWithParameterizedLinksMsg

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- “Identify parameterized library links”
- Solver Diagnostics on page 9-2

Initial state is array

Description

Message behavior when the initial state is an array

Category: Diagnostics

Settings

Default: warning

`warning`

Simulink software displays a warning when the initial state is an array. If the order of the elements in the array do not match the order in which blocks initialize, the simulation can produce unexpected results.

`error`

Simulink software displays an error message when the initial state is an array.

`none`

Simulink software does not display a message when the initial state is an array.

Tips

- Avoid using an array for the initial state. If the order of the elements in the array does not match the order in which blocks initialize, the simulation can produce unexpected results. To promote deterministic simulation results, use the default setting or set the diagnostic to `error`.
- Instead of using array format for the initial state, use a format such as structure, structure with time, or Dataset.

Command-Line Information

Parameter:InitInArrayFormatMsg

Value: 'none' | 'warning' | 'error'

Default: 'warning'

Recommended Settings

Application	Setting
Debugging	Use the default setting of <code>warning</code> .
Traceability	Use the default setting of <code>warning</code> .
Efficiency	Use the default setting of <code>warning</code> .
Safety precaution	Use the default setting of <code>warning</code> .

See Also

Related Examples

- “Initial state” on page 3-7
- “State Information”
- “Dataset Conversion for Logged Data”
- “Model Configuration Parameters: Diagnostics” on page 9-2

Insufficient maximum identifier length

Description

For referenced models, specify diagnostic action when the configuration parameter **Maximum identifier length** does not provide enough character length to make global identifiers unique across models.

Category: Diagnostics

Settings

Default: warning

warning

The code generator displays a warning message when the configuration parameter **Maximum identifier length** does not provide enough character length to make global identifiers unique across models. The code generator truncates the identifier to fit the specified value in the configuration parameter **Maximum identifier length** in the generated code.

error

The code generator displays an error message when the configuration parameter **Maximum identifier length** does not provide enough character length to make global identifiers unique across models.

none

The code generator does not display a message when the configuration parameter **Maximum identifier length** does not provide enough character length to make global identifiers unique across models. The code generator truncates the identifier to fit the specified value in the configuration parameter **Maximum identifier length** in the generated code.

Command-Line Information

Parameter: ModelReferenceSymbolNameMessage

Type: character vector

Value: 'none' | 'warning' | 'error'

Default: 'warning'

Recommended Settings

Application	Setting
Debugging	Use the default setting of warning.
Traceability	Use the default setting of warning.
Efficiency	Use the default setting of warning.
Safety precaution	Use the default setting of warning.

See Also

Related Examples

- “Maximum identifier length” (Simulink Coder)
- “Model Configuration Parameters: Diagnostics” on page 9-2
- “Specify Identifier Length to Avoid Naming Collisions” (Simulink Coder)
- “Set Configuration Parameters for Code Generation of Model Hierarchies” (Simulink Coder)

Compiler optimization level

Description

Sets the degree of optimization used by the compiler when generating code for acceleration, Stateflow® charts, MATLAB Function block, and MATLAB System block.

Category: Simulation Target

Settings

Default: Optimizations off (faster builds)

Optimizations off (faster builds)

Specifies the compiler not to optimize code. This results in faster build times.

Optimizations on (faster runs)

Specifies the compiler to generate optimized code. The generated code will run faster, but the model build will take longer than if optimizations are off.

Tips

- The default **Optimizations off** is a good choice for most models. This quickly produces code that can be used with acceleration.
- Set **Optimizations on** to optimize your code. The fast running code produced by optimization can be advantageous if you will repeatedly run your model with the accelerator.

Command-Line Information

Parameter: SimCompilerOptimization

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- "Acceleration"
- "Interact with the Acceleration Modes Programmatically"

- “Customize the Acceleration Build Process”
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

Verbose accelerator builds

Description

Select the amount of information displayed during code generation for Simulink Accelerator mode, referenced model Accelerator mode, and Rapid Accelerator mode.

Category: Simulation Target

Settings

Default: Off

Off

Display limited amount of information during the code generation process.

On

Display progress information during code generation, and show the compiler options in use.

Command-Line Information

Parameter: AccelVerboseBuild

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- “Controlling Verbosity During Code Generation”
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

Implement logic signals as Boolean data (vs. double)

Description

Controls the output data type of blocks that generate logic signals.

Category: Simulation Target

Settings

Default: On



On

Blocks that generate logic signals output a signal of `boolean` data type. This reduces the memory requirements of generated code.



Off

Blocks that generate logic signals output a signal of `double` data type. This ensures compatibility with models created by earlier versions of Simulink software.

Tips

- Setting this option **on** reduces the memory requirements of generated code, because a Boolean signal typically requires one byte of storage compared to eight bytes for a **double** signal.
- Setting this option **off** allows the current version of Simulink software to run models that were created by earlier versions of Simulink software that supported only signals of type **double**.
- This optimization affects the following blocks:
 - **Logical Operator block** - This parameter affects only those Logical Operator blocks whose **Output data type** parameter specifies **Inherit: Logical** (see **Configuration Parameters: Optimization**). If this parameter is selected, such blocks output a signal of `boolean` data type; otherwise, such blocks output a signal of `double` data type.
 - **Relational Operator block** - This parameter affects only those Relational Operator blocks whose **Output data type** parameter specifies **Inherit: Logical** (see **Configuration Parameters: Optimization**). If this parameter is selected, such blocks output a signal of `boolean` data type; otherwise, such blocks output a signal of `double` data type.
 - **Combinatorial Logic block** - If this parameter is selected, Combinatorial Logic blocks output a signal of `boolean` data type; otherwise, they output a signal of `double` data type. See **Combinatorial Logic** in the *Simulink Reference* for an exception to this rule.
 - **Hit Crossing block** - If this parameter is selected, Hit Crossing blocks output a signal of `boolean` data type; otherwise, they output a signal of `double` data type.

Dependencies

- This parameter is disabled for models created with a version of Simulink software that supports only signals of type **double**.

Command-Line Information

Parameter: BooleanDataType

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	On
Safety precaution	On

See Also

Related Examples

- “Optimize Generated Code Using Boolean Data for Logical Signals” (Simulink Coder)
- “Math and Data Types Pane” on page 23-2

Block reduction

Description

Reduce execution time by collapsing or removing groups of blocks.

Category: Simulation Target

Settings

Default: On



On

Simulink software searches for and reduces the following block patterns:

- **Redundant type conversions** — Unnecessary type conversion blocks, such as an `int` type conversion block with an input and output of type `int`.
- **Dead code** — Blocks or signals in an unused code path.
- **Fast-to-slow Rate Transition block in a single-tasking system** — Rate Transition blocks with an input frequency faster than its output frequency.



Off

Simulink software does not search for block patterns that can be optimized. Simulation and generated code are not optimized.

Tips




- When you select **Block reduction**, Simulink software collapses certain groups of blocks into a single, more efficient block, or removes them entirely. This results in faster execution during model simulation and in generated code.
- Block reduction does not change the appearance of the source model.
- Tunable parameters do not prevent a block from being reduced by dead code elimination.
- Once block reduction takes place, Simulink software does not display the sorted order for blocks that have been removed.
- If you have a Simulink Coder license, block reduction is intended to remove only the generated code that represents execution of a block. Other supporting data, such as definitions for sample time and data types might remain in the generated code.

Dead Code Elimination

Any blocks or signals in an *unused code path* are eliminated from generated code.

- The following conditions need to be met for a block to be considered part of an unused code path:
 - All signal paths for the block end with a block that does not execute. Examples of blocks that do not execute include Terminator blocks, disabled Assertion blocks, S-Function blocks configured for block reduction, and To Workspace blocks when MAT-file logging is disabled for code generation.

- No signal paths for the block include global signal storage downstream from the block.
- Tunable parameters do not prevent a block from being reduced by dead code elimination.



- Consider the signal paths in the following block diagram.

If you check **Block reduction**, Simulink Coder software responds to each signal path as follows:

For Signal Path...	Simulink Coder Software...
In1 to Out1	Generates code because dead code elimination conditions are not met.
In2 to Terminator	Does not generate code because dead code elimination conditions are met.
In3 to Scope	Generates code if MAT-file logging is enabled and eliminates code if MAT-file logging is disabled.

Command-Line Information

Parameter: BlockReduction

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	Off for simulation or during development No impact for production code generation
Traceability	Off
Efficiency	On
Safety precaution	No impact

See Also

Related Examples

- “Remove Code for Blocks That Have No Effect on Computational Results” (Simulink Coder)
- “Eliminate Dead Code Paths in Generated Code” (Simulink Coder)
- “Time-Based Scheduling” (Simulink Coder)
- “Performance” (Simulink Coder)
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

Conditional input branch execution

Description

Improve model execution when the model contains Switch and Multiport Switch blocks.

Category: Simulation Target

Settings

Default: On



On

Executes only the blocks required to compute the control input and the data input selected by the control input. This optimization speeds execution of code generated from the model. Limits to Switch block optimization:

- Only blocks with -1 (inherited) or inf (Constant) sample time can participate.
- Blocks with outputs flagged as test points cannot participate.
- No multirate block can participate.
- Blocks with states cannot participate.
- Only S-functions with option SS_OPTION_CAN_BE_CALLED_CONDITIONALLY set can participate.



Off

Executes all blocks driving the Switch block input ports at each time step.

Command-Line Information

Parameter: ConditionallyExecuteInputs

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	On
Efficiency	On (execution), No impact (ROM, RAM)
Safety precaution	No impact

See Also

Related Examples

- “Use Conditional Input Branch Execution” (Simulink Coder)
- “Conditionally Executed Subsystems Overview”
- “Performance” (Simulink Coder)
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)
- “Simulink Optimizations and Model Coverage” (Simulink Coverage)

Ensure responsiveness

Description

Enables responsiveness checks in code generated for MATLAB Function blocks, Stateflow charts, and dataflow domains.

Category: Simulation Target

Settings

Default: On



On

Enables periodic checks for Ctrl+C breaks in code generated for MATLAB Function blocks, Stateflow charts, and dataflow domains. Also allows graphics refreshing.



Off

Disables periodic checks for Ctrl+C breaks in code generated for MATLAB Function blocks, Stateflow charts, and dataflow domains. Also disables graphics refreshing.

Caution Without these checks, the only way to end a long-running execution might be to terminate the MATLAB session.

Command-Line Information

Parameter: SimCtrlC

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	On
Traceability	No recommendation
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- “Control Run-Time Checks”
- “Model Configuration Parameters: Simulation Target” on page 13-2

Compile-time recursion limit for MATLAB functions

Description

For compile-time recursion, control the number of copies of a function that are allowed in the generated code. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object associated with a MATLAB System block.

Category: Simulation Target > Advanced parameters

Settings

Default: 50

- To disallow recursion in the MATLAB code, set this parameter to 0.
- The default compile-time recursion limit is high enough for most recursive functions that require compile-time recursion. If code generation fails because of the recursion limit, and you want compile-time recursion, increase the limit. Alternatively, you can change your MATLAB code so that the code generator uses run-time recursion.

Command-Line Information

Parameter: `CompileTimeRecursionLimit`

Type: integer

Value: valid value

Default: 50

See Also

More About

- “Code Generation for Recursive Functions”
- “Compile-Time Recursion Limit Reached”
- “Model Configuration Parameters: Simulation Target” on page 13-2

Enable run-time recursion for MATLAB functions

Description

Allow recursive functions in code that is generated for MATLAB code that contains recursive functions. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object associated with a MATLAB System block. Some coding standards, such as MISRA®, do not allow recursion. To increase the likelihood of generating code that is compliant with MISRA C®, clear this option.

Category: Simulation Target > Advanced parameters

Settings

Default: On



On

Enables run-time recursion for code generation of MATLAB code that contains recursive functions.



Off

Disables run-time recursion for code generation of MATLAB code that contains recursive functions. If run-time recursion is disabled, and the MATLAB code requires run-time recursion, code generation fails.

Command-Line Information

Parameter: EnableRuntimeRecursion

Value: 'on' | 'off'

Default: 'on'

See Also

More About

- “Code Generation for Recursive Functions”
- “Compile-Time Recursion Limit Reached”
- “Model Configuration Parameters: Simulation Target” on page 13-2

Dynamic memory allocation in MATLAB functions

Description

Use dynamic memory allocation (malloc) for variable-size arrays whose size (in bytes) is greater than or equal to the dynamic memory allocation threshold. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object™ associated with a MATLAB System block. This parameter does not apply to:

- Input or output signals
- Parameters
- Global variables
- Discrete state properties of System objects associated with a MATLAB System block

Category: Simulation Target > Advanced parameters

Settings

Default: On (for GRT-based targets) | Off (for ERT-based targets)



On

Enables dynamic memory allocation.



Off

Disables dynamic memory allocation.

Dependency

Enables the **Dynamic memory allocation threshold in MATLAB functions** parameter.

Tips

- Code that uses dynamic memory allocation can be less efficient than code that uses static memory allocation. Unless your model requires dynamic memory allocation, consider clearing this check box.
- If sufficient memory is not available to satisfy a memory allocation request, dynamic memory allocation can fail. The code generator does not check memory allocation requirements. For safety-critical systems, the recommended setting for this parameter is **Off**.

Command-Line Information

Parameter: MATLABDynamicMemAlloc

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	Off
Safety precaution	Off

See Also

Related Examples

- “Control Memory Allocation for Variable-Size Arrays in a MATLAB Function Block”
- “Model Configuration Parameters: Simulation Target” on page 13-2

Dynamic memory allocation threshold in MATLAB functions

Description

Specify a threshold for dynamic memory allocation. The code generator uses dynamic memory allocation for variable-size arrays whose size (in bytes) is greater than or equal to the threshold. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object associated with a MATLAB System block. This parameter does not apply to:

- Input or output signals
- Parameters
- Global variables
- Discrete state properties of System objects associated with a MATLAB System block

Category: Simulation Target > Advanced parameters

Settings

Default: 65536

- To specify the threshold, set this parameter to a positive integer.
- To use dynamic memory allocation for all variable-size arrays, set this parameter to 0.

Dependency

Dynamic memory allocation in MATLAB functions enables this parameter.

Command-Line Information

Parameter: MATLABDynamicMemAllocThreshold

Type: integer

Value: integer value

Default: 65536

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No recommendation

See Also

Related Examples

- “Control Memory Allocation for Variable-Size Arrays in a MATLAB Function Block”

- “Model Configuration Parameters: Simulation Target” on page 13-2

Echo expressions without semicolons

Description

Enable run-time output in the MATLAB Command Window, such as actions that do not terminate with a semicolon. This behavior applies to a model that contains MATLAB Function blocks, Stateflow charts, or Truth Table blocks.

Category: Simulation Target

Settings

Default: On



On

Enables run-time output to appear in the MATLAB Command Window during simulation.



Off

Disables run-time output from appearing in the MATLAB Command Window during simulation.

Tip

- If you disable run-time output, faster model simulation occurs.

Command-Line Information

Parameter: SFSimEcho

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	On
Traceability	No impact
Efficiency	Off
Safety precaution	No impact

See Also

Related Examples

- “Speed Up Simulation” (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

Ensure memory integrity

Description

Detects violations of memory integrity while building MATLAB Function blocks and stops simulation with a diagnostic.

Category: Simulation Target

Settings

Default: On



On

Detect violations of memory integrity while building MATLAB Function blocks and stops simulation with a diagnostic message.



Off

Does not detect violations of memory integrity while building MATLAB Function blocks.

Caution Without these checks, violations result in unpredictable behavior.

Tips

- The most likely cause of memory integrity issues is accessing an array out of bounds.
- Only disable these checks if you are sure that all array bounds and dimension checking is unnecessary.

Command-Line Information

Parameter: SimIntegrity

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	On
Traceability	No impact
Efficiency	No recommendation
Safety precaution	On

See Also

Related Examples

- “Control Run-Time Checks”
- “Model Configuration Parameters: Simulation Target” on page 13-2

Generate typedefs for imported bus and enumeration types

Description

Determines `typedef` handling and generation for imported bus and enumeration data types in Stateflow and MATLAB Function blocks.

Category: Simulation Target

Settings

Default: Off



On

The software will generate its own `typedefs` for imported bus and enumeration types.



Off

The software will not generate its own `typedefs` for imported bus and enumeration types, and will use definitions in the included header file. This setting requires you to include header files in **Configuration Parameters**, under **Simulation Target > Custom Code > Header file**.

Tips

- This selection applies if you are using imported bus or enumeration data types in Stateflow and MATLAB Function blocks.

Command-Line Information

Parameter: `SimGenImportedTypeDefs`

Value: `'on'` | `'off'`

Default: `'off'`

See Also

Related Examples

- “Model Configuration Parameters: Simulation Target” on page 13-2

Use local custom code settings (do not inherit from main model)

Description

Specify if a library model can use custom code settings that are unique from the main model.

Category: Simulation Target

Settings

Default: On



On

Enables a library model to use custom code settings that are unique from the main model.



Off

Disables a library model from using custom code settings that are unique from the main model.

Dependency

This parameter is available only for library models that contain MATLAB Function blocks, Stateflow charts, or Truth Table blocks. To access this parameter, in the MATLAB Function Block Editor, in the **Simulink** tab, select **Simulation Target**.

Command-Line Information

Parameter: SimUseLocalCustomCode

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No recommendation

See Also

Related Examples

- Including Custom C Code (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

Allow symbolic dimension specification

Description

Specify whether Simulink propagates dimension symbols throughout the model and preserves these symbols in the propagated signal dimensions.

Category: Diagnostics

Settings

Default: On



On

Simulink propagates symbolic dimensions throughout the model and preserves these symbols in the propagated signal dimensions. If you have an Embedded Coder license, these symbols go into the generated code.



Off

Simulink does not propagate symbolic dimensions throughout the model nor preserve these symbols in propagated signal dimensions.

Command-Line Information

Parameter: AllowSymbolicDim

Value: 'on' | 'off'

Default: 'on'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No recommendation

See Also

Related Examples

- “Implement Dimension Variants for Array Sizes in Generated Code” (Embedded Coder)
- “Model Configuration Parameters: Diagnostics” on page 9-2

Enable decoupled continuous integration

Description

Removes the coupling between continuous and discrete rates. In some cases, unnecessary coupling between the two can cause the integration to be limited by the fastest discrete rate in the model. This coupling might slow down the model.

Category: Solver

Settings

Default: Off

On

Enable the solver to decouple continuous integration from discrete rates.

Off

Preserve the coupling between continuous integration and discrete rates.

Tip

Enabling this parameter can improve simulation speed when:

- A variable step solver is used.
- The model has both continuous and discrete rates.
- The fastest discrete rate is relatively smaller than the maximum step size set by the solver.

Command-Line Information

Parameter: DecoupledContinuousIntegration

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No recommendation

See Also

Related Examples

- “Solver Pane” on page 14-2

Enable minimal zero-crossing impact integration

Reduces the impact of zero-crossing on the integration of continuous states.

Settings

Default: On



On

The solver tries to reduce the impact of zero-crossings on the integration of continuous states



Off

The solver won't try to reduce the impact of zero-crossings on the integration of continuous states

Note For models created before R2018a, this parameter is set to Off by default.

Dependencies

- Solver **Type** must be set to **Variable-Step**.

Tips

Command-Line Information

Parameter: MinimalZcImpactIntegration

Value: 'on' | 'off'

Default: 'off'

Recommended Settings


Application	Setting
Debugging	off
Traceability	off
Efficiency	on
Safety precaution	No impact

Detect ambiguous custom storage class final values

Description

Select the diagnostic action to take when your model contains a Reusable custom storage class that has more than one endpoint. An endpoint is a usage of a Reusable custom storage class with no other downstream usages.

If your model contains a Reusable custom storage class that does not have a unique endpoint, the run-time environment must not use the variable value because the value is ambiguous. For example, in this model, the final value of RCSC_1 is ambiguous because it has two endpoints. If you remove the specification from the signal line that leaves the Sum block or from the signal line that leaves the top Bias block, the Reusable custom storage class has one endpoint.

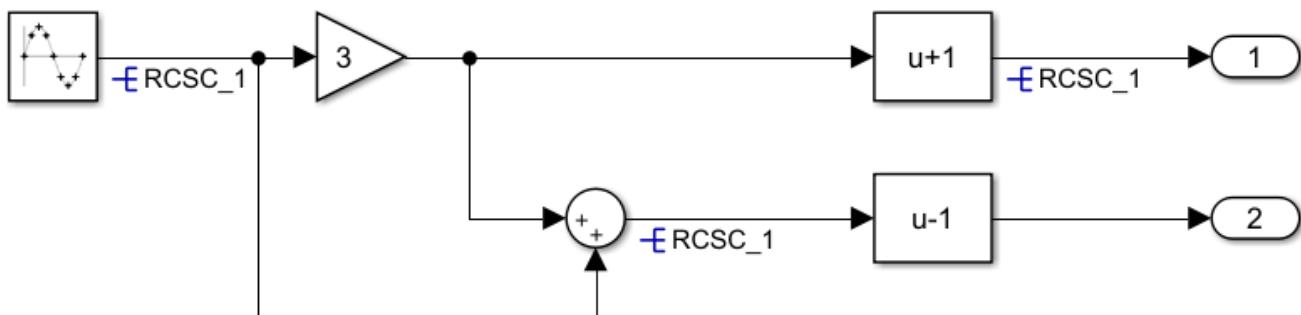

Settings

Default: warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

Tip

If the run-time environment must use the final value of the signal with the Reusable custom storage class specification, set this parameter to error. Remove one of the Reusable custom storage classes so that the Reusable custom storage class has a unique endpoint.

Command-Line Information

Parameter: RCSC0bservableMsg

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	error

See Also

Related Examples


- “Specify Buffer Reuse by Using Simulink.Signal Objects” (Embedded Coder)
- Data Validity Diagnostics on page 6-2
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

Detect non-reused custom storage classes

Description

Select the diagnostic action to take when your model contains a Reusable custom storage class that the code generator cannot reuse with other uses of the same Reusable custom storage class. The default behavior of the parameter settings varies with the presence of Reusable custom storage classes and referenced models. If the code generator cannot change the block execution order to enable reuse or the conditional execution of some blocks is incompatible with reuse, the code generator might not implement the reuse specification. The generated code will likely contain additional global variables.

For example, in this model, the code generator cannot reuse the variable `Y` to hold the outputs of `In2`, `Gain`, and `Gain2` because `Gain` executes before `Gain2`. The generated code contains an extra variable to hold the `Gain` output. The red numbers to the top right of the blocks indicate the execution order.

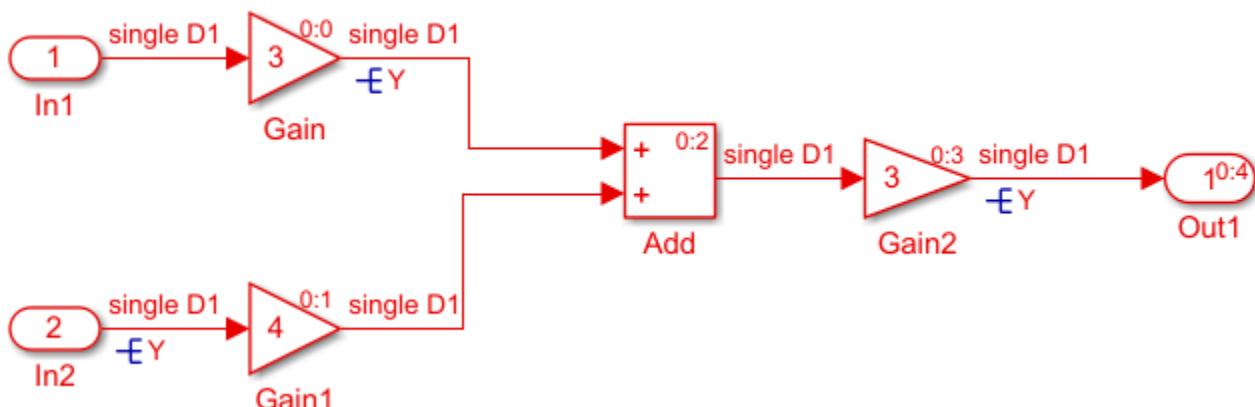

Settings

Default: warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

When there are Reusable custom storage classes and referenced models present, the parameter settings are:

None

Simulink software generates a message for you to set the parameter to Error.

Warning

Simulink software generates a message for you to set the parameter to `Error`
`Error`

If Reusable custom storage classes can be combined Simulink software generates code. If not, it generates an error.

Tip

If you do not want the generated code to contain additional global variables because of a `Reusable` custom storage class specification that the code generator cannot honor, set this parameter to `error`. Remove the `Reusable` custom storage classes from the signal lines in the error message.

Command-Line Information

Parameter: RCSCRenamedMsg

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also**Related Examples**

- “Specify Buffer Reuse by Using `Simulink.Signal` Objects” (Embedded Coder)
- Data Validity Diagnostics on page 6-2
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

Combine output and update methods for code generation and simulation

Description

When output and update code is in one function in the generated code, force the simulation execution order to be the same as the code generation order. For certain modeling patterns, setting this parameter prevents a potential simulation and code generation mismatch. Setting this parameter might cause artificial algebraic loops. If your model requires this parameter, Simulink generates a warning of a potential simulation and code generation mismatch during the model build. The warning states that your model

... references a model that has an import that is used during update only but the model combines output and update methods. This may result in a mismatch between simulation and code generation results.

Settings

Default: Off



On

Forces simulation execution order to be the same as code generation order when output and update code are in one function. You might get the preceding warning if your model meets these conditions:

- The referenced model has a single output/update function, uses function prototype control, or generates C++ code.
- A referenced model input connects only to blocks that do not use their input values to calculate their output values during the same time step, such as Delay or Integrator blocks. The input port is not associated with a Function-Call Subsystem port in the referenced model.
- The referenced model uses a shared global resource such as a global data store.



Off

For the preceding modeling pattern, the simulation execution order might be different than the code generation order. If the execution order is different, an answer mismatch between simulation and code generation might occur.

Tips

Selecting this parameter might cause artificial algebraic loops in simulation. Select it only if you get a warning about a possible simulation versus code generation mismatch, and you plan to generate code.

Command-Line Information

Parameter: ForceCombineOutputUpdateInSim

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- “Artificial Algebraic Loops”
- “Model Configuration Parameters: Diagnostics” on page 9-2

Include custom code for referenced models

Description

Use custom C code for referenced model simulation (SIM) target build for accelerator mode.

Category: Model Referencing

Settings

Default: Off



Off

Ignore custom C code for model reference accelerator simulation.



On

Use custom C code with Stateflow or with MATLAB Function blocks during model reference accelerator simulation.

Tips

- **Caution** Using custom C code for referenced models in accelerator mode can produce different results than if you simulate the model without using the custom code. If the custom code includes declarations of structures for buses or enumerations, the SIM target generation fails if the build results in duplicate declarations of those structures. Also, if the custom code uses a structure that represents a bus or enumeration, you might get unexpected simulation results.
- Use the **Configuration Parameters > Simulation Target** pane to specify the custom code file.

Command-Line Information

Parameter: SupportModelReferenceSimTargetCustomCode

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	Off

Behavior when pregenerated library subsystem code is missing

Description

When you generate code for a model that contains an instance of a reusable library subsystem with a function interface, specify whether or not to display a warning or an error when the model cannot use pregenerated library code or pregenerated library code is missing.

Settings

Default: warning

none

If pregenerated library code is missing, Simulink software does not display a warning or an error. The code generator generates code for a reusable library subsystem that does not contain function interfaces. The generated code for the reusable library subsystem is in the `slprj/target/_sharedutils` folder.

warning

If pregenerated library code is missing, Simulink software displays a warning. The code generator generates code for a reusable library subsystem that does not contain function interfaces. The generated code for the reusable library subsystem is in the `slprj/target/_sharedutils` folder.

error

Simulink software displays an error message. The code generator does not generate code.

Tip

To use pregenerated library code, before generating code for the model, generate code for the library.

Command-Line Information

Parameter: `PregeneratedLibrarySubsystemCodeDiagnostic`

Value: `'none' | 'warning' | 'error'`

Default: `'warning'`

Recommended Settings

Application	Setting
Debugging	<code>error, warning</code>
Traceability	No impact
Efficiency	No impact
Safety precaution	<code>error</code>

See Also

Related Examples

- “Library-Based Code Generation for Reusable Library Subsystems” (Embedded Coder)

Arithmetic operations in variant conditions

Description

Select the diagnostic action to take if Simulink software detects arithmetic operations (+, -, *, idivide, rem) in variant conditions specified within variant blocks.

Category: Diagnostics

Settings

Default: error

Note For models created prior to R2019a, the default value is warning.

none

When Simulink software detects arithmetic operations in variant conditions of a Variant block with the **Variant activation time** option set to `code compile`, the software takes no action.

warning

When Simulink software detects arithmetic operations in variant conditions of a Variant block with the **Variant activation time** option set to `code compile`, the software displays a warning.

error

When Simulink software detects arithmetic operations in variant conditions of a Variant block with the **Variant activation time** option set to `code compile`, the software displays a warning and terminates the simulation.

Note It is recommended to use the default value `error`, as there could be a difference in behavior between simulation and code generation. For example, if you use the condition `V * W == 10` in a Variant Source block and request that the block produces preprocessor conditions in the Simulink Coder generated code. This results in generated C code containing `#if V*W == 10`. Simulink uses `int32` types for `V` and `W`, whereas the integer types used by the compiler are implementation dependent. So, for large values of `V` and `W`, there could be a difference in behavior between simulation and code generation. If the model uses arithmetic operations, you must consider removing their usage rather than relaxing the diagnostic.

Command-Line Information

Parameter: `ArithmeticOperatorsInVariantConditions`

Value: `'none'` | `'warning'` | `'error'`

Default: `'error'`

Recommended Settings

Application	Setting
Debugging	No impact

Application	Setting
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples

- Solver Diagnostics on page 9-2

FMU Import blocks

Description

When the debug execution mode is enabled, FMU binaries are executed in a separate process. Executing FMU binaries in a separate process protects MATLAB processes. For example, the debug execution mode can prevent a segmentation violation in third-party FMU binaries from crashing MATLAB.

Settings

Default: Off



On

Enable debug execution mode for FMU Import blocks. This setting executes FMU binaries in a separate process.



Off

Disable debug execution mode for FMU Import blocks. This setting executes FMU binaries in the same process as the MATLAB process.

Command-Line Information

Parameter: DebugExecutionForFMUVia0ut0fProcess

Value: 'on' | 'off'

Default: 'off'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

Variant condition mismatch at signal source and destination

Description

When you generate code using Embedded Coder, select the diagnostic action to take if the software detects variant-related modeling issues that may result in unused Simulink variables in the generated code. Unused variables are created when there is discrepancy in variant conditions that propagate between the source and the destination blocks while compiling the model. For more on discrepancies, see “Prevent Creation of Unused Variables for Lenient Variant Choices” on page 2-119, or “Prevent Creation of Unused Variables for Unconditional and Conditional Variant Choices” on page 2-122.

Category: Diagnostics

Settings

Default: none

none

When Simulink software detects a discrepancy in variant conditions that propagate between the source and the destination blocks with the **Variant activation time** option set to **code compile**, the software takes no action.

warning

When Simulink software detects a discrepancy in variant conditions that propagate between the source and the destination blocks with the **Variant activation time** option set to **code compile**, the software displays a warning and continues with the simulation. To suppress the warning and continue with simulation, click **Suppress**.

error

When Simulink software detects a discrepancy in variant conditions that propagate between the source and the destination blocks with the **Variant activation time** option set to **code compile**, the software displays an error and terminates the simulation.

Command-Line Information

Parameter: VariantConditionMismatch

Value: 'none' | 'warning' | 'error'

Default: 'none'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No impact
Safety precaution	No impact

See Also

Related Examples


- “Prevent Creation of Unused Variables for Lenient Variant Choices” on page 2-119
- “Prevent Creation of Unused Variables for Unconditional and Conditional Variant Choices” on page 2-122

Prevent Creation of Unused Variables for Lenient Variant Choices

This example shows how to prevent Simulink® models from creating unused variables in generated code when the variant condition of the source block is more lenient than the variant condition of the destination block. Preventing the creation of unused variables in generated code increases the likelihood of generating C code that is compliant with Rule 2.2 of the MISRA C:2012 guidelines.

Model Description

In this model, the source of the highlighted signal is the EvlnB block. The destination of the signal is VariantSource3. The variant condition of EvlnB is $A > 0$, which is more lenient than the variant condition $A > 0 \&\& B == 1$ of VariantSource3.

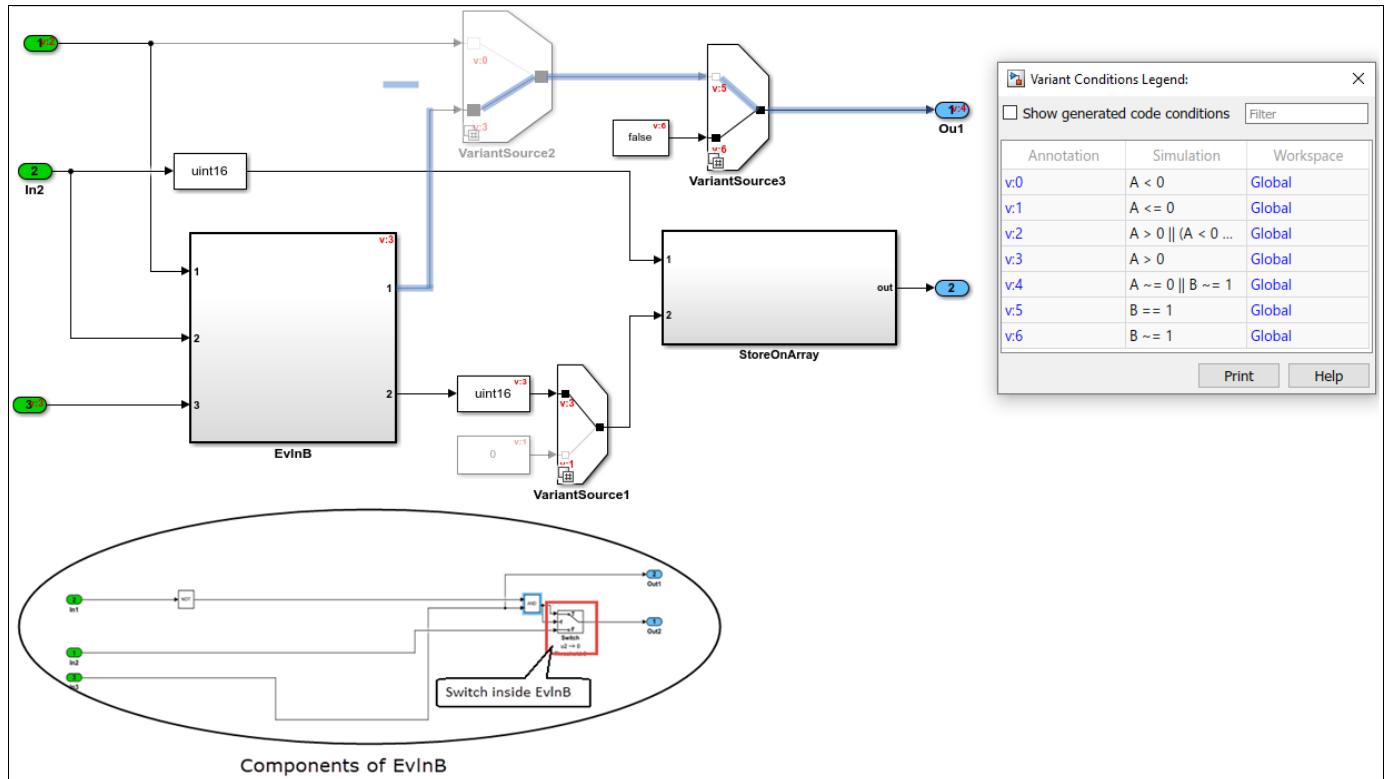

Generate C Code Using Embedded Coder

Suppose that the value of A is 1, and the value of B is 0.

When you generate code using Embedded Coder™, the variant condition of `EvlkB`, $A > 0$, evaluates to `true`, and the condition of `VariantSource3`, $A > 0 \&\& B == 1$, evaluates to `false`. However, code is generated for all variant choices. In the generated code, the variable `rtb_Switch` is created. This variable corresponds to the Switch block that is located inside the `EvlkB` block. `rtb_Switch` is used only when $A > 0 \&\& B == 1$ evaluates to `true`. In this example, since $A > 0 \&\& B == 1$ evaluates to `false`, `rtb_Switch` remains unused.


```

35 #if A != 0 || B != 1
36
37     boolean_T rtb_VariantMerge_For_Variant_So;
38
39 #endif
40
41 #if A > 0
42
43     boolean_T rtb_Switch;
44
45 #endif
46
47 /* SignalConversion generated from: '<Root>/VariantSource' incorporates:
48 *   Import: '<Root>/In1'
49 */
50 #if A < 0 && B == 1
51
52     rtb_VariantMerge_For_Variant_So = rtU.In1;
53
54 #elif A > 0
55
56     /* Outputs for Atomic SubSystem: '<Root>/EvInB2' */
57     /* Switch: '<SI>/Switch' incorporates:
58     *   Import: '<Root>/In1'
59     *   Import: '<Root>/In2'
60     *   Import: '<Root>/In3'
61     *   Logic: '<SI>/LogicalOperator6'
62     *   Logic: '<SI>/LogicalOperator8'
63     */
64     rtb_Switch = (((!rtU.In2) && rtU.In3) || rtU.In1);
65
66     /* End of Outputs for SubSystem: '<Root>/EvInB2' */
67 #endif
68
69 /* End of SignalConversion generated from: '<Root>/VariantSource' */
70
71 /* SignalConversion generated from: '<Root>/VariantSource' incorporates:
72 *   SignalConversion generated from: '<Root>/VariantSource3'
73 */
74 #if A > 0 && B == 1
75
76     rtb_VariantMerge_For_Variant_So = rtb_Switch;
77
78 #elif B != 1
79
80     /* SignalConversion generated from: '<Root>/VariantSource3'
81     *   Constant: '<Root>/Constant'
82     */
83     rtb_VariantMerge_For_Variant_So = false;
84
85 #endif

```

rtb_Switch is used only when A>0
&& B==1 evaluates to true.

To avoid modeling issues that may create unused variables in generated code, select **Model Settings > Diagnostics**. Expand the **Advanced** parameters section and scroll to the bottom of the dialog box. In the **Modeling issues related to variants** section, set the **Variant condition mismatch at signal source and destination** parameter to **warning** or **error**. Setting this parameter warns you about unused variables during code generation.

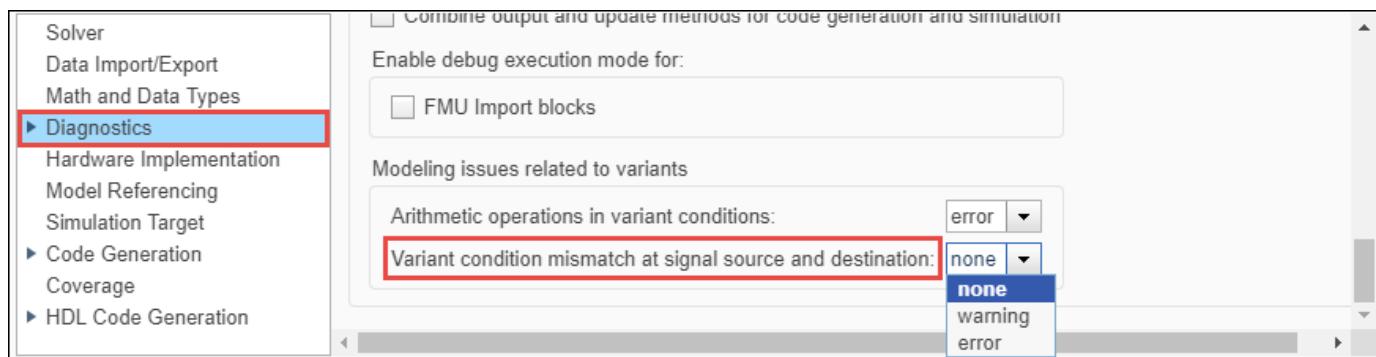

See Also


- “Variant condition mismatch at signal source and destination” on page 2-117
- “Prevent Creation of Unused Variables for Unconditional and Conditional Variant Choices” on page 2-122

Prevent Creation of Unused Variables for Unconditional and Conditional Variant Choices

This example shows how to prevent Simulink® models from creating unused variables in generated code when the variant condition of the source block is unconditional and the variant condition of the destination block is conditional. Preventing the creation of unused variables in generated code increases the likelihood of generating C code that is compliant with Rule 2.2 of the MISRA C:2012 guidelines.

Model Description


In this model, the Variant Sink block has the variant condition expressions $V == 1$ and $V == 2$.

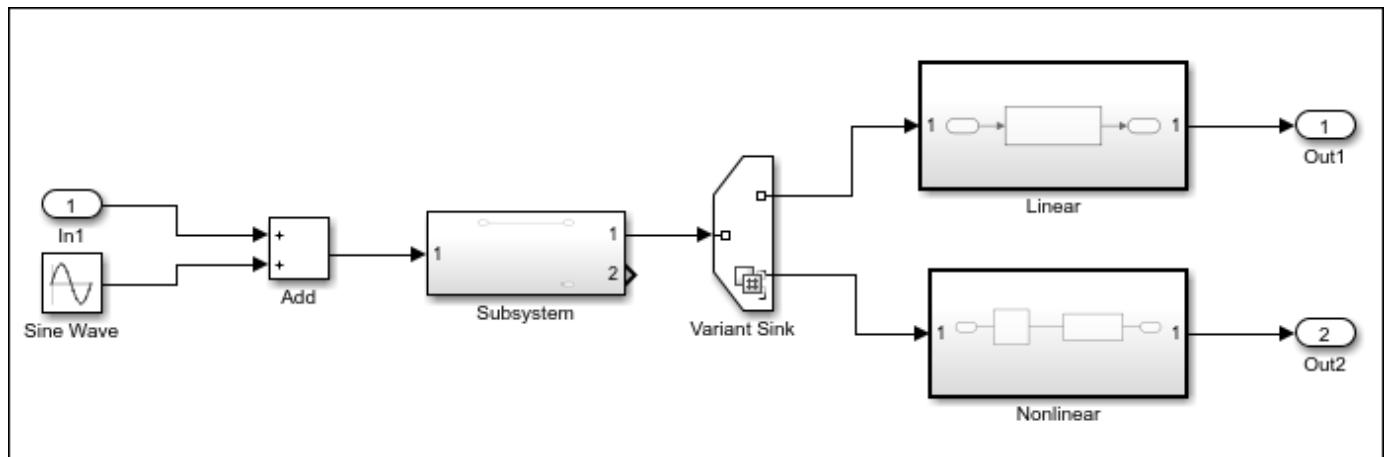

Generate C Code Using Embedded Coder

Suppose that the value of V is set to 3.

When you generate code using Embedded Coder™, the variant condition expressions $V == 1$ and $V == 2$ evaluate to **false**. Simulink disables all the blocks connected to the input and output stream of the Variant Sink block. However, code is generated for all the variant choices in the model.

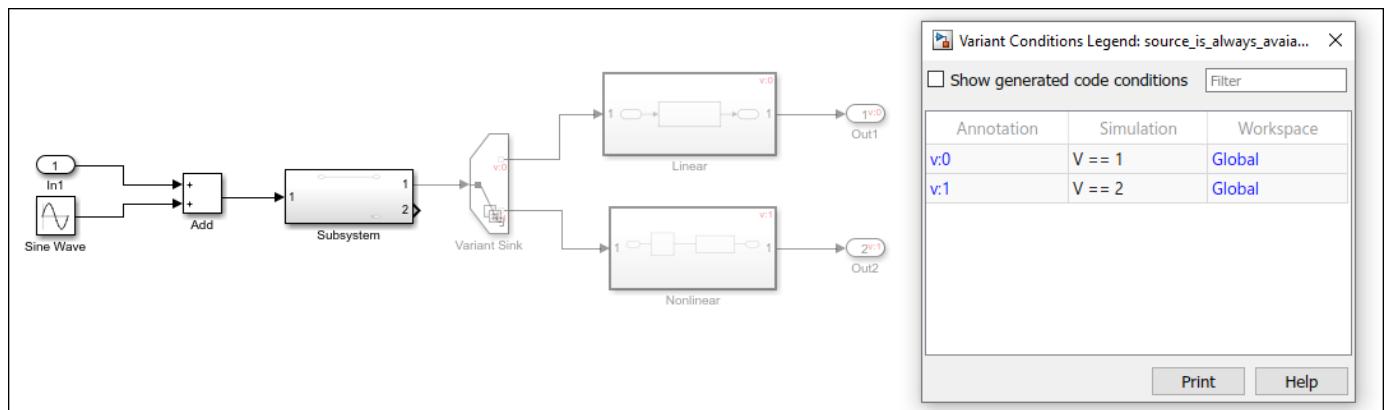

A variable `Add` is created in the generated code. During code compilation, this variable remains unused since both choices evaluate to **false**.

```

/* Model step function */
void source_is_always_available_step(void)
{
    real_T Add;

    /* Sum: '<Root>/Add' incorporates:
     *  * Import: '<Root>/In1'
     *  * Sin: '<Root>/Sine Wave'
     */
    Add = source_is_always_available_U.In1 + sin
        (source_is_always_available_M->Timing.t[0]);


    /* Outport: '<Root>/Out1' incor
     * DiscreteFilter: '<S1>/Di
     * Outport: '<Root>/Out2'
     */
    #if V == 1
        /* Outputs for Atomic SubSystem: '<Root>/Linear' */
        /* DiscreteFilter: '<S1>/Discrete Filter' */
        source_is_always_available_DW.DiscreteFilter_states_d = Add - 0.5 *
            source_is_always_available_DW.DiscreteFilter_states_d;
        source_is_always_available_Y.Out1 =
            source_is_always_available_DW.DiscreteFilter_states_d;

        /* End of Outputs for SubSystem: '<Root>/Linear' */
    #elif V == 2
        /* Outputs for Atomic SubSystem: '<Root>/Nonlinear' */
        /* DiscreteFilter: '<S2>/Discrete Filter' incorporates:
         *  * Lookup_n-D: '<S2>/Lookup Table'
         */
        source_is_always_available_DW.DiscreteFilter_tmp = look1_binlwpw(Add,
            source_is_always_available_ConstP.LookupTable_bp01Data,
            source_is_always_available_ConstP.LookupTable_tableData, 4U) - 0.5 *
            source_is_always_available_DW.DiscreteFilter_states_d;
    #endif
}

```

Variable Add is used only if
V==1 or V==2 evaluates to true.

To avoid modeling issues that may create unused variables in generated code, select **Model Settings** > **Diagnostics**. Expand the **Advanced** parameters section and scroll to the bottom of the dialog box. In the **Modeling issues related to variants** section, set the **Variant condition mismatch at signal source and destination** parameter to **warning** or **error**. Setting this parameter warns you about unused variables during code generation.

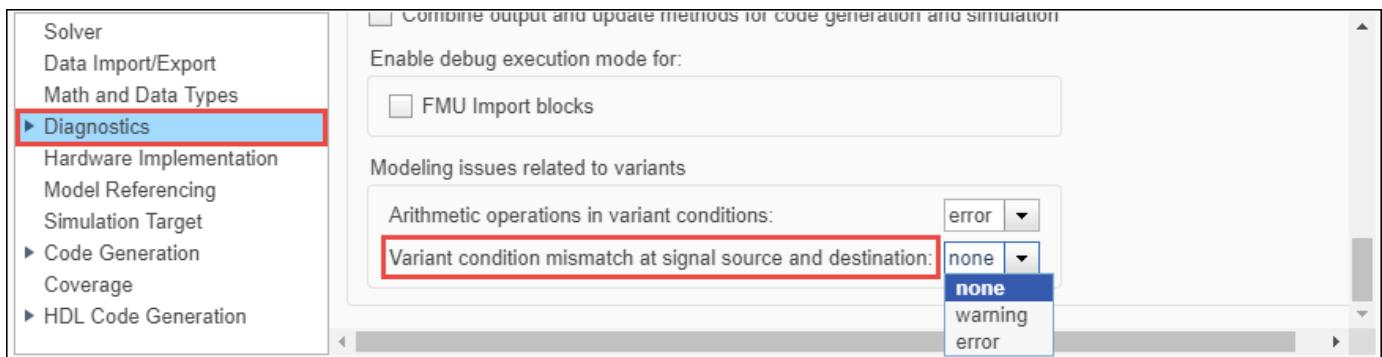

See Also

- “Variant condition mismatch at signal source and destination” on page 2-117
- “Prevent Creation of Unused Variables for Lenient Variant Choices” on page 2-119

Data Import/Export Parameters

Model Configuration Parameters: Data Import/Export

The **Data Import/Export** category includes parameters for configuring input data for simulation (for example, for **Import** blocks) and output data (for example, from **Outport** blocks).

Parameter	Description
"Input" on page 3-5	Loads input data from a workspace before the simulation begins.
"Initial state" on page 3-7	Loads the model initial states from a workspace before simulation begins.
"Time" on page 3-9	Saves simulation time data to the specified variable during simulation.
"States" on page 3-11	Saves state data to the specified variable during a simulation.
"Output" on page 3-13	Saves signal data to the specified variable during simulation.
"Final states" on page 3-15	Saves the model states at the end of a simulation to the specified variable.
"Format" on page 3-17	Select the data format for saving states, output, and final states data.
"Limit data points" on page 3-19	Limit the number of data points to export to the MATLAB workspace.
"Decimation" on page 3-21	Specify decimation factor, N, for logging such that only every N points are logged.
"Save complete SimState in final state" on page 3-22	At the end of a simulation, Simulink saves the complete set of states of the model, including logged states, to the specified MATLAB variable.
"Signal logging" on page 3-26	Globally enable or disable signal logging for the model.
"Data stores" on page 3-28	Globally enable or disable logging of Data Store Memory block variables for the model.
"Log Dataset data to file" on page 3-30	Log data to MAT-file.
"Output options" on page 3-32	Select options for generating additional output signal data for variable-step solvers.
"Refine factor" on page 3-34	Specify how many points to generate between time steps to refine the output.
"Output times" on page 3-35	Specify times at which Simulink software should generate output in addition to, or instead of, the times of the simulation steps taken by the solver used to simulate the model.
"Single simulation output" on page 3-37	Enable the single-output format of the sim command.
"Logging intervals" on page 3-39	Set intervals for logging

Parameter	Description
"Record logged workspace data in Simulation Data Inspector" on page 3-41	Specify whether to send logged data to the Simulation Data Inspector when a simulation pauses or completes.

These configuration parameters are in the **Advanced parameters** section.

Parameter	Description
"Dataset signal format" on page 2-50	Format for Dataset elements.

See Also

Related Examples

- Importing Data from a Workspace
- "Export Simulation Data"
- "Export Signal Data Using Signal Logging"

Data Import/Export Overview

The Data Import/Export pane allows you to import input signal and initial state data from a workspace and export output signal and state data to the MATLAB workspace during simulation. This capability allows you to use standard or custom MATLAB functions to generate a simulated system's input signals and to graph, analyze, or otherwise postprocess the system's outputs.

Configuration

- 1 Specify the data to load from a workspace before simulation begins.
 - 2 Specify the data to save to the MATLAB workspace after simulation completes.

Tips

- To open the **Data Import/Export** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Data Import/Export**.
 - For more information importing and exporting data, see “Load Signal Data for Simulation” and “Save Run-Time Data from Simulation”.
 - See the documentation of the `sim` command for some capabilities that are available only for programmatic simulation.

To get help on an option

- 1 Right-click the option text label.
 - 2 From the context menu, select **What's This**.



See Also

Related Examples

- “Model Configuration Parameters: Data Import/Export” on page 3-2

Input

Description

Loads input data from a workspace for a simulation.

Category: Data Import/Export

Settings

Default: Off, [t, u]



On
Loads data from a workspace.

Specify a MATLAB expression for the data to be loaded into the model from a workspace. The Simulink software resolves symbols in the expression as described in “Symbol Resolution”.

See “Load Data to Root-Level Input Ports” for information.

The **Input** parameter does not load input data from a data dictionary. When a model uses a data dictionary and you disable model access to the base workspace, the Input parameter still accesses simulation input variables in the base workspace.



Off
Does not load data from a workspace.

Tips

- If you use a `Simulink.SimulationData.Dataset` object that includes a `matlab.io.datastore.SimulationDatastore` object as an element, then the data stored in persistent storage is streamed in from a file. For more information, see “Load Big Data for Simulations”.
- You must select the **Input** check box before entering input data.
- Simulink software linearly interpolates or extrapolates input values as necessary if the **Interpolate data** option is selected for the corresponding Import.
- The use of the **Input** box is independent of the setting of the **Format** list on the **Data Import/Export** pane.
- For more information about using the **Input** parameter to load signal data to root-level inputs, see “Load Data to Root-Level Input Ports”.

Command-Line Information

Parameter: `LoadExternalInput`

Value: `'on'` | `'off'`

Default: `'off'`

Parameter: `ExternalInput`

Type: character vector

Value: any valid value

Default: '[t,u]'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- “Load Data to Root-Level Input Ports”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

Initial state

Description

Loads the model initial states from a workspace before simulation begins.

Category: Data Import/Export

Settings

Default: Off, `xInitial`



On

Simulink software loads initial states from a workspace.

Specify the name of a variable that contains the initial state values, for example, a variable containing states saved from a previous simulation.

Use the structure or structure-with-time option to specify initial states if you want to accomplish any of the following:

- Associate initial state values directly with the full path name to the states. This eliminates errors that could occur if Simulink software reorders the states, but the initial state array is not correspondingly reordered.
- Assign a different data type to each state's initial value.
- Initialize only a subset of the states.
- Initialize the states of a top model and the models that it references

See “Load State Information” for more information.

The **Initial state** parameter does not load initial state data from a data dictionary. When a model uses a data dictionary and you disable model access to the base workspace, the **Initial State** parameter still has access to resolve variables in the base workspace.



Off

Simulink software does not load initial states from a workspace.

Tips

- The initial values that the workspace variable specifies override the initial values that the model specifies (the values that the initial condition parameters of those blocks in the model that have states specify).
- Selecting the **Initial state** check box does not result in Simulink initializing discrete states in referenced models.
- Avoid using an array for an initial state. If the order of the elements in the array does not match the order in which blocks initialize, the simulation can produce unexpected results. To promote deterministic simulation results, use the **InitInArrayFormatMsg** diagnostic default setting of **warning** or set the diagnostic to **error**.

Instead of array format for the initial state, consider using a `Simulink.SimulationData.Dataset` object, structure, structure with time, or an operating point.

- If you use a format other than `Dataset`, you can convert the logged data to `Dataset` format. Converting the data to `Dataset` makes it easier to postprocess with other logged data. For more information, see “Dataset Conversion for Logged Data”.
- If you use `Dataset` format, you can specify the discrete state bus type by setting the state label to `DSTATE_NVBUS` (nonvirtual bus) or `DSTATE_VBUS` (virtual bus).

Command-Line Information

Parameter: `LoadInitialState`

Value: `'on'` | `'off'`

Default: `'off'`

Parameter: `InitialState`

Type: variable (character vector) or vector

Value: any valid value

Default: `'xInitial'`

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- Importing Data from a Workspace
- “State Information”
- “Dataset Conversion for Logged Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

Time

Description

Saves simulation time data to the specified variable during simulation.

Category: Data Import/Export

Settings

Default: On, tout



On

Simulink software exports time data to the MATLAB workspace during simulation.

Specify the name of the MATLAB variable used to store time data. See “Export Simulation Data” for more information.



Off

Simulink software does not export time data to the MATLAB workspace during simulation.

Tips

- You must select the **Time** check box before entering the time variable.
- Simulink software saves the output to the MATLAB workspace at the base sample rate of the model. Use a To Workspace block if you want to save output at a different sample rate.
- **Additional parameters** includes parameters for specifying a limit on the number of data points to export and the decimation factor.
- To specify an interval for logging, use the **Logging intervals** parameter.
- If you use a format other than **Dataset**, you can convert the logged data to **Dataset** format. Converting the data to **Dataset** makes it easier to postprocess with other logged data. For more information, see “Dataset Conversion for Logged Data”.
- Do not use a variable name that is the same as a **Simulink.SimulationOutput** object function name or property name.

Command-Line Information

Parameter: SaveTime

Value: 'on' | 'off'

Default: 'on'

Parameter: TimeSaveName

Type: character vector

Value: any valid value

Default: 'tout'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- “Export Simulation Data”
- “Data Format for Logged Simulation Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

States

Description

Saves state data to the specified variable in the MATLAB workspace during simulation.

Category: Data Import/Export

Settings

Default: Off, xout



On

Log state data to the MATLAB workspace during simulation.

Specify the name of the variable used to store states data. See “State Information” for more information.



Off

Do not log state data during simulation.

Tips

- Specify the format for the logged states data using the **Format** parameter.
- To log fixed-point states data, log states data using the **Dataset** format.
- When you log states data using the **Dataset** format, states data streams to the Simulation Data Inspector during simulation.
- **Dataset** format does not support:
 - Rapid accelerator simulation
 - Logging states information inside a function-call subsystem
 - Code generation
- The state logging variable is empty when you enable states logging for a model that has no states.
- If you log states data in a format other than **Dataset**, you can convert the logged data to **Dataset** format. Converting the data to **Dataset** makes it easier to post process with other logged data. For more information, see “Dataset Conversion for Logged Data”.
- If you log states data in **Array** format while also logging time or in **Structure with time** format, check the **Record logged workspace data in Simulation Data Inspector** parameter to view the data in the Simulation Data Inspector after simulation.

Command-Line Information

Parameter: SaveState

Value: 'on' | 'off'

Default: 'off'

Parameter: StateSaveName

Type: character vector

Value: any valid value

Default: 'xout'

Recommended Settings

Application	Setting
Debugging	No impact
Traceability	No impact
Efficiency	No recommendation
Safety precaution	No recommendation

See Also

Related Examples

- “State Information”
- “Comparison of Signal Loading Techniques”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

Output

Description

Saves root Outport data to the specified MATLAB variable during simulation.

Category: Data Import/Export

Settings

Default: On, `yout`



On

Simulink exports root outport signal data to the MATLAB workspace during simulation.

Specify the name of the MATLAB variable used to store the data. See “Export Simulation Data” for more information.



Off

Simulink does not export root outport signal data during simulation.

Tips

- You must select the **Output** check box before entering a name for the output variable.
 - Simulink saves the output to the MATLAB workspace at the base sample rate of the model if you set the **Format** parameter to a value other than **Dataset**. For **Dataset** format, logging uses the rate set for each Outport block.
 - The **Additional parameters** area includes parameters for specifying other characteristics of the saved data, including the format and the decimation factor.
 - To specify an interval for logging, use the **Logging intervals** parameter.
 - To log **Output** data to the Simulation Data Inspector, select **Dataset** format.
 - To log fixed-point data, set the **Format** parameter to **Dataset**. If you set the **Format** parameter to a value other than **Dataset**, Simulink logs fixed-point data as double.
 - To log bus signal data, set the **Format** parameter to a value other than **Array**.
 - If you use a format other than **Dataset**, you can convert the logged data to **Dataset** format. Converting the data to **Dataset** makes it easier to postprocess with other logged data. For more information, see “Dataset Conversion for Logged Data”.
 - For the active variant condition, Simulink creates a **Dataset** object with the logged data. For inactive variant conditions, Simulink creates MATLAB **timeseries** with zero samples.
 - When you invoke a `sim` command inside a function, the output logged by the function is in the function workspace. To be able to access that output in the base workspace, add a command such as this after the `sim` command:
- ```
assignin('base','yout',yout);
```
- Do not use a variable name that is the same as a `Simulink.SimulationOutput` object function name or property name.

## Command-Line Information

**Parameter:** SaveOutput

**Value:** 'on' | 'off'

**Default:** 'on'

**Parameter:** OutputSaveName

**Type:** character vector

**Value:** any valid value

**Default:** 'yout'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Data Format for Logged Simulation Data”
- “Export Simulation Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2
- “Dataset Conversion for Logged Data”

# Final states

## Description

Saves the logged states of the model at the end of a simulation to the specified MATLAB variable.

**Category:** Data Import/Export

## Settings

**Default:** Off, `xFinal`



On

Simulink software exports final logged state data to the MATLAB workspace during simulation.

Specify the name of the MATLAB variable in which to store the values of these final states. See Importing and Exporting States for more information.



Off

Simulink software does not export the final state data during simulation.

## Tips

- You must select the **Final states** check box before entering the final states variable.
- Simulink software saves the final states in a MATLAB workspace variable having the specified name.
- The saved data has the format that you specify with the **Format** parameter.
- Simulink creates empty variables for final state logging (`xfinal`) if both of these conditions apply:
  - You enable **Final states**.
  - A model has no states.
- Using the **Final states** is not always sufficient for complete and accurate restoration of a simulation state. The `ModelOperatingPoint` object contains the set of all variables that are related to the simulation of a model. For details, see “Save complete SimState in final state” on page 3-22 and “Save and Restore Simulation Operating Point”.
- See “State Information” for more information.
- If you use a format other than Dataset, you can convert the logged data to Dataset format. Converting the data to Dataset makes it easier to postprocess with other logged data. For more information, see “Dataset Conversion for Logged Data”.

## Command-Line Information

**Parameter:** `SaveFinalState`

**Value:** `'on'` | `'off'`

**Default:** `'off'`

**Parameter:** `FinalStateName`

**Type:** character vector

**Value:** any valid value

**Default:** 'xFinal'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Importing and Exporting States
- “Model Configuration Parameters: Data Import/Export” on page 3-2
- “Dataset Conversion for Logged Data”

# Format

## Description

Select the data format for saving states, output, and final states data.

**Category:** Data Import/Export

## Settings

**Default:** Dataset

### Dataset

Logged states and outputs are each stored in a `Simulink.SimulationData.Dataset` object. Each `Dataset` object contains an element for each individual state or output. The data for each individual state or output is stored in a `timeseries` object by default.

### Array

Logged data is stored in a matrix. Each row in the matrix corresponds to a simulation time step, and each column corresponds to a state or output. The order of the states and outputs in the matrix depends on the block sorted order, which can change from one simulation to the next. Do not use `Array` format to log bus data.

### Structure

State and output data each log to a structure. The states structure contains a structure for each block in the model that has a state. The outputs structure contains a structure for each root-level Outport block in the model.

### Structure with time

The data logs to a structure with a time field and a signals field. The time field contains a vector of simulation times. The signals field contains the same data as the `Structure` format.

## Tips

- When you log states and output data using `Dataset`:
  - You can work with logged data in MATLAB without a Simulink license.
  - Logging supports saving multiple data values for a given time step, which can be required for logging data in a For Iterator Subsystem, a While Iterator Subsystem, and Stateflow.
  - Logged data automatically streams to the **Simulation Data Inspector** during simulation.
- `Dataset` format does not support rapid accelerator simulation.
- For states logging, `Dataset` format does not support:
  - Logging states information inside a function-call subsystem
  - Code generation
- To use `Array` format, all logged states and outputs must:
  - Be all scalars or all vectors (or all matrices for states)
  - Be all real or all complex

- Have the same data type

Use another format if the outputs and states in your model do not meet these conditions.

- The format specified for the **Format** parameter does not apply to final states data.

## Command-Line Information

**Parameter:** SaveFormat

**Value:** 'Array' | 'Structure' | 'StructureWithTime' | 'Dataset'

**Default:** 'Dataset'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Export Simulation Data”
- “Data Format for Logged Simulation Data”
- “Time, State, and Output Data Format”
- “Dataset Conversion for Logged Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Limit data points

## Description

Limit the number of data points logged to the MATLAB workspace.

**Category:** Data Import/Export

## Settings

**Default:** Off, 1000



On

Limits the number of data points logged to the MATLAB workspace to the specified number.

Specify the maximum number of data points to log to the MATLAB workspace. At the end of the simulation, the MATLAB workspace contains the last N points generated by the simulation.



Off

Does not limit the number of data points logged to the MATLAB workspace.

## Tips

- Saving data to the MATLAB workspace can consume memory. Use this parameter to limit the number of samples saved to help avoid this problem.
- You can also apply a **Decimation** factor to reduce the number of saved samples.

## Command-Line Information

**Parameter:** LimitDataPoints

**Value:** 'on' | 'off'

**Default:** 'off'

**Parameter:** MaxDataPoints

**Type:** character vector

**Value:** any valid value

**Default:** '1000'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Export Simulation Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Decimation

## Description

Specify the decimation factor, N, such that Simulink outputs data every N points.

**Category:** Data Import/Export

## Settings

**Default:** 1

- With the default value, 1, all data points are saved.
- The specified value must be a positive integer greater than zero.
- Simulink outputs data at the specified number of data points. For example, specifying 2 saves every other data point, while specifying 10 saves one in ten data points.

## Tips

- Saving data to the MATLAB workspace can consume memory. Use **Decimation** to limit the number of saved samples to consume less memory.
- You can also use the **Limit data points to last** parameter to help resolve memory consumption issues.

## Command-Line Information

**Parameter:** Decimation

**Type:** character vector

**Value:** any valid value

**Default:** '1'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

## Related Examples

- "Export Simulation Data"
- "Model Configuration Parameters: Data Import/Export" on page 3-2

## Save complete SimState in final state

### Description

At the end of a simulation, Simulink saves the complete set of states of the model, including logged states, to the specified MATLAB variable.

**Category:** Data Import/Export

### Settings

**Default:** Off, xFinal



On

Simulink software exports the complete set of final state data (i.e., the SimState) to the MATLAB workspace during simulation.

Specify the name of the MATLAB variable in which to store the values of the final states. See Importing and Exporting States for more information.



Off

Simulink software exports the final logged states during simulation.

### Tips

- You must select the **Final states** check box to enable the **Save complete SimState in final state** option.
- Simulink saves the final states in a MATLAB workspace variable having the specified name.

### Dependencies

This parameter is enabled by **Final states**.

### Command-Line Information

**Parameter:** SaveCompleteFinalSimState

**Value:** 'on' | 'off'

**Default:** 'off'

**Parameter:** FinalStateName

**Type:** character vector

**Value:** any valid value

**Default:** 'xFinal'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |

| Application       | Setting           |
|-------------------|-------------------|
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Importing and Exporting States
- “Limitations of Saving and Restoring Operating Point”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

## Save final operating point

### Description

At the end of a simulation, Simulink saves the complete set of states of the model, including logged states, to the specified MATLAB variable.

**Category:** Data Import/Export

### Settings

**Default:** Off, `xFinal`

On

Simulink software exports the complete set of final state data (i.e., the operating point) to the MATLAB workspace during simulation.

Specify the name of the MATLAB variable in which to store the values of the final states. See Importing and Exporting States for more information.

Off

Simulink software exports the final logged states during simulation.

### Tips

- You must select the **Final states** check box to enable the **Save final operating point** option.
- Simulink saves the final states in a MATLAB workspace variable having the specified name.

### Dependencies

This parameter is enabled by **Final states**.

### Command-Line Information

**Parameter:** `SaveOperatingPoint`

**Value:** `'on'` | `'off'`

**Default:** `'off'`

**Parameter:** `FinalStateName`

**Type:** character vector

**Value:** any valid value

**Default:** `'xFinal'`

### Recommended Settings

| Application  | Setting           |
|--------------|-------------------|
| Debugging    | No impact         |
| Traceability | No impact         |
| Efficiency   | No recommendation |

| Application       | Setting           |
|-------------------|-------------------|
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Importing and Exporting States
- “Limitations of Saving and Restoring Operating Point”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Signal logging

## Description

Globally enable or disable signal logging to the workspace for this model.

**Category:** Data Import/Export

## Settings

**Default:** On, logsout



Enables logging data for specified signals to the MATLAB workspace and the Simulation Data Inspector.

Specify the name of variable used to store logged signal data in the MATLAB workspace. For more information, see “Specify a Name for Signal Logging Data”.



Disables logging signal data to the MATLAB workspace and the Simulation Data Inspector.

## Tips

- You must select the **Signal logging** check box before entering the signal logging variable.
- Simulink saves the signal data in a MATLAB workspace variable with the specified name.
- The saved data is a `Simulink.SimulationData.Dataset` object.
- Simulink does not support signal logging for the following types of signals:
  - Output of a Function-Call Generator block
  - Signal connected to the input of a Merge block
  - Outputs of Trigger and Enable blocks
- If you select **Signal logging**, you can use the **Configure Signals to Log** button to open the Signal Logging Selector. You can use the Signal Logging Selector to:
  - Review all signals in a model hierarchy that are configured for logging
  - Override signal logging settings for specific signals
  - Control signal logging throughout a model reference hierarchy in a streamlined way

You can use the Signal Logging Selector with Simulink and Stateflow signals.

For details about the Signal Logging Selector, see “View Logging Configuration Using the Signal Logging Selector” and “Override Signal Logging Settings”.

- Do not use a variable name that is the same as a `Simulink.SimulationOutput` object function name or property name.

## Dependencies

This parameter enables the **Configure Signals to Log** button.

### Command-Line Information

**Parameter:** SignalLogging

**Value:** 'on' | 'off'

**Default:** 'on'

**Parameter:** SignalLoggingName

**Type:** character vector

**Value:** any valid value

**Default:** 'logout'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Export Signal Data Using Signal Logging”
- “Dataset Conversion for Logged Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

## Data stores

### Description

Globally enable or disable logging of Data Store Memory block variables for this model.

**Category:** Data Import/Export

### Settings

**Default:** On, dsmOut



Enables data store logging to the MATLAB workspace and the Simulation Data Inspector during simulation.

Specify the name of the `Simulink.SimulationData.Dataset` object for the logged data store data.



Disables data store logging to the MATLAB workspace and the Simulation Data Inspector during simulation.

### Tips

- Simulink saves the data in a MATLAB workspace variable having the specified name.
- The saved data has the `Simulink.SimulationData.Dataset` format.
- See “Supported Data Types, Dimensions, and Complexity for Logging Data Stores”, “Data Store Logging Limitations”, and “Data Store Logging Limitations” for more information.

### Dependencies

Select the **Data stores** check box before entering the data store logging variable.

### Command-Line Information

**Parameter:** DSMLogging

**Value:** 'on' | 'off'

**Default:** 'on'

**Parameter:** DSMLoggingName

**Type:** character vector

**Value:** any valid value

**Default:** 'dsmOut'

### Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting           |
|-------------------|-------------------|
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

[Data Store Memory](#) | [Simulink.SimulationData.DataStoreMemory](#)

## Related Examples

- “Log Data Stores”
- “Export Signal Data Using Signal Logging”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

## Log Dataset data to file

### Description

Log simulation data saved using the **Dataset** format to a MAT-file.

**Category:** Data Import/Export

### Settings

**Default:** 'off'



Enables logging data saved using the **Dataset** format to a MAT-file.

Log simulation data to a MAT-file when you know prior to simulation that you want to save the results in a file.

Specify the path and file name for the MAT-file.



Disables logging simulation data to a MAT-file.

### Tips

- To use the **Log Dataset data to file** option, select one or more of these types of data to log:
  - **States**
  - **Final states**
  - **Signal logging**
  - **Output**
  - **Data stores**
  - Stateflow states and data

If you are logging states or output data, set the **Format** parameter to **Dataset**.

If you select the **Final states** parameter, clear the **Save final operating point** parameter.

- When the data in the MAT-file fits into memory, use the **load** function to access the data.
- When the data in the MAT-file is too large to fit into memory, access the data in the MAT-file using **Simulink.SimulationData.DatasetRef** and **matlab.io.datastore.SimulationDatastore** objects.
- Except for parallel simulations, Simulink overwrites the contents of the MAT-file during each simulation unless you change the name of the file between simulations. For details, see "Save Logged Data from Successive Simulations".

### Dependencies

Select the **Log Dataset data to file** check box before entering the path to the MAT-file for logging.

## Command-Line Information

**Parameter:** LoggingToFile

**Value:** 'on' | 'off'

**Default:** 'off'

**Parameter:** LoggingFileName

**Value:** valid path and file name

**Default:** 'out.mat'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

[Simulink.SimulationData.Dataset](#) | [Simulink.SimulationData.DatasetRef](#) | [load](#)

## Related Examples

- “Log Data to Persistent Storage”
- “Load Big Data for Simulations”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

## Output options

### Description

Select options for generating additional output signal data for variable-step solvers.

**Category:** Data Import/Export

### Settings

**Default:** Refine output

**Refine output**

Generates data output between, as well as at, simulation times steps. Use **Refine factor** to specify the number of points to generate between simulation time steps. For more information, see "Refine Output".

**Produce additional output**

Generates additional output at specified times. Use **Output times** to specify the simulation times at which Simulink software generates additional output.

**Produce specified output only**

Use **Output times** to specify the simulation times at which Simulink generates output, in addition to the simulation start and stop times.

### Tips

- These settings can force the solver to calculate output values for times that it would otherwise have omitted because the calculations were not needed to achieve accurate simulation results. These extra calculations can cause the solver to locate zero crossings that it would otherwise have missed.
- For additional information on how Simulink software calculates outputs for these three options, see "Samples to Export for Variable-Step Solvers".
- Do not use a variable name that is the same as a `Simulink.SimulationOutput` object function name or property name.

### Dependencies

This parameter is enabled only if the model specifies a variable-step solver (see Solver Type on page 14-9).

Selecting `Refine output` enables the **Refine factor** parameter.

Selecting `Produce additional output` or `Produce specified output only` enables the **Output times** parameter.

### Command-Line Information

**Parameter:** `OutputOption`

**Value:** '`RefineOutputTimes`' | '`AdditionalOutputTimes`' | '`SpecifiedOutputTimes`'

**Default:** 'RefineOutputTimes'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Output Options”
- “Refine factor” on page 3-34
- “Refine Output”
- “Export Simulation Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

## Refine factor

### Description

Specify how many points to generate between time steps to refine the output.

**Category:** Data Import/Export

### Settings

**Default:** 1

- The default refine factor is 1, meaning that no extra data points are generated.
- A refine factor of 2 provides output midway between the time steps, as well as at the steps.

### Tip

Simulink software ignores this option for discrete models. This is because the value of data between time steps is undefined for discrete models.

### Dependency

This parameter is enabled only if you select `Refine output` as the value of **Output options**.

### Command-Line Information

**Parameter:** Refine

**Type:** character vector

**Value:** any valid value

**Default:** '1'

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- “Refine Output”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Output times

## Description

Specify times at which Simulink software should generate output in addition to, or instead of, the times of the simulation steps taken by the solver used to simulate the model.

**Category:** Data Import/Export

## Settings

**Default:** []

- Enter a matrix containing the times at which Simulink software should generate output in addition to, or instead of, the simulation steps taken by the solver.
- If the value of **Output options** is **Produce additional output**, for the default value [], Simulink generates no additional data points.
- If the value of **Output options** is **Produce specified output only**, for the default value [] Simulink generates no data points.

## Tips

- The **Produce additional output** option generates output at the specified times, as well as at the regular simulation steps.
- The **Produce specified output only** option generates output at the specified times.
- Discrete models define outputs only at major time steps. Therefore, Simulink software logs output for discrete models only at major time steps. If the **Output times** field specifies other times, Simulink displays a warning at the MATLAB command line.
- For additional information on how Simulink software calculates outputs for the **Output options** **Produce specified output only** and **Produce additional output** options, see “Samples to Export for Variable-Step Solvers”.

## Dependency

This parameter is enabled only if the value of **Output options** is **Produce additional output** or **Produce specified output only**.

## Command-Line Information

**Parameter:** OutputTimes

**Type:** character vector

**Value:** any valid value

**Default:** '[]'

## Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting           |
|-------------------|-------------------|
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Refine Output”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Single simulation output

## Description

Enable the single-output format of the `sim` command.

Check the single simulation output option in the import/export pane, to get simulation outputs in a `Simulink.SimulationOutput` object when simulating interactively. Simulation outputs include signal, state, output, DSM logging, and scope and `toworkspace` block logging.

**Category:** Data Import/Export

## Settings

**Default:** on

When you enable this option:

- Simulink returns all simulation outputs within a single `Simulink.SimulationOutput` object, providing that you simulate by click **Run**.
- Specify the variable name of the single output object which will contain the simulation outputs. Use the text field next to the check box to specify this name. If the name is not specified, it defaults to `out`.

## Tips

- To use the **Logging intervals** parameter, you must select **Single simulation output**.
- The method `who` of the `Simulink.SimulationOutput` object returns the list of variables that the object contains.

## Command-Line Information

**Parameter:** `ReturnWorkspaceOutputs`

**Value:** `'on'` | `'off'`

**Default:** `'on'`

**Parameter:** `ReturnWorkspaceOutputsName`

**Type:** character vector

**Value:** character vector

**Default:** `'out'`

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Run Simulations Programmatically”
- “Run Multiple Simulations”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Logging intervals

## Description

Set intervals for logging

**Category:** Data Import/Export

## Settings

**Default:** [-inf,inf]

- Use a real double matrix with two columns.
- The matrix elements cannot be NaN.
- You can specify as many intervals as you want.
- Each row defines the start and end times for an interval.
- Intervals must be disjoint and ordered. For example, you can specify these three intervals: [1,5;6,10;11,15]

## Tips

- The logging intervals apply to data logged for:
  - Time
  - States
  - Output
  - Signal logging
  - The To Workspace block
  - The To File block

The logging intervals do not apply to final state logged data, scopes or streaming data to the Simulation Data Inspector.

- PIL simulation mode does not support logging intervals. Simulink ignores specified logging intervals, without displaying a warning.
- SIL simulation mode supports logging intervals for data logged to a `Simulink.SimulationOutput` object. In SIL mode, Simulink ignores specified logging intervals, without displaying a warning, for:
  - Data logged to a To File block
  - MAT-file logging (enabled with the **MAT-file logging** configuration parameter)
- The interval times that meet either of these two conditions do not return logged data:
  - The time is before the simulation start time.
  - The time is after the simulation stop time.

Interval times that meet these conditions do not cause a warning.

- All logged data, except for data logged to a To File block, is stored in the object you specify for the **Single simulation output** parameter. Data for the To File block reflects the specified intervals, but is stored in the file associated with the block.
- To prevent logging of To Workspace blocks, set **Logging intervals** to an empty matrix ([ ]).
- If you set **Decimation** to 2, then the logged data is for alternating times in the intervals. In other words, data is for times 2, 4, and 8.
- If you set **Limit data points to last** to 4, then the logged data is for the last four times in the intervals. In other words, data is for times 4, 7, 8, and 9.
- Simulation Stepper rollback reflects logging intervals. If you change the logging intervals of a simulation before rollback, logging:
  - Includes data starting with the first step after the rollback
  - Does not include data for time steps that are outside of the original logging intervals

## Dependency

This parameter is enabled only if you select the **Single simulation output** parameter.

## Command-Line Information

**Parameter:** LoggingIntervals

**Type:** real double matrix with two columns

**Default:** [-inf,inf]

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Run Simulations Programmatically”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Record logged workspace data in Simulation Data Inspector

## Description

Specify whether to send data logged in a format other than Dataset and data logged using blocks to the Simulation Data Inspector after simulation pauses or completes.

**Category:** Data Import/Export

## Settings

**Default:** Off



On

Record these kinds of data to display in the Simulation Data Inspector after a simulation pauses or completes:

- States and output data logged in Array or Structure with time formats
- Data logged using To Workspace blocks, To File blocks, or Scope blocks

This setting adds a recording icon to the **Simulation Data Inspector** button.



Off

Do not record data logged using blocks or in a format other than Dataset to view in the Simulation Data Inspector.

## Tips

- When you log data using the Array format, you must also log time for the states and output data to log to the Simulation Data Inspector.
- To open the Simulation Data Inspector, click the **Simulation Data Inspector** button.

## Command-Line Information

**Parameter:** InspectSignalLogs

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

[Simulation Data Inspector](#)

## Related Examples

- “Load Signal Data for Simulation”
- “View Data in the Simulation Data Inspector”
- “Inspect Simulation Data”
- “Model Configuration Parameters: Data Import/Export” on page 3-2

# Diagnostics Parameters: Compatibility

---

## Model Configuration Parameters: Compatibility Diagnostics

The **Diagnostics > Compatibility** category includes parameters for detecting issues when you use a model that you created in an earlier release.

| Parameter                                                      | Description                                                                                                                                     |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| "S-function upgrades needed" on page 4-4                       | Select the diagnostic action to take if Simulink software encounters a block that has not been upgraded to use features of the current release. |
| "Block behavior depends on frame status of signal" on page 4-5 | Select the diagnostic action to take when Simulink software encounters a block whose behavior depends on the frame status of a signal.          |
| "SimState object from earlier release" on page 4-7             | Use this check to report that the SimState was generated by an earlier version of Simulink.                                                     |

### See Also

#### Related Examples

- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2
- "Model Configuration Parameters: Model Referencing Diagnostics" on page 7-2

# Compatibility Diagnostics Overview

Specify the diagnostic actions that Simulink software should take when it detects an incompatibility between the current version of Simulink software and the model.

## Configuration

Set the parameters displayed.

## Tips

- To open the **Compatibility** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Compatibility**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



### **See Also**

## Related Examples

- “Model Configuration Parameters: Compatibility Diagnostics” on page 4-2

## S-function upgrades needed

### Description

Select the diagnostic action to take if Simulink software encounters a block that has not been upgraded to use features of the current release.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Command-Line Information

**Parameter:** SFcnCompatibilityMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Compatibility Diagnostics” on page 4-2

# Block behavior depends on frame status of signal

## Description

Select the diagnostic action to take when Simulink software encounters a block whose behavior depends on the frame status of a signal.

In future releases, frame status will no longer be a signal attribute. To prepare for this change, many blocks received a new parameter. This parameter allows you to specify whether the block treats its input as frames of data or as samples of data. Setting this parameter prepares your model for future releases by moving control of sample- and frame-based processing from the frame status of the signal to the block.

This diagnostic helps you identify whether any of the blocks in your model relies on the frame status of a signal. By knowing this status, you can determine whether the block performs sample- or frame-based processing. For more information, see the R2012a DSP System Toolbox™ Release Notes section about frame-based processing.

---

**Note** Frame-based processing requires a DSP System Toolbox license.

---

**Category:** Diagnostics

## Settings

**Default:** error

**none**

Simulink software takes no action.

**warning**

If your model contains any blocks whose behavior depends on the frame status of a signal, Simulink software displays a warning.

**error**

If your model contains any blocks whose behavior depends on the frame status of a signal, Simulink software terminates the simulation and displays an error message.

## Tips

- Use the Upgrade Advisor to automatically update the blocks in your model. See “Model Upgrades”.

## Command-Line Information

**Parameter:** FrameProcessingCompatibilityMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Sample- and Frame-Based Concepts” (DSP System Toolbox)
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Compatibility Diagnostics” on page 4-2

# SimState object from earlier release

## Description

Use this check to report that the SimState was generated by an earlier version of Simulink.

**Category:** Diagnostics

## Settings

**Default:** error

warning

    Simulink will restore as much of this SimState as possible.

error

    When Simulink detects that the SimState was generated by an earlier version of Simulink, it does not attempt to load the object.

## Command-Line Information

**Parameter:** SimStateOlderReleaseMsg

**Value:** 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Save and Restore Simulation Operating Point”
- “Model Configuration Parameters: Compatibility Diagnostics” on page 4-2



# Diagnostics Parameters: Connectivity

---

## Model Configuration Parameters: Connectivity Diagnostics

The **Diagnostics > Connectivity** category includes parameters for detecting issues related to signal line connectivity, for example, unconnected ports and lines.

On the Configuration Parameters dialog box, the following configuration parameters are on the **Connectivity** pane.

| Parameter                                                  | Description                                                                                                                                                                                                                          |
|------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Signal label mismatch" on page 5-5                        | Select the diagnostic action to take when different names are used for the same signal as that signal propagates through blocks in a model. This diagnostic does not check for signal label mismatches on a virtual bus signal.      |
| "Unconnected block input ports" on page 5-6                | Select the diagnostic action to take when the model contains a block with an unconnected input.                                                                                                                                      |
| "Unconnected block output ports" on page 5-7               | Select the diagnostic action to take when the model contains a block with an unconnected output.                                                                                                                                     |
| "Unconnected line" on page 5-8                             | Select the diagnostic action to take when the Model contains an unconnected line or an unmatched Goto or From block.                                                                                                                 |
| "Unspecified bus object at root Outport block" on page 5-9 | Select the diagnostic action to take while generating a simulation target for a referenced model if any of the model's root Outport blocks is connected to a bus but does not specify a bus object (see <code>Simulink.Bus</code> ). |
| "Element name mismatch" on page 5-10                       | Select the diagnostic action to take if the name of a bus element does not match the name specified by the corresponding bus object.                                                                                                 |
| "Bus signal treated as vector" on page 5-12                | Select the diagnostic action to take when Simulink software detects a virtual bus signal that is used as a mux signal.                                                                                                               |
| "Non-bus signals treated as bus signals" on page 5-14      | Detect when Simulink implicitly converts a non-bus signal to a bus signal to support connecting the signal to a Bus Assignment or Bus Selector block.                                                                                |
| "Repair bus selections" on page 5-16                       | Repair broken selections in the Bus Selector and Bus Assignment block parameter dialogs due to upstream bus hierarchy changes.                                                                                                       |
| "Context-dependent inputs" on page 5-17                    | Select the diagnostic action to take when Simulink software has to compute any of a function-call subsystem's inputs directly or indirectly during execution of a call to a function-call subsystem.                                 |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

# Connectivity Diagnostics Overview

# Configuration

Set the parameters displayed.

## Tips

- To open the **Connectivity** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Connectivity**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This?**



### **See Also**

## Related Examples

- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

# Signal label mismatch

## Description

Select the diagnostic action to take when different names are used for the same signal as that signal propagates through blocks in a model. This diagnostic does not check for signal label mismatches on a virtual bus signal.

**Category:** Diagnostics

## Settings

**Default:** none

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** SignalLabelMismatchMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Signal Names and Labels”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Unconnected block input ports

### Description

Select the diagnostic action to take when the model contains a block with an unconnected input.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Command-Line Information

**Parameter:** UnconnectedInputMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

# Unconnected block output ports

## Description

Select the diagnostic action to take when the model contains a block with an unconnected output.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** UnconnectedOutputMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Unconnected line

### Description

Select the diagnostic action to take when the Model contains an unconnected line or an unmatched Goto or From block.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Command-Line Information

**Parameter:** UnconnectedLineMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- Goto
- From
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

# Unspecified bus object at root Outport block

## Description

Select the diagnostic action to take while generating a simulation target for a referenced model if any of the model's root Outport blocks is connected to a bus but does not specify a bus object (see [Simulink.Bus](#)).

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** RootOutportRequireBusObject

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Functions

[Simulink.Bus](#)

## Related Examples

- Diagnosing Simulation Errors
- Outport
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Element name mismatch

### Description

Select the diagnostic action to take if the name of a bus element does not match the name specified by the corresponding bus object.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- You can use this diagnostic along with bus objects to ensure that your model meets bus element naming requirements imposed by some blocks, such as the Switch block.
- In a Bus Creator block, you can enforce strong data typing. See the tips section for the Bus Creator Use names from inputs instead of from bus object parameter.

### Command-Line Information

**Parameter:** BusObjectNameMismatch

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- Diagnosing Simulation Errors

- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Bus signal treated as vector

### Description

Select the diagnostic action to take when Simulink software detects a virtual bus signal treated as a vector signal.

**Category:** Diagnostics

### Settings

**Default:** none

none

Disables checking for virtual bus signals treated as vector signals.

warning

Simulink displays a warning if it detects a virtual bus signal treated as a vector signal.

error

Simulink terminates the simulation and displays an error message when it builds a model that uses a virtual bus signal treated as a vector signal.

### Tips

- The diagnostic considers a virtual bus signal to be treated as a vector signal if the signal is input to a block that does not accept virtual bus signals. See “Bus-Capable Blocks” for details.
- Virtual buses can be treated as vector signals only when all constituent signals have the same attributes.
- You can identify bus signals that are treated as vectors using the Model Advisor **“Check bus signals treated as vectors”** check.

### Command-Line Information

**Parameter:** StrictBusMsg

**Value:** 'ErrorLevel1' | 'WarnOnBusTreatedAsVector' | 'ErrorOnBusTreatedAsVector'

**Default:** 'ErrorLevel1'

Here is how the StrictBusMsg parameter values map to the values of the **Bus signal treated as vector** parameter in the **Configuration Parameters > Diagnostics > Connectivity** dialog box.

| Value of StrictBusMsg     | Value of “Bus signal treated as vector” diagnostic |
|---------------------------|----------------------------------------------------|
| ErrorLevel1               | none                                               |
| WarnOnBusTreatedAsVector  | warning                                            |
| ErrorOnBusTreatedAsVector | error                                              |

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Functions

`Simulink.BlockDiagram.addBusToVector`

## Related Examples

- Diagnosing Simulation Errors
- “Bus-Capable Blocks”
- Demux
- Bus to Vector
- “Underspecified initialization detection” on page 2-66
- “Check virtual bus inputs to blocks”
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Non-bus signals treated as bus signals

### Description

Detect when Simulink implicitly converts a non-bus signal to a bus signal to support connecting the signal to a Bus Assignment or Bus Selector block.

**Category:** Diagnostics

### Settings

**Default:** none

none

Implicitly converts non-bus signals to bus signals to support connecting the signal to a Bus Assignment or Bus Selector block.

warning

Simulink displays a warning, indicating that it has converted a non-bus signal to a bus signal. The warning lists the non-bus signals that Simulink converts.

error

Simulink terminates the simulation without converting non-bus signals to bus signals. The error message lists the non-bus signal that is being treated as a bus signal.

### Command-Line Information

**Parameter:** NonBusSignalsTreatedAsBus

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

#### Functions

`Simulink.BlockDiagram.addBusToVector`

### Related Examples

- Diagnosing Simulation Errors
- “Bus-Capable Blocks”

- Demux
- Bus to Vector
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

## Repair bus selections

### Description

Repair broken selections in the Bus Selector and Bus Assignment block parameter dialogs due to upstream bus hierarchy changes.

**Category:** Diagnostics

### Settings

**Default:** Warn and repair

**Warn and repair**

Simulink displays a warning, indicating the block parameters for Bus Selector and Bus Assignment blocks that Simulink repaired to reflect upstream bus hierarchy changes.

**Error without repair**

Simulink terminates the simulation and displays an error message indicating the block parameters that you need to repair for Bus Selector and Bus Assignment blocks to reflect upstream bus hierarchy changes.

### Command-Line Information

**Parameter:** BusNameAdapt

**Values:** 'WarnAndRepair' | 'ErrorWithoutRepair'

**Default:** 'WarnAndRepair'

### Recommended Settings

| Application       | Setting         |
|-------------------|-----------------|
| Debugging         | No impact       |
| Traceability      | No impact       |
| Efficiency        | No impact       |
| Safety precaution | Warn and repair |

### See Also

### Related Examples

- “Resolve Circular Dependencies in Buses”
- Diagnosing Simulation Errors
- “Bus-Capable Blocks”
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

# Context-dependent inputs

## Description

Select the diagnostic action to take when Simulink has to compute any function-call subsystem inputs directly or indirectly during execution of a call to a function-call subsystem.

**Category:** Diagnostics

## Settings

**Default:** error

error

Issue an error for context-dependent inputs.

warning

Issue a warning for context-dependent inputs.

## Tips

- This situation occurs when executing a function-call subsystem that can change its inputs.
- For examples of function-call subsystems, see the "Function-call systems" examples in the Simulink "Subsystem Semantics" library).
- To fix an error or warning generated by this diagnostic, use *one* of these approaches:
  - For the Import block inside of the function-call subsystem, enable the **Latch input for feedback signals of function-call subsystem outputs** parameter.
  - Place a Function-Call Feedback Latch block on the feedback signal.

For examples of using these approaches, open the sl\_subsys\_fcncallerr12 model and press the **more info** button.

## Command-Line Information

**Parameter:** FcnCallInpInsideContextMsg

**Value:** 'Error' | 'Warning'

**Default:** 'Error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | Error     |

## See Also

### Related Examples

- “Using Function-Call Subsystems”
- “Pass fixed-size scalar root inputs by value for code generation” on page 12-18
- Subsystem Semantics
- Subsystem
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Connectivity Diagnostics” on page 5-2

# Diagnostics Parameters: Data Validity

---

## Model Configuration Parameters: Data Validity Diagnostics

The **Diagnostics > Data Validity** category includes parameters for detecting issues related to data (signals, parameters, and states). These issues include:

- Loss of information due to data type quantization and overflow.
- Loss of parameter tunability in the generated code.
- Loss of information due to Data Store Write and Data Store Read block ordering.

On the Configuration Parameters dialog box, the following configuration parameters are on the **Data Validity** pane.

| Parameter                                                | Description                                                                                                                                                     |
|----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Signal resolution" on page 6-6                          | Select how Simulink software resolves signals and states to <code>Simulink.Signal</code> objects.                                                               |
| "Division by singular matrix" on page 6-8                | Select the diagnostic action to take if the Product block detects a singular matrix while inverting one of its inputs in matrix multiplication mode.            |
| "Underspecified data types" on page 6-10                 | Select the diagnostic action to take if Simulink software could not infer the data type of a signal during data type propagation.                               |
| "Simulation range checking" on page 6-12                 | Select the diagnostic action to take when signals exceed specified minimum or maximum values.                                                                   |
| "String truncation checking" on page 6-14                | Select the diagnostic action to take if the string signal is truncated.                                                                                         |
| "Wrap on overflow" on page 6-15                          | Select the diagnostic action to take if the value of a signal overflows the signal data type and wraps around.                                                  |
| "Underspecified dimensions" on page 6-19                 | Select the diagnostic action to take if Simulink software could not infer the signal dimension at compile time.                                                 |
| "Saturate on overflow" on page 6-17                      | Select the diagnostic action to take if the value of a signal is too large to be represented by the signal data type, resulting in a saturation.                |
| "Inf or NaN block output" on page 6-20                   | Select the diagnostic action to take if the value of a block output is <code>Inf</code> or <code>Nan</code> at the current time step.                           |
| " <code>rt</code> " prefix for identifiers" on page 6-22 | Select the diagnostic action to take during code generation if a Simulink object name (the name of a parameter, block, or signal) begins with <code>rt</code> . |
| "Detect downcast" on page 6-24                           | Select the diagnostic action to take when a parameter downcast occurs during simulation.                                                                        |
| "Detect overflow" on page 6-26                           | Select the diagnostic action to take if a parameter overflow occurs during simulation.                                                                          |
| "Detect underflow" on page 6-28                          | Select the diagnostic action to take when a parameter underflow occurs during simulation.                                                                       |

| Parameter                                 | Description                                                                                                                                                                                                      |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Detect precision loss" on page 6-30      | Select the diagnostic action to take when parameter precision loss occurs during simulation.                                                                                                                     |
| "Detect loss of tunability" on page 6-32  | Select the diagnostic action to take when an expression with tunable variables is reduced to its numerical equivalent in the generated code.                                                                     |
| "Detect read before write" on page 6-34   | Select the diagnostic action to take if the model attempts to read data from a data store to which it has not written data in this time step.                                                                    |
| "Detect write after read" on page 6-36    | Select the diagnostic action to take if the model attempts to write data to a data store after previously reading data from it in the current time step.                                                         |
| "Detect write after write" on page 6-38   | Select the diagnostic action to take if the model attempts to write data to a data store twice in succession in the current time step.                                                                           |
| "Multitask data store" on page 6-40       | Select the diagnostic action to take when one task reads data from a Data Store Memory block to which another task writes data.                                                                                  |
| "Duplicate data store names" on page 6-42 | Select the diagnostic action to take when the model contains multiple data stores that have the same name. The data stores can be defined with Data Store Memory blocks or <code>Simulink.Signal</code> objects. |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                                                     | Description                                                                                                                                                                                 |
|-------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Array bounds exceeded" on page 2-54                                          | Ensure that Simulink-allocated memory used in S-functions does not write beyond its assigned array bounds when writing to its outputs, states, or work vectors.                             |
| "Model Verification block enabling" on page 2-56                              | Enable model verification blocks in the current model either globally or locally.                                                                                                           |
| "Detect multiple driving blocks executing at the same time step" on page 2-64 | Select the diagnostic action to take when the software detects a Merge block with more than one driving block executing at the same time step.                                              |
| "Underspecified initialization detection" on page 2-66                        | Select how Simulink software handles initialization of initial conditions for conditionally executed subsystems, Merge blocks, subsystem elapsed time, and Discrete-Time Integrator blocks. |

| Parameter                                                          | Description                                                                                                                                                                                                                                                               |
|--------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Detect ambiguous custom storage class final values" on page 2-105 | Detect if a signal using a Reusable custom storage class does not have a unique endpoint. The run-time environment should not read the variable because its value is ambiguous.                                                                                           |
| "Detect non-reused custom storage classes" on page 2-107           | Detect if a signal uses a Reusable custom storage class that the code generator cannot reuse with other uses of the same Reusable custom storage class. If the code generator cannot implement reuse, the generated code will likely contain additional global variables. |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- "Data Types Supported by Simulink"
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

# Data Validity Diagnostics Overview

Specify what diagnostic action Simulink software should take, if any, when it detects a condition that could compromise the integrity of data defined by the model, as well as the Data Validity parameters that pertain to code generation, and are used to debug a model.

## Configuration

Set the parameters displayed.

## Tips

- To open the **Data Validity** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Data Validity**.
- The options are typically to do nothing or to display a warning or an error message.
- A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
- 2 From the context menu, select **What's This**.



## See Also

### Related Examples

- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

# Signal resolution

## Description

Select how a model resolves signals and states to `Simulink.Signal` objects. See “Explicit and Implicit Symbol Resolution” for more information.

**Category:** Diagnostics

## Settings

**Default:** Explicit only

None

Do not perform signal resolution. None of the signals, states, Stateflow data, and MATLAB Function block data in the model can resolve to `Simulink.Signal` objects.

This setting does not affect data stores that you define by creating `Simulink.Signal` objects (instead of using Data Store Memory blocks).

Explicit only

Do not perform implicit signal resolution. Only explicitly specified signal resolution occurs. This is the recommended setting.

Explicit and implicit

Perform implicit signal resolution wherever possible, without posting any warnings about the implicit resolutions.

Explicit and warn implicit

Perform implicit signal resolution wherever possible, posting a warning of each implicit resolution that occurs.

## Tips

- To reduce the dependency of the model on variables and objects in workspaces and data dictionaries, which can improve model portability, readability, and ease of maintenance, use None.

When you use this setting, migrate design attributes from existing `Simulink.Signal` objects into the model by using block parameters and signal properties (for example, in the Model Data Editor or in Signal Properties dialog boxes).

- Use the Signal Properties dialog box (see Signal Properties Dialog Box on page 17-2) to specify explicit resolution for signals.
- Use the **State Attributes** pane on dialog boxes of blocks that have discrete states, e.g., the Discrete-Time Integrator block, to specify explicit resolution for discrete states.
- Multiple signals can resolve to the same signal object and have the properties that the object specifies. However, the signal object cannot use a storage class other than Auto or Reusable.
- MathWorks discourages using implicit signal resolution except for fast prototyping, because implicit resolution slows performance, complicates model validation, and can have nondeterministic effects.
- Simulink software provides the `disableimplicitresolution` function, which you can use to change settings throughout a model so that it does not use implicit signal resolution.

## Command-Line Information

**Parameter:** SignalResolutionControl

**Value:** 'None' | 'UseLocalSettings' | 'TryResolveAll' | 'TryResolveAllWithWarning'

**Default:** 'UseLocalSettings'

| SignalResolutionControl Value | Equivalent Signal Resolution Value |
|-------------------------------|------------------------------------|
| 'None'                        | None                               |
| 'UseLocalSettings'            | Explicit only                      |
| 'TryResolveAll'               | Explicit and implicit              |
| 'TryResolveAllWithWarning'    | Explicit and warn implicit         |

## Recommended Settings

| Application       | Setting               |
|-------------------|-----------------------|
| Debugging         | Explicit only or None |
| Traceability      | Explicit only or None |
| Efficiency        | Explicit only or None |
| Safety precaution | Explicit only         |

## See Also

[Simulink.Signal](#)

## Related Examples

- Diagnosing Simulation Errors
- Signal Properties Dialog Box on page 17-2
- Discrete-Time Integrator
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Division by singular matrix

### Description

Select the diagnostic action to take if the Product block detects a singular matrix while inverting one of its inputs in matrix multiplication mode.

**Category:** Diagnostics

### Settings

**Default:** none

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

For models referenced in Accelerator mode, Simulink ignores the **Division by singular matrix** parameter setting if you set it to a value other than **None**.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration parameter settings during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
- 2 Select **By Task**.
- 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.

### Command-Line Information

**Parameter:** CheckMatrixSingularityMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Product
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Underspecified data types

### Description

Select the diagnostic action to take if Simulink software could not infer the data type of a signal during data type propagation.

**Category:** Diagnostics

### Identify and Resolve Underspecified Data Types

This example shows how to use the configuration parameter **Underspecified data types** to identify and resolve an underspecified data type.

- 1 Open the example model `ex_underspecified_data_types`.
- 2 Set the **Underspecified data types** configuration parameter to `warning`.
- 3 Update the diagram.

The signals in the model use the data type `uint8`, and the model generates a warning.

- 4 Open the Diagnostic Viewer. The warning indicates that the output signal of the Constant block has an underspecified data type.
- 5 Open the Constant block dialog box.

On the **Signal Attributes** tab, **Output data type** is set to `Inherit: Inherit via back propagation`. The Constant block output inherits a data type from the destination block. In this case, the destination is the Sum block.

- 6 Open the Sum block dialog box.

On the **Signal Attributes** tab, **Accumulator data type** is set to `Inherit: Inherit via internal rule`. Sum blocks cast all of their input signals to the selected accumulator data type. In this case, the accumulator data type is specified as an inherited type.

- 7 Open the Import block dialog box. On the **Signal Attributes** tab, **Data type** is set to `uint8`.

The data type of the Constant block output signal is underspecified because the source and destination blocks each apply an inherited data type. The signal cannot identify an explicit data type to inherit. In cases like this, Simulink applies heuristic rules to select a data type to use.

To resolve the underspecified data type, you can use one of these techniques:

- On the **Signal Attributes** tab of the Constant block dialog box, specify **Output data type** as a particular numeric type, such as `uint8`.
- On the **Signal Attributes** tab of the Sum block dialog box, select the check box **Require all inputs to have the same data type**.

With this setting, the Sum block applies the data type of the first input, `uint8`, to the underspecified data type of the second input.

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** UnderSpecifiedDataTypeMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## See Also

### Related Examples

- “Default for underspecified data type” on page 23-5
- Diagnosing Simulation Errors
- “Use single Data Type as Default for Underspecified Types” (Embedded Coder)
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Simulation range checking

### Description

Select the diagnostic action to take when signals exceed specified minimum or maximum values.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- For information about specifying minimum and maximum values for signals and about how Simulink checks nondouble signals, see “Specify Signal Ranges”.
- For referenced models, Simulink performs signal range checking for only root-level I/O signals. It does not check internal signals.
- If you have an Embedded Coder license, you can perform signal range checking in top-model or Model block software-in-the-loop (SIL) and processor-in-the-loop (PIL) simulations (Embedded Coder).

### Command-Line Information

**Parameter:** `SignalRangeChecking`

**Value:** `'none' | 'warning' | 'error'`

**Default:** `'none'`

### Recommended Settings

| Application       | Setting                                    |
|-------------------|--------------------------------------------|
| Debugging         | <code>warning</code> or <code>error</code> |
| Traceability      | <code>warning</code> or <code>error</code> |
| Efficiency        | <code>none</code>                          |
| Safety precaution | <code>error</code>                         |

## See Also

### Related Examples

- “Specify Signal Ranges”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## String truncation checking

### Description

Select the diagnostic action to take if the string signal is truncated.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Command-Line Information

**Parameter:** StringTruncationChecking

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | error     |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

# Wrap on overflow

## Description

Select the diagnostic action to take if the value of a signal overflows the signal data type and wraps around.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation or code generation and displays an error message.

## Tips

- This diagnostic applies only to overflows which wrap for integer and fixed-point data types.
- This diagnostic also reports division by zero for all data types, including floating-point data types.
- To check for floating-point overflows (for example, Inf or NaN) for double or single data types, select the **Inf or NaN block output** diagnostic. (See “Inf or NaN block output” on page 6-20 for more information.)
- For models referenced in accelerator mode, Simulink ignores the **Wrap on overflow** parameter setting if you set it to a value other than None.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration parameter settings during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
  - 2 Select **By Task**.
  - 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.
- During code generation, Simulink may simulate a few blocks in the model for optimization purposes. If simulation of these blocks triggers this diagnostic to report an error, the software terminates code generation.

## Command-Line Information

**Parameter:** IntegerOverflowMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | warning   |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Handle Overflows in Simulink Models” (Fixed-Point Designer)
- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

# Saturate on overflow

## Description

Select the diagnostic action to take if the value of a signal is too large to be represented by the signal data type, resulting in a saturation.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation or code generation and displays an error message.

## Tips

- This diagnostic applies only to overflows which saturate for integer and fixed-point data types.
- To check for floating-point overflows (for example, Inf or NaN) for double or single data types, select the **Inf or NaN block output** diagnostic. (See “Inf or NaN block output” on page 6-20 for more information.)
- During code generation, Simulink may simulate a few blocks in the model for optimization purposes. If simulation of these blocks triggers this diagnostic to report an error, the software terminates code generation.

## Command-Line Information

**Parameter:** IntegerSaturationMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | warning   |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Handle Overflows in Simulink Models” (Fixed-Point Designer)
- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

# Underspecified dimensions

## Description

Select the diagnostic action to take if Simulink software could not infer the signal dimension at compile time.

## Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** UnderSpecifiedDimensionMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## Inf or NaN block output

### Description

Select the diagnostic action to take if the value of a block output is Inf or NaN at the current time step.

---

**Note** Accelerator mode does not support any runtime diagnostics.

---

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- This diagnostic applies only to floating-point overflows for double or single data types.
- To check for integer and fixed-point overflows, select the **Wrap on overflow** diagnostic. (See “Wrap on overflow” on page 6-15 for more information.)
- For models referenced in accelerator mode, Simulink ignores the **Info or NaN block output** parameter setting if you set it to a value other than None.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration parameter settings during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
- 2 Select **By Task**.
- 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.

### Command-Line Information

**Parameter:** SignalInfNanChecking

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Validate a Floating-Point Embedded Model”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## "rt" prefix for identifiers

### Description

Select the diagnostic action to take during code generation if a Simulink object name (the name of a parameter, block, or signal) begins with `rt`.

**Category:** Diagnostics

### Settings

**Default:** `error`

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- The default setting (`error`) causes code generation to terminate with an error if it encounters a Simulink object name (parameter, block, or signal), that begins with `rt`.
- This is intended to prevent inadvertent clashes with generated identifiers whose names begin with `rt`.

### Command-Line Information

**Parameter:** `RTPrefix`

**Value:** `'none' | 'warning' | 'error'`

**Default:** `'error'`

### Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

### See Also

### Related Examples

- Diagnosing Simulation Errors

- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect downcast

### Description

Select the diagnostic action to take when a parameter downcast occurs during code generation.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates code generation and displays an error message.

### Tips

- A parameter downcast occurs if the computation of block output required converting the parameter's specified type to a type having a smaller range of values (for example, from `uint32` to `uint8`).
- This diagnostic applies only to named tunable parameters (parameters with a non-Auto storage class).

### Command-Line Information

**Parameter:** ParameterDowncastMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- Diagnosing Simulation Errors

- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect overflow

### Description

Select the diagnostic action to take if a parameter overflow occurs during simulation.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- A parameter overflow occurs if Simulink software encounters a parameter whose data type's range is not large enough to accommodate the parameter's ideal value (the ideal value is either too large or too small to be represented by the data type). For example, suppose that the parameter's ideal value is 200 and its data type is `int8`. Overflow occurs in this case because the maximum value that `int8` can represent is 127.
- Parameter overflow differs from parameter precision loss, which occurs when the ideal parameter value is within the range of the data type and scaling being used, but cannot be represented exactly.
- Both parameter overflow and precision loss are quantization errors, and the distinction between them can be a fine one. The **Detect overflow** diagnostic reports all quantization errors greater than one bit. For very small parameter quantization errors, precision loss will be reported rather than an overflow when

$$(Max + Slope) \geq V_{ideal} > (Min - Slope)$$

where

- *Max* is the maximum value representable by the parameter data type
- *Min* is the minimum value representable by the parameter data type
- *Slope* is the slope of the parameter data type (slope = 1 for integers)
- *V<sub>ideal</sub>* is the ideal value of the parameter

### Command-Line Information

**Parameter:** ParameterOverflowMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect underflow

### Description

Select the diagnostic action to take when parameter quantization causes a non-zero value to underflow to zero during simulation.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- Parameter underflow occurs when Simulink software encounters a parameter whose data type does not have enough precision to represent the parameter's ideal value because the ideal value is too small.
- When parameter underflow occurs, casting the ideal non-zero value to the parameter's data type causes the modeled value to become zero.
- Parameter underflow can occur for any data type, including floating-point, fixed-point, and integer data types. For example, the ideal value  $1e-46$  will quantize to zero for single-precision, half-precision, all integer types, and most commonly used fixed-point types.
- The absolute quantization error will be small relative to the precision of the data type, but the relative quantization error will be 100%. Depending on how the parameter is used in your algorithm, the effects of underflow will be significant. For example, if the parameter is directly used in multiplication or division, then the impact of a 100% relative quantization error can be significant.

### Command-Line Information

**Parameter:** ParameterUnderflowMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect precision loss

### Description

Select the diagnostic action to take when parameter precision loss occurs during simulation.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- Precision loss occurs when Simulink software encounters a parameter whose data type does not have enough precision to represent the parameter's value exactly. As a result, the modeled value differs from the ideal value.
- Parameter precision loss differs from parameter overflow, which occurs when the range of the parameter's data type, i.e., that maximum value that it can represent, is smaller than the ideal value of the parameter.
- Both parameter overflow and precision loss are quantization errors, and the distinction between them can be a fine one. The **Detect Parameter overflow** diagnostic reports all parameter quantization errors greater than one bit. For very small parameter quantization errors, precision loss will be reported rather than an overflow when

$$(Max + Slope) \geq V_{ideal} > (Min - Slope)$$

where

- *Max* is the maximum value representable by the parameter data type.
- *Min* is the minimum value representable by the parameter data type.
- *Slope* is the slope of the parameter data type (slope = 1 for integers).
- *V<sub>ideal</sub>* is the full-precision, ideal value of the parameter.

### Command-Line Information

**Parameter:** ParameterPrecisionLossMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect loss of tunability

### Description

Select the diagnostic action to take when an expression with tunable variables is reduced to its numerical equivalent in the generated code.

**Category:** Diagnostics

### Settings

**Default:** warning for GRT targets | error for ERT targets

`none`

Take no action.

`warning`

Generate a warning.

`error`

Terminate simulation or code generation and generate an error.

### Tips

- This diagnostic applies only to named tunable parameters (parameters with a non-Auto storage class).
- The default value for **Detect loss of tunability** for ERT-based targets is `error`. When you switch from a system target file that is not ERT-based to one that is ERT-based, **Detect loss of tunability** is set to `error`. However, you can change the setting of **Detect loss of tunability** later.
- If a tunable workspace variable is modified by Mask Initialization code, or is used in an arithmetic expression with unsupported operators or functions, the expression is reduced to its numeric value and therefore cannot be tuned.

### Command-Line Information

**Parameter:** ParameterTunabilityLossMsg

**Type:** character vector

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning' for GRT targets | 'error' for ERT targets

### Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Tunable Expression Limitations” (Simulink Coder)
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect read before write

### Description

Select the diagnostic action to take if the model attempts to read data from a data store to which it has not written data in this time step.

**Category:** Diagnostics

### Settings

**Default:** Use local settings

**Use local settings**

For each local data store (defined by a Data Store Memory block or `Simulink.Signal` object in a model workspace) use the setting specified by the block. For each global data store (defined by a `Simulink.Signal` object in the base workspace) disable the diagnostic.

**Disable all**

Disables this diagnostic for all data stores accessed by the model.

**Enable all as warnings**

Displays diagnostic as a warning at the MATLAB command line.

**Enable all as errors**

Halts the simulation and displays the diagnostic in an error dialog box.

---

**Note** During model referencing simulation in accelerator and rapid accelerator mode, if the **Detect read before write** parameter is set to **Enable all as warnings**, **Enable all as errors**, or **Use local settings**, Simulink temporarily changes the setting to **Disable all**.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration this parameter setting during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
  - 2 Select **By Task**.
  - 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.
- 

### Command-Line Information

**Parameter:** `ReadBeforeWriteMsg`

**Value:** `'UseLocalSettings'` | `'DisableAll'` | `'EnableAllAsWarning'` |  
`'EnableAllAsError'`

**Default:** `'UseLocalSettings'`

## Recommended Settings

| Application       | Setting              |
|-------------------|----------------------|
| Debugging         | No impact            |
| Traceability      | No impact            |
| Efficiency        | No impact            |
| Safety precaution | Enable all as errors |

## See Also

[Simulink.Signal](#)

## Related Examples

- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- Data Store Memory
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect write after read

### Description

Select the diagnostic action to take if the model attempts to write data to a data store after previously reading data from it in the current time step.

**Category:** Diagnostics

### Settings

**Default:** Use local settings

**Use local settings**

For each local data store (defined by a Data Store Memory block or `Simulink.Signal` object in a model workspace) use the setting specified by the block. For each global data store (defined by a `Simulink.Signal` object in the base workspace) disable the diagnostic.

**Disable all**

Disables this diagnostic for all data stores accessed by the model.

**Enable all as warnings**

Displays diagnostic as a warning at the MATLAB command line.

**Enable all as errors**

Halts the simulation and displays the diagnostic in an error dialog box.

---

**Note** During model referencing simulation in accelerator and rapid accelerator mode, if the **Detect write after read** parameter is set to **Enable all as warnings**, **Enable all as errors**, or **Use local settings**, Simulink temporarily changes the setting to **Disable all**.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration this parameter setting during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
  - 2 Select **By Task**.
  - 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.
- 

### Command-Line Information

**Parameter:** `WriteAfterReadMsg`

**Value:** `'UseLocalSettings'` | `'DisableAll'` | `'EnableAllAsWarning'` |  
`'EnableAllAsError'`

**Default:** `'UseLocalSettings'`

## Recommended Settings

| Application       | Setting              |
|-------------------|----------------------|
| Debugging         | No impact            |
| Traceability      | No impact            |
| Efficiency        | No impact            |
| Safety precaution | Enable all as errors |

## See Also

[Simulink.Signal](#)

## Related Examples

- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- Data Store Memory
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Detect write after write

### Description

Select the diagnostic action to take if the model attempts to write data to a data store twice in succession in the current time step.

**Category:** Diagnostics

### Settings

**Default:** Use local settings

**Use local settings**

For each local data store (defined by a Data Store Memory block or `Simulink.Signal` object in a model workspace) use the setting specified by the block. For each global data store (defined by a `Simulink.Signal` object in the base workspace) disable the diagnostic.

**Disable all**

Disables this diagnostic for all data stores accessed by the model.

**Enable all as warnings**

Displays diagnostic as a warning at the MATLAB command line.

**Enable all as errors**

Halts the simulation and displays the diagnostic in an error dialog box.

---

**Note** During model referencing simulation in accelerator and rapid accelerator mode, if the **Detect write after write** parameter is set to **Enable all as warnings**, **Enable all as errors**, or **Use local settings**, Simulink temporarily changes the setting to **Disable all**.

You can use the Model Advisor to identify referenced models for which Simulink changes configuration this parameter setting during accelerated simulation.

- 1 In the Simulink Editor, in the **Modeling** tab, click **Model Advisor**, then click **OK**.
  - 2 Select **By Task**.
  - 3 Run the **Check diagnostic settings ignored during accelerated model reference simulation** check.
- 

### Command-Line Information

**Parameter:** `WriteAfterWriteMsg`

**Value:** `'UseLocalSettings'` | `'DisableAll'` | `'EnableAllAsWarning'` |  
`'EnableAllAsError'`

**Default:** `'UseLocalSettings'`

## Recommended Settings

| Application       | Setting              |
|-------------------|----------------------|
| Debugging         | No impact            |
| Traceability      | No impact            |
| Efficiency        | No impact            |
| Safety precaution | Enable all as errors |

## See Also

[Simulink.Signal](#)

## Related Examples

- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- Data Store Memory
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Multitask data store

### Description

Select the diagnostic action to take when one task reads data from a Data Store Memory block to which another task writes data.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- Such a situation is safe only if one of the tasks cannot interrupt the other, such as when the data store is a scalar and the writing task uses an atomic copy operation to update the store or the target does not allow the tasks to preempt each other.
- You should disable this diagnostic (set it to none) only if the application warrants it, such as if the application uses a cyclic scheduler that prevents tasks from preempting each other.

### Command-Line Information

**Parameter:** MultiTaskDSMMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

[Simulink.Signal](#)

## Related Examples

- Diagnosing Simulation Errors
- “Local and Global Data Stores”
- Data Store Memory
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2

## Duplicate data store names

### Description

Select the diagnostic action to take when the model contains multiple data stores that have the same name. The data stores can be defined with Data Store Memory blocks or `Simulink.Signal` objects.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tip

This diagnostic is useful for detecting errors that can occur when a lower-level data store unexpectedly shadows a higher-level data store that has the same name.

### Command-Line Information

**Parameter:** `UniqueDataStoreMsg`

**Value:** `'none' | 'warning' | 'error'`

**Default:** `'none'`

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

### See Also

`Simulink.Signal`

### Related Examples

- Diagnosing Simulation Errors
- “Local and Global Data Stores”

- Data Store Memory
- “Model Configuration Parameters: Data Validity Diagnostics” on page 6-2



# Diagnostics Parameters: Model Referencing

---

## Model Configuration Parameters: Model Referencing Diagnostics

The **Diagnostics > Model Referencing** category includes parameters for detecting issues related to referenced models (Model blocks).

| Parameter                                                  | Description                                                                                                                                                                                                                                         |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Model block version mismatch" on page 7-4                 | Select the diagnostic action to take when loading or updating this model if Simulink software detects a mismatch between the version of the model used to create or refresh a Model block in this model and the referenced model's current version. |
| "Port and parameter mismatch" on page 7-6                  | Select the diagnostic action to take if Simulink software detects a port or parameter mismatch during model loading or updating.                                                                                                                    |
| "Invalid root Import/Outport block connection" on page 7-8 | Select the diagnostic action to take if Simulink software detects invalid internal connections to this model's root-level Output port blocks.                                                                                                       |
| "Unsupported data logging" on page 7-12                    | Select the diagnostic action to take if this model contains To Workspace blocks or Scope blocks with data logging enabled.                                                                                                                          |
| "No explicit final value for model arguments" on page 7-14 | Select the diagnostic action to take when the final value of a model argument is the default value instead of an explicit value.                                                                                                                    |

## See Also

### Related Examples

- "Model References"
- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2

## Model Referencing Diagnostics Overview

Specify the diagnostic actions that Simulink software should take when it detects an incompatibility relating to a model reference hierarchy.

# Configuration

Set the parameters displayed.

## Tips

- To open the **Diagnostics: Model Referencing** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Model Referencing**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



### **See Also**

## Related Examples

- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2

## Model block version mismatch

### Description

Select the diagnostic action to take when loading or updating this model if Simulink software detects a mismatch between the version of the model used to create or refresh a Model block in this model and the current version of the referenced model.

**Category:** Diagnostics

### Settings

**Default:** none

none

Simulink software refreshes the Model block.

warning

Simulink software displays a warning and refreshes the Model block.

error

Simulink software displays an error message and does not refresh Model block.

### Tips

- Version mismatches can occur when you modify, save, and close a referenced model while the model that references it is not loaded. For more information, see “Manage Model Versions and Specify Model Properties”.
- Model block icons can display a message indicating version mismatches. To enable this feature, from the parent model, on the **Debug** tab, select **Information Overlays > Ref. Model Version**. The Model block displays a version mismatch, for example: Rev:1.0 != 1.2.

### Command-Line Information

**Parameter:** ModelReferenceVersionMismatchMessage

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Model References”
- Diagnosing Simulation Errors
- “Model Version Numbers”
- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2

## Port and parameter mismatch

### Description

Select the diagnostic action to take when loading or updating this model if Simulink software detects a port or parameter mismatch between a Model block and its referenced model.

**Category:** Diagnostics

### Settings

**Default:** none

none

Simulink software refreshes the Model block.

warning

Simulink software displays a warning and refreshes the Model block.

error

Simulink software displays an error message and does not refresh the Model block.

### Tips

- Port mismatches occur when the input and output ports of a Model block do not match the root-level input and output ports of the model it references.
- Parameter mismatches occur when the parameter arguments recognized by the Model block do not match the parameter arguments declared by the referenced model.
- Model block icons can display a message indicating port or parameter mismatches. To enable this feature, from the parent model, on the **Debug** tab, select **Information Overlays > Ref Model I/O Mismatch**.

### Command-Line Information

**Parameter:** ModelReferenceIOMismatchMessage

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Model References”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2

## Invalid root Import/Outport block connection

### Description

Select the diagnostic action to take if Simulink software detects invalid internal connections to this model's root-level Output port blocks.

**Category:** Diagnostics

### Settings

**Default:** none

none

Simulink software silently inserts hidden blocks to satisfy the constraints wherever possible.

warning


Simulink software warns you that a connection constraint has been violated and attempts to satisfy the constraint by inserting hidden blocks.

error

Simulink software terminates the simulation or code generation and displays an error message.

### Tips


- In some cases (such as function-call feedback loops), automatically inserted hidden blocks may introduce delays and thus may change simulation results.
- Auto-inserting hidden blocks to eliminate root I/O problems stops at subsystem boundaries. Therefore, you may need to manually modify models with subsystems that violate any of the constraints below.
- The types of invalid internal connections are:
  - A root output port is connected directly or indirectly to more than one nonvirtual block port:

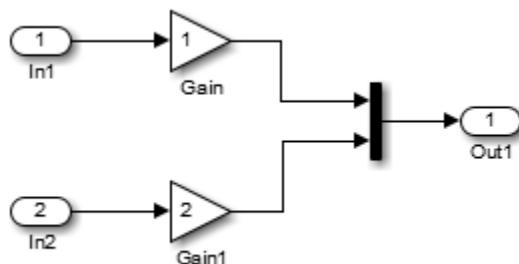


- A root output port is connected to a Ground block:




- Two root Outport blocks are connected to the same block port:

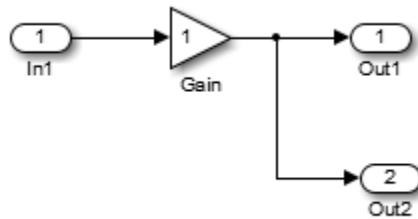


- An Outport block is connected to some elements of a block output and not others:

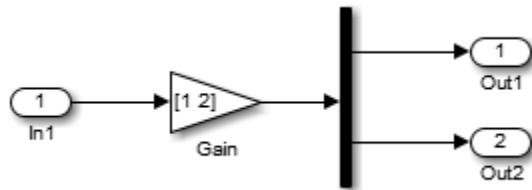


- An Outport block is connected more than once to the same element:

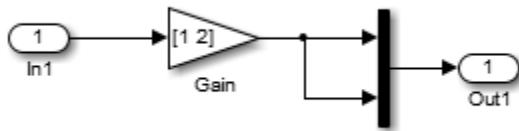


- The signal driving the root output port is a test point:

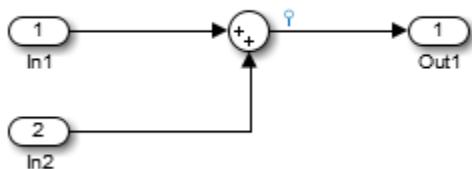


- The output port has a constant sample time, but the driving block has a non-constant sample time:

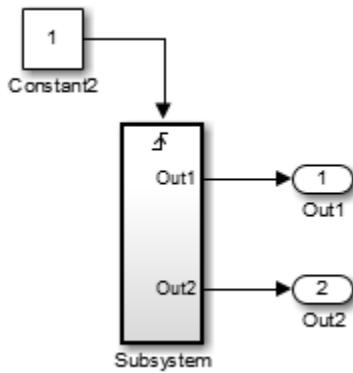

- The driving block has a constant sample time and multiple output ports, and one of the other output ports of the block is a test point.

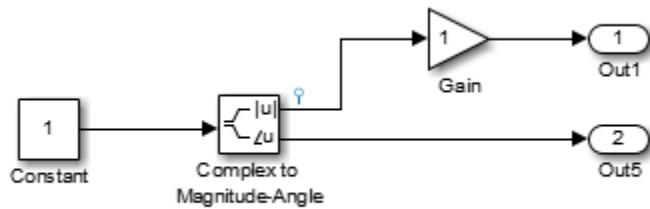

- The root output port is conditionally computed, you are using Function Prototype Control or a Encapsulated C++ target, and the Function Prototype specification or C++ target specification states that the output variable corresponding to that root output port is returned by value.

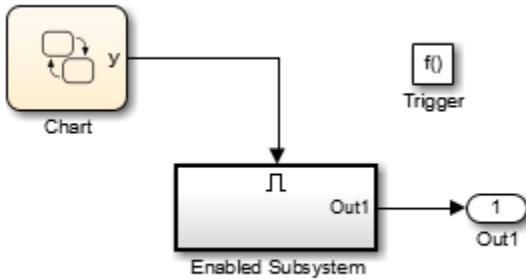

## Command-Line Information

**Parameter:** ModelReferenceIOMsg  
**Value:** 'none' | 'warning' | 'error'  
**Default:** 'none'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Model Reference Requirements and Limitations”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2

## Unsupported data logging

### Description

Select the diagnostic action to take if this model contains To Workspace blocks or Scope blocks with data logging enabled.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- The default action warns you that Simulink software does not support use of these blocks to log data from referenced models.
- See “Models with Model Referencing: Overriding Signal Logging Settings” for information on how to log signals from a reference to this model.

### Command-Line Information

**Parameter:** ModelReferenceDataLoggingMessage

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- “Model References”

- Diagnosing Simulation Errors
- “Models with Model Referencing: Overriding Signal Logging Settings”
- To Workspace
- Scope
- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2

## No explicit final value for model arguments

### Description

Select the diagnostic action to take when the topmost Model block that can set the value for a model argument uses a default value instead of providing an explicit value.

In the Model Data Editor, Property Inspector, or Model Explorer, the default value for a model argument displays as either <inherited> or <from below>.

- If the **Argument** check box is selected, Simulink displays <inherited> to indicate that, in the case that a model references the Model block, the model argument value is provided by the parent.
- If the **Argument** check box is cleared, Simulink displays <from below> to indicate that its value is provided by the last model to specify a value in the model hierarchy below.

At the command-line, a default value for a model argument is represented by an empty string.

The value of this configuration parameter in the top model applies to each model argument in the model hierarchy.

**Category:** Diagnostics

### Settings

**Default:** none

**none**

If the topmost Model block uses the default value for a model argument, Simulink uses the last value specified in the model hierarchy below.

**warning**

If the topmost Model block uses the default value for a model argument, Simulink uses the last value specified in the model hierarchy below, but displays a warning that the model argument does not have an explicit final value.

**error**

If the topmost Model block uses a default value for a model argument, Simulink displays an error message at compile time.

### Command-Line Information

**Parameter:** ModelReferenceNoExplicitFinalValueMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Model References”
- Diagnosing Simulation Errors
- “Parameterize Instances of a Reusable Referenced Model”
- “Parameterize a Referenced Model Programmatically”
- “Model Configuration Parameters: Model Referencing Diagnostics” on page 7-2



# Diagnostics Parameters: Sample Time

---

## Model Configuration Parameters: Sample Time Diagnostics

The **Diagnostics > Sample Time** category includes parameters for detecting issues related to sample time and sample time specifications.

| Parameter                                                                    | Description                                                                                                                                                                          |
|------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Source block specifies -1 sample time" on page 8-5                          | Select the diagnostic action to take if a source block (such as a Sine Wave block) specifies a sample time of -1.                                                                    |
| "Multitask data transfer" on page 8-7                                        | Select the diagnostic action to take if an invalid rate transition occurred between two blocks operating in multitasking mode.                                                       |
| "Single task data transfer" on page 8-9                                      | Select the diagnostic action to take if a rate transition occurred between two blocks operating in single-tasking mode.                                                              |
| "Multitask conditionally executed subsystem" on page 8-11                    | Select the diagnostic action to take if Simulink software detects a subsystem that may cause data corruption or non-deterministic behavior.                                          |
| "Tasks with equal priority" on page 8-13                                     | Select the diagnostic action to take if Simulink software detects two tasks with equal priority that can preempt each other in the target system.                                    |
| "Exported tasks rate transition" on page 8-17                                | Select the diagnostic action to take if Simulink software detects unspecified data transfers between exported tasks.                                                                 |
| "Enforce sample times specified by Signal Specification blocks" on page 8-15 | Select the diagnostic action to take if the sample time of the source port of a signal specified by a Signal Specification block differs from the signal's destination port.         |
| "Sample hit time adjusting" on page 8-18                                     | Select the diagnostic action to take if Simulink software makes a minor adjustment to a sample hit time while running the model.                                                     |
| "Unspecified inheritability of sample time" on page 8-20                     | Select the diagnostic action to take if this model contains S-functions that do not specify whether they preclude this model from inheriting their sample times from a parent model. |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2

- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

# Sample Time Diagnostics Overview

Specify what diagnostic actions Simulink software should take, if any, when it detects a compilation error related to model sample times.

# Configuration

Set the parameters displayed.

## Tips

- To open the **Sample Time** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Sample Time**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



## See Also

## Related Examples

- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Source block specifies -1 sample time

## Description

Select the diagnostic action to take if a source block (such as a Sine Wave block) specifies a sample time of -1.

**Category:** Diagnostics

## Settings

**Default:** warning

**none**

Simulink software takes no action.

**warning**

Simulink software displays a warning.

**error**

Simulink software terminates the simulation and displays an error message.

## Tips

- The Random Source block does not obey this parameter. If its **Sample time** parameter is set to -1, the Random Source block inherits its sample time from its output port and never produces warnings or errors.
- Some Communications Toolbox™ blocks internally inherit sample times, which can be a useful and valid modeling technique. Set this parameter to none for these types of models.

## Command-Line Information

**Parameter:** InheritedTsInSrcMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Multitask data transfer

## Description

Select the diagnostic action to take if an invalid rate transition occurred between two blocks operating in multitasking mode.

**Category:** Diagnostics

## Settings

**Default:** error

**warning**

Simulink software displays a warning.

**error**

Simulink software terminates the simulation and displays an error message.

## Tips

- This parameter allows you to adjust error checking for sample rate transitions between blocks that operate at different sample rates.
- Use this option for models of real-time multitasking systems to ensure detection of illegal rate transitions between tasks that can result in a task's output being unavailable when needed by another task. You can then use Rate Transition blocks to eliminate such illegal rate transitions from the model.

## Command-Line Information

**Parameter:** MultiTaskRateTransMsg

**Value:** 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Rate Transition

- “Model Execution and Rate Transitions” (Simulink Coder)
- Single-Tasking and Multitasking Execution Modes (Simulink Coder)
- “Handle Rate Transitions” (Simulink Coder)
- “Treat each discrete rate as a separate task” on page 14-37
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Single task data transfer

## Description

Select the diagnostic action to take if a rate transition occurred between two blocks operating in single-tasking mode.

**Category:** Diagnostics

## Settings

**Default:** none

**none**

Simulink takes no action.

**warning**

Simulink displays a warning.

**error**

Simulink terminates the simulation and displays an error message.

## Tips

- This parameter allows you to adjust error checking for sample rate transitions between blocks that operate at different sample rates.
- Use this parameter when you are modeling a single-tasking system. In such systems, task synchronization is not an issue.
- Since variable step solvers are always single tasking, this parameter applies to them.

## Command-Line Information

**Parameter:** SingleTaskRateTransMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting       |
|-------------------|---------------|
| Debugging         | No impact     |
| Traceability      | No impact     |
| Efficiency        | No impact     |
| Safety precaution | none or error |

## See Also

### Related Examples

- Rate Transition
- “Model Execution and Rate Transitions” (Simulink Coder)
- Single-Tasking and Multitasking Execution Modes (Simulink Coder)
- “Handle Rate Transitions” (Simulink Coder)
- “Treat each discrete rate as a separate task” on page 14-37
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Multitask conditionally executed subsystem

## Description

Select the diagnostic action to take if Simulink software detects a subsystem that may cause data corruption or non-deterministic behavior.

**Category:** Diagnostics

## Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

## Tips

- These types of subsystems can be caused by either of the following conditions:
  - Your model uses multitasking solver mode and it contains an enabled subsystem that operates at multiple rates.
  - Your model contains a conditionally executed subsystem that can reset its states and that contains an asynchronous subsystem.

These types of subsystems can cause corrupted data or nondeterministic behavior in a real-time system that uses code generated from the model.

- For models that use multitasking solver mode and contain an enabled subsystem that operates at multiple rates, consider using single-tasking solver mode or using a single-rate enabled subsystem instead.
- For models that contain a conditionally executed subsystem that can reset its states and that contains an asynchronous subsystem, consider moving the asynchronous subsystem outside the conditionally executed subsystem.

## Command-Line Information

**Parameter:** MultiTaskCondExecSysMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Treat each discrete rate as a separate task” on page 14-37
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Tasks with equal priority

## Description

Select the diagnostic action to take if Simulink software detects two tasks with equal priority that can preempt each other in the target system.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

## Tips

- This condition can occur when one asynchronous task of the target represented by this model has the same priority as one of the target's asynchronous tasks.
- This option must be set to Error if the target allows tasks having the same priority to preempt each other.

## Command-Line Information

**Parameter:** TasksWithSamePriorityMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting       |
|-------------------|---------------|
| Debugging         | No impact     |
| Traceability      | No impact     |
| Efficiency        | No impact     |
| Safety precaution | none or error |

## See Also

### Related Examples

- Diagnosing Simulation Errors

- “Rate Transitions and Asynchronous Blocks” (Simulink Coder)
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Enforce sample times specified by Signal Specification blocks

## Description

Select the diagnostic action to take if the sample time of the source port of a signal specified by a Signal Specification block differs from the signal's destination port.

**Category:** Diagnostics

## Settings

**Default:** warning

**none**

Simulink software takes no action.

**warning**

Simulink software displays a warning.

**error**

Simulink software terminates the simulation and displays an error message.

---

**Note** The setting of this diagnostic is ignored when the **Default parameter behavior** parameter in the **Code Generation > Optimization** pane of the model Configuration Parameters is set to **Tunable**.

---

## Tips

- The Signal Specification block allows you to specify the attributes of the signal connected to its input and output ports. If the specified attributes conflict with the attributes specified by the blocks connected to its ports, Simulink software displays an error when it compiles the model, for example, at the beginning of a simulation. If no conflict exists, Simulink software eliminates the Signal Specification block from the compiled model.
- You can use the Signal Specification block to ensure that the actual attributes of a signal meet desired attributes, or to ensure correct propagation of signal attributes throughout a model.

## Command-Line Information

**Parameter:** SigSpecEnsureSampleTimeMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |
| Efficiency   | No impact |

| Application       | Setting |
|-------------------|---------|
| Safety precaution | error   |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Signal Specification
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

# Exported tasks rate transition

## Description

Select the diagnostic action to take if Simulink software detects unspecified data transfers between exported tasks.

## Settings

**Default:** none

**none**

Simulink software takes no action.

**warning**

Simulink software displays a warning.

**error**

Simulink software terminates the simulation and displays an error message.

## Command-Line Information

**Parameter:** ExportedTasksRateTransMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

## Sample hit time adjusting

### Description

Select the diagnostic action to take if Simulink software makes a minor adjustment to a sample hit time while running the model.

**Category:** Diagnostics

### Settings

**Default:** none

none

Simulink software takes no action.

warning

Simulink software displays a warning.

### Tips

- Simulink software might change a sample hit time if that hit time is close to the hit time for another task. If Simulink software considers the difference to be due only to numerical errors (for example, precision issues or roundoff errors), it changes the sample hits of the faster task or tasks to exactly match the time of the slowest task that has that hit.
- Over time, these sample hit changes might cause a discrepancy between the numerical simulation results and the actual theoretical results.
- When this option is set to `warning`, the MATLAB Command Window displays a warning like the following when Simulink software detects a change in the sample hit time:

```
Warning: Timing engine warning: Changing the hit time for ...
```

### Command-Line Information

**Parameter:** `TimeAdjustmentMsg`

**Value:** `'none'` | `'warning'`

**Default:** `'none'`

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2

## Unspecified inheritability of sample time

### Description

Select the diagnostic action to take if this model contains S-functions that do not specify whether they preclude this model from inheriting their sample times from a parent model.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- Not specifying an inheritance rule may lead to incorrect simulation results.
- Simulink software checks for this condition only if the solver used to simulate this model is a fixed-step discrete solver and the periodic sample time constraint for the solver is set to ensure sample time independence
- For more information, see “Periodic sample time constraint” on page 14-54.

### Command-Line Information

**Parameter:** UnknownTsInhSupMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Periodic sample time constraint” on page 14-54
- Solver Diagnostics on page 9-2
- “Model Configuration Parameters: Sample Time Diagnostics” on page 8-2



# Diagnostics Parameters

---

## Model Configuration Parameters: Diagnostics

The **Diagnostics** category includes parameters for detecting issues related to solvers and solver settings, for example, algebraic loops.

| Parameter                                             | Description                                                                                                                                                                             |
|-------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Algebraic loop" on page 9-6                          | Select the diagnostic action to take if Simulink software detects an algebraic loop while compiling the model.                                                                          |
| "Minimize algebraic loop" on page 9-8                 | Select the diagnostic action to take if artificial algebraic loop minimization cannot be performed for an atomic subsystem or Model block because an input port has direct feedthrough. |
| "Block priority violation" on page 9-10               | Select the diagnostic action to take if Simulink software detects a block priority specification error.                                                                                 |
| "Min step size violation" on page 9-12                | Select the diagnostic action to take if Simulink software detects that the next simulation step is smaller than the minimum step size specified for the model.                          |
| "Consecutive zero-crossings violation" on page 9-14   | Select the diagnostic action to take when Simulink software detects that the number of consecutive zero crossings exceeds the specified maximum.                                        |
| "Automatic solver parameter selection" on page 9-16   | Select the diagnostic action to take if Simulink software changes a solver parameter setting.                                                                                           |
| "Extraneous discrete derivative signals" on page 9-18 | Select the diagnostic action to take when a discrete signal appears to pass through a Model block to the input of a block with continuous states.                                       |
| "State name clash" on page 9-20                       | Select the diagnostic action to take when a name is used for more than one state in the model.                                                                                          |
| "SimState interface checksum mismatch" on page 9-21   | Use this check to ensure that the interface checksum is identical to the model checksum before loading the OperatingPoint.                                                              |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                              | Description                                                                                                                                 |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| "Allow symbolic dimension specification" on page 2-102 | Specify whether Simulink propagates dimension symbols throughout the model and preserves these symbols in the propagated signal dimensions. |
| "Allowed unit systems" on page 2-46                    | Specify unit systems allowed in the model.                                                                                                  |

| Parameter                                                                            | Description                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Units inconsistency messages" on page 2-48                                          | Specify if unit inconsistencies should be reported as warnings. Select the diagnostic action to take when the Simulink software detects unit inconsistencies.                                                                                                                                                |
| "Allow automatic unit conversions" on page 2-49                                      | Allow automatic unit conversions in the model.                                                                                                                                                                                                                                                               |
| "Check runtime output of execution context" on page 2-58                             | Specify whether to display a warning if Simulink software detects potential output differences from previous releases.                                                                                                                                                                                       |
| "Check undefined subsystem initial output" on page 2-61                              | Specify whether to display a warning if the model contains a conditionally executed subsystem in which a block with a specified initial condition drives an Outport block with an undefined initial condition.                                                                                               |
| "Solver data inconsistency" on page 2-68                                             | Select the diagnostic action to take if Simulink software detects S-functions that have continuous sample times, but do not produce consistent results when executed multiple times.                                                                                                                         |
| "Ignored zero crossings" on page 2-70                                                | Select the diagnostic action to take if Simulink detects zero-crossings that are being ignored                                                                                                                                                                                                               |
| "Masked zero crossings" on page 2-72                                                 | Select the diagnostic action to take if Simulink detects zero-crossings that are being masked.                                                                                                                                                                                                               |
| "Block diagram contains disabled library links" on page 2-73                         | Select the diagnostic action to take when saving a model containing disabled library links.                                                                                                                                                                                                                  |
| "Block diagram contains parameterized library links" on page 2-75                    | Select the diagnostic action to take when saving a model containing parameterized library links.                                                                                                                                                                                                             |
| "Initial state is array" on page 2-76                                                | Message behavior when the initial state is an array                                                                                                                                                                                                                                                          |
| "Insufficient maximum identifier length" on page 2-78                                | For referenced models, specify diagnostic action when the configuration parameter <b>Maximum identifier length</b> does not provide enough character length to make global identifiers unique across models.                                                                                                 |
| "Combine output and update methods for code generation and simulation" on page 2-109 | When output and update code is in one function, force simulation execution order to be the same as code generation order. For certain modeling patterns, setting this parameter prevents a potential simulation and code generation mismatch. Setting this parameter might cause artificial algebraic loops. |
| "Behavior when pregenerated library subsystem code is missing" on page 2-112         | When generating code for a model that contains an instance of a reusable library subsystem with a function interface, specify whether or not to display a warning or an error when the model cannot use pregenerated library code or pregenerated library code is missing.                                   |

| Parameter                                                                   | Description                                                                                                                                              |
|-----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| "FMU Import blocks" on page 2-116                                           | When the debug execution mode is enabled, FMU binaries are executed in a separate process.                                                               |
| "Arithmetic operations in variant conditions" on page 2-114                 | Specify the diagnostic action to take when arithmetic operations are found in variant conditions.                                                        |
| "Variant condition mismatch at signal source and destination" on page 2-117 | Specify the diagnostic action to take when there are variant-related modeling issues that may result in unused Simulink variables in the generated code. |

## See Also

### Related Examples

- "Algebraic Loop Concepts"
- Diagnosing Simulation Errors
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

# Solver Diagnostics Overview

Specify what diagnostic actions Simulink software should take, if any, when it detects an abnormal condition with the solver.

# Configuration

Set the parameters displayed.

## Tips

- To open the **Diagnostics** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This..**



## See Also

## Related Examples

- “Model Configuration Parameters: Diagnostics” on page 9-2

## Algebraic loop

### Description

Select the diagnostic action to take if Simulink software detects an algebraic loop while compiling the model.

**Category:** Diagnostics

### Settings

**Default:** warning

none

When the Simulink software detects an algebraic loop, the software tries to solve the algebraic loop. If the software cannot solve the algebraic loop, it reports an error and the simulation terminates.

warning


When Simulink software detects an algebraic loop, it displays a warning and tries to solve the algebraic loop. If the software cannot solve the algebraic loop, it reports an error and the simulation terminates.

error

When Simulink software detects an algebraic loop, it terminates the simulation, displays an error message, and highlights the portion of the block diagram that comprises the loop.

### Tips

- An *algebraic loop* generally occurs when an input port with direct feedthrough is driven by the output of the same block, either directly, or by a feedback path through other blocks with direct feedthrough. An example of an algebraic loop is this simple scalar loop.



- When a model contains an algebraic loop, Simulink software calls a loop-solving routine at each time step. The loop solver performs iterations to determine the solution to the problem (if it can). As a result, models with algebraic loops run slower than models without them.
- Use the `error` option to highlight algebraic loops when you simulate a model. This causes Simulink software to display an error dialog (the Diagnostic Viewer) and recolor portions of the diagram that represent the first algebraic loop that it detects. Simulink software uses red to color the blocks and lines that constitute the loop. Closing the error dialog restores the diagram to its original colors.
- See “Algebraic Loop Concepts” for more information.

### Command-Line Information

**Parameter:** AlgebraicLoopMsg

**Value:** 'none' | 'warning' | 'error'  
**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | error     |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “Algebraic Loop Concepts”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Diagnostics” on page 9-2

## Minimize algebraic loop

### Description

Select the diagnostic action to take if artificial algebraic loop minimization cannot be performed for an atomic subsystem or Model block because an input port has direct feedthrough.

When you set the **Minimize algebraic loop occurrences** parameter for an atomic subsystem or a Model block, if Simulink detects an artificial algebraic loop, it attempts to eliminate the loop by checking for non-direct-feedthrough blocks before simulating the model. If Simulink cannot minimize the artificial algebraic loop, the simulation performs the diagnostic action specified by the **Minimize algebraic loop** parameter.

**Category:** Diagnostics

### Settings

**Default:** warning

**none**

Simulink takes no action.

**warning**

Simulink displays a warning that it cannot minimize the artificial algebraic loop.

**error**

Simulink terminates the simulation and displays an error that it cannot minimize the artificial algebraic loop.

### Tips

- If the port is involved in an artificial algebraic loop, Simulink software can remove the loop only if at least one other input port in the loop lacks direct feedthrough.
- Simulink software cannot minimize artificial algebraic loops containing signals designated as test points (see Working with Test Points).

### Command-Line Information

**Parameter:** ArtificialAlgebraicLoopMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Efficiency        | No impact |
| Traceability      | No impact |
| Safety precaution | error     |

## See Also

### Related Examples

- “How Simulink Eliminates Artificial Algebraic Loops”
- Diagnosing Simulation Errors
- Working with Test Points
- “Model Configuration Parameters: Diagnostics” on page 9-2

# Block priority violation

## Description

Select the diagnostic action to take if Simulink software detects a block priority specification error.

**Category:** Diagnostics

## Settings

**Default:** warning

`warning`

When Simulink software detects a block priority specification error, it displays a warning.

`error`

When Simulink software detects a block priority specification error, it terminates the simulation and displays an error message.

## Tips

- Simulink software allows you to assign update priorities to blocks. Simulink software executes the output methods of higher priority blocks before those of lower priority blocks.
- Simulink software honors the block priorities that you specify only if they are consistent with the Simulink block sorting algorithm. If Simulink software is unable to honor a user specified block priority, it generates a block priority specification error.

## Command-Line Information

**Parameter:** `BlockPriorityViolationMsg`

**Value:** `'warning'` | `'error'`

**Default:** `'warning'`

## Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## See Also

## Related Examples

- Controlling and Displaying the Sorted Order
- Diagnosing Simulation Errors

- “Model Configuration Parameters: Diagnostics” on page 9-2

## Min step size violation

### Description

Select the diagnostic action to take if Simulink software detects that the next simulation step is smaller than the minimum step size specified for the model.

**Category:** Diagnostics

### Settings

**Default:** warning

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- A minimum step size violation can occur if the specified error tolerance for the model requires a step size smaller than the specified minimum step size. See “Min step size” on page 14-21 and “Maximum order” on page 14-29 for more information.
- Simulink software allows you to specify the maximum number of consecutive minimum step size violations permitted (see “Number of consecutive min steps” on page 14-33).

### Command-Line Information

**Parameter:** `MinStepSizeMsg`

**Value:** `'warning'` | `'error'`

**Default:** `'warning'`

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

### See Also

### Related Examples

- “Min step size” on page 14-21
- “Maximum order” on page 14-29

- “Number of consecutive min steps” on page 14-33
- “Purely Discrete Systems”
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Diagnostics” on page 9-2

## Consecutive zero-crossings violation

### Description

Select the diagnostic action to take when Simulink software detects that the number of consecutive zero crossings exceeds the specified maximum.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- If you select warning or error, Simulink software reports the current simulation time, the number of consecutive zero crossings counted, and the type and name of the block in which Simulink software detected the zero crossings.
- For more information, see “Preventing Excessive Zero Crossings”.

### Dependency

This diagnostic applies only when you are using a variable-step solver and the zero-crossing control is set to either **Enable all** or **Use local settings**.

### Command-Line Information

**Parameter:** MaxConsecutiveZCsMsg

**Value:** 'none' | 'warning'

**Default:** 'error'

### Recommended Settings

| Application       | Setting          |
|-------------------|------------------|
| Debugging         | No impact        |
| Traceability      | No impact        |
| Efficiency        | No impact        |
| Safety precaution | warning or error |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Zero-crossing control” on page 14-44
- “Number of consecutive zero crossings” on page 14-48
- “Time tolerance” on page 14-46
- Diagnosing Simulation Errors
- “Model Configuration Parameters: Diagnostics” on page 9-2

## Automatic solver parameter selection

### Description

Select the diagnostic action to take if Simulink software changes a solver parameter setting.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink takes no action.

`warning`

Simulink displays a warning.

`error`

Simulink terminates the simulation and displays an error message.

### Tips

When enabled, this option notifies you if:

- Simulink changes a user-modified parameter to make it consistent with other model settings.
- Simulink automatically selects solver parameters for the model, such as `FixedStepSize`.

For example, if you simulate a discrete model that specifies a continuous solver, Simulink changes the solver type to discrete and displays a warning about this change.

### Command-Line Information

**Parameter:** `SolverPrmCheckMsg`

**Value:** `'none' | 'warning' | 'error'`

**Default:** `'none'`

### Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Choosing a Solver
- “Model Configuration Parameters: Diagnostics” on page 9-2

## Extraneous discrete derivative signals

### Description

Select the diagnostic action to take when a discrete signal appears to pass through a Model block to the input of a block with continuous states.

**Category:** Diagnostics

### Settings

**Default:** error

none

Simulink software takes no action.

warning

Simulink software displays a warning.

error

Simulink software terminates the simulation and displays an error message.

### Tips

- This error can occur if a discrete signal passes through a Model block to the input of a block with continuous states, such as an Integrator block. In this case, Simulink software cannot determine with certainty the minimum rate at which it needs to reset the solver to solve this model accurately.
- If this diagnostic is set to none or warning, Simulink software resets the solver whenever the value of the discrete signal changes. This ensures accurate simulation of the model if the discrete signal is the source of the signal entering the block with continuous states. However, if the discrete signal is not the source of the signal entering the block with continuous states, resetting the solver at the rate the discrete signal changes can lead to the solver being reset more frequently than necessary, slowing down the simulation.
- If this diagnostic is set to error, Simulink software halts when compiling this model and displays an error.

### Dependency

This diagnostic applies only when you are using a variable-step ode solver and the block diagram contains Model blocks.

### Command-Line Information

**Parameter:** ModelReferenceExtraNoncontSigs

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Choosing a Solver
- “Model Configuration Parameters: Diagnostics” on page 9-2

## State name clash

### Description

Select the diagnostic action to take when a name is used for more than one state in the model.

**Category:** Diagnostics

### Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

### Tips

- This diagnostic applies for continuous and discrete states during simulation.
- This diagnostic applies only if you save states to the MATLAB workspace using the format **Structure** or **Structure with time**. If you do not save states in structure format, the state names are not used, and therefore the diagnostic will not warn you about a naming conflict.

### Command-Line Information

**Parameter:** StateNameClashWarn

**Value:** 'none' | 'warning'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Data Import/Export” on page 3-2
- “Save Run-Time Data from Simulation”
- “Model Configuration Parameters: Diagnostics” on page 9-2

# SimState interface checksum mismatch

**Note** SimState interface checksum mismatch is no longer recommended. Use Operating point interface checksum mismatch instead.

## Description

Use this check to ensure that the interface checksum is saved in a `SimState` object, identical to the model checksum before loading the operating point.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software does not compare the interface checksum to the model checksum.

warning

The interface checksum in the `SimState` is different than the model checksum.

error

When Simulink detects that a change in the configuration settings occurred after saving the `SimState`, it does not load the `SimState` and reports an error.

## Command-Line Information

**Parameter:** `SimStateInterfaceChecksumMismatchMsg`

**Value:** 'warning' | 'error' | 'none'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

`Simulink.BlockDiagram.getChecksum`

## Related Examples

- “Save and Restore Simulation Operating Point”
- “Model Configuration Parameters: Diagnostics” on page 9-2

## Operating point interface checksum mismatch

### Description

Use this check to ensure that the interface checksum is identical to the model checksum before loading the `ModelOperatingPoint`.

**Category:** Diagnostics

### Settings

**Default:** warning

`none`

Simulink software does not compare the interface checksum to the model checksum.

`warning`

The interface checksum in the operating point is different than the model checksum.

`error`

When Simulink detects that a change in the configuration settings occurred after saving the operating point, it does not load the `ModelOperatingPoint` object and reports an error.

### Command-Line Information

**Parameter:** `OperatingPointInterfaceChecksumMismatchMsg`

**Value:** `'warning' | 'error' | 'none'`

**Default:** `'warning'`

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

### See Also

`Simulink.BlockDiagram.getChecksum`

### Related Examples

- “Save and Restore Simulation Operating Point”
- “Model Configuration Parameters: Diagnostics” on page 9-2

# Diagnostics Parameters: Stateflow

---

## Model Configuration Parameters: Stateflow Diagnostics

The **Diagnostics > Stateflow** category includes parameters for detecting issues related to Stateflow charts.

| Parameter                                                                 | Description                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Unused data, events, messages, and functions" on page 10-5               | Select the diagnostic action to take for detection of unused data, events, and messages in a chart. Removing unused data, events, and messages can minimize the size of your model.                                                                                                                               |
| "Unexpected backtracking" on page 10-7                                    | Select the diagnostic action to take when a chart junction has both of the following conditions. The junction: <ul style="list-style-type: none"> <li>Does not have an unconditional transition path to a state or a terminal junction</li> <li>Has multiple transition paths leading to it</li> </ul>            |
| "Invalid input data access in chart initialization" on page 10-9          | Select the diagnostic action to take when a chart: <ul style="list-style-type: none"> <li>Has the <code>ExecuteAtInitialization</code> property set to <code>true</code></li> <li>Accesses input data on a default transition or associated state entry actions, which execute at chart initialization</li> </ul> |
| "No unconditional default transitions" on page 10-11                      | Select the diagnostic action to take when a chart does not have an unconditional default transition to a state.                                                                                                                                                                                                   |
| "Transition outside natural parent" on page 10-12                         | Select the diagnostic action to take when a chart contains a transition that loops outside of the parent state or junction.                                                                                                                                                                                       |
| "Undirected event broadcasts" on page 10-13                               | Select the diagnostic action to take when a chart contains undirected local event broadcasts.                                                                                                                                                                                                                     |
| "Transition action specified before condition action" on page 10-14       | Select the diagnostic action to take when a transition action executes before a condition action in a transition path with multiple transition segments.                                                                                                                                                          |
| "Read-before-write to output in Moore chart" on page 10-15                | Select the diagnostic action to take when a Moore chart uses a previous output value to determine the current state.                                                                                                                                                                                              |
| "Absolute time temporal value shorter than sampling period" on page 10-16 | Select the diagnostic action to take when a state or transition absolute time operator uses a time value that is shorter than the sample time for the Stateflow block.                                                                                                                                            |
| "Self transition on leaf state" on page 10-17                             | Select the diagnostic action to take when you can remove a self-transition on a leaf state.                                                                                                                                                                                                                       |

| Parameter                                                                      | Description                                                                                                                                             |
|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Execute-at-Initialization disabled in presence of input events" on page 10-18 | Select the diagnostic action to take when Stateflow detects triggered or enabled charts that are not running at initialization.                         |
| "Use of machine-parented data instead of Data Store Memory" on page 10-19      | Select the diagnostic action to take when Stateflow detects machine-parented data that can replace with chart-parented data of scope Data Store Memory. |
| "Unreachable execution path" on page 10-20                                     | Select the diagnostic action to take when there are chart constructs not on a valid execution path.                                                     |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Type Conversion Diagnostics on page 11-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

## Stateflow Diagnostics Overview

Specify the diagnostic actions to take for detection of unwanted chart designs.

### Configuration

Set the parameters displayed.

### Tips

- To open the Stateflow pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Stateflow**.
- The options are typically to do nothing or to display a warning or an error message.
- A warning does not terminate a simulation, but an error does.

### To get help on an option

- 1 Right-click the option text label.
- 2 From the context menu, select **What's This**.



### See Also

#### Related Examples

- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Unused data, events, messages, and functions

## Description

Select the diagnostic action to take for detection of unused data, events, messages, and functions in a chart. Removing unused data, events, messages, and functions can minimize the size of your model.

**Category:** Diagnostics

## Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears, with a link to delete the unused data, event, or message in your chart.

error

An error appears and stops the simulation.

## Tip

This diagnostic does not detect these types of data and events:

- Machine-parented data
- Inputs and outputs of MATLAB functions
- Input events

## Command-Line Information

**Parameter:** SFUnusedDataAndEventsDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting                                                             |
|-------------------|---------------------------------------------------------------------|
| Debugging         | warning                                                             |
| Traceability      | No impact                                                           |
| Efficiency        | No impact (for simulation)<br>none (for production code generation) |
| Safety precaution | warning                                                             |

## See Also

### Related Examples

- “Synchronize Model Components by Broadcasting Events” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Unexpected backtracking

## Description

Select the diagnostic action to take when a chart junction has both of the following conditions. The junction:

- Does not have an unconditional transition path to a state or a terminal junction
- Has multiple transition paths leading to it

This chart configuration can lead to unwanted backtracking during simulation.

**Category:** Diagnostics

## Settings

**Default:** error

**none**

No warning or error appears.

**warning**

A warning appears, with a link to examples of unwanted backtracking.

**error**

An error appears and stops the simulation.

## Tip

To avoid unwanted backtracking, consider adding an unconditional transition from the chart junction to a terminal junction.

## Command-Line Information

**Parameter:** SFUnexpectedBacktrackingDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting                                                                  |
|-------------------|--------------------------------------------------------------------------|
| Debugging         | warning                                                                  |
| Traceability      | No impact                                                                |
| Efficiency        | No impact (for simulation)<br>No impact (for production code generation) |
| Safety precaution | error                                                                    |

## See Also

### Related Examples

- “Best Practices for Creating Flow Charts” (Stateflow)
- “Backtrack in Flow Charts” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Invalid input data access in chart initialization

## Description

Select the diagnostic action to take when a chart:

- Has the `ExecuteAtInitialization` property set to `true`
- Accesses input data on a default transition or associated state entry actions, which execute at chart initialization

In this chart configuration, blocks that connect to chart input ports might not initialize their outputs during initialization. To locate this configuration in your model and correct it, use this diagnostic.

**Category:** Diagnostics

## Settings

**Default:** warning

**none**

No warning or error appears.

**warning**

A warning appears.

**error**

An error appears and stops the simulation.

## Tip

In charts that do not contain states, the `ExecuteAtInitialization` property has no effect.

## Command-Line Information

**Parameter:** `SFInvalidInputDataAccessInChartInitDiag`

**Value:** `'none' | 'warning' | 'error'`

**Default:** `'warning'`

## Recommended Settings

| Application       | Setting                                                                  |
|-------------------|--------------------------------------------------------------------------|
| Debugging         | <code>warning</code>                                                     |
| Traceability      | No impact                                                                |
| Efficiency        | No impact (for simulation)<br>No impact (for production code generation) |
| Safety precaution | <code>error</code>                                                       |

## See Also

### Related Examples

- “Execution of a Chart at Initialization” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# No unconditional default transitions

## Description

Select the diagnostic action to take when a chart does not have an unconditional default transition to a state.

This chart construct can cause inconsistency errors. To locate this construct in your model and correct it, use this diagnostic. If a chart contains local event broadcasts or implicit events, detection of a state inconsistency might not be possible until run time.

**Category:** Diagnostics

## Settings

**Default:** error

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFNoUnconditionalDefaultTransitionDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting                                                             |
|-------------------|---------------------------------------------------------------------|
| Debugging         | error                                                               |
| Traceability      | No impact                                                           |
| Efficiency        | No impact (for simulation)<br>none (for production code generation) |
| Safety precaution | error                                                               |

## See Also

### Related Examples

- “State Inconsistencies” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

## Transition outside natural parent

### Description

Select the diagnostic action to take when a chart contains a transition that loops outside of the parent state or junction.

**Category:** Diagnostics

### Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

### Command-Line Information

**Parameter:** SFTransitionOutsideNaturalParentDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting                                                             |
|-------------------|---------------------------------------------------------------------|
| Debugging         | warning                                                             |
| Traceability      | No impact                                                           |
| Efficiency        | No impact (for simulation)<br>none (for production code generation) |
| Safety precaution | error                                                               |

### See Also

### Related Examples

- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Undirected event broadcasts

## Description

Select the diagnostic action to take when a chart contains undirected local event broadcasts.

Undirected local event broadcasts can cause unwanted recursive behavior in a chart and inefficient code generation. To flag these types of event broadcasts and fix them, use this diagnostic.

**Category:** Diagnostics

## Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFUndirectedBroadcastEventsDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | warning   |
| Traceability      | No impact |
| Efficiency        | warning   |
| Safety precaution | error     |

## See Also

### Related Examples

- “Avoid Unwanted Recursion in a Chart” (Stateflow)
- “Broadcast Local Events to Synchronize Parallel States” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

## Transition action specified before condition action

### Description

Select the diagnostic action to take when a transition action executes before a condition action in a transition path with multiple transition segments.

When a transition with a specified transition action precedes a transition with a specified condition action in the same transition path, out-of-order execution can occur. To flag such behavior in your chart and fix it, use this diagnostic.

**Category:** Diagnostics

### Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

### Command-Line Information

**Parameter:** SFTransitionActionBeforeConditionDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting |
|-------------------|---------|
| Debugging         | warning |
| Traceability      | warning |
| Efficiency        | warning |
| Safety precaution | error   |

### See Also

### Related Examples

- “Transition Action Types” (Stateflow)
- “Transitions” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Read-before-write to output in Moore chart

## Description

Select the diagnostic action to take when a Moore chart uses a previous output value to determine the current state. This behavior violates Moore machine semantics. In a Moore machine, output is a function of current state only. To allow output values from the previous time step in calculating current state, set this diagnostic to warning or none.

**Category:** Diagnostics

## Settings

**Default:** error

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFOutputUsedAsStateInMooreChartDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting |
|-------------------|---------|
| Debugging         | error   |
| Traceability      | error   |
| Efficiency        | error   |
| Safety precaution | error   |

## See Also

### Related Examples

- “Design Considerations for Moore Charts” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

## Absolute time temporal value shorter than sampling period

### Description

Select the diagnostic action to take when a state or transition absolute time operator uses a time value that is shorter than the sample time for the Stateflow block. Stateflow cannot update states in smaller increments than the sample time for the block. For example, a model with a sample rate of 0.1 sec and an operator `after(5,usec)` triggers this diagnostic. If this parameter is set to warning or none, then the operator is evaluated as true at every time step.

**Category:** Diagnostics

### Settings

**Default:** warning

`none`

No warning or error appears.

`warning`

A warning appears.

`error`

An error appears and stops the simulation.

### Command-Line Information

**Parameter:** SFTemporalDelaySmallerThanSampleTimeDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting |
|-------------------|---------|
| Debugging         | error   |
| Traceability      | error   |
| Efficiency        | error   |
| Safety precaution | error   |

### See Also

#### Related Examples

- “Update Method” (Stateflow)
- “Control Chart Execution by Using Temporal Logic” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Self transition on leaf state

## Description

Select the diagnostic action to take when you can remove a self-transition on a leaf state. Some self-transitions with no actions in the leaf state or on the self-transition have no effect on chart execution. Removing these transitions simplifies the state diagram.

**Category:** Diagnostics

## Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFSelfTransitionDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | error     |
| Traceability      | error     |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

## Related Examples

- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

## Execute-at-Initialization disabled in presence of input events

### Description

Select the diagnostic action to take when Stateflow detects triggered or enabled charts that are not running at initialization. When the chart does not execute at initialization, then the chart default transitions are processed at the first input event. Until then, any data that you initialize in the chart or active state data is not valid at time 0.

To initialize the chart configuration at time 0 rather than at the first input event, select the chart property **Execute (enter) Chart At Initialization**.

**Category:** Diagnostics

### Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

### Command-Line Information

**Parameter:** SFExecutionAtInitializationDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | error     |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

### See Also

### Related Examples

- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

# Use of machine-parented data instead of Data Store Memory

## Description

Select the diagnostic action to take when Stateflow detects machine-parented data that you can replace with chart-parented data of scope Data Store Memory.

**Category:** Diagnostics

## Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFMachineParentedDataDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | error     |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | error     |

## See Also

### Related Examples


- “Best Practices for Using Data in Charts” (Stateflow)
- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2

## Unreachable execution path


### Description

Select the diagnostic action to take when there are chart constructs not on a valid execution path. These constructs can cause unreachable execution paths:


- Dangling transitions not connected to a destination object.
- Transition shadowing caused by an unconditional transition originating from a source that prevents other transitions from the same source from executing.

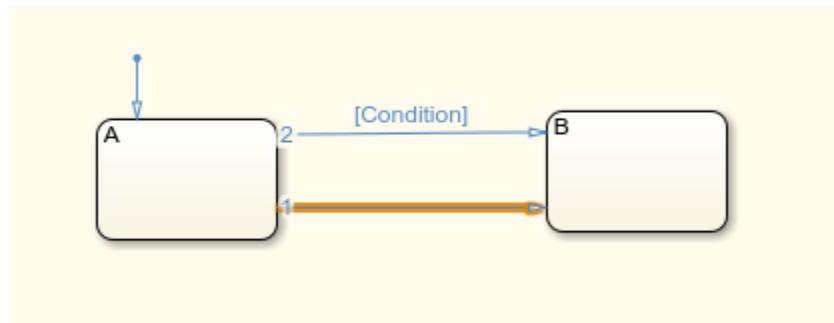

- States or junctions not connected as a destination from a valid transition.

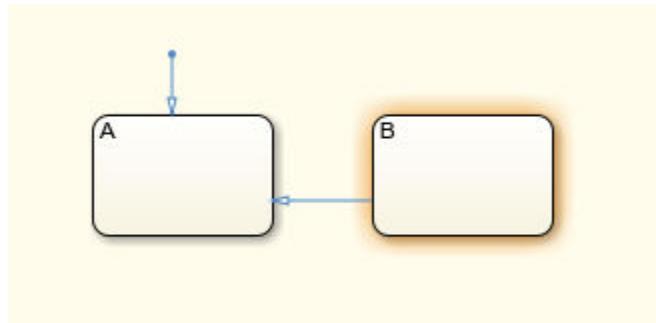

- Unconditional paths out of states. In this chart, initially state A and state B are active. The chart then takes the unconditional transition to state C, and state C becomes active. The transition to state B1 does not execute and state B1 is unreachable.

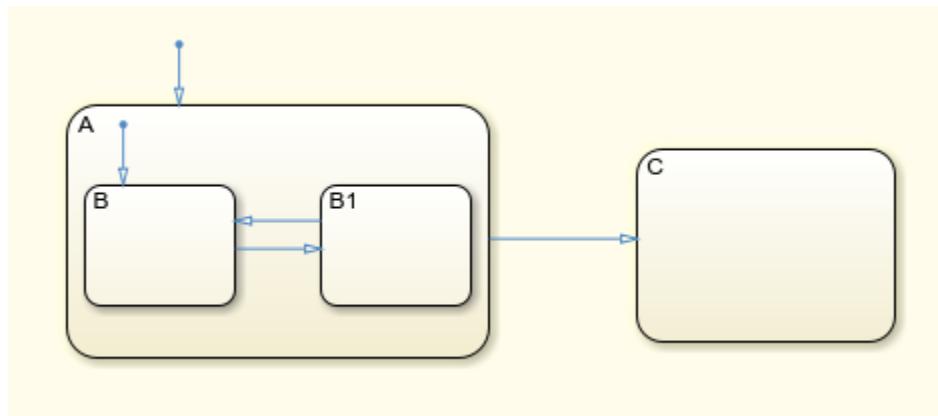

**Category:** Diagnostics

## Settings

**Default:** warning

none

No warning or error appears.

warning

A warning appears.

error

An error appears and stops the simulation.

## Command-Line Information

**Parameter:** SFUnreachableExecutionPathDiag

**Value:** 'none' | 'warning' | 'error'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting                                                             |
|-------------------|---------------------------------------------------------------------|
| Debugging         | warning                                                             |
| Traceability      | No impact                                                           |
| Efficiency        | No impact (for simulation)<br>none (for production code generation) |
| Safety precaution | error                                                               |

## See Also

### Related Examples

- “Model Configuration Parameters: Stateflow Diagnostics” on page 10-2
- “Detect Modeling Errors During Edit Time” (Stateflow)



# Diagnostics Parameters: Type Conversion

---

## Model Configuration Parameters: Type Conversion Diagnostics

The **Diagnostics > Type Conversion** category includes parameters for detecting issues related to data type conversions (for example, from `int32` to `single`).

| Parameter                                                          | Description                                                                                                                                  |
|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| "Unnecessary type conversions" on page 11-4                        | Select the diagnostic action to take when Simulink software detects a Data Type Conversion block used where no type conversion is necessary. |
| "Vector/matrix block input conversion" on page 11-5                | Select the diagnostic action to take when Simulink software detects a vector-to-matrix or matrix-to-vector conversion at a block input.      |
| "32-bit integer to single precision float conversion" on page 11-7 | Select the diagnostic action to take if Simulink software detects a 32-bit integer value was converted to a floating-point value.            |
| "Detect underflow" on page 11-8                                    | Select the diagnostic action to take if Simulink software detects a 32-bit integer value was converted to a floating-point value.            |
| "Detect precision loss" on page 11-10                              | Specifies diagnostic action to take when a fixed-point constant precision loss occurs during simulation.                                     |
| "Detect overflow" on page 11-12                                    | Specifies diagnostic action to take when a fixed-point constant overflow occurs during simulation.                                           |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- "Data Types Supported by Simulink"
- Solver Diagnostics on page 9-2
- Sample Time Diagnostics on page 8-2
- Data Validity Diagnostics on page 6-2
- Connectivity Diagnostics on page 5-2
- Compatibility Diagnostics on page 4-2
- Model Referencing Diagnostics on page 7-2

## Type Conversion Diagnostics Overview

Specify the diagnostic actions that Simulink software should take when it detects a data type conversion problem while compiling the model.

# Configuration

Set the parameters displayed.

## Tips

- To open the **Type Conversion** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Diagnostics > Type Conversion**.
  - The options are typically to do nothing or to display a warning or an error message.
  - A warning does not terminate a simulation, but an error does.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



## See Also

## Related Examples

- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

## Unnecessary type conversions

### Description

Select the diagnostic action to take when Simulink software detects a Data Type Conversion block used where no type conversion is necessary.

**Category:** Diagnostics

### Settings

**Default:** none

**none**

Simulink software takes no action.

**warning**

Simulink software displays a warning.

### Command-Line Information

**Parameter:** UnnecessaryDatatypeConvMsg

**Value:** 'none' | 'warning'

**Default:** 'none'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | warning   |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- Data Type Conversion
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

# Vector/matrix block input conversion

## Description

Select the diagnostic action to take when Simulink software detects a vector-to-matrix or matrix-to-vector conversion at a block input.

**Category:** Diagnostics

## Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

## Tips

Simulink software converts vectors to row or column matrices and row or column matrices to vectors under the following circumstances:

- If a vector signal is connected to an input that requires a matrix, Simulink software converts the vector to a one-row or one-column matrix.
- If a one-column or one-row matrix is connected to an input that requires a vector, Simulink software converts the matrix to a vector.
- If the inputs to a block consist of a mixture of vectors and matrices and the matrix inputs all have one column or one row, Simulink software converts the vectors to matrices having one column or one row, respectively.

## Command-Line Information

**Parameter:** VectorMatrixConversionMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

## Recommended Settings

| Application       | Setting            |
|-------------------|--------------------|
| Debugging         | No impact          |
| Traceability      | No impact          |
| Efficiency        | No impact          |
| Safety precaution | <code>error</code> |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Determining Output Signal Dimensions
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

# 32-bit integer to single precision float conversion

## Description

Select the diagnostic action to take if Simulink software detects a 32-bit integer value was converted to a floating-point value.

**Category:** Diagnostics

## Settings

**Default:** warning

none

Simulink software takes no action.

warning

Simulink software displays a warning.

## Tip

Converting a 32-bit integer value to a floating-point value can result in a loss of precision. See Working with Data Types for more information.

## Command-Line Information

**Parameter:** Int32ToFloatConvMsg

**Value:** 'none' | 'warning'

**Default:** 'warning'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | warning   |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- Working with Data Types
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

## Detect underflow

Specifies diagnostic action to take when a fixed-point constant underflow occurs during simulation.

### Description

Select the diagnostic action to take if Simulink software detects a 32-bit integer value was converted to a floating-point value.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- This diagnostic applies only to fixed-point constants (net slope and net bias).
- Fixed-point constant underflow occurs when Simulink software encounters a fixed-point constant whose data type does not have enough precision to represent the ideal value of the constant because the ideal value is too small.
- When fixed-point constant underflow occurs, casting the ideal value to the data type causes the value of the fixed-point constant to become zero, and therefore to differ from its ideal value.

### Dependency

This parameter requires a Fixed-Point Designer™ license.

### Command-Line Information

**Parameter:** FixptConstUnderflowMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- Net Slope and Net Bias Precision Issues (Fixed-Point Designer)
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

## Detect precision loss

### Description

Specifies diagnostic action to take when a fixed-point constant precision loss occurs during simulation.

**Category:** Diagnostics

### Settings

**Default:** none

**none**

Simulink software takes no action.

**warning**

Simulink software displays a warning.

**error**

Simulink software terminates the simulation and displays an error message.

### Tips

- This diagnostic applies only to fixed-point constants (net slope and net bias).
- Precision loss occurs when Simulink software converts a fixed-point constant to a data type which does not have enough precision to represent the exact value of the constant. As a result, the quantized value differs from the ideal value.
- Fixed-point constant precision loss differs from fixed-point constant overflow. Overflow occurs when the range of the parameter's data type, that is, the maximum value that it can represent, is smaller than the ideal value of the parameter.

### Dependency

This parameter requires a Fixed-Point Designer license.

### Command-Line Information

**Parameter:** FixptConstPrecisionLossMsg

**Value:** 'none' | 'warning' | 'error'

**Default:** 'none'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |
| Efficiency   | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Safety precaution | No impact |

## See Also

### Related Examples

- Net Slope and Net Bias Precision Issues (Fixed-Point Designer)
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2

## Detect overflow

### Description

Specifies diagnostic action to take when a fixed-point constant overflow occurs during simulation.

**Category:** Diagnostics

### Settings

**Default:** none

`none`

Simulink software takes no action.

`warning`

Simulink software displays a warning.

`error`

Simulink software terminates the simulation and displays an error message.

### Tips

- This diagnostic applies only to fixed-point constants (net slope and net bias).
- Overflow occurs when the Simulink software converts a fixed-point constant to a data type whose range is not large enough to accommodate the ideal value of the constant. The ideal value is either too large or too small to be represented by the data type. For example, suppose that the ideal value is 200 and the converted data type is `int8`. Overflow occurs in this case because the maximum value that `int8` can represent is 127.
- Fixed-point constant overflow differs from fixed-point constant precision loss. Precision loss occurs when the ideal fixed-point constant value is within the range of the data type and scaling being used, but cannot be represented exactly.

### Dependency

This parameter requires a Fixed-Point Designer license.

### Command-Line Information

**Parameter:**`FixptConstOverflowMsg`

**Value:** '`none`' | '`warning`' | '`error`'

**Default:** '`none`'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- Net Slope and Net Bias Precision Issues (Fixed-Point Designer)
- “Model Configuration Parameters: Type Conversion Diagnostics” on page 11-2



# Model Referencing Parameters

---

## Model Configuration Parameters: Model Referencing

The **Model Referencing** category includes parameters for configuring the inclusion of other models (Model blocks).

On the Configuration Parameters dialog box, the following configuration parameters are on the **Model Referencing** pane.

| Parameter                                                                       | Description                                                                                                                                                                                                                                                                                                                           |
|---------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Rebuild" on page 12-5                                                          | Select the method used to determine when to rebuild simulation and Simulink Coder targets for referenced models before updating, simulating, or generating code from this model.                                                                                                                                                      |
| "Never rebuild diagnostic" on page 12-10                                        | Select the diagnostic action that Simulink software should take if it detects a model reference target that needs to be rebuilt.                                                                                                                                                                                                      |
| "Enable parallel model reference builds" on page 12-12                          | Specify whether to use automatic parallel building of the model reference hierarchy whenever possible.                                                                                                                                                                                                                                |
| "MATLAB worker initialization for builds" on page 12-14                         | Specify how to initialize MATLAB workers for parallel builds.                                                                                                                                                                                                                                                                         |
| "Enable strict scheduling checks for referenced models" on page 12-16           | This parameter enables these checks for referenced models: <ul style="list-style-type: none"> <li>Scheduling order consistency of function-call subsystems in a referenced export function model</li> <li>Sample time consistency across the boundary of a referenced export function model or referenced rate-based model</li> </ul> |
| "Total number of instances allowed per top model" on page 12-17                 | Specify how many references to this model can occur in another model.                                                                                                                                                                                                                                                                 |
| "Pass fixed-size scalar root inputs by value for code generation" on page 12-18 | Specify whether a model that calls (references) this model passes its scalar inputs to this model by value.                                                                                                                                                                                                                           |
| "Minimize algebraic loop occurrences" on page 12-20                             | Try to eliminate artificial algebraic loops from a model that involve the current referenced model                                                                                                                                                                                                                                    |
| "Propagate all signal labels out of the model" on page 12-22                    | Pass propagated signal names to output signals of Model block.                                                                                                                                                                                                                                                                        |
| "Propagate sizes of variable-size signals" on page 12-25                        | Select how variable-size signals propagate through referenced models.                                                                                                                                                                                                                                                                 |
| "Model dependencies" on page 12-27                                              | You can add user-created dependencies to the set of known target dependencies by using the <b>Model dependencies</b> parameter.                                                                                                                                                                                                       |

## See Also

### Related Examples

- “Model Reference Basics”
- Model Dependencies

## Model Referencing Pane Overview

Specify the options for including other models in this model, this model in other models, and for building simulation and code generation targets.

## Configuration

Set the parameters displayed.

## Tips

- To open the Model Referencing pane, in the Simulink Editor, on the **Modeling** tab, click **Modeling Settings**. Then, in the Configuration Parameters dialog box, select **Model Referencing**.
  - The Model Referencing pane allows you to specify options for:
    - Including other models in this model.
    - Including the current model in other models.
  - The option descriptions use the term *this model* to refer to the model that you are configuring and the term *referenced model* to designate models referenced by *this model*.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This?**



### See Also

## Related Examples

- “Model Configuration Parameters: Model Referencing” on page 12-2

# Rebuild

## Description

Select the method to determine when to rebuild simulation and Simulink Coder targets for referenced models before updating, simulating, or generating code from the model.

**Category:** Model Referencing

## Settings

**Default:** If any changes detected

### Always

Always rebuild targets for referenced models. This setting requires the most processing time because it can trigger unnecessary builds. To make all model reference targets up to date, use this setting before you deploy a model.

### If any changes detected

Conditionally rebuild targets for referenced models when Simulink detects a change that could affect simulation results. To perform extensive change detection on dependencies of referenced models, use this setting.

If Simulink finds no changes in known dependencies, it computes the structural checksum of the model. The structural checksum detects changes that occur in user-created dependencies that are not specified using the **Model dependencies** configuration parameter. If the structural checksum has changed, Simulink rebuilds the model reference target.

### If any changes in known dependencies detected

Conditionally rebuild targets for referenced models when Simulink detects a change that could affect simulation results. To reduce the time required for change detection, use this setting.

If Simulink finds no changes in known or potential dependencies, it does *not* compute the structural checksum of the model and does *not* rebuild the model reference target. To avoid invalid simulation results, you must list all user-created dependencies in the **Model dependencies** parameter.

### Never

Do not rebuild targets for referenced models. This setting requires the least processing time and, when available, uses Simulink cache files for faster simulations. To avoid rebuilds when developing a model, use this setting.

If model reference targets are out of date, the simulation may present invalid results. To have Simulink check for changes in known target dependencies and report if the model reference targets may be out of date, use the **Never rebuild diagnostic** parameter. To manually rebuild model reference targets, use the `slbuild` function.

For information on using and sharing Simulink cache files, see “Share Simulink Cache Files for Faster Simulation”.

## Definitions

### Known target dependencies

Known target dependencies are files and data external to model files that Simulink examines for changes when checking if a model reference target is up to date. Simulink automatically computes a set of known target dependencies. Examples of known target dependencies are:

- Changes to the model workspace, if its data source is a MAT-file or MATLAB file
- Enumerated type definitions
- User-written S-functions and their TLC files
- Files specified in the **Model dependencies** parameter
- External files used by Stateflow, a MATLAB Function block, or a MATLAB System block
- Dataflow subsystems – Analysis of dataflow subsystems requires that the simulation target rebuilds to profile and rebuilds again to partition the subsystem. In addition, the simulation target must rebuild if the machine running the simulation has fewer cores than the subsystem is partitioned to use, for example, if the simulation target was last built on a machine with a greater number of cores. For more information, see “Simulation of Dataflow Domains” (DSP System Toolbox).

### Potential target dependencies

Potential target dependencies are files and data external to model files and model configuration settings that Simulink examines for changes when checking if a model reference target is up to date. Simulink automatically computes a set of potential target dependencies. Examples of potential target dependencies are:

- Changes to global variables
- Changes to targets of models referenced by this model
- The **Configuration Parameters > Diagnostics > Data Validity > Signal resolution** parameter when set to either `Explicit and implicit` or `Explicit and warn implicit`

Simulink examines each potential target dependency to determine whether its state triggers a structural checksum check.

### User-created dependencies

User-created dependencies are files that Simulink does not automatically identify, in spite of their potential impact on simulation results. Examples of user-created dependencies are:

- MATLAB files that contain code executed by callbacks
- MAT-files that contain definitions for variables used by the model that are loaded as part of a customized initialization script

You can add user-created dependencies to the set of known target dependencies by using the **Model dependencies** parameter.


### Structural checksum

A structural checksum is a computation used to detect changes in the model that can affect simulation results. When Simulink computes the structural checksum, it loads and compiles the model. To compile the model, Simulink must execute callbacks and access all variables that the model uses. The structural checksum detects changes in user-created dependencies, regardless of whether you have specified those user-created dependencies in the **Model dependencies** parameter.

For more information about the kinds of changes that affect the structural checksum, see [Simulink.BlockDiagram.getChecksum](#).

## Tips

- Models in a model hierarchy can have different rebuild settings. When you update, simulate, or generate code for a model, the rebuild setting for that model applies to all its referenced models.
- Models that execute in normal mode do not generate simulation targets and are unaffected by **Rebuild** settings.
- To improve rebuild detection speed and accuracy, use the **Model dependencies on page 12-27** configuration parameter to specify user-created dependencies.
- This flow chart describes the processing Simulink performs when you set **Rebuild** to either **If any changes detected** or **If any changes in known dependencies detected**.

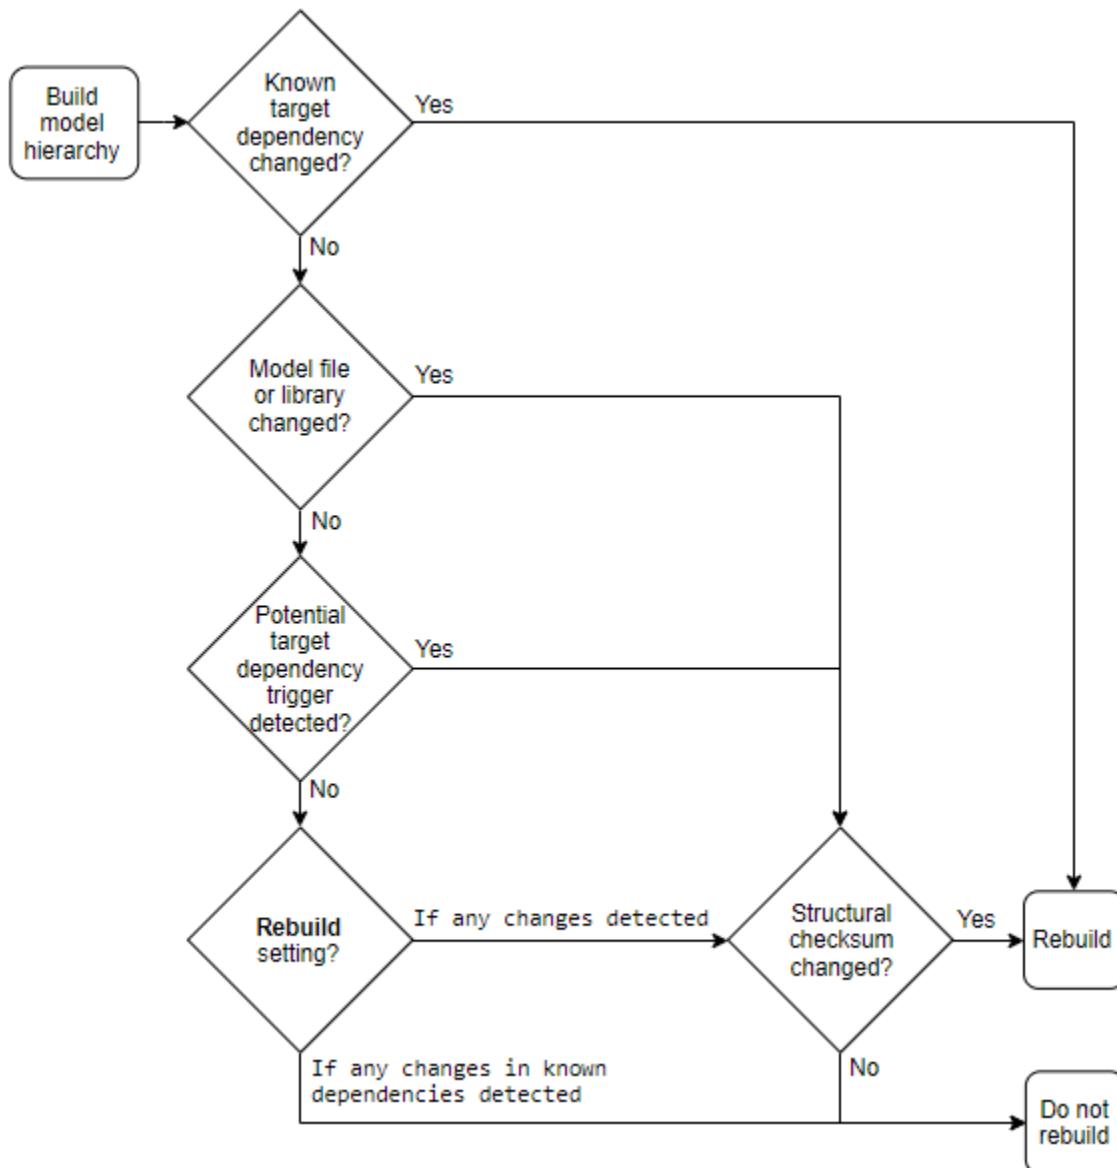

- This example explains the difference between the If any changes detected and If any changes in known dependencies detected settings.

If you change a MATLAB file that is executed as part of a callback script that you have not listed in the **Model dependencies** parameter:

- If any changes detected causes a rebuild because the change affects the structural checksum of the model.
- If any changes in known dependencies detected does not cause a rebuild because no known target dependency has changed.

## Dependency

Selecting Never enables the **Never rebuild diagnostic** on page 12-10 parameter.

### Command-Line Information

**Parameter:** UpdateModelReferenceTargets

**Value:** 'Force' | 'IfOutOfDateOrStructuralChange' | 'IfOutOfDate' | 'AssumeUpToDate'

**Default:** 'IfOutOfDateOrStructuralChange'

| UpdateModelReferenceTargets Value | Equivalent Rebuild Value                      |
|-----------------------------------|-----------------------------------------------|
| 'Force'                           | Always                                        |
| 'IfOutOfDateOrStructuralChange'   | If any changes detected                       |
| 'IfOutOfDate'                     | If any changes in known dependencies detected |
| 'AssumeUpToDate'                  | Never                                         |

## Recommended Settings

| Application       | Setting                                                                                                                                                    |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                  |
| Traceability      | No impact                                                                                                                                                  |
| Efficiency        | No impact                                                                                                                                                  |
| Safety precaution | If any changes detected or Never<br><br>If you use the Never setting, then set the <b>Never rebuild diagnostic</b> parameter to Error if rebuild required. |

## Compatibility Considerations

Starting in R2019b, If any changes detected ignores cosmetic changes, such as repositioning a block.

## See Also

[Simulink.BlockDiagram.getChecksum](#)

## Related Examples

- “Manage Simulation Targets for Referenced Models”
- “Share Simulink Cache Files for Faster Simulation”
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Never rebuild diagnostic

### Description

Select the diagnostic action that Simulink software should take if it detects a model reference target that needs to be rebuilt.

**Category:** Model Referencing

### Settings

**Default:** Error if rebuild required

none

Simulink takes no action.

Warn if rebuild required

Simulink displays a warning.

Error if rebuild required

Simulink terminates the simulation and displays an error message.

### Tip

If you set the **Rebuild** parameter to Never and set the **Never rebuild diagnostic** parameter to Error if rebuild required or Warn if rebuild required, then Simulink:

- Performs the same change detection processing as for the If any changes in known dependencies detected rebuild option setting, except it does not compare structural checksums
- Issues an error or warning (depending on the **Never rebuild diagnostic** setting), if it detects a change
- Never rebuilds the model reference target

Selecting None bypasses dependency checking, and thus enables faster updating, simulation, and code generation. However, the None setting can cause models that are not up to date to malfunction or generate incorrect results. For more information on the dependency checking, see “Rebuild” on page 12-5.

### Dependency

This parameter is enabled only if you select Never in the **Rebuild** field.

### Command-Line Information

**Parameter:** CheckModelReferenceTargetMessage

**Value:** 'none' | 'warning' | 'error'

**Default:** 'error'

## Recommended Settings

| Application       | Setting                   |
|-------------------|---------------------------|
| Debugging         | No impact                 |
| Traceability      | No impact                 |
| Efficiency        | No impact                 |
| Safety precaution | Error if rebuild required |

## See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Enable parallel model reference builds

### Description

Specify whether to use automatic parallel building of the model reference hierarchy whenever possible.

**Category:** Model Referencing

### Settings

**Default:** Off

On

Simulink software builds the model reference hierarchy in parallel whenever possible (based on computing resources and the structure of the model reference hierarchy).

Off

Simulink never builds the model reference hierarchy in parallel.

### Dependency

Selecting this option enables the **MATLAB worker initialization for builds** parameter. Parallel building requires Parallel Computing Toolbox™.

### Tip

You only need to set **Enable parallel model reference builds** for the top model of the model reference hierarchy to which it applies.

### Command-Line Information

**Parameter:** EnableParallelModelReferenceBuilds

**Value:** 'on' | 'off'

**Default:** 'off'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Reduce Update Time for Referenced Models by Using Parallel Builds”
- “Reduce Build Time for Referenced Models by Using Parallel Builds” (Simulink Coder)
- “Model Configuration Parameters: Model Referencing” on page 12-2

## MATLAB worker initialization for builds

### Description

Specify how to initialize MATLAB workers for parallel builds.

**Category:** Model Referencing

### Settings

**Default:** None

None

Simulink software takes no action. Specify this value if the child models in the model reference hierarchy do not rely on anything in the base workspace beyond what they explicitly set up (for example, with a model load function).

**Copy base workspace**

Simulink attempts to copy the base workspace to each MATLAB worker. Specify this value if you use a setup script to prepare the base workspace for all models to use.

**Load top model**

Simulink loads the top model on each MATLAB worker. Specify this value if the top model in the model reference hierarchy handles all of the base workspace setup (for example, with a model load function).

### Limitation

For values other than **None**, limitations apply to global variables in the base workspace. Global variables are not propagated across parallel workers and do not reflect changes made by top and child model scripts.

### Dependency

Selecting the option **Enable parallel model reference builds** enables this parameter. Parallel building requires Parallel Computing Toolbox.

### Command-Line Information

**Parameter:** ParallelModelReferenceMATLABWorkerInit

**Value:** 'None' | 'Copy Base Workspace' | 'Load Top Model'

**Default:** 'None'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |
| Efficiency   | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Safety precaution | No impact |

## See Also

### Related Examples

- “Reduce Update Time for Referenced Models by Using Parallel Builds”
- “Reduce Build Time for Referenced Models by Using Parallel Builds” (Simulink Coder)
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Enable strict scheduling checks for referenced models

### Description

This parameter enables these checks for referenced models:

- Scheduling order consistency of function-call subsystems in referenced export function models
- Sample time consistency across the boundary of referenced export function models
- Sample time consistency across the boundary of referenced rate-based models that are function-call adapted.

**Category:** Model Referencing

### Settings

**Default:** On

On

Simulink enforces strict checks on scheduling order and sample time consistency in referenced models.

Off

Simulink does not enforce strict checks on scheduling order and sample time consistency in referenced models.

### Command-Line Information

**Parameter:** EnableRefExpFcnMdlschedulingChecks

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

### Related Examples

- “Export-Function Models Overview”
- “Model Referencing Pane Overview” on page 12-4
- “Sorting Rules for Explicitly Scheduled Model Components”

## Total number of instances allowed per top model

### Description

Specify how many references to this model can occur in another model.

**Category:** Model Referencing

### Settings

**Default:** Multiple

Zero

The model cannot be referenced. An error occurs if a reference to the model occurs in another model.

One

The model can be referenced at most once in a model reference hierarchy. An error occurs if more than one reference exists.

Multiple

The model can be referenced more than once in a hierarchy, provided that it contains no constructs that preclude multiple reference. An error occurs if the model cannot be referenced multiple times, even if only one reference exists.

To use multiple instances of a referenced model in normal mode, use the **Multiple** setting. For details, see “Simulate Multiple Referenced Model Instances in Normal Mode”.

### Command-Line Information

**Parameter:** ModelReferenceNumInstancesAllowed

**Value:** 'Zero' | 'Single' | 'Multi'

**Default:** 'Multi'

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Pass fixed-size scalar root inputs by value for code generation

### Description

Specify whether a model that calls (references) this model passes its scalar inputs to this model by value.

**Category:** Model Referencing

### Settings

**Default:** Off (GUI), 'on' (command-line)



A model that calls (references) this model passes scalar inputs to this model by value.



The calling model passes the inputs by reference (it passes the addresses of the inputs rather than the input values).

### Tips

- This option is ignored in either of these two cases:
  - The C function prototype control is not the default.
  - The C++ encapsulation interface is not the default.
- Passing root inputs by value allows this model to read its scalar inputs from register or local memory, which is faster than reading the inputs from their original locations.
- Enabling this parameter can result in the simulation behavior differing from the generated code behavior under certain modeling semantics. If you use the default setting of `Enable all as errors` for the **Configuration Parameters > Diagnostics > Connectivity > Context-dependent inputs** parameter, then Simulink reports cases where the modeling semantics may result in inconsistent behaviors for simulation and for generated code. If the diagnostic identifies an issue, latch the function-call subsystem inputs. For more information about latching function-call subsystems, see "Context-dependent inputs" on page 5-17.
- If the Context-dependent inputs diagnostic reports no issues for a model, consider enabling the **Pass fixed-size scalar root inputs by value for code generation** parameter, which usually generates more efficient code for such a model.
- If you have a Simulink Coder license, selecting this option can affect reuse of code generated for subsystems. See "Generate Reentrant Code from Subsystems" (Simulink Coder) for more information.
- For SIM targets, a model that references this model passes inputs by reference, regardless of how you set the **Pass fixed-size scalar root inputs by value for code generation** parameter.

### Command-Line Information

**Parameter:** `ModelReferencePassRootInputsByReference`

**Value:** 'on' | 'off'

**Default:** 'on'

---

**Note** The command-line values are reverse of the settings values. Therefore, 'on' in the command line corresponds to the description of "Off" in the settings section, and 'off' in the command line corresponds to the description of "On" in the settings section.

---

## Recommended Settings

| Application       | Setting                                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                               |
| Traceability      | No impact                                                                                                                                               |
| Efficiency        | No impact                                                                                                                                               |
| Safety precaution | No recommendation                                                                                                                                       |
|                   | For the diagnostic action to take when the software has to compute the input to a function-call subsystem, see "Context-dependent inputs" on page 5-17. |

## See Also

### Related Examples

- “Using Function-Call Subsystems”
- “Generate Reentrant Code from Subsystems” (Simulink Coder)
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Minimize algebraic loop occurrences

### Description

Try to eliminate artificial algebraic loops from a model that involve the current referenced model

**Category:** Model Referencing

### Settings

**Default:** Off

On

Simulink software tries to eliminate artificial algebraic loops from a model that involve the current referenced model.

Off

Simulink software does not try to eliminate artificial algebraic loops from a model that involve the current referenced model.

### Tips

Enabling this parameter together with the Simulink Coder **Single output/update function** parameter results in an error.

### Command-Line Information

**Parameter:** ModelReferenceMinAlgLoopOccurrences

**Value:** 'on' | 'off'

**Default:** 'off'

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- Model block
- “Algebraic Loop Concepts”
- “Model Blocks and Direct Feedthrough”

- Diagnosing Simulation Errors
- “Model Configuration Parameters: Model Referencing” on page 12-2

## Propagate all signal labels out of the model

### Description

Pass propagated signal names to output signals of Model block.

**Category:** Model Referencing

### Settings

**Default:** On

On


Simulink propagates signal names to output signals of the Model block.

Off


Simulink does not propagate signal names to output signals of the Model block.

### Tips

- By default, each instance of a referenced model propagates signal labels. Clear the setting for any instance that you do not want to propagate signal labels.
- The following models illustrate the behavior when you use the default setting of the **Propagate all signal labels out of the model** parameter of enabled for the referenced model. The output signal from the Model block Out2 port displays the propagated signal name (*chirp\_sig*), whose source is inside the referenced model.

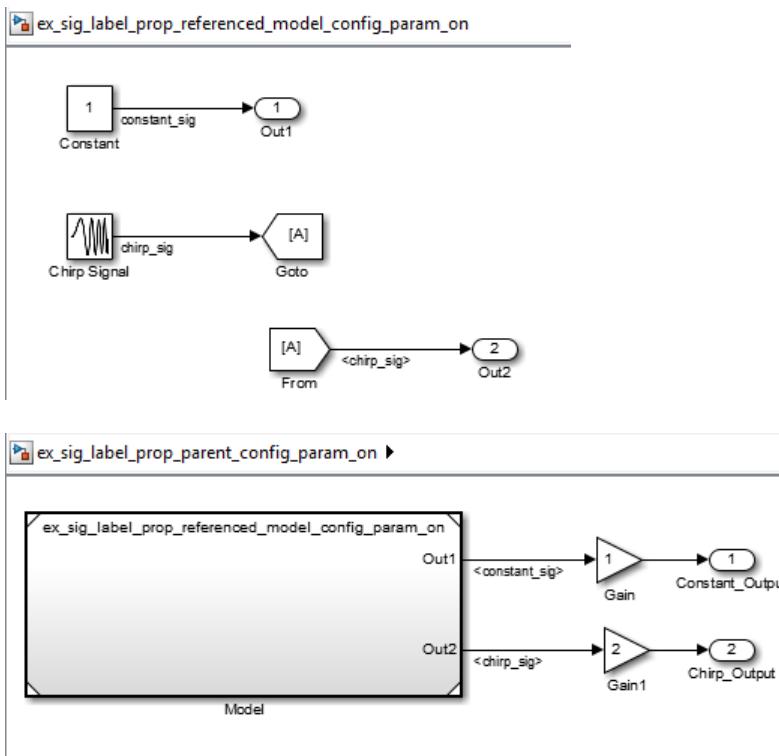

- The following models illustrate the behavior when you clear this parameter, if you enable signal label propagation for every eligible signal. Inside the referenced model, signal label propagation occurs as in any model. However, the output signal from the Model block Out2 port displays empty brackets for the propagated signal label.

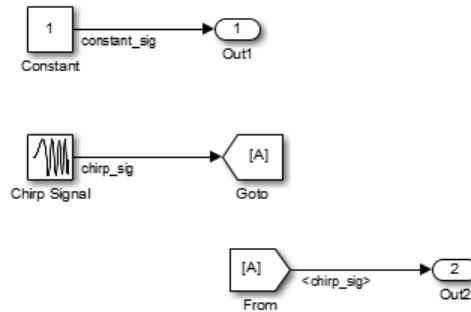

## Command-Line Information

**Parameter:** PropagateSignalLabelsOut0fModel

**Value:** 'on' | 'off'

**Default:** 'on'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Model block

- “Signal Label Propagation”
- “Model Configuration Parameters: Model Referencing” on page 12-2

# Propagate sizes of variable-size signals

## Description

Select how variable-size signals propagate through referenced models.

**Category:** Model Referencing

## Settings

**Default:** Infer from blocks in model

Infer from blocks in model

Searches a referenced model and groups blocks into the following categories.

| Category | Description                                                  | Example Blocks in This Category                                                                                                              |
|----------|--------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | Output signal size depends on input signal values.           | Switch or Enable Subsystem block whose parameter <b>Propagate sizes of variable-size signals</b> is set to <b>During execution</b>           |
| 2        | States require resetting when the input signal size changes. | Unit Delay block in an Enabled Subsystem whose parameter <b>Propagate sizes of variable-size signals</b> is set to <b>Only when enabling</b> |
| 3        | Output signal size depends only on the input signal size.    | Gain block.                                                                                                                                  |

The search stops at the boundary of Enable, Function-Call, and Action subsystems because these subsystems can specify when to propagate the size of a variable-size signal.

Simulink sets the propagation of variable-size signals for a referenced model as follows:

- One or more blocks in category 1, and all other blocks are in category 3, select **During execution**.
- One or more blocks in category 2, and all other blocks are in category 3, select **Only when enabling**.
- Blocks in category 1 and 2, report an error.
- All blocks in category 3 with a conditionally executed subsystem that is not an Enable, Function-Call, or Action subsystem, report an error. Simulink, in this case, cannot determine when to propagate sizes of variable-size signals.
- All blocks in category 3 with only conditionally executed subsystems that are an Enable, Function-Call, or Action subsystem, support both **Only with enabling** and **During execution**.

### Only when enabling

Propagates sizes of variable-size signals for the referenced model only when enabling (at Enable method).

**During execution**

Propagates sizes of variable-size signals for the referenced model during execution (at Outputs method).

**Command-Line Information**

**Parameter:** PropagateVarSize

**Value:** 'Infer from blocks in model' | 'Only when enabling' | 'During execution'

**Default:** 'Infer from blocks in model'

**Recommended Settings**

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

**See Also****Related Examples**

- “Model Configuration Parameters: Model Referencing” on page 12-2

# Model dependencies

## Description

Model dependencies are files and data that potentially impact simulation results. Simulink does not automatically identify user-created dependencies. Examples of user-created dependencies are:

- MATLAB files that contain code executed by callbacks
- MAT-files that contain definitions for variables used by the model that are loaded as part of a customized initialization script

To avoid invalid simulation results, list all user-created dependencies in the **Model dependencies** parameter. When determining whether a model reference target is up to date, Simulink examines dependencies that it automatically identifies and files specified by the **Model dependencies** parameter.

**Category:** Model Referencing

## Settings

**Default:** ''

Specify dependencies as a cell array of character vectors, where each cell array entry is one of the following:

- File name — Simulink looks on the MATLAB path for a file with the given name. If the file is not on the MATLAB path, specify the path to the dependent file. The file name must include a file extension, such as .m or .mat.
- Path to the dependent file — The path can be relative or absolute, and must include the file name.
- Folder — Simulink treats every file in that folder as a dependent file. Simulink does not include files of subfolders of the folder you specify.

Cell array entries can include:

- Spaces
- The token \$MDL as a prefix to a dependency to indicate that the path to the dependency is relative to the location of this model file
- An asterisk (\*) as a wild card
- A percent sign (%) to comment out a line
- An ellipsis (...) to continue a line

For example:

```
{'D:\Work\parameters.mat', '$MDL\mdlvars.mat', ...
'D:\Work\masks*.m'}
```

## Tips

- To improve rebuild detection speed and accuracy, use the **Model dependencies** parameter to specify user-created dependencies when the **Rebuild** on page 12-5 parameter is set to either **If any changes detected** or **If any changes in known dependencies detected**.

- To prevent invalid simulation results, if the **Rebuild** setting is **If any changes in known dependencies detected**, add every user-created dependency.
- To help identify model dependencies, use the Dependency Analyzer. For more information, see “Analyze Model Dependencies”.
- If Simulink cannot find a specified dependent file when you update or simulate a model that references this model, Simulink displays a warning.
- The dependencies automatically include the model and linked library files, so you do not need to specify those files with the **Model dependencies** parameter.

## Command-Line Information

**Parameter:** ModelDependencies

**Type:** character vector

**Value:** any valid value

**Default:** ''

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Rebuild” on page 12-5
- “Model Configuration Parameters: Model Referencing” on page 12-2

# Simulation Target Parameters

---

## Model Configuration Parameters: Simulation Target

The **Simulation Target** category includes parameters for configuring the simulation target for a model that contains MATLAB Function blocks, Stateflow charts, or Truth Table blocks.

| Parameter                                                                       | Description                                                                                                                                                                                                                        |
|---------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Import custom code" on page 13-9                                               | Specify whether or not to parse the custom code and report unresolved symbols in a model. This setting applies to all C charts in the model, including library link charts.                                                        |
| "Language" on page 13-6                                                         | Specify the language to compile and parse the custom code.                                                                                                                                                                         |
| "GPU Acceleration" on page 13-8                                                 | Specify whether or not to accelerate MATLAB Function blocks on NVIDIA® GPUs. This option requires a GPU Coder™ license.                                                                                                            |
| "Source file" on page 13-12                                                     | Enter code lines to appear near the top of a generated source code file.                                                                                                                                                           |
| "Header file" on page 13-13                                                     | Enter code lines to appear near the top of a generated header file.                                                                                                                                                                |
| "Initialize function" on page 13-14                                             | Enter code statements that execute once at the start of simulation.                                                                                                                                                                |
| "Terminate function" on page 13-15                                              | Enter code statements that execute at the end of simulation.                                                                                                                                                                       |
| "Include directories" on page 13-16                                             | Specify a list of folder paths that contain files you include in the compiled target.                                                                                                                                              |
| "Source files" on page 13-18                                                    | Specify a list of source files to compile and link into the target.                                                                                                                                                                |
| "Libraries" on page 13-19                                                       | Specify a list of static libraries that contain custom object code to link into the target.                                                                                                                                        |
| "Reserved names" on page 13-20                                                  | Enter the names of variables or functions in the generated code that match the names of variables or functions specified in custom code for a model that contains MATLAB Function blocks, Stateflow charts, or Truth Table blocks. |
| "Defines" on page 13-22                                                         | Specify preprocessor macro definitions to be added to the compiler command line.                                                                                                                                                   |
| "Use local custom code settings (do not inherit from main model)" on page 2-101 | Specify if a library model can use custom code settings that are unique from the main model. (This parameter is read-only)                                                                                                         |
| "Default function array layout" on page 13-23                                   | Specify the default array layout for all external C functions used by C Caller block.                                                                                                                                              |
| "Undefined Function Handling" on page 13-25                                     | Specify undefined function behaviour for all external C functions called by C Caller, MATLAB Function, MATLAB System blocks or Stateflow charts.                                                                                   |

| Parameter                                                        | Description                                                                       |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| "Enable custom code globals as function interface" on page 13-27 | Specify the behavior of global variables in the C Caller custom code.             |
| "Specify by function" on page 13-28                              | Specify the array layout for each external C function used by the C Caller block. |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                                                | Description                                                                                                                                                                                                                                                                                                              |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Echo expressions without semicolons" on page 2-97                       | Enable run-time output in the MATLAB Command Window, such as actions that do not terminate with a semicolon.                                                                                                                                                                                                             |
| "Ensure responsiveness" on page 2-90                                     | Enables responsiveness checks in code generated for MATLAB Function blocks, Stateflow charts, and dataflow domains.                                                                                                                                                                                                      |
| "Generate typedefs for imported bus and enumeration types" on page 2-100 | Determines <code>typedef</code> handling and generation for imported bus and enumeration data types in Stateflow and MATLAB Function blocks.                                                                                                                                                                             |
| "Ensure memory integrity" on page 2-98                                   | Detects violations of memory integrity in code generated for MATLAB Function blocks and stops execution with a diagnostic.                                                                                                                                                                                               |
| "Enable run-time recursion for MATLAB functions" on page 2-92            | Allow recursive functions in code that is generated for MATLAB code that contains recursive functions.                                                                                                                                                                                                                   |
| "Compile-time recursion limit for MATLAB functions" on page 2-91         | For compile-time recursion, control the number of copies of a function that are allowed in the generated code.                                                                                                                                                                                                           |
| "Block reduction" on page 2-85                                           | Reduce execution time by collapsing or removing groups of blocks.                                                                                                                                                                                                                                                        |
| "Compiler optimization level" on page 2-80                               | Sets the degree of optimization used by the compiler when generating code for acceleration.                                                                                                                                                                                                                              |
| "Conditional input branch execution" on page 2-88                        | Improve model execution when the model contains Switch and Multiport Switch blocks.                                                                                                                                                                                                                                      |
| "Verbose accelerator builds" on page 2-82                                | Select the amount of information displayed during code generation for Simulink Accelerator mode, referenced model Accelerator mode, and Rapid Accelerator mode.                                                                                                                                                          |
| "Dynamic memory allocation in MATLAB functions" on page 2-93             | Use dynamic memory allocation ( <code>malloc</code> ) for variable-size arrays whose size (in bytes) is greater than or equal to the dynamic memory allocation threshold. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object associated with a MATLAB System block. |

| Parameter                                                              | Description                                                                                                                                                                                                                                                                   |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Dynamic memory allocation threshold in MATLAB functions" on page 2-95 | Use dynamic memory allocation (malloc) for variable-size arrays whose size (in bytes) is greater than or equal to a threshold. This parameter applies to MATLAB code in a MATLAB Function block, a Stateflow chart, or a System object associated with a MATLAB System block. |
| <b>Allow setting breakpoints during simulation</b>                     | Enable debugging and animation during simulation of a model that contains MATLAB Function blocks, Stateflow charts, State Transition blocks, or Truth Table blocks.                                                                                                           |

## See Also

### Related Examples

- “Speed Up Simulation” (Stateflow)

# Simulation Target: General Tab Overview

Configure the simulation target for a model that contains MATLAB Function blocks, Stateflow charts, Truth Table blocks, or State Transition Table blocks.

## Configuration

Set the parameters that appear.

### Tip

To open the **Simulation Target** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Simulation Target**.

### To get help on an option

- 1 Right-click the option text label.
- 2 From the context menu, select **What's This**.



## See Also

### Related Examples

- “Model Configuration Parameters: Simulation Target” on page 13-2
- “Perform Acceleration”

## Language

### Description

Select C or C++ language to compile and parse custom code integrated in Simulink blocks. This option affects the C Function, C Caller, MATLAB Function, and MATLAB System blocks and Stateflow charts. If **Import Custom Code** is checked, available custom code variables and functions are parsed.

**Category:** Simulation Target

### Settings

**Default:** C

C

Compiles custom code using rules of C.

C++

Compiles custom code using rules of C++.

Select the C++ option to:

- Generate MATLAB Function block or Stateflow chart MEX code as C++ files and compile custom code using C++. For MATLAB Function and MATLAB System blocks, if you add C++ code to `buildInfo` using `coder.updateBuildInfo` or `coder.ExternalDependency`, set **Language** to C++.
- Simulate a MATLAB System block through code generation and compilation using C++.

Before you build a system, configure Simulink to use a compiler system using `mex -setup`.

### Command-Line Information

**Parameter:** `SimTargetLang`

**Value:** 'C' | 'C++'

**Default:** 'C'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | On        |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | On        |

## See Also

### Related Examples

- “Model Configuration Parameters: Simulation Target” on page 13-2

## GPU Acceleration

### Description

Speed up the execution of MATLAB Function block on NVIDIA GPUs by generating CUDA® code. This option requires a GPU Coder license.

**Category:** Simulation Target

### Settings

**Default:** Off



#### On

Enables simulation acceleration by using GPU Coder. When this option is on, the software generates CUDA MATLAB executable (MEX) code from the block and dynamically links the generated code to Simulink during simulation.



#### Off

Disables simulation acceleration by using GPU Coder. When this option is off, Simulink uses the interpreted code mode normally used in simulations.

### Command-Line Information

**Parameter:** GPUAcceleration

**Type:** character vector

**Value:** 'on' | 'off'

**Default:** 'off'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | On        |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | On        |

### See Also

### Related Examples

- “Model Configuration Parameters: Simulation Target” on page 13-2

# Import custom code

## Description

Specify whether or not to parse available custom code variables and functions and compile custom code into its own simulation target. This option affects the C Caller block, the MATLAB Function block, the MATLAB System block, and Stateflow charts.

**Category:** Simulation Target

## Settings

**Default:** On



On

Enables parsing of custom code to report unresolved symbols in C charts of your model. When this option is on, Simulink:

- Uses the same custom code for simulation with the C Caller block, the MATLAB Function block, the MATLAB System block, and Stateflow charts. When using the C Caller block or the C Function block, this option must be turned on.
- Automatically rebuilds the custom code simulation target when specified custom code dependencies change.
- Automatically rebuilds simulation targets for blocks using custom code when custom code changes.
- Enables Just-In-Time (JIT) compilation of the C Caller block, the MATLAB Function block, the MATLAB System block, and Stateflow charts.
- Allows the **Enable custom code analysis** option to enable Simulink Coverage and Simulink Design Verifier support for custom code.



Off

Disables importing of custom code. Turn off **Import custom code** to allow Simulink to:

- Split custom code dependencies between Simulation Target and other means of specifying custom code dependencies (`coder.cinclude`, `coder.updateBuildInfo`, and `coder.ExternalDependency`) in Stateflow charts that use MATLAB as the action language, the MATLAB Function block, or the MATLAB System block.
- Allow functions without C interfaces, and support overloaded C++ functions from custom code.
- Permit custom code dependencies to contain declared but undefined function symbols. Otherwise Simulink creates a version of the symbol that returns a zero value.
- In Stateflow charts that use MATLAB as the action language, you can access C++ class members with the `->` operator, access members in a structure containing a pointer to itself with a `->` operator, and access members in a union type.

---

**Note** You cannot split custom code dependencies by specifying the path and the source files at different locations.

## Command-Line Information

**Parameter:** SimParseCustomCode

**Value:** 'on' | 'off'

**Default:** 'on'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | On        |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | On        |

## See Also

### Related Examples

- Including Custom C Code (Stateflow)
- Resolving Symbols in Stateflow Charts (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

# Enable custom code analysis

## Description

Specify whether or not to enable Simulink Coverage™ and Simulink Design Verifier™ support for custom code. This option affects the C Caller block, the MATLAB Function block, the MATLAB System block, and Stateflow charts.

**Category:** Simulation Target

## Settings

**Default:** Off



**On**

Enables Simulink Coverage and Simulink Design Verifier support for custom code.



**Off**

Disables Simulink Coverage and Simulink Design Verifier support for custom code.

## Command-Line Information

**Parameter:** SimAnalyzeCustomCode

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No recommendation |
| Traceability      | No recommendation |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

## Related Examples

- “Coverage for Custom C/C++ Code in Simulink Models” (Simulink Coverage)

## Source file

### Description

Enter code lines to appear near the top of a generated source code file.

**Category:** Simulation Target

### Settings

**Default:** ''

Code lines appear near the top of the generated *model.c* source file, outside of any function.

### Command-Line Information

**Parameter:** SimCustomSourceCode

**Type:** character vector

**Value:** any C code

**Default:** ''

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No recommendation |
| Traceability      | No recommendation |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- Including Custom C Code (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

# Header file

## Description

Enter code lines to appear near the top of a generated header file.

**Category:** Simulation Target

## Settings

**Default:** ''

Code lines appear near the top of the generated *model.h* header file.

## Tips

- When you include a custom header file, enclose the file name in double quotes. For example, `#include "sample_header.h"` is a valid declaration for a custom header file.
- You can include `extern` declarations of variables or functions.

## Command-Line Information

**Parameter:** SimCustomHeaderCode

**Type:** character vector

**Value:** any C code

**Default:** ''

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No recommendation |
| Traceability      | No recommendation |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

## Related Examples

- Including Custom C Code (Stateflow)
- "Model Configuration Parameters: Simulation Target" on page 13-2

## Initialize function

### Description

Enter code statements that execute once at the start of simulation.

**Category:** Simulation Target

### Settings

**Default:** ''

Code appears inside the model's initialize function in the *model.c* file.

### Tip

- Use this code to invoke functions that allocate memory or to perform other initializations of your custom code.

### Command-Line Information

**Parameter:** SimCustomInitializer

**Type:** character vector

**Value:** any C code

**Default:** ''

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No recommendation |
| Traceability      | No recommendation |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

### See Also

#### Related Examples

- Including Custom C Code (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

# Terminate function

## Description

Enter code statements that execute at the end of simulation.

**Category:** Simulation Target

## Settings

**Default:** ''

Code appears inside the model's terminate function in the *model.c* file.

## Tip

- Use this code to invoke functions that free memory allocated by the custom code or to perform other cleanup tasks.

## Command-Line Information

**Parameter:** SimCustomTerminator

**Type:** character vector

**Value:** any C code

**Default:** ''

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No recommendation |
| Traceability      | No recommendation |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Including Custom C Code (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

## Include directories

### Description

Specify a list of folder paths that contain files you include in the compiled target.

**Category:** Simulation Target

### Settings

**Default:** ''

Enter a space-separated list of folder paths.

- Specify absolute or relative paths to the directories.
- Relative paths must be relative to the folder containing your model files, not relative to the build folder.
- The order in which you specify the directories is the order in which they are searched for header, source, and library files.

---

**Note** If you specify a Windows® path containing one or more spaces, you must enclose the character vector in double quotes. For example, the second and third paths in the **Include directories** entry below must be double-quoted:

```
C:\Project "C:\Custom Files" "C:\Library Files"
```

If you set the equivalent command-line parameter `SimUserIncludeDirs`, each path containing spaces must be separately double-quoted within the single-quoted third argument, for example,

```
>> set_param('mymodel', 'SimUserIncludeDirs', ...
 'C:\Project "C:\Custom Files" "C:\Library Files"')
```

---

### Command-Line Information

**Parameter:** `SimUserIncludeDirs`

**Type:** character vector

**Value:** any folder path

**Default:** ''

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- Including Custom C Code (Stateflow)
- “Model Configuration Parameters: Simulation Target” on page 13-2

## Source files

### Description

Specify a list of source files to compile and link into the target.

**Category:** Simulation Target

### Settings

**Default:** ''

You can separate source files with a comma, a space, or a new line.

### Limitation

This parameter does not support Windows file names that contain embedded spaces.

### Tip

- The file name is sufficient if the file is in the current MATLAB folder or in one of the include directories.

### Command-Line Information

**Parameter:** SimUserSources

**Type:** character vector

**Value:** any file name

**Default:** ''

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- Including Custom C Code (Stateflow)
- "Model Configuration Parameters: Simulation Target" on page 13-2

# Libraries

## Description

Specify a list of static libraries that contain custom object code to link into the target.

**Category:** Simulation Target

## Settings

**Default:** ''

Enter a space-separated list of library files.

## Limitation

This parameter does not support Windows file names that contain embedded spaces.

## Tip

- The file name is sufficient if the file is in the current MATLAB folder or in one of the include directories.

## Command-Line Information

**Parameter:** SimUserLibraries

**Type:** character vector

**Value:** any library file name

**Default:** ''

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

## Related Examples

- Including Custom C Code (Stateflow)
- "Model Configuration Parameters: Simulation Target" on page 13-2

## Reserved names

### Description

Enter the names of variables or functions in the generated code that match the names of variables or functions specified in custom code for a model that contains MATLAB Function blocks, Stateflow charts, or Truth Table blocks.

**Category:** Simulation Target

### Settings

**Default:** {}

This action changes the names of variables or functions in the generated code to avoid name conflicts with identifiers in custom code. Reserved names must be shorter than 256 characters.

### Tips

- Start each reserved name with a letter or an underscore to prevent error messages.
- Each reserved name must contain only letters, numbers, or underscores.
- Separate the reserved names using commas or spaces.
- You can also specify reserved names by using the command line:

```
config_param_object.set_param('SimReservedNameArray', {'abc','xyz'})
```

where `config_param_object` is the object handle to the model settings in the Configuration Parameters dialog box.

### Command-Line Information

**Parameter:** SimReservedNameArray

**Type:** cell array of character vectors or string array

**Value:** any reserved names shorter than 256 characters

**Default:** {}

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Model Configuration Parameters: Simulation Target” on page 13-2

## Defines

### Description

Specify preprocessor macro definitions to be added to the compiler command line.

**Category:** Simulation Target

### Settings

**Default:** ''

Enter a list of macro definitions for the compiler command line. Specify the parameters with a space-separated list of macro definitions. If a makefile is generated, these macro definitions are added to the compiler command line in the makefile. The list can include simple definitions (for example, -DDEF1), definitions with a value (for example, -DDEF2=1), and definitions with a space in the value (for example, -DDEF3="my value"). Definitions can omit the -D (for example, -DF00=1 and F00=1 are equivalent). If the toolchain uses a different flag for definitions, the code generator overrides the -D and uses the appropriate flag for the toolchain.

### Command-Line Information

**Parameter:** SimUserDefines

**Type:** character vector

**Value:** preprocessor macro definition

**Default:** ''

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

### See Also

### Related Examples

- “Integrate External Code by Using Model Configuration Parameters” (Simulink Coder)
- “Model Configuration Parameters: Simulation Target” on page 13-2

# Default function array layout

## Description

Specify the default array layout for all external C functions used by C Caller block.

**Category:** Simulation Target

## Settings

**Default:** Not specified

**Column-major**

Call all external C functions in column-major array layout.

**Row-major**

Call all external C functions in row-major array layout.

**Any**

Call all external C functions in column-major or row-major array layout. If your external function algorithms do not require the matrix data to be in a specific array layout, use this option.

**Not specified**

Call all external C functions in column-major or row-major array layout. If **Array layout** (Simulink Coder) is set to Row-major, Simulink reports an error. You can turn off the error by changing the **External functions compatibility for row-major code generation** (Simulink Coder) to warning or none.

**Default function array layout** parameter controls the default array layout of the custom code function. To specify array layout for individual functions, use **Specify by function** on page 13-28 dialog box.

## Command-Line Information

**Parameter:** DefaultCustomCodeFunctionArrayLayout

**Type:** character vector

**Value:** 'Column-major' | 'Row-major' | 'Any' | 'NotSpecified'

**Default:** 'NotSpecified'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Integrate External Code by Using Model Configuration Parameters” (Simulink Coder)
- “Model Configuration Parameters: Simulation Target” on page 13-2
- C Caller

# Undefined Function Handling

## Description

Specify the behavior of undefined functions in the C source code file of a model that contains C Caller, MATLAB Function, MATLAB System block or a Stateflow chart. If a function is declared in the source header file, but not implemented in the source code, Simulink behaves according to this setting.

**Category:** Simulation Target

## Settings

**Default:** Filter out

**Throw Error**

Return error if a function in the C source code is undefined. A stub function is not generated automatically, but function is visible on the C Caller **Port Specification** table.

**Filter out**

Filter out any undefined functions in the C source code. A stub function is not generated automatically, and the function is not visible on the C caller **Port Specification** table.

If you have any undefined functions in the C source code and they are called in a model that uses a MATLAB Function, MATLAB System block or a Stateflow chart, Simulink returns an error. If the custom code to any of your blocks in your model has undefined functions, Simulink displays a warning.

**Do not detect**

Do not detect any undefined functions from the source code. A stub function is not generated automatically, but function is visible on the C Caller **Port Specification** table.

**Use interface only**

Detect any undefined functions from the C source code. Generate stub functions for the undefined functions and make them visible in the model and to call from Stateflow charts, C Function, MATLAB Function and MATLAB System blocks.

## Command-Line Information

**Parameter:** CustomCodeUndefinedFunction

**Type:** character vector

**Value:** 'ThrowError' | 'FilterOut' | 'DoNotDetect' | 'UseInterfaceOnly'

**Default:** 'FilterOut'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Integrate External Code by Using Model Configuration Parameters” (Simulink Coder)
- “Model Configuration Parameters: Simulation Target” on page 13-2
- C Caller

# Enable custom code globals as function interface

## Description

Specify the behavior of global variables in the C Caller custom code. If this option is selected, the variables declared as global in the custom code can be used as global arguments on the block interface.

**Category:** Simulation Target

## Settings

**Default:** Off



**On**

Enables parsing of custom code global variables on the function interface. C Caller block treats the global variables in your custom code as global arguments on the block interface. These arguments appear in bold on the **Port Specification** table.



**Off**

Disables parsing of global variables on the block interface.

## Command-Line Information

**Parameter:** CustomCodeGlobalsAsFunctionIO

**Value:** 'on' | 'off'

**Default:** 'on'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

C Caller | FunctionPortSpecification | getGlobalArg

## More About

- “Integrate C Code Using C Caller Blocks”

## Specify by function

### Description

Specify the array layout for each external C function used by the C Caller block.

**Category:** Simulation Target

### Settings

Specify the array layout for each external C function used by the C Caller block. The array layout specified for an individual function takes precedence over the option specified in **Default function array layout** on page 13-23 parameter. Use these options to add or remove the array layout setting for an individual C function:



Add

Add custom C function used by the C Caller block and specify the array layout setting.



Remove

Remove the custom C function used by the C Caller block.

### Command-Line Information

**Parameter:** CustomCodeFunctionArrayLayout

**Type:** structure array

**Value:** structure with 'FunctionName' and 'ArrayLayout' fields. 'ArrayLayout' can be 'Column-major', 'Row-major' or 'Any'.

**Default:** ''

### Example

Consider a model `foo_model`. If you have external C functions that you interface with the model by using the C Caller block, use these commands in MATLAB command window to specify array layouts for these functions:

```
arrayLayout(1).FunctionName = 'MyCFunction1';
arrayLayout(1).ArrayLayout = 'Column-major';
arrayLayout(2).FunctionName = 'MyCFunction2';
arrayLayout(2).ArrayLayout = 'Row-major';
set_param('foo_model', 'CustomCodeFunctionArrayLayout', arrayLayout)
```

### Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No recommendation |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Integrate External Code by Using Model Configuration Parameters” (Simulink Coder)
- “Model Configuration Parameters: Simulation Target” on page 13-2
- C Caller



# Solver Parameters

---

## Solver Pane

The **Solver** category includes parameters for configuring a solver for a model. A solver computes a dynamic system's states at successive time steps over a specified time span. You also use these parameters to specify the simulation start and stop times.

| Parameter                                       | Description                                                                                                                                                                                 |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Start time" on page 14-7                       | Specify the start time for the simulation or generated code as a double-precision value, scaled to seconds.                                                                                 |
| "Stop time" on page 14-8                        | Specify the stop time for the simulation or generated code as a double-precision value, scaled to seconds.                                                                                  |
| "Type" on page 14-9                             | Select the type of solver you want to use to simulate your model.                                                                                                                           |
| "Solver" on page 14-11                          | Select the solver you want to use to compute the states of the model during simulation or code generation.                                                                                  |
| "Max step size" on page 14-17                   | Specify the largest time step that the solver can take.                                                                                                                                     |
| "Integration method" on page 14-67              | Specify the integration order of the <code>odeN</code> solver                                                                                                                               |
| "Initial step size" on page 14-19               | Specify the size of the first time step that the solver takes.                                                                                                                              |
| "Min step size" on page 14-21                   | Specify the smallest time step that the solver can take.                                                                                                                                    |
| "Relative tolerance" on page 14-23              | Specify the largest acceptable solver error, relative to the size of each state during each time step. If the relative error exceeds this tolerance, the solver reduces the time step size. |
| "Absolute tolerance" on page 14-25              | Specify the largest acceptable solver error, as the value of the measured state approaches zero. If the absolute error exceeds this tolerance, the solver reduces the time step size.       |
| "Shape preservation" on page 14-27              | At each time step use derivative information to improve integration accuracy.                                                                                                               |
| "Maximum order" on page 14-29                   | Select the order of the numerical differentiation formulas (NDFs) used in the <code>ode15s</code> solver.                                                                                   |
| "Solver reset method" on page 14-31             | Select how the solver behaves during a reset, such as when it detects a zero crossing.                                                                                                      |
| "Number of consecutive min steps" on page 14-33 | Specify the maximum number of consecutive minimum step size violations allowed during simulation.                                                                                           |
| "Solver Jacobian Method" on page 14-35          | Specify the method to compute the Jacobian matrix for an implicit solver.                                                                                                                   |

| Parameter                                                              | Description                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Treat each discrete rate as a separate task” on page 14-37            | Specify whether Simulink executes blocks with periodic sample times individually or in groups.                                                                                                                                                                 |
| “Automatically handle rate transition for data transfer” on page 14-39 | Specify whether Simulink software automatically inserts hidden Rate Transition blocks between blocks that have different sample rates to ensure: the integrity of data transfers between tasks; and optional determinism of data transfers for periodic tasks. |
| “Deterministic data transfer” on page 14-41                            | Control whether the Rate Transition block parameter <b>Ensure deterministic data transfer (maximum delay)</b> is set for auto-inserted Rate Transition blocks.                                                                                                 |
| “Higher priority value indicates higher task priority” on page 14-43   | Specify whether the real-time system targeted by the model assigns higher or lower priority values to higher priority tasks when implementing asynchronous data transfers.                                                                                     |
| “Zero-crossing control” on page 14-44                                  | Enables zero-crossing detection during variable-step simulation of the model. For most models, this speeds up simulation by enabling the solver to take larger time steps.                                                                                     |
| “Time tolerance” on page 14-46                                         | Specify a tolerance factor that controls how closely zero-crossing events must occur to be considered consecutive.                                                                                                                                             |
| “Number of consecutive zero crossings” on page 14-48                   | Specify the number of consecutive zero crossings that can occur before Simulink software displays a warning or an error.                                                                                                                                       |
| “Algorithm” on page 14-50                                              | Specifies the algorithm to detect zero crossings when a variable-step solver is used.                                                                                                                                                                          |
| “Signal threshold” on page 14-52                                       | Specifies the deadband region used during the detection of zero crossings. Signals falling within this region are defined as having crossed through zero.                                                                                                      |
| “Periodic sample time constraint” on page 14-54                        | Select constraints on the sample times defined by this model. If the model does not satisfy the specified constraints during simulation, Simulink software displays an error message.                                                                          |
| “Fixed-step size (fundamental sample time)” on page 14-56              | Specify the step size used by the selected fixed-step solver.                                                                                                                                                                                                  |
| “Sample time properties” on page 14-58                                 | Specify and assign priorities to the sample times that this model implements.                                                                                                                                                                                  |
| “Extrapolation order” on page 14-60                                    | Select the extrapolation order used by the <code>ode14x</code> solver to compute a model's states at the next time step from the states at the current time step.                                                                                              |

| Parameter                                                     | Description                                                                                                                                                                         |
|---------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Number of Newton's iterations" on page 14-62                 | Specify the number of Newton's method iterations used by the <code>ode14x</code> solver to compute a model's states at the next time step from the states at the current time step. |
| "Allow tasks to execute concurrently on target" on page 14-63 | Enable concurrent tasking behavior for model.                                                                                                                                       |
| "Auto scale absolute tolerance" on page 14-65                 | Enable automatic absolute tolerance adaptation                                                                                                                                      |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                                       | Description                                                                     |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------|
| "Enable decoupled continuous integration" on page 2-103         | Removes the coupling between continuous and discrete rates.                     |
| "Enable minimal zero-crossing impact integration" on page 2-104 | Minimizes the impact of zero-crossings on the integration of continuous states. |

## See Also

### Related Examples

- "Solver Selection Criteria"

## Solver Overview

Specify the simulation start and stop time, and the solver configuration for the simulation. Use the Solver pane to set up a solver for a model's active configuration set.

A solver computes a dynamic system's states at successive time steps over a specified time span, using information provided by the model. Once the model compiles, the Solver Information tooltip displays

- Compiled solver name
  - Step size (**Max step size** or **Fixed step size**)

Once the model compiles, the status bar displays the solver used for compiling and a caret (^) when:

- Simulink selects a different solver during compilation.
  - You set the step size to `auto`. The Solver Information tooltip displays the step size that Simulink calculated.

# Configuration

- 1 Select a solver type from the **Type** list.
  - 2 Select a solver from the **Solver** list.
  - 3 Set the parameters displayed for the selected type and solver combination.
  - 4 Apply the changes.

## Tips

- To open the **Solver** pane, in the Simulink Editor, in the **Modeling** tab, click **Model Settings**, then select **Solver**.
  - Simulation time is not the same as clock time. For example, running a simulation for 10 seconds usually does not take 10 seconds. Total simulation time depends on factors such as model complexity, solver step sizes, and computer speed.
  - **Fixed-step** solver type is required for code generation, unless you use an S-function or RSim target.
  - **Variable-step** solver type can significantly shorten the time required to simulate models in which states change rapidly or which contain discontinuities.

### To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



**See Also****Related Examples**

- “Solver Pane” on page 14-2

# Start time

## Description

Specify the start time for the simulation or generated code as a double-precision value, scaled to seconds.

**Category:** Solver

## Settings

**Default:** 0.0

- A start time must be less than or equal to the stop time. For example, use a nonzero start time to delay the start of a simulation while running an initialization script.
- The values of block parameters with initial conditions must match the initial condition settings at the specified start time.
- Simulation time is not the same as clock time. For example, running a simulation for 10 seconds usually does not take 10 seconds. Total simulation time depends on factors such as model complexity, solver step sizes, and computer speed.

## Command-Line Information

**Parameter:** StartTime

**Type:** character vector

**Default:** '0.0'

## See Also

### Related Examples

- “Solver Pane” on page 14-2

## Stop time

### Description

Specify the stop time for the simulation or generated code as a double-precision value, scaled to seconds.

**Category:** Solver

### Settings

**Default:** 10

- Stop time must be greater than or equal to the start time.
- Specify `inf` to run a simulation or generated program until you explicitly pause or stop it.
- If the stop time is the same as the start time, the simulation or generated program runs for one step.
- Simulation time is not the same as clock time. For example, running a simulation for 10 seconds usually does not take 10 seconds. Total simulation time depends on factors such as model complexity, solver step sizes, and computer speed.
- If your model includes blocks that depend on absolute time and you are creating a design that runs indefinitely, see “Blocks That Depend on Absolute Time”.

### Command-Line Information

**Parameter:** `StopTime`

**Type:** character vector

**Value:** any valid value

**Default:** '10.0'

### See Also

#### Related Examples

- “Blocks That Depend on Absolute Time”
- “Use Blocks to Stop or Pause a Simulation”
- “Solver Pane” on page 14-2

## Type

### Description

Select the type of solver you want to use to simulate your model.

**Category:** Solver

### Settings

**Default:** Variable-step

#### Variable-step

Step size varies from step to step, depending on model dynamics. A variable-step solver:

- Reduces step size when model states change rapidly, to maintain accuracy.
- Increases step size when model states change slowly, to avoid unnecessary steps.

Variable-step is recommended for models in which states change rapidly or that contain discontinuities. In these cases, a variable-step solver requires fewer time steps than a fixed-step solver to achieve a comparable level of accuracy. This can significantly shorten simulation time.

#### Fixed-step

Step size remains constant throughout the simulation. You require a fixed-step solver for code generation, unless you use an S-function or RSim target. Typically, lower order solvers are computationally less expensive than higher order solvers. However, they also provide less accuracy.

---

**Note** The solver computes the next time as the sum of the current time and the step size.

---

### Dependencies

Selecting Variable-step enables the following parameters:

- **Solver**
- **Max step size**
- **Min step size**
- **Initial step size**
- **Relative tolerance**
- **Absolute tolerance**
- **Shape preservation**
- **Initial step size**
- **Number of consecutive min steps**
- **Zero-crossing control**
- **Time tolerance**
- **Algorithm**

Selecting **Fixed-step** enables the following parameters:

- **Solver**
- **Periodic sample time constraint**
- **Fixed-step size (fundamental sample time)**
- **Treat each discrete rate as a separate task**
- **Higher priority value indicates higher task priority**
- **Automatically handle rate transitions for data transfers**

## Command-Line Information

**Parameter:** SolverType

**Value:** 'Variable-step' | 'Fixed-step'

**Default:** 'Variable-step'

## See Also

### Related Examples

- “Choose a Solver”
- “Purely Discrete Systems”
- “Solver Pane” on page 14-2

# Solver

## Description

Select the solver you want to use to compute the states of the model during simulation or code generation.

**Category:** Solver

## Settings

Select from these types:

- “Fixed-step Solvers” on page 14-11
- “Variable-step Solvers” on page 14-12

The default setting for new models is `VariableStepAuto`.

### Fixed-step Solvers

**Default:** `FixedStepAuto`

In general, all fixed-step solvers except for `ode 14x` calculate the next step as:

$$X(n+1) = X(n) + h \, dX(n)$$

where  $X$  is the state,  $h$  is the step size, and  $dX$  is the state derivative.  $dX(n)$  is calculated by a particular algorithm using one or more derivative evaluations depending on the order of the method.

`auto`

Computes the state of the model using a fixed-step solver that `auto` solver selects. At the time the model compiles, `auto` changes to a fixed-step solver that `auto` solver selects based on the model dynamics. Click on the solver hyperlink in the lower right corner of the model to accept or change this selection.

`ode3 (Bogacki-Shampine)`

Computes the state of the model at the next time step as an explicit function of the current value of the state and the state derivatives, using the Bogacki-Shampine Formula integration technique to compute the state derivatives.

`Discrete (no continuous states)`

Computes the time of the next time step by adding a fixed step size to the current time.

Use this solver for models with no states or discrete states only, using a fixed step size. Relies on the model's blocks to update discrete states.

The accuracy and length of time of the resulting simulation depends on the size of the steps taken by the simulation: the smaller the step size, the more accurate the results but the longer the simulation takes.

---

**Note** The fixed-step discrete solver cannot be used to simulate models that have continuous states.

---

**ode8 (Dormand-Prince RK8(7))**

Uses the eighth-order Dormand-Prince formula to compute the model state at the next time step as an explicit function of the current value of the state and the state derivatives approximated at intermediate points.

**ode5 (Dormand-Prince)**

Uses the fifth-order Dormand-Prince formula to compute the model state at the next time step as an explicit function of the current value of the state and the state derivatives approximated at intermediate points.

**ode4 (Runge-Kutta)**

Uses the fourth-order Runge-Kutta (RK4) formula to compute the model state at the next time step as an explicit function of the current value of the state and the state derivatives.

**ode2 (Heun)**

Uses the Heun integration method to compute the model state at the next time step as an explicit function of the current value of the state and the state derivatives.

**ode1 (Euler)**

Uses the Euler integration method to compute the model state at the next time step as an explicit function of the current value of the state and the state derivatives. This solver requires fewer computations than a higher order solver. However, it provides comparatively less accuracy.

**ode14x (extrapolation)**

Uses a combination of Newton's method and extrapolation from the current value to compute the model's state at the next time step, as an *implicit* function of the state and the state derivative at the next time step. In the following example,  $X$  is the state,  $dX$  is the state derivative, and  $h$  is the step size:

$$X(n+1) - X(n) - h dX(n+1) = 0$$

This solver requires more computation per step than an explicit solver, but is more accurate for a given step size.

**ode1be (Backward Euler)**

The `ode1be` solver is a Backward Euler type solver that uses a fixed number of Newton iterations, and incurs only a fixed cost. You can use the `ode1be` solver as a computationally inexpensive fixed-step alternative to the `ode14x` solver.

**Variable-step Solvers****Default: VariableStepAuto****auto**

Computes the state of the model using a variable-step solver that auto solver selects. At the time the model compiles, `auto` changes to a variable-step solver that auto solver selects based on the model dynamics. Click on the solver hyperlink in the lower right corner of the model to accept or change this selection.

**ode45 (Dormand-Prince)**

Computes the model's state at the next time step using an explicit Runge-Kutta (4,5) formula (the Dormand-Prince pair) for numerical integration.

`ode45` is a one-step solver, and therefore only needs the solution at the preceding time point.

Use `ode45` as a first try for most problems.

#### `Discrete (no continuous states)`

Computes the time of the next step by adding a step size that varies depending on the rate of change of the model's states.

Use this solver for models with no states or discrete states only, using a variable step size.

#### `ode23 (Bogacki-Shampine)`

Computes the model's state at the next time step using an explicit Runge-Kutta (2,3) formula (the Bogacki-Shampine pair) for numerical integration.

`ode23` is a one-step solver, and therefore only needs the solution at the preceding time point.

`ode23` is more efficient than `ode45` at crude tolerances and in the presence of mild stiffness.

#### `ode113 (Adams)`

Computes the model's state at the next time step using a variable-order Adams-Basforth-Moulton PECE numerical integration technique.

`ode113` is a multistep solver, and thus generally needs the solutions at several preceding time points to compute the current solution.

`ode113` can be more efficient than `ode45` at stringent tolerances.

#### `ode15s (stiff/NDF)`

Computes the model's state at the next time step using variable-order numerical differentiation formulas (NDFs). These are related to, but more efficient than the backward differentiation formulas (BDFs), also known as Gear's method.

`ode15s` is a multistep solver, and thus generally needs the solutions at several preceding time points to compute the current solution.

`ode15s` is efficient for stiff problems. Try this solver if `ode45` fails or is inefficient.

#### `ode23s (stiff/Mod. Rosenbrock)`

Computes the model's state at the next time step using a modified Rosenbrock formula of order 2.

`ode23s` is a one-step solver, and therefore only needs the solution at the preceding time point.

`ode23s` is more efficient than `ode15s` at crude tolerances, and can solve stiff problems for which `ode15s` is ineffective.

#### `ode23t (Mod. stiff/Trapezoidal)`

Computes the model's state at the next time step using an implementation of the trapezoidal rule with a "free" interpolant.

`ode23t` is a one-step solver, and therefore only needs the solution at the preceding time point.

Use `ode23t` if the problem is only moderately stiff and you need a solution with no numerical damping.

#### `ode23tb (stiff/TR-BDF2)`

Computes the model's state at the next time step using a multistep implementation of TR-BDF2, an implicit Runge-Kutta formula with a trapezoidal rule first stage, and a second stage consisting of a backward differentiation formula of order two. By construction, the same iteration matrix is used in evaluating both stages.

`ode23tb` is more efficient than `ode15s` at crude tolerances, and can solve stiff problems for which `ode15s` is ineffective.

#### `odeN` (fixed step with zero crossings)

Uses an  $N^{\text{th}}$  order fixed step integration formula to compute the model state as an explicit function of the current value of the state and the state derivatives approximated at intermediate points.

While the solver itself is a fixed step solver, Simulink will reduce the step size at zero crossings for accuracy.

#### `daessc` (Solver for Simscape™)

Computes the model's state at the next time step by solving systems of differential-algebraic equations resulting from Simscape models. `daessc` provides robust algorithms specifically designed to simulate differential-algebraic equations arising from modeling physical systems.

`daessc` is only available with Simscape products.

## Tips

- Identifying the optimal solver for a model requires experimentation. For an in-depth discussion, see "Solver Selection Criteria".
- The optimal solver balances acceptable accuracy with the shortest simulation time.
- Simulink software uses a discrete solver for a model with no states or discrete states only, even if you specify a continuous solver.
- A smaller step size increases accuracy, but also increases simulation time.
- The degree of computational complexity increases for `oden`, as  $n$  increases.
- As computational complexity increases, the accuracy of the results also increases.

## Dependencies

Selecting the `ode1` (Euler), `ode2` (Huen), `ode 3` (Bogacki-Shampine), `ode4` (Runge-Kutta), `ode 5` (Dormand-Prince), `ode 8` (Dormand Prince RK8(7)) or `Discrete` (no continuous states) fixed-step solvers enables the following parameters:

- **Fixed-step size (fundamental sample time)**
- **Periodic sample time constraint**
- **Treat each discrete rate as a separate task**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**

Selecting `odeN` (fixed step with zero crossings) variable-step solver enables the following parameters:

- **Max step size**
- **Integration method**

Selecting `ode14x` (extrapolation) enables the following parameters:

- **Fixed-step size (fundamental sample time)**

- **Extrapolation order**
- **Number of Newton's iterations**
- **Periodic sample time constraint**
- **Treat each discrete rate as a separate task**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**

Selecting `ode1be` (Backward Euler) enables the following parameters:

- **Fixed-step size (fundamental sample time)**
- **Number of Newton's iterations**
- **Periodic sample time constraint**
- **Treat each discrete rate as a separate task**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**

Selecting the `Discrete` (no continuous states) variable-step solver enables the following parameters:

- **Max step size**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**
- **Zero-crossing control**
- **Time tolerance**
- **Number of consecutive zero crossings**
- **Algorithm**

Selecting `ode45` (Dormand-Prince), `ode23` (Bogacki-Shampine), `ode113` (Adams), or `ode23s` (stiff/Mod. Rosenbrock) enables the following parameters:

- **Max step size**
- **Min step size**
- **Initial step size**
- **Relative tolerance**
- **Absolute tolerance**
- **Shape preservation**
- **Number of consecutive min steps**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**
- **Zero-crossing control**
- **Time tolerance**
- **Number of consecutive zero crossings**
- **Algorithm**

Selecting `ode15s` (stiff/NDF), `ode23t` (Mod. stiff/Trapezoidal), or `ode23tb` (stiff/TR-BDF2) enables the following parameters:

- **Max step size**
- **Min step size**
- **Initial step size**
- **Solver reset method**
- **Number of consecutive min steps**
- **Relative tolerance**
- **Absolute tolerance**
- **Shape preservation**
- **Maximum order**
- **Automatically handle rate transition for data transfers**
- **Higher priority value indicates higher task priority**
- **Zero-crossing control**
- **Time tolerance**
- **Number of consecutive zero crossings**
- **Algorithm**

## Command-Line Information

**Parameter:** `SolverName` or `Solver`

**Value:** `'VariableStepAuto'` | `'VariableStepDiscrete'` | `'ode45'` | `'ode23'` | `'ode113'` | `'ode15s'` | `'ode23s'` | `'ode23t'` | `'ode23tb'` | `'daessc'` | `'FixedStepAuto'` | `'FixedStepDiscrete'` | `'ode8'` | `'ode5'` | `'ode4'` | `'ode3'` | `'ode2'` | `'ode1'` | `'ode14x'`

**Default:** `'VariableStepAuto'`

## See Also

### Related Examples

- “Compare Solvers”
- “Solver Selection Criteria”
- “Purely Discrete Systems”
- “Solver Pane” on page 14-2

# Max step size

## Description

Specify the largest time step that the solver can take.

**Category:** Solver

## Settings

**Default:** auto

- For the discrete solver, the default value (auto) is the model's shortest sample time.
- For continuous solvers, the default value (auto) is determined from the start and stop times. If the stop time equals the start time or is `inf`, Simulink chooses 0.2 seconds as the maximum step size. Otherwise, it sets the maximum step size to

$$h_{\max} = \frac{t_{\text{stop}} - t_{\text{start}}}{50}$$

- For Sine and Signal Generator source blocks, Simulink calculates the max step size using this heuristic:

$$h_{\max} = \min\left(\frac{t_{\text{stop}} - t_{\text{start}}}{50}, \left(\frac{1}{3}\right)\left(\frac{1}{F_{\max}}\right)\right)$$

where  $F_{\max}$  is the maximum frequency (Hz) of these blocks in the model.

## Tips

- Generally, the default maximum step size is sufficient. If you are concerned about the solver missing significant behavior, change the parameter to prevent the solver from taking too large a step.
- Max step size determines the step size of the variable-step solver.
- If the time span of the simulation is very long, the default step size might be too large for the solver to find the solution.
- If your model contains periodic or nearly periodic behavior and you know the period, set the maximum step size to some fraction (such as 1/4) of that period.
- In general, for more output points, change the refine factor, not the maximum step size.

## Dependencies

This parameter is enabled only if the solver **Type** is set to **Variable-step**.

## Command-Line Information

**Parameter:** `MaxStep`

**Type:** character vector

**Value:** any valid value

**Default:** 'auto'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Purely Discrete Systems”
- “Solver Pane” on page 14-2

# Initial step size

## Description

Specify the size of the first time step that the solver takes.

**Category:** Solver

## Settings

**Default:** auto

By default, the solver selects an initial step size by examining the derivatives of the states at the start time.

## Tips

- Be careful when increasing the initial step size. If the first step size is too large, the solver might step over important behavior.
- The initial step size parameter is a *suggested* first step size. The solver tries this step size but reduces it if error criteria are not satisfied.

## Dependencies

This parameter is enabled only if the solver **Type** is set to Variable-step.

## Command-Line Information

**Parameter:** InitialStep

**Type:** character vector

**Value:** any valid value

**Default:** 'auto'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

## Related Examples

- “Purely Discrete Systems”
- “Improve Simulation Performance Using Performance Advisor”

- “Solver Pane” on page 14-2

## Min step size

### Description

Specify the smallest time step that the solver can take.

**Category:** Solver

### Settings

**Default:** auto

- The default value (auto) sets an unlimited number of warnings and a minimum step size on the order of machine precision.
- You can specify either a real number greater than zero, or a two-element vector for which the first element is the minimum step size and the second element is the maximum number of minimum step size warnings before an error was issued.

### Tips

- If the solver takes a smaller step to meet error tolerances, it issues a warning indicating the current effective relative tolerance.
- Setting the second element to zero results in an error the first time the solver must take a step smaller than the specified minimum. This is equivalent to changing the **Min step size violation** diagnostic to **error** on the **Diagnostics** pane (see “Min step size violation” on page 9-12).
- Setting the second element to -1 results in an unlimited number of warnings. This is also the default if the input is a scalar.
- Min step size determines the step size of the variable step ODE solver. The size is limited by the smallest discrete sample time in the model.

### Dependencies

This parameter is enabled only if the solver **Type** is set to **Variable-step**.

### Command-Line Information

**Parameter:** MinStep

**Type:** character vector

**Value:** any valid value

**Default:** 'auto'

### Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |
| Efficiency   | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Safety precaution | No impact |

## See Also

### Related Examples

- “Purely Discrete Systems”
- “Min step size violation” on page 9-12
- “Solver Pane” on page 14-2

# Relative tolerance

## Description

Specify the largest acceptable solver error, relative to the size of each state during each time step. If the relative error exceeds this tolerance, the solver reduces the time step size.

**Category:** Solver

## Settings

**Default:** 1e-3

- Setting the relative tolerance to `auto` is actually the default value of 1e-3.
- The relative tolerance is a percentage of the state's value.
- The default value (1e-3) means that the computed state is accurate to within 0.1%.

## Tips

- The acceptable error at each time step is a function of both the **Relative tolerance** and the **Absolute tolerance**. For more information about how these settings work together, see "Error Tolerances for Variable-Step Solvers".
- During each time step, the solver computes the state values at the end of the step and also determines the local error - the estimated error of these state values. If the error is greater than the acceptable error for any state, the solver reduces the step size and tries again.
- The default relative tolerance value is sufficient for most applications. Decreasing the relative tolerance value can slow down the simulation.
- To check the accuracy of a simulation after you run it, you can reduce the relative tolerance to 1e-4 and run it again. If the results of the two simulations are not significantly different, you can feel confident that the solution has converged.

## Dependencies

This parameter is enabled only if you set:

- Solver **Type** to `Variable-step`.
- **Solver** to a continuous variable-step solver.

This parameter works along with **Absolute tolerance** to determine the acceptable error at each time step. For more information about how these settings work together, see "Error Tolerances for Variable-Step Solvers".

## Command-Line Information

**Parameter:** `RelTol`

**Type:** character vector

**Value:** any valid value

**Default:** '`1e-3`'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Error Tolerances for Variable-Step Solvers”
- “Improve Simulation Performance Using Performance Advisor”
- “Solver Pane” on page 14-2

# Absolute tolerance

## Description

Specify the largest acceptable solver error, as the value of the measured state approaches zero. If the absolute error exceeds this tolerance, the solver reduces the time step size.

**Category:** Solver

## Settings

**Default:** auto

- The default value (auto) initially sets the absolute tolerance for each state based on the relative tolerance alone. If the relative tolerance is larger than 1e-3, then the initial absolute tolerance is set to 1e-6. However, for relative tolerances smaller than 1e-3, the absolute tolerance for the state is initialized to `reltol * 1e-3`. As the simulation progresses, the absolute tolerance for each state is reset to the maximum value that the state has reached until that point, times the relative tolerance for that state.

For example, if a state goes from 0 to 1 and the **Relative tolerance** is 1e-4, then the **Absolute tolerance** is initialized at 1e-7 and by the end of the simulation, the **Absolute tolerance** reaches 1e-4.

If, on the other hand, the **Relative tolerance** is set to 1e-3, the **Absolute tolerance** is set to 1e-6 and by the end of the simulation, reaches 1e-3.

- If the computed setting is not suitable, you can determine an appropriate setting yourself.
- If you do set your own value for **Absolute tolerance**, you can also select whether it adapts based on the value of the states by toggling the `AutoScaleAbsTol` parameter. For more information, see "Auto scale absolute tolerance" on page 14-65.

## Tips

- The acceptable error at each time step is a function of both the **Relative tolerance** and the **Absolute tolerance**. For more information about how these settings work together, see "Error Tolerances for Variable-Step Solvers".
- The Integrator, Second-Order Integrator, Variable Transport Delay, Transfer Fcn, State-Space, and Zero-Pole blocks allow you to specify absolute tolerance values for solving the model states that they compute or that determine their output. The absolute tolerance values that you specify in these blocks override the global setting in the Configuration Parameters dialog box.
- You might want to override the **Absolute tolerance** setting using blocks if the global setting does not provide sufficient error control for all your model states, for example, if they vary widely in magnitude.
- If you set the **Absolute tolerance** too low, the solver might take too many steps around near-zero state values, and thus slow the simulation.
- To check the accuracy of a simulation after you run it, you can reduce the absolute tolerance and run it again. If the results of the two simulations are not significantly different, you can feel confident that the solution has converged.

- If your simulation results do not seem accurate, and your model has states whose values approach zero, the **Absolute tolerance** may be too large. Reduce the **Absolute tolerance** to force the simulation to take more steps around areas of near-zero state values.

## Dependencies

This parameter is enabled only if you set:

- Solver **Type** to Variable-step.
- **Solver** to a continuous variable-step solver.

This parameter works along with **Relative tolerance** to determine the acceptable error at each time step. For more information about how these settings work together, see “Error Tolerances for Variable-Step Solvers”.

## Command-Line Information for Configuration Parameters

**Parameter:** AbsTol

**Type:** character vector | numeric value

**Value:** 'auto' | positive real scalar

**Default:** 'auto'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Error Tolerances for Variable-Step Solvers”
- “Improve Simulation Performance Using Performance Advisor”
- “Solver Pane” on page 14-2

# Shape preservation

## Description

At each time step use derivative information to improve integration accuracy.

**Category:** Solver

## Settings

**Default:** Disable all

**Disable all**

Do not perform Shape preservation on any signals.

**Enable all**

Perform Shape preservation on all signals.

## Tips

- The default setting (Disable all) usually provides good accuracy for most models.
- Setting to Enable all will increase accuracy in those models having signals whose derivative exhibits a high rate of change, but simulation time may be increased.

## Dependencies

This parameter is enabled only if you use a continuous-step solver.

## Command-Line Information

**Parameter:** ShapePreserveControl

**Value:** 'EnableAll' | 'DisableAll'

**Default:** 'DisableAll'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”

- “Solver Pane” on page 14-2

# Maximum order

## Description

Select the order of the numerical differentiation formulas (NDFs) used in the `ode15s` solver.

**Category:** Solver

## Settings

**Default:** 5

5

Specifies that the solver uses fifth order NDFs.

1

Specifies that the solver uses first order NDFs.

2

Specifies that the solver uses second order NDFs.

3

Specifies that the solver uses third order NDFs.

4

Specifies that the solver uses fourth order NDFs.

## Tips

- Although the higher order formulas are more accurate, they are less stable.
- If your model is stiff and requires more stability, reduce the maximum order to 2 (the highest order for which the NDF formula is A-stable).
- As an alternative, you can try using the `ode23s` solver, which is a lower order (and A-stable) solver.

## Dependencies

This parameter is enabled only if **Solver** is set to `ode15s`.

## Command-Line Information

**Parameter:** MaxOrder

**Type:** integer

**Value:** 1 | 2 | 3 | 4 | 5

**Default:** 5

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Error Tolerances for Variable-Step Solvers”
- “Improve Simulation Performance Using Performance Advisor”
- “Solver Pane” on page 14-2

# Solver reset method

## Description

Select how the solver behaves during a reset, such as when it detects a zero crossing.

**Category:** Solver

## Settings

**Default:** Fast

**Fast**

Specifies that the solver will not recompute the Jacobian matrix at a solver reset.

**Robust**

Specifies that the solver will recompute the Jacobian matrix needed by the integration step at every solver reset.

## Tips

- Selecting **Fast** speeds up the simulation. However, it can result in incorrect solutions in some cases.
- If you suspect that the simulation is giving incorrect results, try the **Robust** setting. If there is no difference in simulation results between the fast and robust settings, revert to the fast setting.

## Dependencies

This parameter is enabled only if you select one of the following solvers:

- `ode15s` (Stiff/NDF)
- `ode23t` (Mod. Stiff/Trapezoidal)
- `ode23tb` (Stiff/TR-BDF2)

## Command-Line Information

**Parameter:** SolverResetMethod

**Value:** 'Fast' | 'Robust'

**Default:** 'Fast'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Choose a Solver”
- “Solver Pane” on page 14-2

# Number of consecutive min steps

## Description

Specify the maximum number of consecutive minimum step size violations allowed during simulation.

**Category:** Solver

## Settings

**Default:** 1

- A minimum step size violation occurs when a variable-step continuous solver takes a smaller step than that specified by the **Min step size** property (see “Min step size” on page 14-21).
- Simulink software counts the number of consecutive violations that it detects. If the count exceeds the value of **Number of consecutive min steps**, Simulink software displays either a warning or error message as specified by the **Min step size violation** diagnostic (see “Min step size violation” on page 9-12).

## Dependencies

This parameter is enabled only if you set:

- Solver **Type** to **Variable-step**.
- **Solver** to a continuous variable step solver.

## Command-Line Information

**Parameter:** MaxConsecutiveMinStep

**Type:** character vector

**Value:** any valid value

**Default:** '1'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

## Related Examples

- “Choose a Solver”
- “Min step size violation” on page 9-12

- “Min step size” on page 14-21
- “Solver Pane” on page 14-2

# Solver Jacobian Method

## Description

**Category:** Solver

## Settings

**Default:** Auto

auto

Sparse perturbation

Full perturbation

Sparse analytical

Full analytical

## Tips

- The default setting (Auto) usually provides good accuracy for most models.

## Dependencies

This parameter is enabled only if an implicit solver is used.

## Command-Line Information

**Parameter:** SolverJacobianMethodControl

**Value:** 'auto' | 'SparsePerturbation'|'FullPerturbation' | 'SparseAnalytical' |'FullAnalytical'

**Default:** 'auto'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Choose a Solver”

- “Solver Pane” on page 14-2

# Treat each discrete rate as a separate task

## Description

Specify whether Simulink executes blocks with periodic sample times individually or in groups.

**Category:** Solver

## Settings

**Default:** Off



On

Selects multitasking execution for models operating at different sample rates. Specifies that groups of blocks with the same execution priority are processed through each stage of simulation (for example, calculating output and updating discrete states) based on task priority. The multitasking mode helps to create valid models of real-world multitasking systems, where sections of your model represent concurrent tasks.



Off

Specifies that all blocks are processed through each stage of simulation together (for example, calculating output and updating discrete states). Use single-tasking execution if:

- Your model contains one sample time.
- Your model contains a continuous and a discrete sample time, and the fixed-step size is equal to the discrete sample time.

## Tips

- A multirate model with multitasking mode enabled cannot reference another multirate model that has the single-tasking mode enabled.
- The **Single task rate transition** and **Multitask rate transition** parameters on the **Diagnostics > Sample Time** pane allow you to adjust error checking for sample rate transitions between blocks that operate at different sample rates.

## Dependency

This parameter is enabled by selecting the Fixed-step solver type.

## Command-Line Information

**Parameter:** EnableMultiTasking

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application       | Setting                                                                              |
|-------------------|--------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                            |
| Traceability      | No impact for simulation or during development<br>Off for production code generation |
| Efficiency        | No impact                                                                            |
| Safety precaution | No recommendation                                                                    |

## See Also

Rate Transition

## Related Examples

- “Time-Based Scheduling” (Simulink Coder)
- “Model Execution and Rate Transitions” (Simulink Coder)
- “Handle Rate Transitions” (Simulink Coder)
- “Solver Pane” on page 14-2

# Automatically handle rate transition for data transfer

## Description

Specify whether Simulink software automatically inserts hidden Rate Transition blocks between blocks that have different sample rates to ensure: the integrity of data transfers between tasks; and optional determinism of data transfers for periodic tasks.

**Category:** Solver

## Settings

**Default:** Off



On

Inserts hidden Rate Transition blocks between blocks when rate transitions are detected. Handles rate transitions for asynchronous and periodic tasks. Simulink software adds the hidden blocks configured to ensure data integrity for data transfers. Selecting this option also enables the parameter **Deterministic data transfer**, which allows you to control the level of data transfer determinism for periodic tasks.



Off

Does not insert hidden Rate Transition blocks when rate transitions are detected. If Simulink software detects invalid transitions, you must adjust the model such that the sample rates for the blocks in question match or manually add a Rate Transition block.

See “Rate Transition Block Options” (Simulink Coder) for further details.

## Tips

- Selecting this parameter allows you to handle rate transition issues automatically. This saves you from having to manually insert Rate Transition blocks to avoid invalid rate transitions, including invalid asynchronous-to-periodic and asynchronous-to-asynchronous rate transitions, in multirate models.
- For asynchronous tasks, Simulink software configures the inserted blocks to ensure data integrity but not determinism during data transfers.

## Command-Line Information

**Parameter:** AutoInsertRateTranBlk

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting                                                                              |
|-------------------|--------------------------------------------------------------------------------------|
| Traceability      | No impact for simulation or during development<br>Off for production code generation |
| Efficiency        | No impact                                                                            |
| Safety precaution | No recommendation                                                                    |

## See Also

### Related Examples

- “Rate Transition Block Options” (Simulink Coder)
- “Solver Pane” on page 14-2

# Deterministic data transfer

## Description

Control whether the Rate Transition block parameter **Ensure deterministic data transfer (maximum delay)** is set for auto-inserted Rate Transition blocks

**Default:** Whenever possible

**Always**

Specifies that the block parameter **Ensure deterministic data transfer (maximum delay)** is always set for auto-inserted Rate Transition blocks.

If **Always** is selected and if a model needs to auto-insert a Rate Transition block to handle a rate transition that is *not* between two periodic sample times related by an integer multiple, Simulink errors out.

**Whenever possible**

Specifies that the block parameter **Ensure deterministic data transfer (maximum delay)** is set for auto-inserted Rate Transition blocks whenever possible. If an auto-inserted Rate Transition block handles data transfer between two periodic sample times that are related by an integer multiple, **Ensure deterministic data transfer (maximum delay)** is set; otherwise, it is cleared.

**Never (minimum delay)**

Specifies that the block parameter **Ensure deterministic data transfer (maximum delay)** is never set for auto-inserted Rate Transition blocks.

---

**Note** Clearing the Rate Transition block parameter **Ensure deterministic data transfer (maximum delay)** can provide reduced latency for models that do not require determinism. See the description of **Ensure deterministic data transfer (maximum delay)** on the Rate Transition block reference page for more information.

---

**Category:** Solver

## Dependencies

This parameter is enabled only if **Automatically handle rate transition for data transfer** is checked.

## Command-Line Information

**Parameter:** InsertRTBMode

**Value:** 'Always' | 'Whenever possible'| 'Never (minimum delay)'

**Default:** 'Whenever possible'

## Recommended Settings

| Application       | Setting           |
|-------------------|-------------------|
| Debugging         | No impact         |
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Rate Transition Block Options” (Simulink Coder)
- “Solver Pane” on page 14-2

# Higher priority value indicates higher task priority

## Description

Specify whether the real-time system targeted by the model assigns higher or lower priority values to higher priority tasks when implementing asynchronous data transfers

**Category:** Solver

## Settings

**Default:** Off



On

Real-time system assigns higher priority values to higher priority tasks, for example, 8 has a higher task priority than 4. Rate Transition blocks treat asynchronous transitions between rates with lower priority values and rates with higher priority values as low-to-high rate transitions.



Off

Real-time system assigns lower priority values to higher priority tasks, for example, 4 has a higher task priority than 8. Rate Transition blocks treat asynchronous transitions between rates with lower priority values and rates with higher priority values as high-to-low rate transitions.

## Command-Line Information

**Parameter:** PositivePriorityOrder

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Rate Transitions and Asynchronous Blocks” (Simulink Coder)
- “Solver Pane” on page 14-2

## Zero-crossing control

### Description

Enables zero-crossing detection during variable-step simulation of the model. For most models, this speeds up simulation by enabling the solver to take larger time steps.

**Category:** Solver

### Settings

**Default:** Use local settings

**Use local settings**

Specifies that zero-crossing detection be enabled on a block-by-block basis. For a list of applicable blocks, see "Simulation Phases in Dynamic Systems"

To specify zero-crossing detection for one of these blocks, open the block's parameter dialog box and select the **Enable zero-crossing detection** option.

**Enable all**

Enables zero-crossing detection for all blocks in the model.

**Disable all**

Disables zero-crossing detection for all blocks in the model.

### Tips

- For most models, enabling zero-crossing detection speeds up simulation by allowing the solver to take larger time steps.
- If a model has extreme dynamic changes, disabling this option can speed up the simulation but can also decrease the accuracy of simulation results. See "Zero-Crossing Detection" for more information.
- Selecting **Enable all** or **Disable all** overrides the local zero-crossing detection setting for individual blocks.

### Dependencies

This parameter is enabled only if the solver **Type** is set to **Variable-step**.

Selecting either **Use local settings** or **Enable all** enables the following parameters:

- Time tolerance**
- Number of consecutive zero crossings**
- Algorithm**

### Command-Line Information

**Parameter:** ZeroCrossControl

**Value:** 'UseLocalSettings' | 'EnableAll' | 'DisableAll'

**Default:** 'UseLocalSettings'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Number of consecutive zero crossings” on page 14-48
- “Consecutive zero-crossings violation” on page 9-14
- “Time tolerance” on page 14-46
- “Solver Pane” on page 14-2

## Time tolerance

### Description


Specify a tolerance factor that controls how closely zero-crossing events must occur to be considered consecutive.

**Category:** Solver

### Settings

**Default:**  $10*128*eps$

- Simulink software defines zero crossings as consecutive if the time between events is less than a particular interval. The following figure depicts a simulation timeline during which Simulink software detects zero crossings  $ZC_1$  and  $ZC_2$ , bracketed at successive time steps  $t_1$  and  $t_2$ .

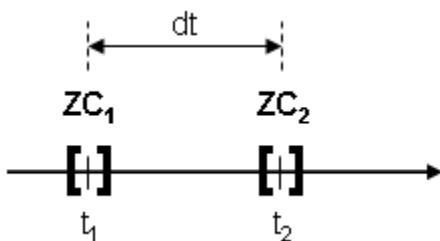

Simulink software determines that the zero crossings are consecutive if

$$dt < \text{RelTolZC} * t_2$$

where  $dt$  is the time between zero crossings and  $\text{RelTolZC}$  is the **Time tolerance**.

- Simulink software counts the number of consecutive zero crossings that it detects. If the count exceeds the value of **Number of consecutive zero crossings** allowed, Simulink software displays either a warning or error as specified by the **Consecutive zero-crossings violation** diagnostic (see “Consecutive zero-crossings violation” on page 9-14).

### Tips

- Simulink software resets the counter each time it detects nonconsecutive zero crossings (successive zero crossings that fail to meet the relative tolerance setting); therefore, decreasing the relative tolerance value may afford your model's behavior more time to recover.
- If your model experiences excessive zero crossings, you can also increase the **Number of consecutive zero crossings** to increase the threshold at which Simulink software triggers the **Consecutive zero-crossings violation** diagnostic.

### Dependencies

This parameter is enabled only if **Zero-crossing control** is set to either **Use local settings** or **Enable all**.

## Command-Line Information

**Parameter:** ConsecutiveZCsStepRelTol

**Type:** character vector

**Value:** any valid value

**Default:** '10\*128\*eps'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Number of consecutive zero crossings” on page 14-48
- “Zero-crossing control” on page 14-44
- “Consecutive zero-crossings violation” on page 9-14
- “Solver Pane” on page 14-2

## Number of consecutive zero crossings

### Description

Specify the number of consecutive zero crossings that can occur before Simulink software displays a warning or an error.

**Category:** Solver

### Settings

**Default:** 1000

- Simulink software counts the number of consecutive zero crossings that it detects. If the count exceeds the specified value, Simulink software displays either a warning or an error as specified by the **Consecutive zero-crossings violation** diagnostic (see “Consecutive zero-crossings violation” on page 9-14).
- Simulink software defines zero crossings as consecutive if the time between events is less than a particular interval (see “Time tolerance” on page 14-46).

### Tips

- If your model experiences excessive zero crossings, you can increase this parameter to increase the threshold at which Simulink software triggers the **Consecutive zero-crossings violation** diagnostic. This may afford your model's behavior more time to recover.
- Simulink software resets the counter each time it detects nonconsecutive zero crossings; therefore, decreasing the relative tolerance value may also afford your model's behavior more time to recover.

### Dependencies

This parameter is enabled only if **Zero-crossing control** is set to either `Use local settings` or `Enable all`.

### Command-Line Information

**Parameter:** `MaxConsecutiveZCs`

**Type:** character vector

**Value:** any valid value

**Default:** '`1000`'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Zero-crossing control” on page 14-44
- “Consecutive zero-crossings violation” on page 9-14
- “Time tolerance” on page 14-46
- “Solver Pane” on page 14-2

# Algorithm

## Description

Specifies the algorithm to detect zero crossings when a variable-step solver is used.

**Category:** Solver

## Settings

**Default:** Nonadaptive

**Adaptive**

Use an improved zero-crossing algorithm which dynamically activates and deactivates zero-crossing bracketing. With this algorithm you can set a zero-crossing tolerance. See “Signal threshold” on page 14-52 to learn how to set the zero-crossing tolerance.

**Nonadaptive**

Use the nonadaptive zero-crossing algorithm present in the Simulink software prior to Version 7.0 (R2008a). This option detects zero-crossings accurately, but might cause longer simulation run times for systems with strong “chattering” or Zeno behavior.

## Tips

- The adaptive zero-crossing algorithm is especially useful in systems having strong “chattering”, or Zeno behavior. In such systems, this algorithm yields shorter simulation run times compared to the nonadaptive algorithm. See “Zero-Crossing Detection” for more information.

## Dependencies

- This parameter is enabled only if the solver **Type** is set to **Variable-step**.
- Selecting **Adaptive** enables the **Signal threshold** parameter.

## Command-Line Information

**Parameter:** ZeroCrossAlgorithm

**Value:** 'Nonadaptive' | 'Adaptive'

**Default:** 'Nonadaptive'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Zero-crossing control” on page 14-44
- “Consecutive zero-crossings violation” on page 9-14
- “Time tolerance” on page 14-46
- “Number of consecutive zero crossings” on page 14-48
- “Solver Pane” on page 14-2

## Signal threshold

### Description

Specifies the deadband region used during the detection of zero crossings. Signals falling within this region are defined as having crossed through zero.

The signal threshold is a real number, greater than or equal to zero.

**Category:** Solver

### Settings

**Default:** auto

- By default, the zero-crossing signal threshold is determined automatically by the adaptive algorithm.
- You can also specify a value for the signal threshold. The value must be a real number equal to or greater than zero.

### Tips

- Entering too small of a value for the **Signal Threshold** parameter will result in long simulation run times.
- Entering a large **Signal Threshold** value may improve the simulation speed (especially in systems having extensive chattering). However, making the value too large may reduce the simulation accuracy.

### Dependency

This parameter is enabled if the zero-crossing **Algorithm** is set to Adaptive.

### Command-Line Information

**Parameter:** ZCThreshold

**Value:** 'auto' | any real number greater than or equal to zero

**Default:** 'auto'

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Zero-Crossing Detection”
- “Zero-crossing control” on page 14-44
- “Consecutive zero-crossings violation” on page 9-14
- “Time tolerance” on page 14-46
- “Number of consecutive zero crossings” on page 14-48
- “Solver Pane” on page 14-2

## Periodic sample time constraint

### Description

Select constraints on the sample times defined by this model. If the model does not satisfy the specified constraints during simulation, Simulink software displays an error message.

**Category:** Solver

### Settings

**Default:** Unconstrained

#### Unconstrained

Specifies no constraints. Selecting this option causes Simulink software to display a field for entering the solver step size.

Use the **Fixed-step size (fundamental sample time)** option to specify solver step size.

#### Ensure sample time independent

Specifies that Model blocks inherit sample time from the context in which they are used. You cannot use a referenced model that has intrinsic sample times in a triggered subsystem or iterator subsystem. If you plan on referencing this model in a triggered or iterator subsystem, you should select **Ensure sample time independent** so that Simulink can detect sample time problems while unit testing this model.

- “Referenced Model Sample Times”
- “S-Functions That Specify Sample Time Inheritance Rules” (Simulink Coder)
- “Modify Referenced Models for Conditional Execution”

Simulink software checks to ensure that this model can inherit its sample times from a model that references it without altering its behavior. Models that specify a step size (i.e., a base sample time) cannot satisfy this constraint. For this reason, selecting this option causes Simulink software to hide the group's step size field (see “Fixed-step size (fundamental sample time)” on page 14-56).

#### Specified

Specifies that Simulink software check to ensure that this model operates at a specified set of prioritized periodic sample times. Use the **Sample time properties** option to specify and assign priorities to model sample times.

“Execute Multitasking Models” (Simulink Coder) explains how to use this option for multitasking models.

### Tips

During simulation, Simulink software checks to ensure that the model satisfies the constraints. If the model does not satisfy the specified constraint, then Simulink software displays an error message.

## Dependencies

This parameter is enabled only if the solver **Type** is set to **Fixed-step**.

Selecting **Unconstrained** enables the following parameters:

- **Fixed-step size (fundamental sample time)**
- **Treat each discrete rate as a separate task**
- **Higher priority value indicates higher task priority**
- **Automatically handle rate transitions for data transfers**

Selecting **Specified** enables the following parameters:

- **Sample time properties**
- **Treat each discrete rate as a separate task**
- **Higher priority value indicates higher task priority**
- **Automatically handle rate transitions for data transfers**

## Command-Line Information

**Parameter:** SampleTimeConstraint

**Value:** 'unconstrained' | 'STIndependent' | 'Specified'

**Default:** 'unconstrained'

## Recommended Settings

| Application       | Setting                                                               |
|-------------------|-----------------------------------------------------------------------|
| Debugging         | Update optimize using the specified minimum and maximum values to Off |
| Traceability      | No impact                                                             |
| Efficiency        | No impact                                                             |
| Safety precaution | No impact                                                             |

## See Also

### Related Examples

- “Referenced Model Sample Times”
- “S-Functions That Specify Sample Time Inheritance Rules” (Simulink Coder)
- “Modify Referenced Models for Conditional Execution”
- “Function-Call Models”
- “Fixed-step size (fundamental sample time)” on page 14-56
- “Execute Multitasking Models” (Simulink Coder)
- “Solver Pane” on page 14-2

## Fixed-step size (fundamental sample time)

### Description

Specify the step size used by the selected fixed-step solver.

**Category:** Solver

### Settings

**Default:** auto

- Entering **auto** (the default) in this field causes Simulink to choose the step size.
- If the model specifies one or more periodic sample times, Simulink chooses a step size equal to the greatest common divisor of the specified sample times. This step size, known as the fundamental sample time of the model, ensures that the solver will take a step at every sample time defined by the model.
- If the model does not define any periodic sample times, Simulink chooses a step size that divides the total simulation time into 50 equal steps.
- If the model specifies no periodic rates and the stop time is **Inf**, Simulink uses 0.2 as the step size. Otherwise, it sets the fixed-step size to

$$h_{\max} = \frac{t_{\text{stop}} - t_{\text{start}}}{50}$$

- For Sine and Signal Generator source blocks, if the stop time is **Inf**, Simulink calculates the step size using this heuristic:
$$h_{\max} = \min\left(0.2, \left(\frac{1}{3}\right)\left(\frac{1}{F_{\max}}\right)\right)$$
Otherwise, the step size is:

$$h_{\max} = \min\left(\frac{t_{\text{stop}} - t_{\text{start}}}{50}, \left(\frac{1}{3}\right)\left(\frac{1}{F_{\max}}\right)\right)$$

where  $F_{\max}$  is the maximum frequency (Hz) of these blocks in the model.

### Dependencies

This parameter is enabled only if the **Periodic sample time constraint** is set to **Unconstrained**.

### Command-Line Information

**Parameter:** FixedStep

**Type:** character vector

**Value:** any valid value

**Default:** 'auto'

### Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Solver Pane” on page 14-2

## Sample time properties

### Description

Specify and assign priorities to the sample times that this model implements.

**Category:** Solver

### Settings

#### No Default

- Enter an Nx3 matrix with rows that specify the model's discrete sample time properties in order from fastest rate to slowest rate.
- Faster sample times must have higher priorities.

#### Format

[period, offset, priority]

period            The time interval (sample rate) at which updates occur during the simulation.

offset            A time interval indicating an update delay. The block is updated later in the sample interval than other blocks operating at the same sample rate.

priority          Execution priority of the real-time task associated with the sample rate.

See "Specify Sample Time" for more details and options for specifying sample time.

#### Example

`[[0.1, 0, 10]; [0.2, 0, 11]; [0.3, 0, 12]]`

- Declares that the model should specify three sample times.
- Sets the fundamental sample time period to 0.1 second.
- Assigns priorities of 10, 11, and 12 to the sample times.
- Assumes higher priority values indicate lower priorities — the **Higher priority value indicates higher task priority** option is not selected.

### Tips

- If the model's fundamental rate differs from the fastest rate specified by the model, specify the fundamental rate as the first entry in the matrix followed by the specified rates, in order from fastest to slowest. See "Purely Discrete Systems".
- If the model operates at one rate, enter the rate as a three-element vector in this field — for example, [0.1, 0, 10].
- When you update a model, Simulink software displays an error message if what you specify does not match the sample times defined by the model.
- If **Periodic sample time constraint** is set to **Unconstrained**, Simulink software assigns priority 40 to the model base sample rate. If **Higher priority value indicates higher task priority** is selected, Simulink software assigns priorities 39, 38, 37, and so on, to subrates of the base rate. Otherwise, it assigns priorities 41, 42, 43, and so on, to the subrates.

- Continuous rate is assigned a higher priority than is the discrete base rate regardless of whether **Periodic sample time constraint** is Specified or Unconstrained.

## Dependencies

This parameter is enabled by selecting Specified from the **Periodic sample time constraint** list.

## Command-Line Information

**Parameter:** SampleTimeProperty

**Type:** structure

**Value:** any valid matrix

**Default:** [ ]

---

**Note** If you specify SampleTimeProperty at the command line, you must enter the sample time properties as a structure with the following fields:

- SampleTime
  - Offset
  - Priority
- 

## See Also

## Related Examples

- “Purely Discrete Systems”
- “Specify Sample Time”
- “Solver Pane” on page 14-2

## Extrapolation order

### Description

Select the extrapolation order used by the `ode14x` solver to compute a model's states at the next time step from the states at the current time step.

**Category:** Solver

### Settings

**Default:** 4

1

Specifies first order extrapolation.

2

Specifies second order extrapolation.

3

Specifies third order extrapolation.

4

Specifies fourth order extrapolation.

### Tip

Selecting a higher order produces a more accurate solution, but is more computationally intensive per step size.

### Dependencies

This parameter is enabled by selecting `ode14x` (extrapolation) from the **Solver** list.

### Command-Line Information

**Parameter:** `ExtrapolationOrder`

**Type:** integer

**Value:** 1 | 2 | 3 | 4

**Default:** 4

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Fixed Step Solvers in Simulink”
- “Solver Pane” on page 14-2

## Number of Newton's iterations

### Description

Specify the number of Newton's method iterations used by the `ode14x` and `ode1be` solvers to compute a model's states at the next time step from the states at the current time step.

**Category:** Solver

### Settings

**Default:** 1

**Minimum:** 1

**Maximum:** 2147483647

More iterations produce a more accurate solution, but are more computationally intensive per step size.

### Dependencies

This parameter is enabled by selecting any of the following solvers from the **Solver** list:

- `ode14x` (extrapolation)
- `ode1be` (Backward Euler)

### Command-Line Information

**Parameter:** `NumberNewtonIterations`

**Type:** integer

**Value:** any valid number

**Default:** 1

### Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

### See Also

#### Related Examples

- “Fixed Step Solvers in Simulink”
- “Purely Discrete Systems”
- “Solver Pane” on page 14-2

# Allow tasks to execute concurrently on target

## Description

Enable concurrent tasking behavior for model.

**Category:** Solver

## Settings

**Default:** On



On

Enable the model to be configured for concurrent tasking.



Off

Disable the model from being configured for concurrent tasking.

## Tip

- If the referenced model has a single rate, you do not need to select this check box to enable concurrent tasking behavior.

## Dependencies

This option is visible only if the **Solver Type** is set to Fixed Step and the **Periodic sample time constraint** is set to Unconstrained. You can toggle it in the **Additional Parameters** section of the Solver Configuration Settings.

- When you select this parameter check box, clicking the **Configure Tasks** button displays the Concurrent Execution dialog.
- If you clear this parameter check box, these parameters are enabled:
  - Periodic sample time constraint**
  - Treat each discrete rate as a separate task**
  - Automatically handle rate transition for data transfer**
  - Higher priority value indicates higher task priority**

## Command-Line Information

**Parameter:** ConcurrentTasks

**Value:** 'on' | 'off'

**Default:** 'on'

## Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| Application       | Setting           |
|-------------------|-------------------|
| Traceability      | No impact         |
| Efficiency        | No impact         |
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Concurrent Execution Window: Main Pane” on page 20-2
- “Solver Pane” on page 14-2

# Auto scale absolute tolerance

## Description

Allow the solver to dynamically adjust the absolute tolerance value for each state.

## Settings

**Default:** On



On  
Allow the solver to adjust the absolute tolerance



Off  
Keep the absolute tolerance value fixed.

## Dependencies

This option is visible when the following conditions are satisfied:

- Solver **Type** is set to Variable-step.
- **Solver** is not set to discrete (no continuous states).

If the **Absolute Tolerance** is set to auto, the AutoScaleAbsTol parameter is turned on by default and cannot be disabled. To disable this parameter, you must first specify a finite non-negative value for abstol.

## Command-Line Information

**Parameter:** AutoScaleAbsTol

**Value:** 'on' | 'off'

**Default:** 'on'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

## Related Examples

- “Absolute tolerance” on page 14-25
- “Solver Pane” on page 14-2

- “Absolute Tolerances”

# Integration method

## Description

Specify integration order of `odeN` solver

## Settings

**Default:** `ode3`

`ode1` (Euler)

    Use the `ode1` solver with a first order of accuracy

`ode2` (Heun)

    Use the `ode2` solver with a second order of accuracy

`ode3` (Bogacki-Shampine)

    Use the `ode3` solver with a third order of accuracy

`ode4` (Runge-Kutta)

    Use the `ode4` solver with a fourth order of accuracy

`ode5` (Dormand-Prince)

    Use the `ode5` solver with a fifth order of accuracy

`ode8` (Dormand-Prince)

    Use the `ode8` solver with an eighth order of accuracy

`ode14x` (extrapolation)

    Use the `ode14x implicit` solver.

`ode1be` (Backward Euler)

    Use the `ode1be` solver. This solver uses the first-order Backward Euler integration method.

## Dependencies

This option is visible when the following conditions are satisfied:

- Solver **Type** is set to **Variable-step**.
- Solver is set to `odeN` (**fixed step with zero crossings**).

## Command-Line Information

**Parameter:** `ODENIntegrationMethod`

**Value:** `ode1|ode2|ode3|ode4|ode5|ode8|ode14x|ode1be`

**Default:** `ode3`

## Recommended Settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |

| Application       | Setting   |
|-------------------|-----------|
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Max step size” on page 14-17
- “Solver Pane” on page 14-2
- “Solver” on page 14-11

### More About

- “Fixed-Step Continuous Solvers”
- “Fixed-Step Versus Variable-Step Solvers”

# Hardware Implementation Parameters

---

## Hardware Implementation Pane

The **Hardware Implementation** category includes parameters for configuring a hardware board to run a model. Hardware implementation parameters specify different options for building models to run on hardware boards or devices including communication connections and hardware specific parameters.

| Parameter                                         | Description                                                                                              |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| "Hardware board" on page 15-6                     | Select the hardware board upon which to run your model.                                                  |
| "Code Generation system target file" on page 15-8 | System target file that you select on the <b>Code Generation</b> pane.                                   |
| "Device vendor" on page 15-9                      | Select the manufacturer of the hardware board to use to implement the system that this model represents. |
| "Device type" on page 15-11                       | Select the type of hardware to use to implement the system that this model represents.                   |

These configuration parameters are in the **Device details** section.

| Parameter                                    | Description                                                                                       |
|----------------------------------------------|---------------------------------------------------------------------------------------------------|
| "Number of bits: char" on page 15-22         | Describe the character bit length for the hardware.                                               |
| "Number of bits: short" on page 15-24        | Describe the data bit length for the hardware.                                                    |
| "Number of bits: int" on page 15-26          | Describe the data integer bit length for the hardware.                                            |
| "Number of bits: long" on page 15-28         | Describe the data bit lengths for the hardware.                                                   |
| "Number of bits: long long" on page 15-30    | Describe the length in bits of the C <code>long long</code> data type that the hardware supports. |
| "Number of bits: float" on page 15-32        | Describe the bit length of floating-point data for the hardware (read only).                      |
| "Number of bits: double" on page 15-33       | Describe the bit-length of <code>double</code> data for the hardware (read only).                 |
| "Number of bits: native" on page 15-34       | Describe the microprocessor native word size for the hardware.                                    |
| "Number of bits: pointer" on page 15-36      | Describe the bit-length of pointer data for the hardware.                                         |
| "Number of bits: size_t" on page 15-38       | Describe the bit-length of <code>size_t</code> data for the hardware.                             |
| "Number of bits: ptrdiff_t" on page 15-40    | Describe the bit-length of <code>ptrdiff_t</code> data for the hardware.                          |
| "Largest atomic size: integer" on page 15-42 | Specify the largest integer data type that can be atomically loaded and stored on the hardware.   |

| Parameter                                                           | Description                                                                                                                       |
|---------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| "Largest atomic size: floating-point" on page 15-44                 | Specify the largest floating-point data type that can be atomically loaded and stored on the hardware.                            |
| "Byte ordering" on page 15-46                                       | Describe the byte ordering for the hardware board.                                                                                |
| "Signed integer division rounds to" on page 15-48                   | Describe how your compiler for the hardware rounds the result of dividing two signed integers.                                    |
| "Shift right on a signed integer as arithmetic shift" on page 15-50 | Describe how your compiler for the hardware fills the sign bit in a right shift of a signed integer.                              |
| "Support long long" on page 15-52                                   | Specify that your C compiler supports the C <code>long long</code> data type. Most C99 compilers support <code>long long</code> . |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                                      | Description                                                                                                 |
|----------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| "Test hardware is the same as production hardware" on page 2-2 | Specify whether the test hardware differs from the production hardware.                                     |
| "Test device vendor and type" on page 2-3                      | Select the manufacturer and type of the hardware to use to test the code generated from the model.          |
| "Number of bits: char" on page 2-15                            | Describe the character bit length for the hardware that you use to test code.                               |
| "Number of bits: short" on page 2-17                           | Describe the data bit length for the hardware that you use to test code.                                    |
| "Number of bits: int" on page 2-19                             | Describe the data integer bit length of the hardware that you use to test code.                             |
| "Number of bits: long" on page 2-21                            | Describe the data bit lengths for the hardware that you use to test code.                                   |
| "Number of bits: long long" on page 2-23                       | Describe the length in bits of the C <code>long long</code> data type that the test hardware supports.      |
| "Number of bits: float" on page 2-25                           | Describe the bit length of floating-point data for the hardware that you use to test code (read only).      |
| "Number of bits: double" on page 2-26                          | Describe the bit-length of <code>double</code> data for the hardware that you use to test code (read only). |
| "Number of bits: native" on page 2-27                          | Describe the microprocessor native word size for the hardware that you use to test code.                    |
| "Number of bits: pointer" on page 2-29                         | Describe the bit-length of pointer data for the hardware that you use to test code.                         |
| "Number of bits: size_t" on page 2-30                          | Describe the bit-length of <code>size_t</code> data for the hardware that you use to test code.             |
| "Number of bits: ptrdiff_t" on page 2-32                       | Describe the bit-length of <code>ptrdiff_t</code> data for the hardware that you use to test code.          |

| Parameter                                                          | Description                                                                                                                      |
|--------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| "Largest atomic size: integer" on page 2-34                        | Specify the largest integer data type that can be atomically loaded and stored on the hardware that you use to test code.        |
| "Largest atomic size: floating-point" on page 2-36                 | Specify the largest floating-point data type that can be atomically loaded and stored on the hardware that you use to test code. |
| "Byte ordering" on page 2-38                                       | Describe the byte ordering for the hardware that you use to test code.                                                           |
| "Signed integer division rounds to" on page 2-40                   | Describe how your compiler for the test hardware rounds the result of dividing two signed integers.                              |
| "Shift right on a signed integer as arithmetic shift" on page 2-42 | Describe how your compiler for the test hardware fills the sign bit in a right shift of a signed integer.                        |
| "Support long long" on page 2-44                                   | Specify that your C compiler supports the C <code>long long</code> data type.                                                    |
| "Use Simulink Coder Features" (Simulink Coder)                     | Enable "Simulink Coder" features for models deployed to "Simulink Supported Hardware".                                           |
| "Use Embedded Coder Features" (Embedded Coder)                     | Enable "Embedded Coder" features for models deployed to "Simulink Supported Hardware".                                           |

The following model configuration parameters have no other documentation.

| Parameter                            | Description                                                                                          |
|--------------------------------------|------------------------------------------------------------------------------------------------------|
| TargetPreprocMaxBitsSint<br>int - 32 | Specify the maximum number of bits that the target C preprocessor can use for signed integer math.   |
| TargetPreprocMaxBitsUint<br>int - 32 | Specify the maximum number of bits that the target C preprocessor can use for unsigned integer math. |

## See Also

### Related Examples

- "Hardware Implementation Overview" on page 15-5
- "Simulink Supported Hardware"

# Hardware Implementation Overview

Specify hardware options to simulate and generate code for models of computer-based systems, such as embedded controllers.

**Hardware Implementation** pane parameters do not control hardware or compiler behavior. The parameters describe hardware and compiler properties for the MATLAB software.

- Specifying hardware characteristics enables simulation of the model to detect error conditions that can arise when executing code, such as hardware overflow.
- MATLAB uses the information to generate code for the platform that runs as efficiently as possible. MATLAB software also uses the information to give bit-true agreement for the results of integer and fixed-point operations in simulation and generated code.

## See Also

- [Hardware Implementation Options \(Simulink Coder\)](#)
- [“Hardware Implementation Pane” on page 15-2](#)

## Hardware board

Select the hardware board upon which to run your model.

Changing this parameter updates the dialog box display so that it displays parameters that are relevant to your hardware board.

To install support for a hardware board, start the Support Package Installer by selecting **Get Hardware Support Packages**. Alternatively, in the MATLAB Command Window, enter `supportPackageInstaller`.

After installing support for a hardware board, reopen the Configuration Parameters dialog box and select the hardware board.

### Settings

**Default:** None if the specified system target file is `ert.tlc`, `realtime.tlc`, or `autosar.tlc`. Otherwise, the default is **Determine by Code Generation system target file**.

**None**

No hardware board is specified. The system target file specified for the model is `ert.tlc`, `realtime.tlc`, or `autosar.tlc`.

**Determine by Code Generation system target file**

Specifies that the system target file setting determines the hardware board.

**Get Hardware Support Packages**

Invokes the Support Package Installer. After you install a hardware support package, the list includes relevant hardware board names.

**Hardware board name**

Specifies the hardware board to use to implement the system this model represents.

### Tips

- When you select a hardware board, parameters for board settings appear in the dialog box display.
- After you select a hardware board, you can select a device vendor and type.

### Dependencies

The **Device vendor** and **Device type** parameter values reflect available device support for the selected hardware board.

When you select a hardware board, the selection potentially changes the **Toolchain** parameter value and other configuration parameter values. For example, if you change the hardware board selection to **ARM Cortex-A9 (QEMU)**, the **Toolchain** parameter value changes to a supported toolchain, such as **Linaro Toolchain v4.8**.

### Command-Line Information

**Parameter:** `HardwareBoard`

**Type:** character array

**Default:** 'Determine by Code Generation system target file'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Code Generation system target file

System target file that you select on the **Code Generation** pane.

### See Also

"Hardware Implementation Pane" on page 15-2

## Device vendor

Select the manufacturer of the hardware board to use to implement the system that this model represents.

### Settings

**Default:** Intel

If you have installed target support packages, the list of settings can include additional manufacturers.

- AMD
- ARM Compatible
- Altera
- Analog Devices
- Atmel
- Freescale
- Infineon
- Intel
- Microchip
- NXP
- Renesas
- STMicroelectronics
- Texas Instruments
- ASIC/FPGA
- Custom Processor

### Tips

- The **Device vendor** and **Device type** fields share the command-line parameter `ProdHWDeviceType`. When specifying this parameter at the command line, separate the device vendor and device type values by using the characters `->`. For example: '`Intel->x86-64 (Linux 64)`'.
- If you have a Simulink Coder license and you want to add **Device vendor** and **Device type** values to the default set, see "Register New Hardware Devices" (Simulink Coder).

### Dependencies

The **Device vendor** and **Device type** parameter values reflect available device support for the selected hardware board.

### Command-Line Information

**Parameter:** `ProdHWDeviceType`

**Type:** string

**Value:** any valid value (see tips)

**Default:** 'Intel'

## Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                   |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                 |
| Traceability      | No impact                                                                                                                                                                                                                                 |
| Efficiency        | No impact                                                                                                                                                                                                                                 |
| Safety precaution | Select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Device type

Select the type of hardware to use to implement the system that this model represents.

### Settings

**Default:** x86–64 (Windows64)

If you have installed target support packages, the list of settings includes additional types of hardware.

AMD options:

- Athlon 64
- K5/K6/Athlon
- x86–32 (Windows 32)
- x86–64 (Linux 64)
- x86–64 (macOS)
- x86–64 (Windows64)

ARM options:

- ARM 10
- ARM 11
- ARM 7
- ARM 8
- ARM 9
- ARM Cortex-A
- ARM Cortex-M
- ARM Cortex-R
- ARM Cortex
- ARM 64-bit (LP64)
- ARM 64-bit (LLP64)

Altera options:

- SoC (ARM CortexA)

Analog Devices options:

- ADSP-CM40x (ARM Cortex-M)
- Blackfin
- SHARC
- TigerSHARC

Atmel options:

- AVR
- AVR (32-bit)
- AVR (8-bit)

Freescale options:

- 32-bit PowerPC
- 68332
- 68HC08
- 68HC11
- ColdFire
- DSP563xx (16-bit mode)
- HC(S)12
- MPC52xx
- MPC5500
- MPC55xx
- MPC5xx
- MPC7xxx
- MPC82xx
- MPC83xx
- MPC85xx
- MPC86xx
- MPC8xx
- S08
- S12x
- StarCore

Infineon options:

- C16x, XC16x
- TriCore

Intel options:

- x86-32 (Windows32)
- x86-64 (Linux 64)
- x86-64 (macOS)
- x86-64 (Windows64)

Microchip options:

- PIC18
- dsPIC

NXP options:

- Cortex-M0/M0+
- Cortex-M3
- Cortex-M4

Renesas options:

- M16C
- M32C
- R8C/Tiny
- RH850
- RL78
- RX
- RZ
- SH-2/3/4
- V850

STMicroelectronics:

- ST10/Super10

Texas Instruments options:

- C2000
- C5000
- C6000
- MSP430
- Stellaris Cortex-M3
- TMS470
- TMS570 Cortex-R4

ASIC/FPGA options:

- ASIC/FPGA

## Tips

- Before you specify the device type, select the device vendor.
- To view parameters for a device type, click the arrow button to the left of **Device details**.
- Selecting a device type specifies the hardware device to define system constraints:
  - Default hardware properties appear as the initial values.
  - You cannot change parameters with only one possible value.
  - Parameters with more than one possible value provide a list of valid values.

The following table lists values for each device type.

| Key:                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
|-----------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|---------|------|---------------------|---------------|---------------|----------|-------------|-----------|
|                             | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
|                             | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
|                             | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
| Device vendor / Device type | Number of bits                                                            |       |     |      |           |        |         |        |         |      | Largest atomic size |               | Byte ordering | Round to | Shift right | Long long |
|                             | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdiff | int  | float               |               |               |          |             |           |
| AMD                         |                                                                           |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
| Athlon 64                   | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64      | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| K5/K6/Athlon                | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32      | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| x86-32 (Windows32)          | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32      | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (Linux 64)           | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64      | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (macOS)              | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64      | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (Windows64)          | 8                                                                         | 16    | 32  | 32   | 64        | 64     | 64      | 64     | 64      | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| ARM Compatible              |                                                                           |       |     |      |           |        |         |        |         |      |                     |               |               |          |             |           |
| ARM 7/8/9/10                | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32      | Long | Float               | Little Endian | Zero          | ✓        | □           |           |
| ARM 11                      | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32      | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| ARM Cortex                  | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32      | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| ARM 64-bit (LP64)           | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64      | Long | Double              | Little Endian | Zero          | ✓        | ✓           |           |

| Key:                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|-----------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|------------|------|---------------------|---------------|---------------|----------|-------------|-----------|
|                             | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| Device vendor / Device type | Number of bits                                                            |       |     |      |           |        |         |        |            |      | Largest atomic size |               | Byte ordering | Round to | Shift right | Long long |
|                             | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdif_f_t | int  | float               |               |               |          |             |           |
| ARM 64-bit (LLP64)          | 8                                                                         | 16    | 32  | 32   | 64        | 64     | 64      | 64     | 64         | Long | Double              | Little Endian | Zero          | ✓        | ✓           |           |
| Altera                      |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| SoC (ARM Cortex A)          | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| Analog Devices              |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| ADSP-CM40x(ARM Cortex-M)    | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| Blackfin                    | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| SHARC                       | 32                                                                        | 32    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Big Endian    | Zero          | ✓        | □           |           |
| TigerSHARC                  | 32                                                                        | 32    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| Atmel                       |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| AVR                         | 8                                                                         | 16    | 16  | 32   | 64        | 8      | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| AVR (32-bit)                | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| AVR (8-bit)                 | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| Freescale                   |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |

| Key:                                                                                | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |            |      |                            |               |                      |                 |                    |                  |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|------------|------|----------------------------|---------------|----------------------|-----------------|--------------------|------------------|
|                                                                                     | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |            |      |                            |               |                      |                 |                    |                  |
|                                                                                     | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |            |      |                            |               |                      |                 |                    |                  |
|                                                                                     | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |            |      |                            |               |                      |                 |                    |                  |
| Device vendor / Device type                                                         | <b>Number of bits</b>                                                     |       |     |      |           |        |         |        |            |      | <b>Largest atomic size</b> |               | <b>Byte ordering</b> | <b>Round to</b> | <b>Shift right</b> | <b>Long long</b> |
|                                                                                     | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdif_f_t | int  | float                      |               |                      |                 |                    |                  |
| 32-bit PowerPC                                                                      | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double                     | Big Endian    | Zero                 | ✓               | □                  |                  |
| 68332                                                                               | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |
| 68HC08                                                                              | 8                                                                         | 16    | 16  | 32   | 64        | 8      | 8       | 16     | 8          | Char | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |
| 68HC11                                                                              | 8                                                                         | 16    | 16  | 32   | 64        | 8      | 8       | 16     | 16         | Char | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |
| ColdFire                                                                            | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |
| DSP563xx (16-bit mode)                                                              | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                       | Little Endian | Zero                 | ✓               | □                  |                  |
| DSP5685x                                                                            | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | Float                      | Little Endian | Zero                 | ✓               | □                  |                  |
| HC(S)12                                                                             | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |
| MPC52xx, MPC500, MPC55xx, MPC5xx, PC5xx, MPC7xxx, MPC82xx, MPC83xx, MPC86xx, MPC8xx | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | None                       | Big Endian    | Zero                 | ✓               | □                  |                  |

| Key:                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|-----------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|------------|------|---------------------|---------------|---------------|----------|-------------|-----------|
|                             | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| Device vendor / Device type | Number of bits                                                            |       |     |      |           |        |         |        |            |      | Largest atomic size |               | Byte ordering | Round to | Shift right | Long long |
|                             | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdif_f_t | int  | float               |               |               |          |             |           |
| MPC85xx                     | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Big Endian    | Zero          | ✓        | □           |           |
| S08                         | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Big Endian    | Zero          | ✓        | □           |           |
| S12x                        | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Big Endian    | Zero          | ✓        | □           |           |
| StarCore                    | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| Infineon                    |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| C16x, XC16x                 | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| TriCore                     | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| Intel                       |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| x86-32 (Windows32)          | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (Linux 64)           | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64         | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (macOS)              | 8                                                                         | 16    | 32  | 64   | 64        | 64     | 64      | 64     | 64         | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| x86-64 (Windows64)          | 8                                                                         | 16    | 32  | 32   | 64        | 64     | 64      | 64     | 64         | Char | Float               | Little Endian | Zero          | ✓        | □           |           |
| Microchip                   |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |

| Key:                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|-----------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|------------|------|---------------------|---------------|---------------|----------|-------------|-----------|
|                             | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
|                             | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| Device vendor / Device type | Number of bits                                                            |       |     |      |           |        |         |        |            |      | Largest atomic size |               | Byte ordering | Round to | Shift right | Long long |
|                             | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdif_f_t | int  | float               |               |               |          |             |           |
| PIC18                       | 8                                                                         | 16    | 16  | 32   | 64        | 8      | 8       | 24     | 24         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| dsPIC                       | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| NXP                         |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| Cortex-M0/M0+               | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| Cortex-M3                   | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| Cortex-M4                   | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double              | Little Endian | Zero          | ✓        | □           |           |
| Renesas                     |                                                                           |       |     |      |           |        |         |        |            |      |                     |               |               |          |             |           |
| M16C                        | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| M32C                        | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| R8C/Tiny                    | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| RH850                       | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None                | Little Endian | Zero          | ✓        | □           |           |
| RL78                        | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None                | Little Endian | Zero          | ✓        | □           |           |

| Key:                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
|-----------------------------|---------------------------------------------------------------------------|-------|-----|------|-----------|--------|---------|--------|------------|------|--------|---------------------|---------------|----------|-------------|-----------|
|                             | <b>Round to = Signed integer division rounds to</b>                       |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
|                             | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
|                             | <b>Long long = Support long long</b>                                      |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
| Device vendor / Device type | Number of bits                                                            |       |     |      |           |        |         |        |            |      |        | Largest atomic size | Byte ordering | Round to | Shift right | Long long |
|                             | char                                                                      | short | int | long | long long | native | pointer | size_t | ptrdif_f_t | int  | float  |                     |               |          |             |           |
| RX                          | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None   | Little Endian       | Zero          | ✓        | □           |           |
| RZ                          | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Long | Double | Little Endian       | Zero          | ✓        | □           |           |
| SH-2/3/4                    | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None   | Big Endian          | Zero          | ✓        | □           |           |
| V850                        | 8                                                                         | 16    | 32  | 32   | 64        | 32     | 32      | 32     | 32         | Char | None   | Little Endian       | Zero          | ✓        | □           |           |
| STMicroelectronics          |                                                                           |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
| ST10/<br>Super10            | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None   | Little Endian       | Zero          | ✓        | □           |           |
| Texas Instruments           |                                                                           |       |     |      |           |        |         |        |            |      |        |                     |               |          |             |           |
| C2000                       | 16                                                                        | 16    | 16  | 32   | 64        | 16     | 32      | 16     | 16         | Int  | None   | Little Endian       | Zero          | ✓        | □           |           |
| C5000                       | 16                                                                        | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Int  | None   | Big Endian          | Zero          | ✓        | □           |           |
| C6000                       | 8                                                                         | 16    | 32  | 40   | 64        | 32     | 32      | 32     | 32         | Int  | None   | Little Endian       | Zero          | ✓        | □           |           |
| MSP430                      | 8                                                                         | 16    | 16  | 32   | 64        | 16     | 16      | 16     | 16         | Char | None   | Little Endian       | Zero          | ✓        | □           |           |
| Stellaris Cortex-M3         | 8                                                                         | 16    | 32  | 32   | 6         | 32     | 32      | 32     | 32         | Long | Double | Little Endian       | Zero          | ✓        | □           |           |

|                                    |                                                                           |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
|------------------------------------|---------------------------------------------------------------------------|--------------|------------|-------------|------------------|---------------|----------------|---------------|-------------------|------------|----------------------------|----------------------|-----------------|--------------------|------------------|
| <b>Key:</b>                        | <b>float and double (not listed) always equal 32 and 64, respectively</b> |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
|                                    | <b>Round to = Signed integer division rounds to</b>                       |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
|                                    | <b>Shift right = Shift right on a signed integer as arithmetic shift</b>  |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
|                                    | <b>Long long = Support long long</b>                                      |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
| <b>Device vendor / Device type</b> | <b>Number of bits</b>                                                     |              |            |             |                  |               |                |               |                   |            | <b>Largest atomic size</b> | <b>Byte ordering</b> | <b>Round to</b> | <b>Shift right</b> | <b>Long long</b> |
|                                    | <b>char</b>                                                               | <b>short</b> | <b>int</b> | <b>long</b> | <b>long long</b> | <b>native</b> | <b>pointer</b> | <b>size_t</b> | <b>ptrdif_f_t</b> | <b>int</b> | <b>float</b>               |                      |                 |                    |                  |
| TMS470                             | 8                                                                         | 16           | 32         | 32          | 64               | 32            | 32             | 32            | 32                | Long       | Double                     | Little Endian        | Zero            | ✓                  | □                |
| TMS570 Cortex-R4                   | 8                                                                         | 16           | 32         | 32          | 64               | 32            | 32             | 32            | 32                | Long       | Double                     | Big Endian           | Zero            | ✓                  | □                |
| <b>ASIC/FPGA</b>                   |                                                                           |              |            |             |                  |               |                |               |                   |            |                            |                      |                 |                    |                  |
| ASIC/FPGA                          | NA                                                                        | NA           | NA         | NA          | NA               | NA            | NA             | NA            | NA                | NA         | NA                         | NA                   | NA              | NA                 | NA               |

- The **Device vendor** and **Device type** fields share the command-line parameter `ProdHWDeviceType`. When specifying this parameter at the command line, separate the device vendor and device type values by using the characters `->`. For example: '`Intel->x86-64 (Linux 64)`'.
- If you have a Simulink Coder license and you want to add **Device vendor** and **Device type** values to the default set, see "Register New Hardware Devices" (Simulink Coder).

## Dependencies

The **Device vendor** and **Device type** parameter values reflect available device support for the selected hardware board.

Menu options that are available in the menu depend on the **Device vendor** parameter setting.

With the exception of device vendor ASIC/FPGA, selecting a device type sets the following parameters:

- Number of bits: char**
- Number of bits: short**
- Number of bits: int**
- Number of bits: long**
- Number of bits: long long**
- Number of bits: float**
- Number of bits: double**
- Number of bits: native**

- **Number of bits:** pointer
- **Largest atomic size:** integer
- **Largest atomic size:** floating-point
- **Byte ordering**
- **Signed integer division rounds to**
- **Shift right on a signed integer as arithmetic shift**
- **Support long long**

Whether you can modify the setting of a device-specific parameter varies according to device type.

## Command-Line Information

**Parameter:** ProdHWDeviceType

**Type:** string

**Value:** any valid value (see tips)

**Default:** 'Intel->x86-64 (Windows64)'

## Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: char

### Description

Describe the character bit length for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 8

**Minimum:** 8

**Maximum:** 32

Enter a value from 8 through 32.

### Tip

All values must be a multiple of 8.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerChar

**Type:** integer

**Value:** any valid value

**Default:** 8

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: short

### Description

Describe the data bit length for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 16

**Minimum:** 8

**Maximum:** 32

Enter a value from 8 through 32.

### Tip

All values must be a multiple of 8.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerShort

**Type:** integer

**Value:** any valid value

**Default:** 16

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: int

### Description

Describe the data integer bit length of the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 32

**Minimum:** 8

**Maximum:** 32

Enter a number from 8 through 32.

### Tip

All values must be a multiple of 8.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerInt

**Type:** integer

**Value:** any valid value

**Default:** 32

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: long

### Description

Describe the data bit lengths for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 32

**Minimum:** 32

**Maximum:** 128

Enter a value from 32 through 128.

### Tip

All values must be a multiple of 8 and from 32 through 128.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerLong

**Type:** integer

**Value:** any valid value

**Default:** 32

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: long long

### Description

Describe the length in bits of the C `long long` data type for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 64

**Minimum:** 64

**Maximum:** 128

The number of bits that represent the C `long long` data type.

### Tips

- Use the C `long long` data type only if your C compiler supports `long long`.
- You can change the value of this parameter for custom targets only. For custom targets, all values must be a multiple of 8 and be between 64 and 128.

### Dependencies

- **Enable long long** enables use of this parameter.
- The value of this parameter must be greater than or equal to the value of **Number of bits: long**.
- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerLongLong

**Type:** integer

**Value:** any valid value

**Default:** 64

### Recommended Settings

| Application  | Setting         |
|--------------|-----------------|
| Debugging    | No impact       |
| Traceability | No impact       |
| Efficiency   | Target specific |

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: float

### Description

Describe the bit length of floating-point data for the selected hardware (read only).

**Category:** Hardware Implementation

### Settings

**Default:** 32

Always equals 32.

### Command-Line Information

**Parameter:** ProdBitPerFloat

**Type:** integer

**Value:** 32 (read-only)

**Default:** 32

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

### See Also

- 
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: double

### Description

Describe the bit-length of **double** data for the selected hardware (read only).

**Category:** Hardware Implementation

### Settings

**Default:** 64

Always equals 64.

### Command-Line Information

**Parameter:** ProdBitPerDouble

**Type:** integer

**Value:** 64 (read only)

**Default:** 64

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

### See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: native

### Description

Describe the microprocessor native word size for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 64

**Minimum:** 8

**Maximum:** 64

Enter a value from 8 through 64.

### Tip

All values must be a multiple of 8.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdWordSize

**Type:** integer

**Value:** any valid value

**Default:** 32

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: pointer

### Description

Describe the bit-length of pointer data for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** 64

**Minimum:** 8

**Maximum:** 64

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerPointer

**Type:** integer

**Value:** any valid value

**Default:** 64

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

### See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)

- Specifying Production Hardware Characteristics (Simulink Coder)

## Number of bits: size\_t

### Description

Describe the bit-length of size\_t data for the selected hardware.

If ProdEqTarget is off, an Embedded Coder processor-in-the-loop (PIL) simulation checks this setting with reference to the target hardware. If ProdEqTarget is on, the PIL simulation checks the ProdBitPerSizeT setting.

**Category:** Hardware Implementation

### Settings

**Default:** 64

Value must be 8, 16, 24, 32, 40, 64, or 128 and greater or equal to the value of int.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdBitPerSizeT

**Type:** integer

**Value:** any valid value

**Default:** 64

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

### See Also

- “Hardware Implementation Pane” on page 15-2

- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)
- “Verification of Code Generation Assumptions” (Embedded Coder)

## Number of bits: ptrdiff\_t

### Description

Describe the bit-length of `ptrdiff_t` data for the selected hardware.

If `ProdEqTarget` is off, an Embedded Coder processor-in-the-loop (PIL) simulation checks this setting with reference to the target hardware. If `ProdEqTarget` is on, the PIL simulation checks the `ProdBitPerPtrDiffT` setting.

**Category:** Hardware Implementation

### Settings

**Default:** 64

Value must be 8, 16, 24, 32, 40, 64, or 128 and greater or equal to the value of int.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** `ProdBitPerPtrDiffT`

**Type:** integer

**Value:** any valid value

**Default:** 64

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

### See Also

- “Hardware Implementation Pane” on page 15-2

- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)
- “Verification of Code Generation Assumptions” (Embedded Coder)

## Largest atomic size: integer

### Description

Specify the largest integer data type that can be atomically loaded and stored on the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** Char

Char

Specifies that `char` is the largest integer data type that can be atomically loaded and stored on the hardware.

Short

Specifies that `short` is the largest integer data type that can be atomically loaded and stored on the hardware.

Int

Specifies that `int` is the largest integer data type that can be atomically loaded and stored on the hardware.

Long

Specifies that `long` is the largest integer data type that can be atomically loaded and stored on the hardware.

LongLong

Specifies that `long long` is the largest integer data type that can be atomically loaded and stored on the hardware.

### Tip

Use this parameter, where possible, to remove unnecessary double-buffering or unnecessary semaphore protection, based on data size, in generated multirate code.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.
- You can set this parameter to `LongLong` only if the hardware supports the C `long long` data type and you have selected **Enable long long**.

### Command-Line Information

**Parameter:** ProdLargestAtomicInteger

**Type:** string

**Value:** 'Char' | 'Short' | 'Int' | 'Long' | 'LongLong'

**Default:** 'Char'

## Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | Target specific                                                                                                                                                                                                                                                                                                                             |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Largest atomic size: floating-point

### Description

Specify the largest floating-point data type that can be atomically loaded and stored on the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** Float

**Float**

Specifies that float is the largest floating-point data type that can be atomically loaded and stored on the hardware.

**Double**

Specifies that double is the largest floating-point data type that can be atomically loaded and stored on the hardware.

**None**

Specifies that there is no applicable setting or not to use this parameter in generating multirate code.

### Tip

Use this parameter, where possible, to remove unnecessary double-buffering or unnecessary semaphore protection, based on data size, in generated multirate code.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdLargestAtomicFloat

**Type:** string

**Value:** 'Float' | 'Double' | 'None'

**Default:** 'Float'

### Recommended Settings

| Application  | Setting         |
|--------------|-----------------|
| Debugging    | No impact       |
| Traceability | No impact       |
| Efficiency   | Target specific |

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)
- “Verification of Code Generation Assumptions” (Embedded Coder)

## Byte ordering

### Description

Describe the byte ordering for the selected hardware.

**Category:** Hardware Implementation

### Settings

**Default:** Little Endian

**Unspecified**

Specifies that the code determines the endianness of the hardware. This choice is the least efficient.

**Big Endian**

The most significant byte appears first in the byte ordering.

**Little Endian**

The least significant byte appears first in the byte ordering.

### Dependencies

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdEndianess

**Type:** string

**Value:** 'Unspecified' | 'LittleEndian' | 'BigEndian'

**Default:** 'Little Endian'

### Recommended Settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                                                                                                                                                                                                                                                                   |
| Traceability      | No impact                                                                                                                                                                                                                                                                                                                                   |
| Efficiency        | No impact                                                                                                                                                                                                                                                                                                                                   |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Signed integer division rounds to

### Description

Describe how your compiler for the hardware rounds the result of dividing two signed integers.

**Category:** Hardware Implementation

### Settings

**Default:** Zero

Undefined

Choose this option if neither **Zero** nor **Floor** describes the compiler behavior, or if that behavior is unknown.

Zero

If the quotient is between two integers, the compiler chooses the integer that is closer to zero as the result.

Floor

If the quotient is between two integers, the compiler chooses the integer that is closer to negative infinity.

### Tips

- To simulate rounding behavior of the C compiler that you use to compile generated code, use the **Integer rounding mode** parameter for blocks. This setting appears on the **Signal Attributes** pane of the parameter dialog boxes of blocks that can perform signed integer arithmetic, such as the Product block.
- For most blocks, the value of **Integer rounding mode** completely defines rounding behavior. For blocks that support fixed-point data and the **Simplest** rounding mode, the value of **Signed integer division rounds to** also affects rounding. For details, see “Rounding” (Fixed-Point Designer).
- For more information on how this parameter affects code generation, see Hardware Implementation Options (Simulink Coder).
- This table lists the compiler behavior described by the options for this parameter.

| N   | D  | Ideal N/D | Zero | Floor | Undefined |
|-----|----|-----------|------|-------|-----------|
| 33  | 4  | 8.25      | 8    | 8     | 8         |
| -33 | 4  | -8.25     | -8   | -9    | -8 or -9  |
| 33  | -4 | -8.25     | -8   | -9    | -8 or -9  |
| -33 | -4 | 8.25      | 8    | 8     | 8 or 9    |

### Dependency

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.

- This parameter is enabled only if you can modify it for the selected hardware.

## Command-Line Information

**Parameter:** ProdIntDivRoundTo

**Type:** string

**Value:** 'Floor' | 'Zero' | 'Undefined'

**Default:** 'Zero'

## Recommended settings

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Debugging         | No impact for simulation or during development.<br><i>Undefined</i> for production code generation.                                                                                                                                                                                                                                         |
| Traceability      | No impact for simulation or during development.<br><i>Zero</i> or <i>Floor</i> for production code generation.                                                                                                                                                                                                                              |
| Efficiency        | No impact for simulation or during development.<br><i>Zero</i> for production code generation.                                                                                                                                                                                                                                              |
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Shift right on a signed integer as arithmetic shift

### Description

Describe how your compiler for the hardware fills the sign bit in a right shift of a signed integer.

**Category:** Hardware Implementation

### Settings

**Default:** On



Generates simple, efficient code whenever the Simulink model performs arithmetic shifts on signed integers.



Generates fully portable but less efficient code to implement right arithmetic shifts.

### Tips

- Select this parameter if the C compiler implements a signed integer right shift as an arithmetic right shift.
- An arithmetic right shift fills bits vacated by the right shift with the value of the most significant bit. The most significant bit indicates the sign of the number in twos complement notation.

### Dependency

- Selecting a device by using the **Device vendor** and **Device type** parameters sets a device-specific value for this parameter.
- This parameter is enabled only if you can modify it for the selected hardware.

### Command-Line Information

**Parameter:** ProdShiftRightIntArith

**Type:** string

**Value:** 'on' | 'off'

**Default:** 'on'

### Recommended settings

| Application  | Setting   |
|--------------|-----------|
| Debugging    | No impact |
| Traceability | No impact |
| Efficiency   | On        |

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)

## Support long long

### Description

Specify that your C compiler supports the C `long long` data type. Most C99 compilers support `long long`.

**Category:** Hardware Implementation

### Settings

**Default:** Off



On

Enables use of C `long long` data type for simulation and code generation on the hardware.



Off

Disables use of C `long long` data type for simulation or code generation on the hardware.

### Tips

- This parameter is enabled only if the selected hardware supports the C `long long` data type.
- If your compiler does not support C `long long`, do not select this parameter.

### Dependencies

This parameter enables **Number of bits: long long**.

### Command-Line Information

**Parameter:** ProdLongLongMode

**Type:** string

**Value:** 'on' | 'off'

**Default:** 'off'

### Recommended Settings

| Application  | Setting             |
|--------------|---------------------|
| Debugging    | No impact           |
| Traceability | No impact           |
| Efficiency   | On (execution, ROM) |

| Application       | Setting                                                                                                                                                                                                                                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Safety precaution | No recommendation for simulation without code generation.<br>For simulation with code generation, select your <b>Device vendor</b> and <b>Device type</b> if they are available in the drop-down list. If your <b>Device vendor</b> and <b>Device type</b> are not available, set device-specific values by using <b>Custom Processor</b> . |

## See Also

- “Hardware Implementation Pane” on page 15-2
- Hardware Implementation Options (Simulink Coder)
- Specifying Production Hardware Characteristics (Simulink Coder)
- “Number of bits: long long” on page 15-30



# Library Browser

---

# Use the Library Browser

## In this section...

["Libraries Pane" on page 16-2](#)

["Blocks Pane" on page 16-2](#)

["Search for Blocks in the Library Browser" on page 16-3](#)

## Libraries Pane

Use the libraries pane to locate blocks by navigating block libraries. The pane displays a tree view of the libraries installed on your system. You can navigate the tree using your mouse or keyboard. Use the arrow keys to move through the library and expand or collapse libraries. When you select a library, its contents appear in the blocks pane.

### Add Blocks Used Recently

The Library Browser provides quick access to the blocks you have used most recently. At the bottom of the libraries pane, click **Recently Used** to display the blocks in the blocks pane.

**Note** Only blocks added to your model from the Library Browser appear under **Recently Used**.

### Refresh the Library Browser

To refresh the libraries displayed in the Library Browser, right-click in the libraries pane and select **Refresh Library Browser**. The Library Browser updates to display any libraries or blocks added to or deleted from the MATLAB path since the library browser was last opened or refreshed.

Refresh your library browser if you:

- Modify existing libraries or resave them in .slx file format.
- Update repository information for a library.
- Move or delete your library files.
- Add a library.
- Change your Library Browser customizations. See “Customize Library Browser Appearance”.

## Blocks Pane

The blocks pane in the Library Browser displays the contents of the library selected in the libraries pane. You can use the blocks pane to navigate libraries, view block parameters or help, and create instances of library blocks in models.

### Navigate Libraries

To open a library in the blocks pane, double-click the library. To return to the parent, from the block context menu, select **Go to parent**.

### View Block Description, Parameters, and Help

To display the description and library path of a block, hover over the block.

To view the block parameters, double-click the block or, from the block context menu, select **Block parameters**.

To display help for a library block, from the block context menu, select **Help for the <name> block**.


### Add Blocks to Models from the Library

To add an instance of a library block to an open model using the Library Browser:


- Select the block in the blocks pane and drag it into the model window.
- From the block context menu, select **Add block to model <model\_name>**, where **<model\_name>** is the currently active model. If no model is open, use this command to create a model and add the block to it.

### Search for Blocks in the Library Browser

- 1 Enter the search string in the search text box or select from the recent search list.



- 2 Use the search button menu to specify the search options you want to use, for example, match whole words.



- 3 Press **Enter** to start the search.

The blocks pane displays the blocks found, grouped by library. To see where the search string matched, hover over a block. To navigate to a block's library, from the block context menu, select **Select in library view**.



# Signal Properties Dialog Box

---


- “Signal Properties Dialog Box Overview” on page 17-2
- “Signal Properties Controls” on page 17-3
- “Logging and Accessibility Options” on page 17-5
- “Data Transfer Options for Concurrent Execution” on page 17-7
- “Documentation Options” on page 17-8

## Signal Properties Dialog Box Overview

The **Signal Properties** dialog box lets you display and edit signal properties. To display the dialog box, either

- Select the line that represents the signal whose properties you want to set and then choose **Properties** from the signal's context menu.
- or
- Select a block that outputs or inputs the signal and from the block's context menu, select **Signals & Ports** and then either **Input Port Signal Properties** or **Output Port Signal Properties**, then select the port to which the signal is connected from the resulting menu.

The **Signal Properties** dialog box appears.

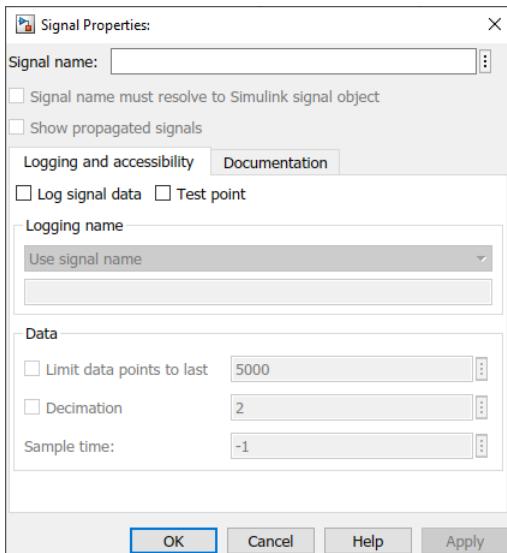

The dialog box includes the following controls.

- “Signal Properties Controls” on page 17-3
- “Logging and Accessibility Options” on page 17-5
- “Data Transfer Options for Concurrent Execution” on page 17-7
- “Documentation Options” on page 17-8

# Signal Properties Controls

## Signal name

Name of signal.

To name a signal programmatically, see “Name a Signal Programmatically”.

## Signal name must resolve to Simulink signal object

Specifies that either the base MATLAB workspace, the model workspace, or the data dictionary must contain a `Simulink.Signal` object with the same name as this signal. Simulink software displays an error message if it cannot find such an object when you update or simulate the model containing this signal.

---

**Note** `Simulink.Signal` objects in the model workspace must have their storage class set to **Auto**. See “Model Workspaces” for more information.

---

When **Signal name must resolve to Simulink signal object** is enabled, a signal resolution icon appears by default to the left of any label on the signal. The icon looks like this:



See “Signal to Object Resolution Indicator” for more information.

This property appears only if you set the model configuration parameter **Signal resolution** to a value other than **None**.

To set this option programmatically, use the port parameter `MustResolveToSignalObject`. See “Use Signal Objects”.

## Show propagated signals


---

**Note** This option is available only for signals that originate from blocks that support signal label propagation. For a list of the blocks, see “Blocks That Support Signal Label Propagation”.

---

Enabling this property causes Simulink to create a propagated signal label.

For example, in the following model, the output signal from the Subsystem block is configured for signal label propagation. The propagated signal label (`<const>`) is based on the name of the upstream output signal of the Constant block (`const`).

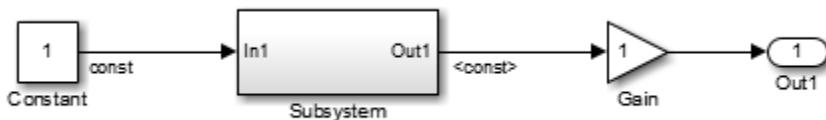

For more information, see “Signal Label Propagation”.

To set this option programmatically, use the port parameter `SignalPropagation`. See “Display Propagated Signal Labels”.


## See Also

### More About

- “Signal Properties Dialog Box Overview” on page 17-2

# Logging and Accessibility Options

Select the **Logging and accessibility** tab on the **Signal Properties** dialog box to display controls that enable you to specify signal logging and accessibility options for this signal.

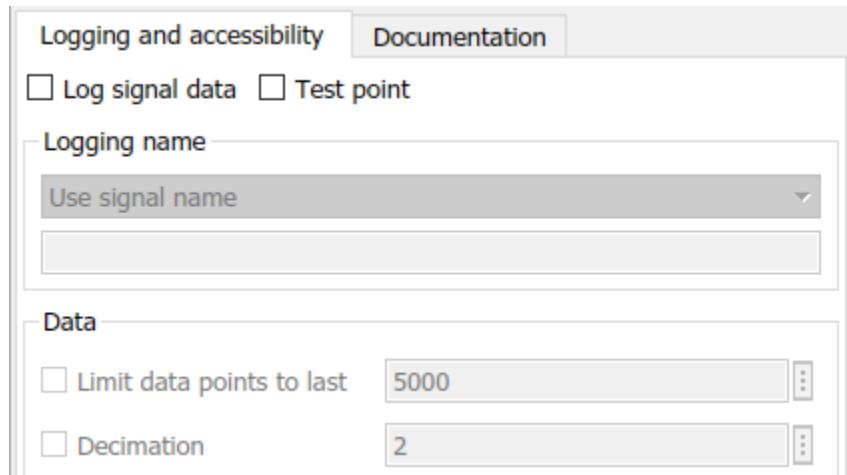

## Log signal data

Select this option to cause Simulink software to save this signal's values to the MATLAB workspace during simulation. See "Export Signal Data Using Signal Logging" for details.


To set this option programmatically, use the port parameter **DataLogging**. See "Programmatic Interface".

## Test point

Select this option to designate this signal as a test point. To set this property programmatically, use the port parameter **TestPoint**. See "Configure Signals as Test Points" for details.

## Logging name

This pair of controls, consisting of a list box and an edit field, specifies the name associated with logged signal data.



Simulink software uses the signal's signal name as its logging name by default. To specify a custom logging name, select **Custom** from the list box and enter the custom name in the adjacent edit field.

To set these properties programmatically, use the port parameters **DataLoggingNameMode** and **DataLoggingName**. See "Signal-Specific Logging Name Specified Programmatically".

## Data

This group of controls enables you to limit the amount of data that Simulink software logs for this signal.



The options are as follows.

### Limit data points to last

Discard all but the last N data points where N is the number entered in the adjacent edit field.

To set these properties programmatically, use the port parameters `DataLoggingLimitDataPoints` and `DataLoggingMaxPoints`. To set signal properties programmatically by using port parameters, see “Signal Properties”.

When you specify a limit for the number of data points, signal data appears in the Simulation Data Inspector and on Dashboard Scope blocks when a simulation pauses or completes, with only the last N data points displayed. Other visualization Dashboard blocks are disabled, with a warning message displayed on the block.

### Decimation

Log every Nth data point where N is the number entered in the adjacent edit field. For example, suppose that your model uses a fixed-step solver with a step size of 0.1 s. if you select this option and accept the default decimation value (2), Simulink software records data points for this signal at times 0.0, 0.2, 0.4, etc.

To set these properties programmatically, use the port parameters `DataLoggingDecimateData` and `DataLoggingDecimation`. To set signal properties programmatically by using port parameters, see “Signal Properties”.

The **Decimation** value you specify applies to the data sent to the Simulation Data Inspector and to Dashboard blocks in your model.

## See Also

### More About

- “Signal Properties Dialog Box Overview” on page 17-2

# Data Transfer Options for Concurrent Execution

## In this section...

- “Specify data transfer settings” on page 17-7
- “Data transfer handling option” on page 17-7
- “Extrapolation method (continuous-time signals)” on page 17-7
- “Initial condition” on page 17-7

This tab displays the data transfer options for configuring models for targets with multicore processors. To enable this tab, in the Model Explorer for the model, right-click **Configuration**, then select the **Show Concurrent Execution** option.

## Specify data transfer settings

Enable custom data transfer settings. For more information, see “Configure Data Transfer Settings Between Concurrent Tasks”.

## Data transfer handling option

Select a data transfer handling option. For more information, see “Configure Data Transfer Settings Between Concurrent Tasks”.

## Extrapolation method (continuous-time signals)

Select a data transfer extrapolation method. For more information, see “Configure Data Transfer Settings Between Concurrent Tasks”.

## Initial condition

For discrete signals, this parameter specifies the initial input on the reader side of the data transfer. It applies for data transfer types **Ensure Data Integrity Only** and **Ensure deterministic transfer (maximum delay)**. Simulink does not allow this value to be Inf or NaN.

For continuous signals, the extrapolation method of the initial input on the reader side of the data transfer uses this parameter. It applies for data transfer types **Ensure Data Integrity Only** and **Ensure deterministic transfer (maximum delay)**. Simulink does not allow this value to be Inf or NaN.

For more information, see “Configure Data Transfer Settings Between Concurrent Tasks”.

## See Also

### More About

- “Signal Properties Dialog Box Overview” on page 17-2

## Documentation Options

### Description

In this field, enter a description of the signal.

The description that you specify in the Signal Properties dialog box does not appear in the generated code. To add a signal description as a comment in the generated code, you must use a Simulink signal object. For more information, see [Simulink.Signal](#).

### Document link

In the field that displays documentation for the signal, enter a MATLAB expression. To display the documentation, click **Document Link**. For example, entering the expression

```
web(['file:/// which('foo_signal.html')'])
```

causes the MATLAB software default Web browser to display `foo_signal.html` when you click the field label.

To set this property programmatically, use the programmatic port parameter `DocumentLink`:

```
% Get a handle to the block output port
% that creates the target signal.
portHandles = get_param('myModel/myBlock','portHandles');
outportHandle = portHandles.Outport;

% Set the document link.
set_param(outportHandle,'DocumentLink',...
'web(['file:/// which('foo_signal.html')'])')
```

### See Also

### More About

- “Signal Properties Dialog Box Overview” on page 17-2

# Simulink Preferences Window

---

- “Set Simulink Preferences” on page 18-2
- “Simulink Preferences General Pane” on page 18-3
- “Simulink Preferences Model File Pane” on page 18-9
- “Simulink Preferences Editor Pane” on page 18-19
- “Font Styles for Models” on page 18-30

## Set Simulink Preferences

### Simulink Preferences Window Overview

You can use Simulink Preferences to specify Simulink editing environment options and default behaviors. Your settings affect the behavior of all Simulink models, including those currently open and all subsequent models. Your preference settings are preserved for the next time you use the software. The Simulink Preferences window has these panes:

- “Simulink Preferences General Pane” on page 18-3
  - Set preferences for generated file folders; background colors for print or export; Model block, callback, and sample time legend display.
- “Simulink Preferences Editor Pane” on page 18-19
  - Configure the Simulink Editor.
- “Simulink Preferences Model File Pane” on page 18-9
  - Set preferences for file change, autosave, version notifications, and other behaviors relating to model files.

To open the Simulink Preferences dialog box:

- From a Simulink Editor menu, in the **Modeling** tab, select **Environment > Simulink Preferences**.
- In the MATLAB Command Window, enter  
`slprivate('showprefs')`

To set preferences programmatically, set the root parameter using `set_param`. For example:

```
set_param(0, 'EditorModernTheme', 'off')
```

Parameters set programmatically do not persist between Simulink sessions.

### See Also

- “Create a Template from a Model”
- “Simulink Preferences General Pane” on page 18-3
- “Simulink Preferences Editor Pane” on page 18-19
- “Simulink Preferences Model File Pane” on page 18-9

# Simulink Preferences General Pane

## Simulink General Preferences Overview

Set preferences to specify the location for generated file folders and background colors for print or export. You also set these preferences to specify information about Model blocks, callbacks, and sample time legend display.

### See Also

- “Set Simulink Preferences” on page 18-2
- “Simulink Preferences Model File Pane” on page 18-9
- “Simulink Preferences Editor Pane” on page 18-19

## Folders for Generated Files

Use these preferences to control the location of model build artifacts. By default, build artifacts are placed in the current working folder (`pwd`) at the start of a diagram update or code generation. For more information, see:

- “Simulation cache folder” on page 18-3
- “Code generation folder” on page 18-4

## Simulation cache folder

Specify the root folder in which to put model build artifacts used for simulation and code generation.

### Settings

#### Default: ‘’

Specify a valid folder path. If you do not specify a path, build artifacts are placed in the current working folder (`pwd`) when you update a diagram.

### Tips

- You can specify an absolute or relative path to the folder. For example:
  - `C:\Work\mymodelsimcache` and `/mywork/mymodelsimcache` specify absolute paths.
  - `mymodelsimcache` is a path relative to the current working folder (`pwd`). The software converts a relative path to a fully qualified path when you set the preference. For example, if `pwd` is `'/mywork'`, the result is `/mywork/mymodelsimcache`.
  - `../test/mymodelsimcache` is a path relative to `pwd`. If `pwd` is `'/mywork'`, the result is `/test/mymodelsimcache`.
- The simulation cache folder is where Simulink cache files are created. For details about these cache files, see “Share Simulink Cache Files for Faster Simulation”.

### Command-Line Information

**Parameter:** `CacheFolder`

**Type:** character vector

**Value:** valid folder path  
**Default:** ''

#### See Also

- “Control Location of Simulation Targets”
- “Share Simulink Cache Files for Faster Simulation”

### Code generation folder

Specify the root folder in which to put Simulink Coder code generation files.

#### Settings

**Default:** ''

Specify a valid folder path. If you do not specify a path, build artifacts are placed in the current working folder (`pwd`) when you start to generate code.

#### Tip

You can specify an absolute or relative path to the folder. For example:

- `C:\Work\mymodelgencode` and `/mywork/mymodelgencode` specify absolute paths.
- `mymodelgencode` is a path relative to the current working folder (`pwd`). The software converts a relative path to a fully qualified path at the time the preference is set. For example, if `pwd` is `'/mywork'`, the result is `/mywork/mymodelgencode`.
- `../test/mymodelgencode` is a path relative to `pwd`. If `pwd` is `'/mywork'`, the result is `/test/mymodelgencode`.

#### Command-Line Information

**Parameter:** `CodeGenFolder`

**Type:** character vector

**Value:** valid folder path

**Default:** ''

#### See Also

“Manage Build Process Folders” (Simulink Coder)

### Code generation folder structure

Specify structure of generated code folder.

#### Settings

**Default:** Model specific

**Model specific**

Place generated code in subfolders within a model-specific folder.

## Target environment subfolder

If you configured models for different target environments, place generated code for each model in a separate subfolder. The name of the subfolder corresponds to the target environment.

### Command-Line Information

**Parameter:** CodeGenFolderStructure

**Value:** 'ModelSpecific' | 'TargetEnvironmentSubfolder'

**Default:** 'ModelSpecific'

### See Also

"Manage Build Process Folders" (Simulink Coder)

## Background Color

Use these preferences to control the background color for printing, exporting to another format, and models copied to the clipboard for export to another application.

- "Print" on page 18-5
- "Export" on page 18-5
- "Clipboard" on page 18-6

## Print

Use a white canvas (background) or the canvas color of the model when printing a model.

### Settings

**Default:** White

White

Use a white canvas.

Match Canvas Color

Match the canvas color of the model.

### Command-Line Information

**Parameter:** PrintBackgroundColorMode

**Value:** 'White' | 'MatchCanvas'

**Default:** 'White'

### See Also

"Share Models"

## Export

Match the canvas (background) color of the model, use a white canvas, or use a transparent canvas for model files that you export to another file format, such as .png or .jpeg.

### Settings

**Default:** Match Canvas Color

### Match Canvas Color

Match the canvas color of the model.

#### White

Use a white canvas.

#### Transparent

Use a transparent canvas, so that whatever is behind the canvas is visible.

### Command-Line Information

**Parameter:** ExportBackgroundColorMode

**Value:** 'White' | 'MatchCanvas' | 'Transparent'

**Default:** 'MatchCanvas'

### See Also

"Copy Model Views to Third-Party Applications"

## Clipboard

Match the canvas (background) color of the model, use a white canvas, or use a transparent canvas for model files that you export to another application.

### Settings

#### Default: Match Canvas Color

##### Match Canvas Color

Match the canvas color of the model.

##### White

Use a white canvas.

##### Transparent

Use a transparent canvas, so that whatever is behind the canvas image shows through.

### Command-Line Information

**Parameter:** ClipboardBackgroundColorMode

**Value:** 'White' | 'MatchCanvas' | 'Transparent'

**Default:** MatchCanvas

### See Also

"Print Models to Image File Formats"

## Warn when opening Model blocks with Normal Mode Visibility set to off

Show a warning when you open a model from Model blocks that have normal mode visibility set to off.

All instances of a normal mode referenced model are part of the simulation. However, Simulink displays only one instance in a model window. That instance is determined by the normal mode visibility setting. Normal mode visibility includes the display of Scope blocks and data port values.

When you open a model from a Model block that has normal mode visibility set to off, the referenced model shows data from the instance of the model has normal mode visibility set to on.

### Settings

**Default:** On



On

After simulation, Simulink displays a warning if you try to open a referenced model from a Model block that has normal mode visibility set to off. Simulink does not open the that instance referenced by the Model block, but instead opens the instance that has normal mode visibility set to on. The instance that has normal mode visibility set to on has different input data sources than the instance referenced by the Model block that you opened.



Off

No warning is displayed if, after simulation, you try to open a referenced model from a Model block that has normal mode visibility set to off.

### Tip

The warning that appears includes an option to suppress the display of the warning in the future. Enabling that option sets this preference to off. Use this preference to resume the display of the warning.

### See Also

"Simulate Multiple Referenced Model Instances in Normal Mode"

## Show callback tracing

Specify whether to display the model callbacks that Simulink invokes when simulating a model.

### Settings

**Default:** Off



On

Display the model callbacks in the MATLAB Command Window as they are invoked.

When you open or simulate a model, you can determine the callbacks invoked and their order.



Off

Do not display model callbacks.

### Command-Line Information

**Parameter:** CallbackTracing

**Value:** 'on' | 'off'

**Default:** 'off'

## Open the sample time legend when the sample time display is changed

Specify whether to display the sample time legend whenever the sample time display changes.

### Settings

**Default:** On



Display the sample time legend whenever you change the sample time display by selecting **Colors**, **Text**, or **All** from the **Sample Time** section of the **Information Overlays** menu in the **Debug** tab of the toolbar. The model is updated and the legend opens.



Do not display the sample time legend whenever the sample time display changes.

### Command-Line Information

**Parameter:** OpenLegendWhenChangingSampleTimeDisplay

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

"View Sample Time Information"

# Simulink Preferences Model File Pane

## Simulink Model File Preferences Overview

Set preferences for file change, autosave, version notifications, and other behaviors relating to model files

These options affect the behavior of all Simulink models.

### See Also

- “Set Simulink Preferences” on page 18-2
- “Simulink Preferences General Pane” on page 18-3
- “Simulink Preferences Editor Pane” on page 18-19

## File format for new models and libraries

### Settings

#### Default:SLX

Specify the default file format for new models and libraries.

##### MDL

Save new models and libraries in MDL format.

##### SLX

Save new models and libraries in SLX format.

### Command-Line Information

**Parameter:** ModelFormat

**Value:** 'mdl' | 'slx'

**Default:** slx

### Tip

You can choose model file format when using **Save As**.

### See Also

“Save Models in the SLX File Format”

## Save a thumbnail image inside SLX files

Specify whether to save a small screenshot of the model to display in the Current Folder browser preview pane.

### Settings

#### Default: On

**On**

When saving the model, include a small screen shot of the model inside the SLX file. You can view the screen shot for a selected model in the Current Folder browser preview pane.

 **Off**

Do not save a screenshot of the model.

**Tip**

If your model is very large and you want to reduce the time taken to save the model, then you can turn this preference off to avoid saving thumbnail model images.

**Command-Line Information**

**Parameter:** SaveSLXThumbnail

**Value:** 'on' | 'off'

**Default:** on

## Change Notification

Use these preferences to specify notifications if the model has changed on disk when you update, simulate, edit, or save the model. When updating or simulating, you can choose whether to warn, error, reload if unmodified, or show a dialog box that lets you choose to reload or ignore. For more information, see “Model File Change Notification”.

You can set these options under **Change Notification**:

- “Updating or simulating the model” on page 18-10
- “Action” on page 18-11
- “First editing the model” on page 18-12
- “Saving the model” on page 18-12

## Updating or simulating the model

Specify whether to notify if the model has changed on disk when updating or simulating the model.

**Settings**

**Default:** On

 **On**

Notify if the model has changed on disk when updating or simulating the model. Select the action to take in the **Action** list.

 **Off**

Do not notify if the model has changed on disk when updating or simulating the model.

**Tip**

To programmatically check whether the model has changed on disk since it was loaded, use the function `slIsFileChangedOnDisk`.

## Dependency

This parameter makes **Action** available.

### Command-Line Information

**Parameter:** MDLFileChangedOnDiskChecks

**Type:** struct, field name: CheckWhenUpdating

**Value:** true | false | 1 | 0

**Default:** true

## See Also

"Model File Change Notification"

## Action

Select the action to take if the file has changed on disk since it was loaded.

### Settings

**Default:** Warning

**Warning**

Displays a warning in MATLAB command window

**Error**

Displays an error. If simulating programmatically, the error appears in the MATLAB command window. If simulating interactively, the error appears in a Simulation Diagnostics window.

**Reload model (if unmodified)**

Reloads if the model is unmodified. If the model is modified, the prompt dialog box appears.

**Show prompt dialog**

Shows prompt dialog box in which you can choose to close and reload or ignore the changes.

## Tip

To programmatically check whether the model has changed on disk since it was loaded, use the function `slIsFileChangedOnDisk`.

## Dependency

This parameter is enabled by the **Updating or simulating the model** parameter.

### Command-Line Information

**Parameter:** MdlFileChangedOnDiskHandling

**Value:** 'Warning' | 'Error' | 'Reload model (if unmodified)' | 'Show prompt dialog'

**Default:** 'Warning'

## See Also

"Model File Change Notification"

## First editing the model

Specify whether to notify if the file has changed on disk when editing the model.

### Settings

**Default:** On



Displays a warning if the file has changed on disk when you modify the block diagram. Any interactive operation that modifies the block diagram (e.g., adding a block) causes a warning dialog box to appear. Any programmatic operation that causes the block diagram to be modified (e.g., a call to `set_param`) causes a warning in the MATLAB Command Window



Do not check for changes on disk when first editing the model.

### Tip

To programmatically check whether the model has changed on disk since it was loaded, use the function `slIsFileChangedOnDisk`.

### Command-Line Information

**Parameter:** `MDLFileChangedOnDiskChecks`

**Type:** struct, field name: `CheckWhenEditing`

**Value:** `true | false | 1 | 0`

**Default:** `true`

### See Also

"Model File Change Notification"

## Saving the model

Specify whether to notify if the file has changed on disk when saving the model.

### Settings

**Default:** On



Notify if the file has changed on disk when you save the model.

- Saving the model in the Simulink Editor causes a dialog box to appear. In the dialog box, you can choose to overwrite or save with a new name.
- The `save_system` function displays an error, unless you use the `OverwriteIfChangedOnDisk` option.



Do not check for changes on disk when saving the model.

**Tip**

To programmatically check whether the model has changed on disk since it was loaded, use the function `slIsFileChangedOnDisk`.

**Command-Line Information**

**Parameter:** `MDLFileChangedOnDiskChecks`

**Type:** struct, field name: `CheckWhenSaving`

**Value:** `true | false | 1 | 0`

**Default:** `true`

**See Also**

“Model File Change Notification”

**Autosave Options**

Use the autosave preferences to specify whether to automatically save a backup copy of the model before updating or simulating, or when overwriting with a newer version of Simulink.

For more information, see these options:

- “Save before updating or simulating the model” on page 18-13
- “Save backup when overwriting a file created in an older version of Simulink” on page 18-14

**Save before updating or simulating the model**

Specify whether to automatically save a backup copy of the model before updating or simulating.

**Settings**

**Default:** On



On

If the model has unsaved changes, automatically save a backup copy of the model before updating or simulating. This autosave copy can be useful for crash recovery.

The copy is saved in the same directory as the model, with the name `MyModel.slx.autosave` or `MyModel.mdl.autosave`.



Off

Do not automatically save a copy before updating or simulating.

**Tips**

- If you open or load a model that has a more recent autosave copy available, then after the model loads, a dialog box prompts to restore, ignore, or discard the autosave copy. If multiple models area involved, then the Model Recovery dialog box appears.
- For each model listed, you can select a check box to specify any of these options. Or you can click the **Restore All**, **Delete All** or **Ignore All** button to select that option for all listed models.

| Option                 | Result                                                                                                                                                                                                                                                                                                                                                 |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Restore</b>         | Overwrite the original model file with the autosave copy, and delete the autosave copy. Simulink will close the model and reload from the restored file. If you select the check box to <b>Keep a copy of original model file</b> , you can save copies of the original model files named <i>MyModel.slx.original</i> or <i>MyModel.mdl.original</i> . |
| <b>Delete Autosave</b> | Delete the autosave copy.                                                                                                                                                                                                                                                                                                                              |
| <b>Ignore</b>          | Leave the model and the autosave copy untouched. This setting is the default. The next time you open the model, the Model Recovery dialog will reappear and you can choose to restore or delete autosave files.                                                                                                                                        |

- Closing a modified model deletes any autosave copy.
- Autosave does not occur for models that are part of the MATLAB installation, so you will not create autosave copies of those models.
- Autosave does not occur if the autosave file or location is read-only.
- Autosave does not occur in Parallel Computing Toolbox workers.

**Caution** If a segmentation violation occurred, then the last autosave file for the model reflects the state of the autosave data prior to the segmentation violation. Because Simulink models might be corrupted by a segmentation violation, Simulink does not autosave a model after a segmentation violation occurs.

### Command-Line Information

**Parameter:** AutoSaveOptions

**Type:** struct, field name: SaveOnModelUpdate

**Value:** true | false | 1 | 0

**Default:** true

## Save backup when overwriting a file created in an older version of Simulink

Specify whether to automatically save a backup copy of the model when overwriting with a newer version of Simulink.

### Settings

**Default:** On

On

If saving the model with a newer version of Simulink, automatically save a backup copy of the model. This backup copy can be useful for recovering the original file in case of accidental overwriting with a newer version.

The backup copy is saved in the same directory as the model, with the name *MyModel.slx.Version* or *MyModel.mdl.Version*, where *Version* is the last version that saved the model, e.g., R2010a.

Off

Do not automatically save a backup copy when overwriting a model with a newer version of Simulink.

**Tip**

To recover the original model, rename the backup copy to *MyModel.mdl* or *MyModel.slx* by deleting the *Version* suffix.

**Command-Line Information**

**Parameter:** AutoSaveOptions

**Type:** struct, field name: SaveBackupOnVersionUpgrade

**Value:** true | false | 1 | 0

**Default:** true

## Notify when loading an old model

Specify whether to notify when loading a model last saved in a older version of Simulink software.

**Settings**

**Default:** Off

On

Print a message in the command window when loading a model last saved in an old version of Simulink software.

Off

No notification when loading old models.

**Tips**

- Run the Upgrade Advisor to convert the block diagram to the format of the current version of Simulink software.
- For advice on upgrading a model to the current version of Simulink, see “Model Upgrades”.

**Command-Line Information**

**Parameter:** NotifyIfLoadOldModel

**Value:** 'on' | 'off'

**Default:** off

## Do not load models created with a newer version of Simulink

Specify whether to load a model last saved in a newer version of Simulink software.

**Settings**

**Default:** On

**On**

Do not load any model last saved in a newer version of Simulink software, and print an error message in the command window.

 **Off**

Load models last saved in a newer version of Simulink software, and print a warning message in the command window.

**Tip**

If possible, use the **Save As** command to convert the block diagram to the format of the desired version of Simulink software. The **Save As** command allows you to save a model created with the latest version of the Simulink software in formats used by earlier versions. See “Export a Model to a Previous Simulink Version”.

**Command-Line Information**

**Parameter:** `ErrorIfLoadNewModel`

**Value:** `'on'` | `'off'`

**Default:** `on`

**Do not load models that are shadowed on the MATLAB path**

Specify whether to load a model that is shadowed by another file of the same name higher on the MATLAB path.

**Settings**

**Default:** Off

 **On**

Do not load any model that is shadowed by another file of the same name higher on the MATLAB path, and print an error message in the command window. This preference applies when you try to open or load a model or library by either:

- Selecting a file in the current folder browser
- Calling `open_system` or `load_system` with a path to a file in a different folder to the current folder

 **Off**

Load shadowed models, and print a warning message in the command window.

**Command-Line Information**

**Parameter:** `ErrorIfLoadShadowedModel`

**Value:** `'on'` | `'off'`

**Default:** `off`

**See Also**

“Shadowed Files”.

## Verify digital signature of protected model before opening

Specify whether to verify the signature on a protected model before opening it.

### Settings

**Default:** Off



On

Do not load a protected model that does not have a verified digital signature. Show an error if signature verification finds any of the following:

- The protected model was changed after it was signed.
- The protected model was not signed.
- The protected model was signed with an expired certificate.
- The protected model was self-signed with a certificate issued by the author.
- The protected model was signed with a missing or invalid certificate.
- The certificate in your system certificate authority store is missing or invalid.
- The model was signed with an invalid key.

Verification does not check if the certificate expired or was revoked after the protected model was signed.

This preference applies when you try to open or load a protected model by:

- Simulating or generating code for a model that references the protected model
- Performing an action that updates the diagram for a model that references the protected model
- Opening the Web view of the protected model
- Opening the protected model report

You can suppress the diagnostic for an unverified protected model when the error message appears in the **Diagnostic Viewer**. The error cannot be suppressed if the signature is not valid because model was changed after it was signed.



Off

Open protected models without verifying digital signatures.

### Command-Line Information

**Parameter:** ProtectedModelValidateCertificate

**Value:** 'on' | 'off'

**Default:** off

### See Also

"Reference Protected Model"

## Notify when opening a model in an unopened project

Specify whether to prompt to open the project containing the selected model.

**Settings****Default:** On

On

Prompt to open the selected model and the associated project.



Off

Open the selected model only.

**See Also**["Create a Project from a Model"](#)

# Simulink Preferences Editor Pane

## Simulink Editor Preferences Overview

Configure the Simulink Editor. These options affect the behavior of all Simulink models. The options relate to how models appear in terms of the visual theme, scroll wheel behavior, and toolbar configuration.

### See Also

- “Set Simulink Preferences” on page 18-2
- “Simulink Preferences General Pane” on page 18-3
- “Simulink Preferences Model File Pane” on page 18-9

## Use classic diagram theme

Option to cause diagrams to appear in the Simulink Editor using the visual theme that was used in the editor before R2012b.

### Settings

**Default:** Off



On

Uses the visual theme that was used in the Simulink Editor before R2012b. Content preview does not display.



Off

Uses the current Simulink Editor visual theme.

### Command-Line Information

**Parameter:** EditorModernTheme

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

For additional information, see “Build and Edit a Model Interactively”.

## Line crossing style

Change the default display for signal lines that cross.

### Settings

**Default:** Tunnel

Tunnel

Causes straight signal lines that cross each other but are not connected to display a slight gap before and after the vertical line where it intersects the horizontal line.

### Line Hop

Shows a bend where the vertical line intersects the horizontal line. Simulink adjusts the side the bend appears on to avoid overlapping with a block icon. If having the bend on either side overlaps with a block, Simulink uses a solid line.

#### None

Uses solid lines. This format can improve performance slightly for updating very large models. With the **Use classic diagram theme** preference enabled, Simulink uses a solid line.

### Command-Line Information

**Parameter:** EditorPathXStyle

**Value:** 'grad\_pin' | 'hop' | 'none'

**Default:** 'grad\_pin'

### See Also

For additional information, see "Build and Edit a Model Interactively".

## Scroll wheel controls zooming

Option to use the scroll wheel on the mouse to zoom without the **Ctrl** key modifier. On Macintosh platforms with an Apple Magic Trackpad, if you enable **Scroll wheel controls zooming**, a panning gesture causes zooming.

### Settings

**Default:** On



On

Enables using the mouse scroll wheel to zoom without using a key modifier. On Macintosh platforms with an Apple Magic Trackpad, enables pan to zoom.



Off

Enables zooming by using the **Ctrl** key with the scroll wheel.

### Command-Line Information

**Parameter:** EditorScrollWheelZooms

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

For more information on zooming, see "Zoom, Scroll, and Change Current Window".

## Content preview displays for new hierarchical elements

Option to display the contents of hierarchical model elements, such as subsystems, on new elements.

### Settings

**Default:** On

On

Displays the contents of hierarchical model elements, such as subsystems, on new elements. This preference does not affect existing elements in your model.

 Off

Does not display the contents of hierarchical model elements.

**Command-Line Information**

**Parameter:** EditorContentPreviewDefaultOn

**Value:** 'on' | 'off'

**Default:** 'on'

**See Also**

You can also turn content preview on and off for each hierarchical element in your model. For detailed information on content preview, see "Preview Content of Model Components".

**Enable smart editing features**

Option to enable the use of smart editing cues to perform common model editing tasks quickly. These are the smart editing features affected by this option:

- Quick insert — Add a block to a model by typing a block name.
- Tear-off block addition — Add a complementary block from a block tear-off cue. For example, when you add a GoTo block, you can use a tear-off to add a corresponding From block.
- Multiselection actions — Perform actions from the prompt that appears when you select multiple blocks.
- Single-selection actions — Perform actions from the prompt that appears when you select a block or a signal.

**Settings**

**Default:** On

 On

Enables smart editing cues.

 Off

Disables smart editing cues.

**Command-Line Information**

**Parameter:** EditorSmartEditing

**Value:** 'on' | 'off'

**Default:** 'on'

**See Also**

For more information, see "Build and Edit a Model Interactively".

## Edit key parameter when adding new blocks

Option to be prompted to enter a key parameter when you add a block to a model.

### Settings

**Default:** On



On

Enables the prompt to enter a key parameter when adding a block to a model.



Off

Disables the prompt to enter a key parameter when adding a block to a model.

### Command-Line Information

**Parameter:** EditorSmartEditingHotParam

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

For an example that uses a key parameter, see “Add More Blocks”.

## Toolbar Configuration

Specify the buttons that appear on the toolbar. For more information, see these options:

- “Simulation cache folder” on page 18-3
- “Code generation folder” on page 18-4

## File Toolbar

Specify the buttons related to opening, saving, and creating to display on the toolbar.

### Settings

**Default:** New/Open/Save

New/Save

Displays the **New** and **Save** buttons on the toolbar.

New/Open/Save

Displays the **New**, **Open**, and **Save** buttons on the toolbar.

None

Does not display any of the file-related buttons on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities

**Type:** struct

**Field name:** NewSave

**Value:** 'on' | 'off'

**Default:** 'off'  
**Field name:** NewOpenSave  
**Value:** 'on' | 'off'  
**Default:** 'on'

### See Also

For more information on editing in the Simulink Editor, see “Build and Edit a Model Interactively”.

## Print

Specify whether to show the **Print** button on the toolbar.

### Settings

**Default:** Off



On

Displays the **Print** button on the toolbar.



Off

Does not display the **Print** button on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities  
**Type:** struct, field name: Print  
**Value:** 'on' | 'off'  
**Default:** 'off'

### See Also

For information on printing, see “Print Model Diagrams”.

## Cut/Copy/Paste

Specify whether to show the **Cut**, **Copy**, and **Paste** buttons on the toolbar.

### Settings

**Default:** On



On

Displays the **Cut**, **Copy**, and **Paste** buttons on the toolbar



Off

Does not display the **Cut**, **Copy**, and **Paste** buttons on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities  
**Type:** struct, field name: CutCopyPaste  
**Value:** 'on' | 'off'

**Default:** 'on'

## Undo/Redo

Specify whether to show the **Undo** and **Redo** buttons on the toolbar.

### Settings

**Default:** Off



Displays the **Undo** and **Redo** buttons on the toolbar.



Does not display the **Undo** and **Redo** buttons on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities

**Type:** struct, field name: Undoredo

**Value:** 'on' | 'off'

**Default:** 'off'

### See Also

For more information on editing in the Simulink Editor, see “Build and Edit a Model Interactively”.

## Browse Back/Forward/Up

Specify whether to show the browsing buttons on the toolbar.

### Settings

**Default:** On



Displays the browse back, forward, and up arrows on the toolbar.



Does not display the browsing buttons on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities

**Type:** struct, field name: Navigate

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

For more information on editing in the Simulink Editor, see “Build and Edit a Model Interactively”.

## Library/Model Configuration/Model Explorer

Specify whether to show the **Library**, **Model Configuration**, and **Model Explorer** buttons on the toolbar.

### Settings

**Default:** On



On

Displays the **Library**, **Model Configuration**, and **Model Explorer** buttons on the toolbar.



Off

Does not display the **Library**, **Model Configuration**, and **Model Explorer** buttons on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities

**Type:** struct, field name: LibraryExplorer

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

- **Library Browser**
- **Model Explorer**
- “Manage Configuration Sets for a Model”

## Refresh Blocks

Specify whether to show the **Refresh Blocks** button on the toolbar. Refreshing a Model block updates its internal representation to reflect changes in the interface of the model that it references.

### Settings

**Default:** Off



On

Displays the **Refresh Blocks** button on the toolbar.



Off

Does not display the **Refresh Blocks** button on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities'

**Type:** struct, field name: RefreshBlocks

**Value:** 'on' | 'off'

**Default:** 'off'

### See Also

For more information, see “Refresh Model Blocks”.

## Update Diagram

Specify whether to show the **Update Diagram** button on the toolbar.

### Settings

**Default:** Off



On

Displays the **Update Diagram** button on the toolbar.



Off

Does not display the **Update Diagram** button on the toolbar.

### Command-Line Information

**Parameter:** 'ToolbarVisibilities'

**Type:** struct, field name: UpdateDiagram

**Value:** 'on' | 'off'

**Default:** 'off'

### See Also

- For more information, see “Update Diagram and Run Simulation”.

## Simulation

Specify whether to show the simulation controls on the toolbar.

### Settings

**Default:** On



On

Displays the simulation controls on the toolbar.



Off

Does not display the simulation controls on the toolbar.

### Command-Line Information

**Parameter:** ToolbarVisibilities

**Type:** struct, field name: Simulation

**Value:** 'on' | 'off'

**Default:** 'on'

### See Also

For information on simulation, see “Simulate a Model Interactively”.

## Fast Restart

Specify whether to show the **Fast Restart** button with the simulation controls on the toolbar.

## Settings

**Default:** On



On

Displays the **Fast Restart** button on the toolbar.



Off

Does not display the **Fast Restart** button on the toolbar.

## See Also

For more information on fast restart, see “Get Started with Fast Restart”.

## Debug Model

Specify whether to show the **Debug Model** button on the toolbar.

## Settings

**Default:** Off



On

Displays the **Debug Model** button on the toolbar.



Off

Does not display the **Debug Model** button on the toolbar.

## Command-Line Information

**Parameter:** ToolbarVisibilities  
**Type:** struct, field name: DebugModel  
**Value:** 'on' | 'off'  
**Default:** 'off'

## See Also

For more information on using **Debug Model**, see “Start the Simulink Debugger”.

## Model Advisor

Specify whether to show the **Model Advisor** button on the toolbar.

## Settings

**Default:** On



On

Displays the **Model Advisor** button on the toolbar.



Off

Does not display the **Model Advisor** button on the toolbar.

**Command-Line Information****Parameter:** ToolbarVisibilities**Type:** struct, field name: ModelAdvisor**Value:** 'on' | 'off'**Default:** 'on'**See Also**

For information on the Model Advisor, see “Check Your Model Using the Model Advisor”.

**Build**

Specify whether to show the **Build** button on the toolbar.

**Settings****Default:** On

On

Displays the **Build** button on the toolbar.

Off

Does not display the **Build** button on the toolbar.**Command-Line Information****Parameter:** ToolbarVisibilities**Type:** struct, field name: Build**Value:** 'on' | 'off'**Default:** 'on'**See Also**

For more information on building models, see:

- “Code Generation Basics” (Embedded Coder)
- “Deployment” (Embedded Coder)

**Find**

Specify whether to show the **Find** button on the toolbar.

**Settings****Default:** Off

On

Displays the **Find** button on the toolbar.

Off

Does not display the **Find** button on the toolbar.

**Command-Line Information**

**Parameter:** ToolbarVisibilities

**Type:** struct, field name: Find

**Value:** 'on' | 'off'

**Default:** 'off'

**See Also**

For more information, see “Search for Model Elements Using Find”.

## Font Styles for Models

### Font Styles Overview

Configure font options for blocks, lines, and annotations.

#### Configuration

New models use these styles. For details, see “Specify Fonts in Models”.

- 1 Use the lists to specify font types, styles, and sizes to apply to new block diagrams.
- 2 Close **OK**.

# Simulink Mask Editor

---

- “Mask Editor Overview” on page 19-2
- “Dialog Control Operations” on page 19-27
- “Specify Data Types Using DataTypeStr Parameter” on page 19-30
- “Design a Mask Dialog Box” on page 19-36

## Mask Editor Overview

### In this section...

- “Icon & Ports Pane” on page 19-2
- “Parameters & Dialog Pane” on page 19-10
- “Initialization Pane” on page 19-21
- “Documentation Pane” on page 19-23
- “Additional Options” on page 19-25

A mask is a custom user interface for a block that hides the block's contents, making it appear to the user as an atomic block with its own icon and parameter dialog box.

The **Mask Editor** dialog box helps you create and customize the block mask. The **Mask Editor** dialog box opens when you create or edit a mask. You can access the **Mask Editor** dialog box by any of these options:

To create mask,

- In the **Modeling** tab, under **Component**, click **Create Model Mask**.
- Select the block and on the **Block** tab, in the **Mask** group, click **Create Mask**. The Mask Editor opens.

To edit mask,

- On the **Block** tab, in the **Mask** group, click **Edit Mask**.
- Right-click the block and select **Mask > Edit Mask**.

---

**Note** You can also use the keyboard shortcut **CTRL + M** to open Mask Editor.

---

The **Mask Editor** dialog box contains a set of tabbed panes, each of which enables you define a feature of the mask. These tabs are:

- “Icon & Ports Pane” on page 19-2: To create block mask icons.
- “Parameters & Dialog Pane” on page 19-10: To design mask dialog boxes.
- “Initialization Pane” on page 19-21: To initialize a masked block using MATLAB code.
- “Documentation Pane” on page 19-23: To add description and help about the block mask.

---


**Note** For information on creating and editing a block mask from command line, see “Control Masks Programmatically”.

---

### Icon & Ports Pane

- “Options” on page 19-3
- “Preview” on page 19-7
- “Icon drawing commands” on page 19-8

The **Icon & Ports** pane helps you to create a block icon that contains descriptive text, state equations, image, and graphics.

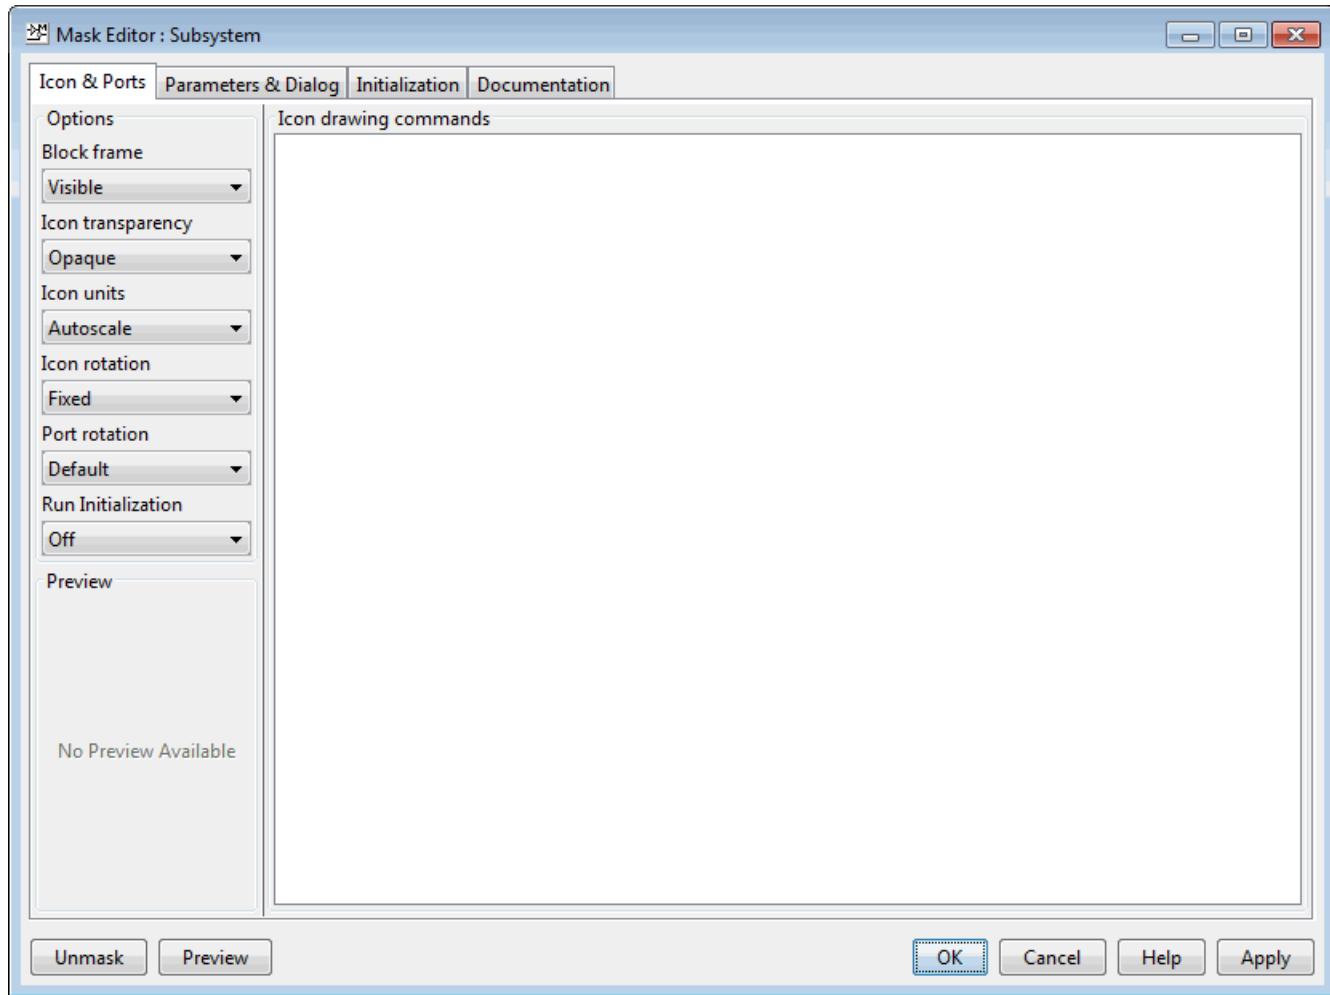

The **Icon & Ports** pane is divided into these sections:

- “Options” on page 19-3: Provides a list of different controls that can be applied on the mask icon.
- “Preview” on page 19-7: Displays the preview of the block mask icon.
- “Icon drawing commands” on page 19-8: Enables you to draw mask icon by using MATLAB code.

---

**Note** You can create static and dynamic block mask icon. For more information, see “Draw Mask Icon” and `slexMaskDisplayAndInitializationExample`.

---


## Options

**Options** available in the left pane are a list of controls that allow you to specify attributes on the mask icon. These options are,

- “Block frame” on page 19-4
- “Icon transparency” on page 19-4
- “Icon units” on page 19-5
- “Icon rotation” on page 19-5
- “Port rotation” on page 19-5
- “Run Initialization” on page 19-7


### Block frame

The block frame is the rectangle that encloses the block. You can choose to show or hide the frame by setting the **Block Frame** parameter to **Visible** or **Invisible**. The default is to make the block frame visible. For example, this figure shows visible and invisible block frames for an AND gate block.

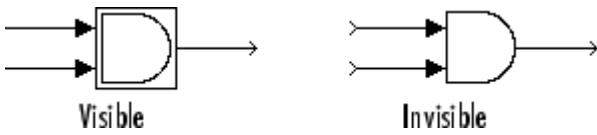


### Icon transparency

The icon transparency can be set to **Opaque**, **Opaque with ports**, or **Transparent**, based on whether you want to hide or show what is underneath the icon. The default option **Opaque** hides information such as port labels. The block frame is displayed for a transparent icon, and hidden for the opaque icon.

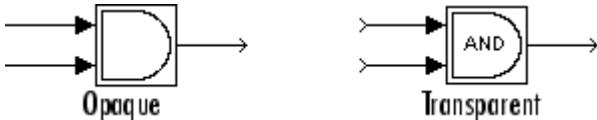

For a subsystem block, if you set the icon transparency to **Opaque with ports** the port labels are visible.




---

### Note

- For the **Opaque** option to hide the port labels, there must be an icon drawing command added in the mask editor.
  - If you set the icon transparency to **Transparent**, Simulink does not hide the block frame even if you set the **Block Frame** property to **Invisible**.
-

### Icon units

This option controls the coordinate system used by the drawing commands. It applies only to the plot, text, and patch drawing commands. You can select from among these choices: Autoscale, Normalized, and Pixel.

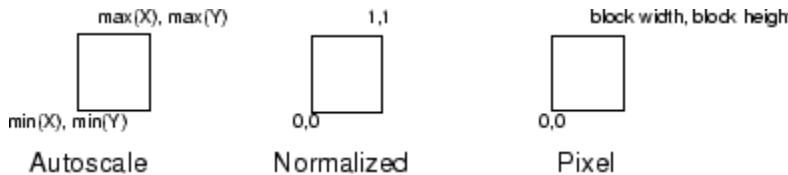

- **Autoscale** scales the icon to fit the block frame. When the block is resized, the icon is also resized. For example, this figure shows the icon drawn using these vectors:

```
X = [0 2 3 4 9]; Y = [4 6 3 5 8];
```



The lower-left corner of the block frame is (0,3) and the upper-right corner is (9,8). The range of the x-axis is 9 (from 0 to 9), while the range of the y-axis is 5 (from 3 to 8).

- **Normalized** draws the icon within a block frame whose bottom-left corner is (0,0) and whose top-right corner is (1,1). Only X and Y values from 0 through 1 appear. When the block is resized, the icon is also resized. For example, this figure shows the icon drawn using these vectors:

```
X = [.0 .2 .3 .4 .9]; Y = [.4 .6 .3 .5 .8];
```



- **Pixel** draws the icon with X and Y values expressed in pixels. The icon is not automatically resized when the block is resized. To force the icon to resize with the block, define the drawing commands in terms of the block size.

### Icon rotation

When the block is rotated or flipped, you can choose whether to rotate or flip the icon or to have it remain fixed in its original orientation. The default is not to rotate the icon. The icon rotation is consistent with block port rotation. This figure shows the results of choosing Fixed and Rotates icon rotation when the AND gate block is rotated.



### Port rotation

This option enables you to specify a port rotation type for the masked block. The choices are:

- **default**

Ports are reordered after a clockwise rotation to maintain a left-to-right port numbering order for ports along the top and bottom of the block and a top-to-bottom port numbering order for ports along the left and right sides of the block.


- **physical**

Ports rotate with the block without being reordered after a clockwise rotation.


The default rotation option is appropriate for control systems and other modeling applications where block diagrams typically have a top-down and left-right orientation. It simplifies editing of diagrams, by minimizing the need to reconnect blocks after rotations to preserve the standard orientation.

Similarly, the physical rotation option is appropriate for electronic, mechanical, hydraulic, and other modeling applications where blocks represent physical components and lines represent physical connections. The physical rotation option more closely models the behavior of the devices represented (that is, the ports rotate with the block as they would on a physical device). In addition, the option avoids introducing line crossings as the result of rotations, making diagrams easier to read.

For example, the following figure shows two diagrams representing the same transistor circuit. In one, the masked blocks representing transistors use default rotation and in the other, physical rotation.

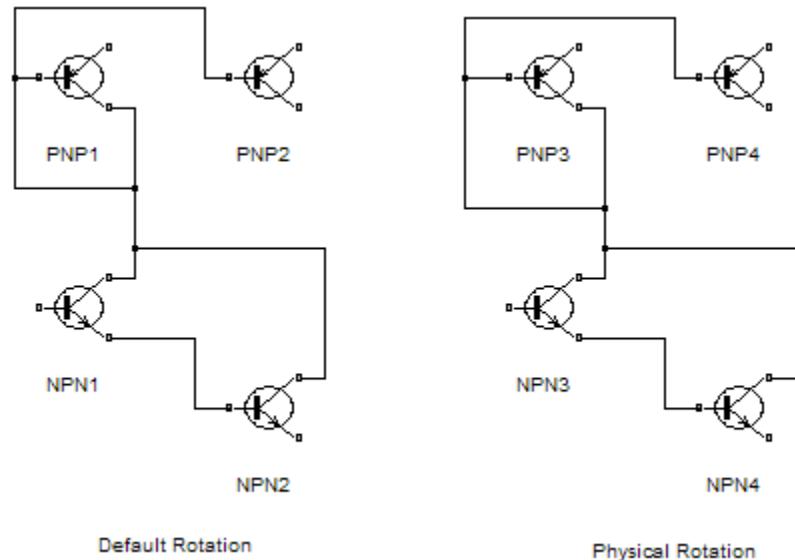

Both diagrams avoid line crossings that make diagrams harder to read. The next figure shows the diagrams after a single clockwise rotation.

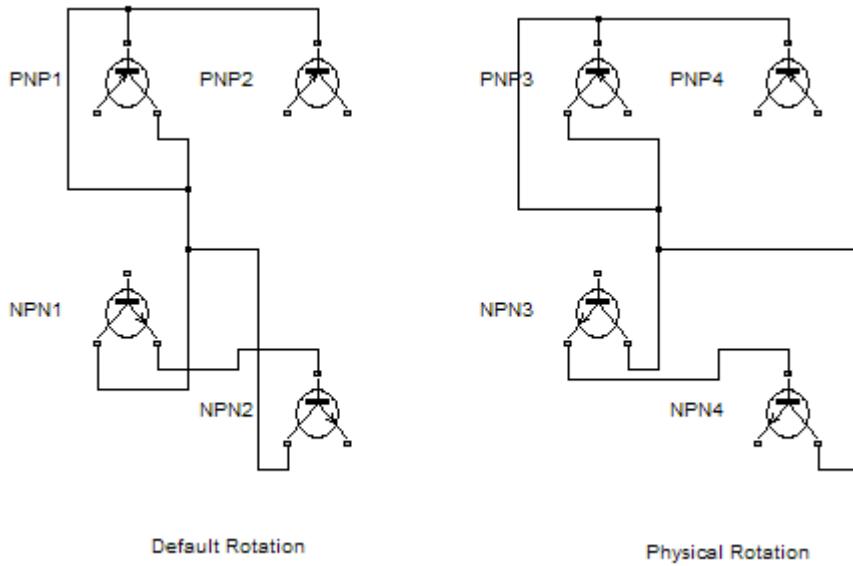

**Note** The rotation introduces a line crossing the diagram that uses default rotation but not in the diagram that uses physical rotation. Also that there is no way to edit the diagram with default rotation to remove the line crossing. See “Flip or Rotate Blocks” for more information.

## Run Initialization

The **Run initialization** option enables you to control the execution of the mask initialization commands. The choices are:

- **Off** (Default): Does not execute the mask initialization commands. When the mask drawing commands do not have dependency on the mask workspace, it is recommended to specify the value of **Run initialization** as **Off**. Setting the value to **Off** helps in optimizing Simulink performance as the mask initialization commands are not executed.
- **On**: Executes the mask initialization commands if the mask workspace is not up-to-date. When this option is specified, the mask initialization commands are executed before executing the mask drawing commands irrespective of the mask workspace dependency of the mask drawing commands.
- **Analyze**: Executes the mask initialization commands only if there is mask workspace dependency. When this option is specified, Simulink executes the mask initialization commands before executing the mask icon drawing commands. The **Analyze** option is for backward compatibility and is not recommended otherwise. It is recommended that the Simulink models from R2016b or before are upgraded using the Upgrade Advisor.

For more information, see `slexMaskDrawingExamples`.

## Preview


This section displays the preview of block mask icon. Block mask preview is available only if the mask contains an icon drawing.


When you add an icon drawing command and click **Apply**, the preview image refreshes and is displayed in the **Preview** section of **Icon & Ports** pane.

### **Icon drawing commands**

The Icon drawing commands text box available in the center pane enables you to add code to draw the block icon. You can use the list of commands mentioned in the Mask icon drawing commands tables to draw a block icon.

## Mask icon drawing commands
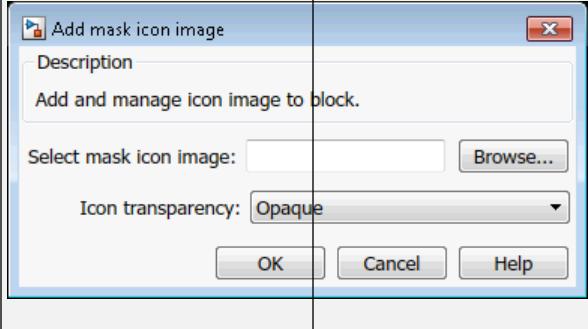
| Drawing Command | Description                                                                                                                                                   | Syntax Example                                         | Preview                                                                                                                                                                       |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| color           | Change drawing color of subsequent mask icon drawing commands                                                                                                 | color('red');<br>port_label('output', 1, 'Text')       |                                                                                            |
| disp            | Display text on the masked icon.                                                                                                                              | disp('Gain')                                           |                                                                                            |
| dpoly           | Display transfer function on masked icon                                                                                                                      | dpoly([0 0 1], [1 2 1], 'z')                           |                                                                                            |
| droots          | Display transfer function on masked icon                                                                                                                      | droots([-1], [-2 -3], 4)                               |                                                                                            |
| fprintf         | Display variable text centered on masked icon                                                                                                                 | fprintf('Sum = %d', 7)                                 |                                                                                            |
| image           | Display RGB image on masked icon<br><br><b>Note</b> To add mask icon image from the user interface, click <b>Mask &gt; Add Mask Icon</b> in the context menu. | image('b747.jpg')                                      | <br> |
| patch           | Draw color patch of specified shape on masked icon                                                                                                            | patch([0 10 20 30 30 0], [10 30 20 25 10 10], [1 0 0]) |                                                                                          |
| plot            | Draw graph connecting series of points on masked icon                                                                                                         | plot([10 20 30 40], [10 20 10 15])                     |                                                                                          |
| port_label      | Draw port label on masked icon                                                                                                                                | port_label('output', 1, 'xy')                          |                                                                                          |

| Drawing Command | Description                                                                                                           | Syntax Example                                                                                                                           | Preview                                                                             |
|-----------------|-----------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| text            | Display text at specific location on masked icon .<br><br>You must select <b>Pixels</b> in the <b>Icon units</b> box. | text(5,10, 'Gain')                                                                                                                       |  |
| block_icon      | Promote icon of a block contained in a Subsystem to the Subsystem mask                                                | block_icon(BlockName)<br><br>Here, the icon of block is promoted to its Subsystem block.<br><br>For more information, see slexblockicon. |  |

**Note** Simulink does not support mask drawing commands within anonymous functions.

The drawing commands execute in the same sequence as they are added in the **Icon drawing commands** text box. Drawing commands have access to all variables in the mask workspace. If any drawing command cannot successfully execute, the block icon displays question masks .


The drawing commands execute after the block is drawn in these cases:

- Changes are made and applied in the mask dialog box.
- Changes are made in the Mask Editor.
- Changes are done to the block diagram that affects the block appearance, such as rotating the block.

## Parameters & Dialog Pane

- “Controls” on page 19-12
- “Dialog box” on page 19-17
- “Property editor” on page 19-18

The **Parameters & Dialog** pane enables you to design mask dialog boxes using the dialog controls in the **Parameters**, **Display**, and **Action** palettes.

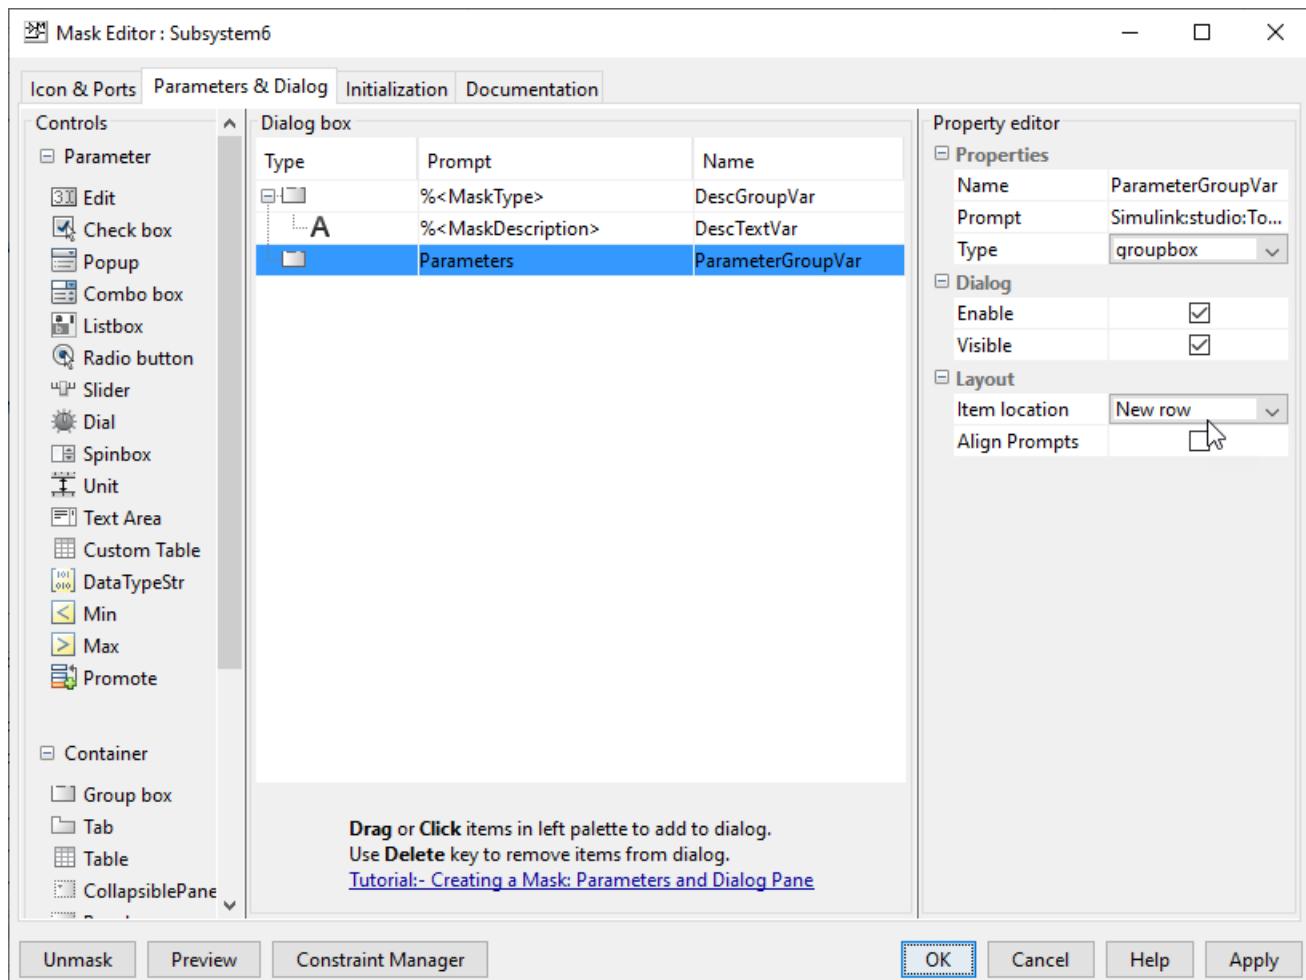

The **Parameters & Dialog** pane divided into these sections:

### Parameter & Dialog Pane

| Section                         | Section Description                                                                                                                           | Sub-Section | Sub-Section Description                                                                                                                                              |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| “Controls” on page 19-12        | Controls are elements in a mask dialog box that users can interact with to add or manipulate data.                                            | Parameter   | Parameters are user inputs that take part in simulation. The <b>Parameters</b> palette has a set of parameter dialog controls that you can add to a mask dialog box. |
|                                 |                                                                                                                                               | Display     | <b>Controls</b> on the <b>Display</b> palette allow you to group dialog controls in the mask dialog box and display text and images                                  |
|                                 |                                                                                                                                               | Action      | Action controls allow you to perform some actions in the mask dialog box. For example, you can click a hyperlink or a button in the mask dialog box.                 |
| “Dialog box” on page 19-17      | You can click or drag and drop dialog controls from the palettes to the <b>Dialog box</b> to create a mask dialog box.                        | NA          | NA                                                                                                                                                                   |
| “Property editor” on page 19-18 | The <b>Property editor</b> allows you to view and set the properties for the <b>Parameters</b> , <b>Display</b> , and <b>Action</b> controls. | Properties  | Defines basic information on all dialog controls, such as <b>Name</b> , <b>Value</b> , <b>Prompt</b> , and <b>Type</b> .                                             |
|                                 |                                                                                                                                               | Attributes  | Defines how a mask dialog control is interpreted. Attributes are related only to parameters.                                                                         |
|                                 |                                                                                                                                               | Dialog      | Defines how dialog controls are displayed in the mask dialog box.                                                                                                    |
|                                 |                                                                                                                                               | Layout      | Defines how dialog controls are laid out on the mask dialog box.                                                                                                     |

### Controls

The controls section is sub divided into Parameters, Display, and Action sections. The Controls Table lists the different controls and their description.

## Controls Table

| Controls   |              | Description                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parameters |              |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|            | Edit         | Allows you to enter a parameter value by typing it into the field.<br>You can associate constraints to an <b>Edit</b> parameter.                                                                                                                                                                                                                                                                                                               |
|            | Check box    | Accepts a Boolean value.                                                                                                                                                                                                                                                                                                                                                                                                                       |
|            | Popup        | Allows you to select a parameter value from a list of possible values. When you select the <b>Evaluate</b> check box, the associated variable holds the index of the selected item. Note that the index starts from 1, and not 0. When <b>Evaluate</b> is disabled, the associated variable holds the string of the selected item.                                                                                                             |
|            | Combo box    | Allows you to select a parameter value from a list of possible values. You can also type a value either from the list or from outside of the list. When you select the <b>Evaluate</b> check box, the associated variable holds the actual value of the selected item.<br><br>You can associate constraints to a Combo box parameter.<br><br>For more information, see the Combo box example in <code>slexMaskParameterOptionsExample</code> . |
|            | Listbox      | Allows you to create a list of parameter values. All options of possible values are displayed on the mask dialog box. You can select multiple values from it.                                                                                                                                                                                                                                                                                  |
|            | Radio button | Allows you to select a parameter value from a list of possible values. All options for a radio button are displayed on the mask dialog.                                                                                                                                                                                                                                                                                                        |

| Controls                                                                            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p><b>Slider</b></p> <p>Allows you to slide to values within a range defined by minimum and maximum values. A <b>Slider</b> parameter can accept input as a number or a variable name. If the specified variable is a base workspace or a model workspace variable, you can tune the variable value through the <b>Slider</b>.</p> <p>You can tune the values in the linear scale or logarithmic scale using the <b>Scale</b> drop-down menu</p> <p>You can also control the slider range dynamically. For more information, see <a href="#">slexMaskParameterOptionsExample</a>.</p> <p><b>Note</b> Values specified for Slider are auto applied.</p> |
|  | <p><b>Dial</b></p> <p>Allows you to dial to values within a range defined by minimum and maximum values. A <b>Dial</b> parameter can accept input as a number or a variable name. If the specified variable is a base workspace or a model workspace variable, you can tune the variable value through the <b>Dial</b>.</p> <p>You can tune the values in the linear scale or logarithmic scale using the <b>Scale</b> drop-down menu.</p> <p>You can also control the dial range dynamically. For more information, see <a href="#">slexMaskParameterOptionsExample</a>.</p> <p><b>Note</b> Values specified for Dial are auto applied.</p>           |

| Controls                                                                            | Description                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | <p>Spinbox</p> <p>Allows you to spin through values within a range defined by minimum and maximum values. You can specify a step size for the values.</p> <p><b>Note</b> Values specified for Spinbox are auto applied.</p>                                                                                                                                          |
|    | <p>DataTypeStr</p> <p>Enables you to specify a data type for a mask parameter. You can associate the <b>Min</b>, <b>Max</b>, and <b>Edit</b> parameters with a data type parameter. For more details, see “Specify Data Types Using DataTypeStr Parameter” on page 19-30.</p>                                                                                        |
|    | <p>Min</p> <p>Specifies a minimum value for the <b>DataTypeStr</b> parameter.</p>                                                                                                                                                                                                                                                                                    |
|    | <p>Max</p> <p>Specifies a maximum value for the <b>DataTypeStr</b> parameter.</p>                                                                                                                                                                                                                                                                                    |
|  | <p>Unit</p> <p>Allows you to set the measurement units for output or input values of a masked block. The <b>Unit</b> parameter can accept any units of measurement as input. For example, rad/sec for angular velocity, meters/sec<sup>2</sup> for acceleration, or distance in km or m. For more information, see <code>slexMaskParameterOptionsExample</code>.</p> |
|  | <p>Custom Table</p> <p>Allows you to add tables in the mask dialog box. You can add values as a nested cell array in the <b>Values</b> section of the Property editor. For more information, see <code>slexMaskParameterOptionsExample</code>.</p>                                                                                                                   |

| Controls  | Description                                                                                                                                                                                                                                                                                                                     |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|           | Allows you to selectively promote block parameters from underlying blocks to the mask. Click the <b>Type options</b> field to open the <b>Promoted Parameter Selector</b> dialog box. In this dialog box, you can select the block parameters that you want to promote. Click <b>OK</b> to close it.                            |
|           | Allows you to promote all underlying block parameters to the mask. When you promote all parameters, the promote operation deletes parameters that have been promoted previously.                                                                                                                                                |
| Container |                                                                                                                                                                                                                                                                                                                                 |
|           | Container to group of dialog controls. You use a <b>Panel</b> for logical grouping of dialog controls.                                                                                                                                                                                                                          |
|           | Container to group other dialog controls and containers in the mask dialog box.                                                                                                                                                                                                                                                 |
|           | Tab to group dialog controls in the mask dialog box. A tab is contained within a tab container. A tab container can have multiple tabs.                                                                                                                                                                                         |
|           | <p>Container to group the <b>Edit</b>, <b>Check box</b>, and the <b>Popup</b> parameters in a tabular form. You can also search and sort the content listed within the <b>Table</b> container.</p> <p>For more information, see the Tables example in Dialog Layout Options and “Handling Large Number of Mask Parameters”.</p> |

| Controls                                                                            |                  | Description                                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | CollapsiblePanel | Container to group dialog controls similar to <b>Panel</b> . You can choose to expand or collapse the <b>CollapsiblePanel</b> dialog controls.<br><br>For more information, see the Collapsible Panel example in Dialog Layout Options. |
| Display                                                                             |                  |                                                                                                                                                                                                                                         |
|    | Text             | Text displayed in the mask dialog box.                                                                                                                                                                                                  |
|    | Image            | Image displayed in the mask dialog box.                                                                                                                                                                                                 |
|    | Text Area        | Add a custom text or MATLAB code in the mask dialog box.                                                                                                                                                                                |
|    | Listbox Control  | Allows you to select a value from a list of possible values. You can select multiple values ( <b>Ctrl</b> + click).                                                                                                                     |
|  | Tree Control     | Allows you to select a value from a hierarchical tree of possible values. You can select multiple values ( <b>Ctrl</b> + click).                                                                                                        |
| Action                                                                              |                  |                                                                                                                                                                                                                                         |
|  | Hyperlink        | Hyperlink text displayed on the mask dialog box.                                                                                                                                                                                        |
|  | Button           | Button controls on the mask dialog box. You can program button for specific actions. You can also add an image on a button controls. For more information, see <a href="#">slexMaskParameterOptionsExample</a> .                        |

## Dialog box

You can build a hierarchy of dialog controls by dragging them from a **Controls** section to the **Dialog box**. You can also click the palettes on the **Controls** section to add the required control to the **Dialog box**. You can add a maximum of 32 levels of hierarchy in the **Dialog box**.

The **Dialog box** displays three fields: **Type**, **Prompt**, and **Name**.

- The **Type** field shows the type of the dialog control and cannot be edited. It also displays a sequence number for parameter dialog controls.
- The **Prompt** field shows the prompt text for the dialog control.


- The **Name** field is auto-populated and uniquely identifies the dialog controls. You can choose to add a different value (valid MATLAB name) in the **Name** field and must not match the built-in parameter name.

The **Parameter** controls are displayed in light blue background whereas the **Display** and **Action** controls are displayed in white background on the **Dialog box**.

You can move a dialog control in the hierarchy, you can copy and paste a dialog control, you can also delete a node. For more information, see “Dialog Control Operations” on page 19-27.

### Property editor

The **Property editor** allows you to view and set the properties for **Parameter**, **Display**, and **Action** dialog controls. The **Property editor** for **Parameter** is shown:

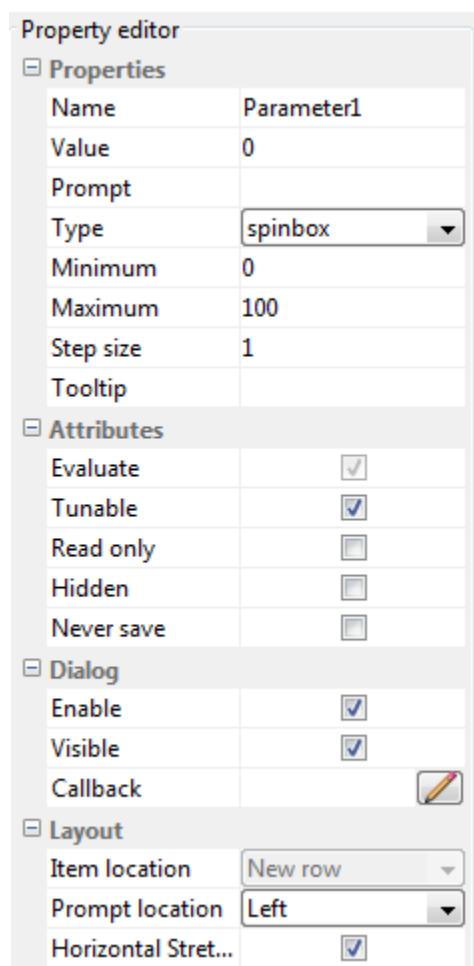

You can set the following properties for **Parameter**, **Action**, and **Display** dialog controls. For more information, see the Property editor table.

## Property editor

| Property            | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Properties</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Name                | Uniquely identifies the dialog control in the mask dialog box. The <b>Name</b> property must be set for all dialog controls.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Value               | Value of the <b>Parameter</b> dialog control. The <b>Value</b> property applies only to the <b>Parameter</b> dialog controls.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Prompt              | Label text that identifies the parameters in a mask dialog box. The <b>Prompt</b> property applies to all dialog controls except <b>Panel</b> and <b>Image</b> dialog control.                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Type                | Type of the dialog control. You can use the <b>Type</b> field to change the <b>Parameter</b> and <b>Container</b> types. You cannot change any container type to <b>Tab</b> and vice versa.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Expand              | Allows you to specify if the collapsible panel dialog control is expanded or collapsed, by default.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Type options        | The <b>Type options</b> property allows you to set specific <b>Parameter</b> properties. The <b>Type options</b> property applies to the <b>Popup</b> , <b>Radio button</b> , <b>DataTypeStr</b> , and <b>Promoted</b> parameters.                                                                                                                                                                                                                                                                                                                                                                                         |
| File path           | <p>You can add an image to a mask using the <b>Image</b> dialog control. You can also display an image on a <b>Button</b> dialog control. In either case, provide the path to the image in the <b>File path</b> property that is enabled for these two dialog controls. For the <b>Button</b> dialog control, specify an empty character vector for the <b>Prompt</b> property in order for the image to be displayed.</p> <p>Note that, when you provide the filepath do not use the quote marks (' '). For example, if you want to add an image, provide the filepath as : C:\Users\User1\Image_Repositort\motor.png</p> |
| Word wrap           | The <b>Word wrap</b> property enables word wrapping for long text. The <b>Word wrap</b> property applies only for <b>Text</b> dialog control.                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Maximum and Minimum | The <b>Maximum</b> and <b>Minimum</b> properties enable you to specify a range for controls like <b>Spinbox</b> , <b>Slider</b> , and <b>Dial</b> .                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Step size           | Allows you to specify a step size for the values. This property applies only for <b>Spinbox</b> dialog control.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Tooltip             | Allows you to specify a tooltip for the selected dialog control type. The tooltip is visible when you hover the cursor over a dialog control on the mask dialog box. You can add tooltips for all dialog controls type except for <b>Group box</b> , <b>Tab</b> , <b>CollapsiblePanel</b> , and <b>Panel</b> .                                                                                                                                                                                                                                                                                                             |
| Scale               | Allows you to set the tuning scale as linear or log for <b>Slider</b> and <b>Dial</b> dialog controls.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Attributes</b>   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |


| Property          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |            |    |            |        |           |            |  |              |           |            |            |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|----|------------|--------|-----------|------------|--|--------------|-----------|------------|------------|
| Evaluate          | Simulink uses the value of a mask parameter as you type it in the mask dialog box, or it can evaluate what you specify and use as the result of the evaluation. Select the <b>Evaluate</b> option for a parameter to specify parameter evaluation (the default). To suppress evaluation, clear the option.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |            |    |            |        |           |            |  |              |           |            |            |
| Tunable           | <p>By default, you can change a mask parameter value during simulation. To prevent the changing of parameter value during simulation, clear the <b>Tunable</b> option. If the masked parameter does not support parameter tuning, Simulink ignore the <b>Tunable</b> option setting of a mask parameter. Such parameters are then disabled on the Mask dialog box when simulating. The available modes in Tunable are:</p> <ul style="list-style-type: none"> <li>• <b>off</b> - you cannot change mask parameter values during simulation while in this mode.</li> <li>• <b>on</b> - you can change the mask parameter value during simulation. Each time you make a change the model is compiled.</li> <li>• <b>run-to-run</b> - you can change the mask parameter value during simulation but the model is not recompiled when you change any mask parameter value. While simulating elaborate models, this mode helps in reducing the model compilation time when simulated in fast restart.</li> </ul> <p>You can also change the mask parameter value while simulating your model on fast restart mode. Depending on the value specified for the <b>Tunable</b> attribute and the simulation mode, the mask parameter can either be read-only or read-write.</p> <table border="1"> <tr> <td></td><td>off</td><td>on</td><td>run-to-run</td></tr> <tr> <td>Normal</td><td>read-only</td><td>read-write</td><td></td></tr> <tr> <td>Fast Restart</td><td>read-only</td><td>read-write</td><td>read-write</td></tr> </table> <p>For information about parameter tuning and the blocks that support it, see “Tune and Experiment with Block Parameter Values”.</p> |            | off        | on | run-to-run | Normal | read-only | read-write |  | Fast Restart | read-only | read-write | read-write |
|                   | off                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | on         | run-to-run |    |            |        |           |            |  |              |           |            |            |
| Normal            | read-only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | read-write |            |    |            |        |           |            |  |              |           |            |            |
| Fast Restart      | read-only                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | read-write | read-write |    |            |        |           |            |  |              |           |            |            |
| Read only         | Indicates that the parameter cannot be modified.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |            |    |            |        |           |            |  |              |           |            |            |
| Hidden            | Indicates that the parameter must not be displayed in the mask dialog box.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |            |    |            |        |           |            |  |              |           |            |            |
| Never save        | Indicates that the parameter value never gets saved in the model file.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |            |    |            |        |           |            |  |              |           |            |            |
| Constraint        | Allows you to add constraints to the selected parameter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |            |            |    |            |        |           |            |  |              |           |            |            |
| <b>Dialog box</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |            |    |            |        |           |            |  |              |           |            |            |
| Enable            | By default <b>Enable</b> is selected. If you clear this option, the selected control becomes unavailable for edit. Masked block users cannot set the value of the parameter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |            |    |            |        |           |            |  |              |           |            |            |

| Property           | Description                                                                                                                                                                                                                                                                            |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Visible            | The selected control appears in the mask dialog box only if this option is selected.                                                                                                                                                                                                   |
| Callback           | MATLAB code that you want Simulink to execute when a user applies a change to the selected control. Simulink uses a temporary workspace to execute the callback code.                                                                                                                  |
| <b>Layout</b>      |                                                                                                                                                                                                                                                                                        |
| Item location      | Allows you to set the location for the dialog control to appear in the current row or a new row.                                                                                                                                                                                       |
| Align Prompts      | Allows you to align the parameters on the mask dialog box. This option is supported for all the Display control types except <b>Table</b> .<br>For more information, see <a href="#">Combo box Parameter</a> .                                                                         |
| Prompt location    | Allows you to set the prompt location for the dialog control on either the top or to the left of the dialog control.<br>You cannot set the <b>Prompt location</b> property for <b>Check box</b> , <b>Dial</b> , <b>DataTypeStr</b> , <b>Collapsible Panel</b> and <b>Radiobutton</b> . |
| Orientation        | Allows you to specify horizontal or vertical orientation for sliders and radio buttons.                                                                                                                                                                                                |
| Horizontal Stretch | If this option is selected, the controls on the mask dialog box stretch horizontally when you resize the mask dialog box. By default, <b>Horizontal Stretch</b> check box is selected.<br><br>For more information, see <a href="#">Horizontal Stretch Property</a> .                  |

## Initialization Pane

- “Dialog variables” on page 19-23
- “Initialization commands” on page 19-23
- “Allow library block to modify its contents” on page 19-23
- “Rules for Initialization commands” on page 19-23

The **Initialization** pane allows you to add MATLAB commands that initialize the masked block.

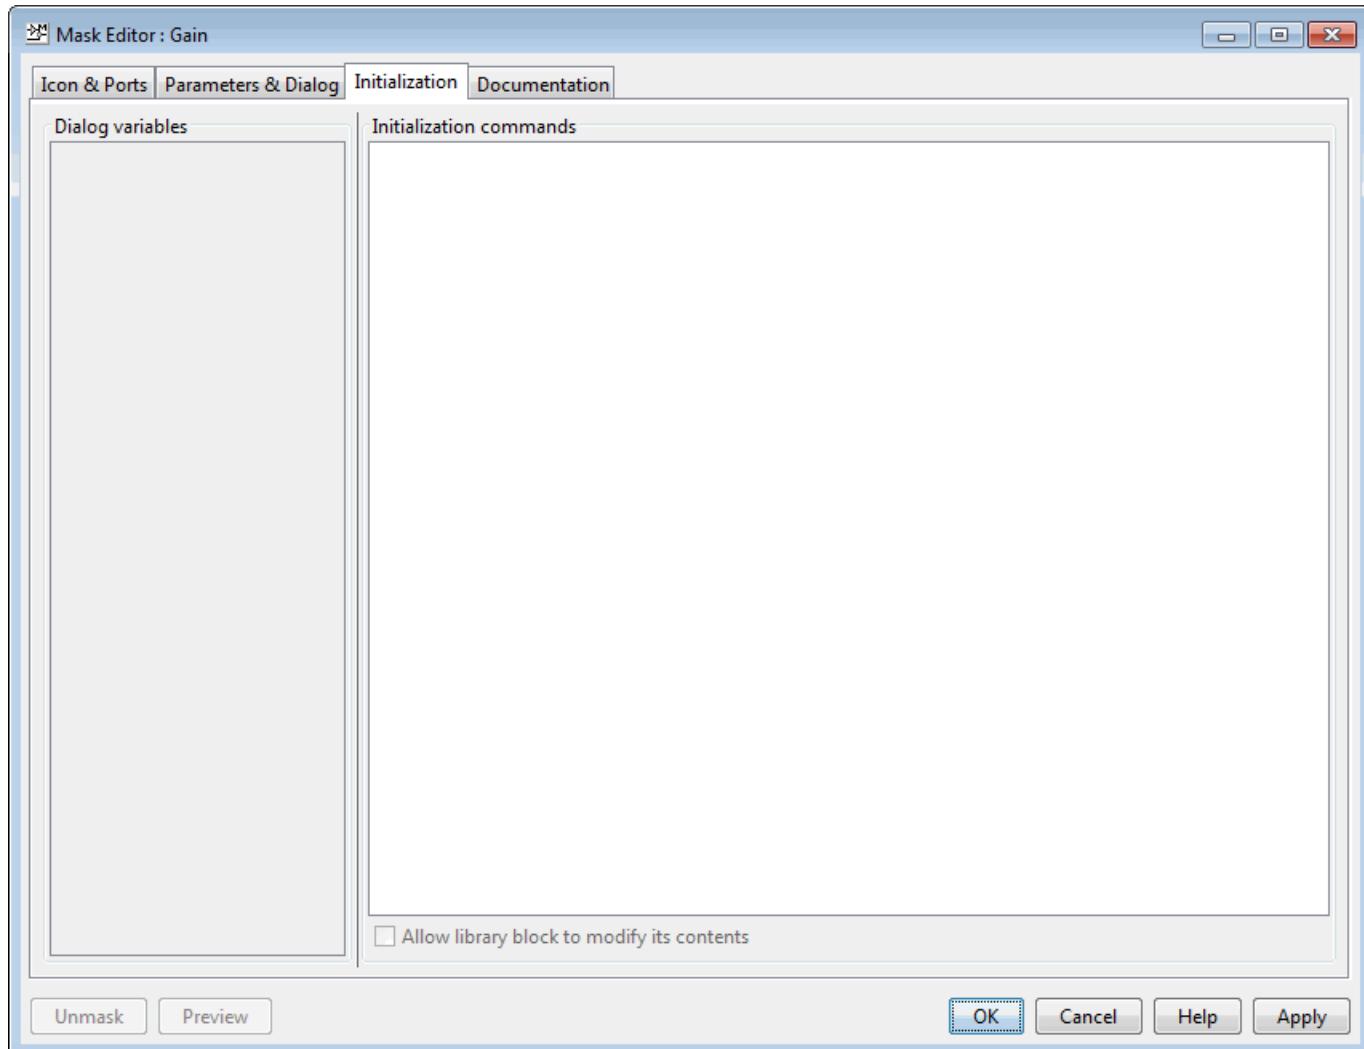

When you open a model, Simulink locates the visible masked blocks that reside at the top level of the model or in an open subsystem. Simulink only executes the initialization commands for these visible masked blocks if they meet either of the following conditions:

- The masked block has icon drawing commands.

**Note** Simulink does not initialize masked blocks that do not have icon drawing commands, even if they have initialization commands.

- The masked block belongs to a library and has the **Allow library block to modify its contents** enabled.

Initialization commands for all masked blocks in a model run when you:

- Update the diagram
- Start simulation
- Start code generation

- Click **Apply** on the dialog box

Initialization commands for an individual masked block run when you:

- Change any of the mask parameters that define the mask, such as `MaskDisplay` and `MaskInitialization`, by using the Mask Editor or the `set_param` command.
- Rotate or flip the masked block, if the icon depends on the initialization commands.
- Cause the icon to be drawn or redrawn, and the icon drawing depends on initialization code.
- Change the value of a mask parameter by using the block dialog box or the `set_param` command.
- Copy the masked block within the same model or between different models.

The **Initialization** pane contains the controls described in this section.

### **Dialog variables**

The **Dialog variables** list displays the names of the dialog controls and associated mask parameters, which are defined in the **Parameters & Dialog** pane. You can also use the list to change the names of mask parameters. To change a name, double-click the name in the list. An edit field containing the existing name appears. Edit the existing name and click **Enter** or click outside the edit field to confirm your changes.

### **Initialization commands**

Enter the initialization commands in this field. You can enter any valid MATLAB expression, consisting of MATLAB functions and scripts, operators, and variables defined in the mask workspace. Initialization commands run in the mask workspace, not the base workspace.

### **Allow library block to modify its contents**

This check box is enabled only if the masked block resides in a library. Selecting this option allows you to modify the parameters of the masked block. If the masked block is a masked subsystem, this option allows you to add or delete blocks and set the parameters of the blocks within that subsystem. If this option is not selected, an error is generated when a masked library block tries to modify its contents in any way.


### **Rules for Initialization commands**

Following rules apply for mask initialization commands:

- Do not use initialization code to create mask dialogs whose appearance or control settings change depending on changes made to other control settings. Instead, use the mask callbacks provided specifically for this purpose.
- Avoid prefacing variable names in initialization commands with `MaskParam_L_` and `MaskParam_M_`. These specific prefixes are reserved for use with internal variable names.
- Avoid using `set_param` commands to set parameters of blocks residing in masked subsystems that reside in the masked subsystem being initialized. See “Set Up Nested Masked Block Parameters” for details.

### **Documentation Pane**

The **Documentation** pane enables you to define or modify the type, description, and help text for a masked block.

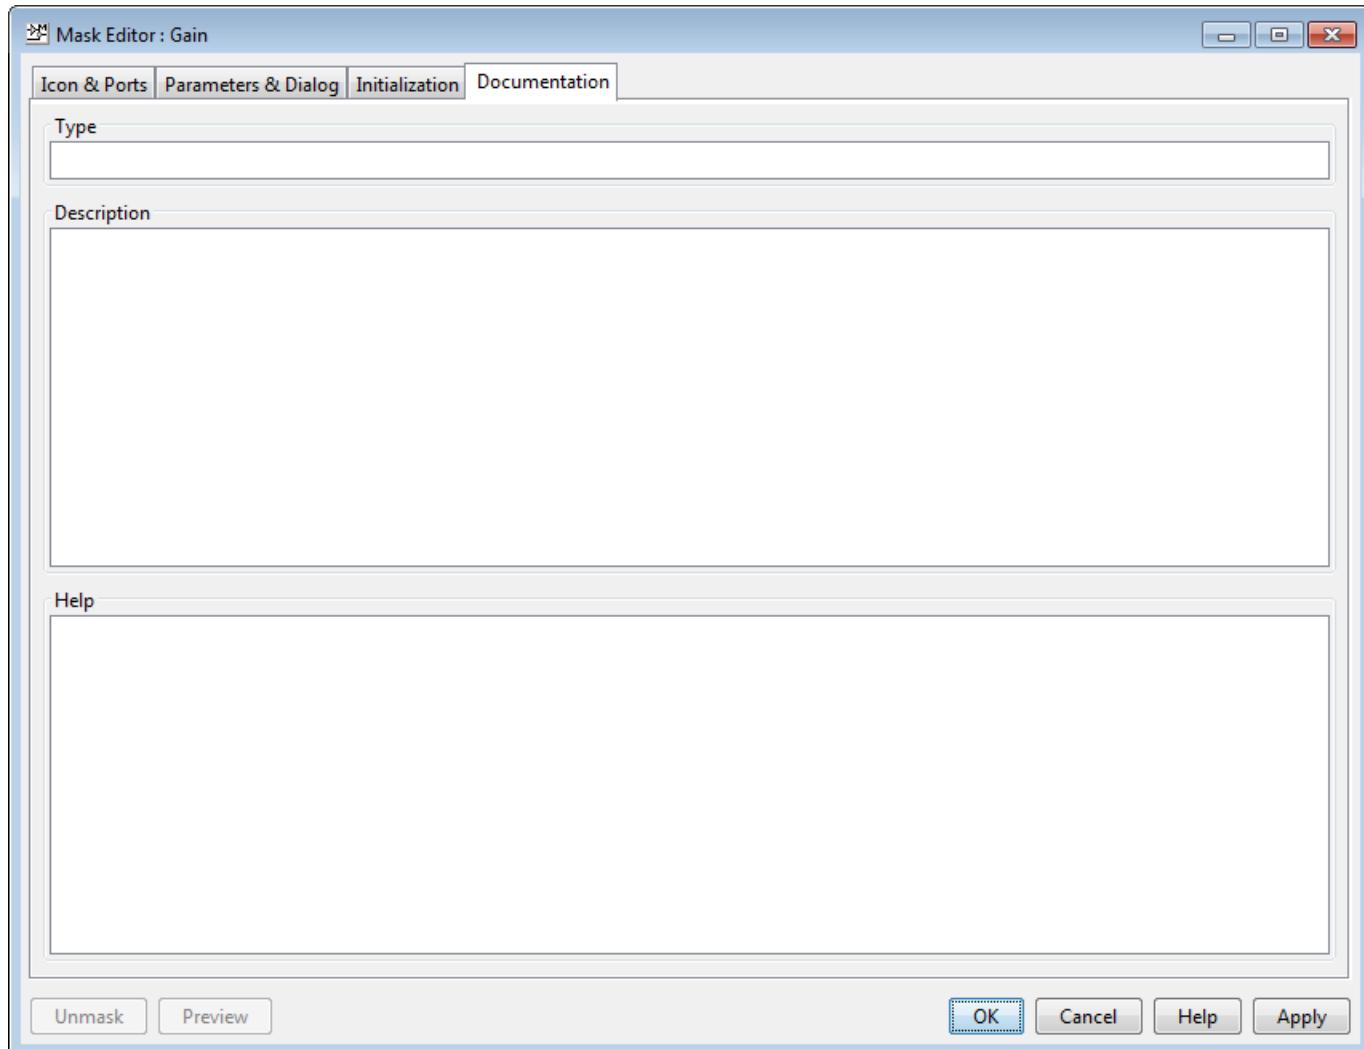

### Type

The mask type is a block classification that appears in the mask dialog box and on all **Mask Editor** panes for the block. When Simulink displays a mask dialog box, it suffixes (`mask`) to the mask type. To define the mask type, enter it in the **Type** field. The text can contain any valid MATLAB character, but cannot contain line breaks.

### Description

The mask description is summary help text that describes the block's purpose or function. By default, the mask description is displayed below the mask type in the mask dialog box. To define the mask description, enter it in the **Description** field. The text can contain any legal MATLAB character. Simulink automatically wraps long lines. You can force line breaks by using the **Enter** key.

### Help

The Online Help for a masked block provides information in addition to that provided by the **Type** and **Description** fields. This information appears in a separate window when the masked block user

clicks the **Help** button on the mask dialog box. To define the mask help, type one of these in the **Help** field:

- URL specification
- web or eval command
- Literal or HTML text

#### Provide a URL

If the first line of the **Help** field is a URL, Simulink passes the URL to your default web browser. The URL can begin with https:, www:, file:, ftp:, or mailto:. Examples:

```
https://www.mathworks.com
file:///c:/mydir/helpdoc.html
```

Once the browser is active, MATLAB and Simulink have no further control over its actions.

#### Provide a web Command

If the first line of the **Help** field is a web command, Simulink passes the command to MATLAB, which displays the specified file in the MATLAB Online Help browser. Example:

```
web([docroot '/MyBlockDoc/' get_param(gcb, 'MaskType') '.html'])
```

See the MATLAB web command documentation for details. A web command used for mask help cannot return values.

#### Provide an eval Command

If the first line of the **Help** field is an eval command, Simulink passes the command to MATLAB, which performs the specified evaluation. Example:

```
eval('open My_Spec.doc')
```

See MATLAB eval command documentation for details. An eval command used for mask help cannot return values.

#### Provide Literal or HTML Text

If the first line of the **Help** field is not a URL, or a web or an eval command, Simulink displays the text in the MATLAB Online Help browser under a heading that is the value of the **Mask type** field. The text can contain any legal MATLAB character, line breaks, and any standard HTML tag, including tags like img that display images.

Simulink first copies the text to a temporary folder, then displays the text using the web command. If you want the text to display an image, you can provide a URL path to the image file, or you can place the image file in the temporary folder. Use tempdir to find the temporary folder that Simulink uses for your system.

## Additional Options

Following buttons appear on the **Mask Editor**:

- The **Preview** button applies the changes you made, and opens the mask dialog box.
- The **OK** button applies the mask settings and closes the **Mask Editor**.

- The **Cancel** button closes the **Mask Editor** without applying any changes you made to the mask.
- The **Help** button displays online information about the **Mask Editor**.
- The **Apply** button applies the mask settings and leaves the **Mask Editor** open.
- The **Unmask** button deletes the mask and closes the **Mask Editor**. To create the mask again, select the block and on the **Block** tab, in the **Mask** group, click **Create Mask**.

## See Also

### More About

- “Masking Fundamentals”
- “Create a Simple Mask”
- “Create Block Masks”
- Creating a Mask: Parameters and Dialog Pane (4 min, 19 sec)

# Dialog Control Operations


## In this section...

- “Moving dialog controls in the Dialog box” on page 19-27
- “Cut, Copy, and Paste Controls” on page 19-27
- “Delete nodes” on page 19-28
- “Error Display” on page 19-28

## Moving dialog controls in the Dialog box

You can move dialog controls up and down in the hierarchy using drag and drop. When you drag a control, a cue line indicates the level in the hierarchy. Based on the type of dialog control, you can drag and drop controls as indicated:

- **Drag and drop on the container dialog control in the Dialog box**
  - **Drop before it:** Adds the dialog control as a sibling before the current dialog control.



- **Drop on it:** Adds to the container as a child at the end.




- **Drop after it:** Adds the dialog control as a sibling after the current dialog control.




- **Drag and drop on the non-container dialog control in the Dialog box**

- **Drop before it:** Adds the dialog control before the current dialog control.



- **Drop after it:** Adds the dialog control after the current dialog control.




- **Drag and drop into Dialog box blank area**

- The element is added to the root level node.

## Cut, Copy, and Paste Controls

You can cut, copy, and paste dialog controls on the **Dialog box** using the context menu.

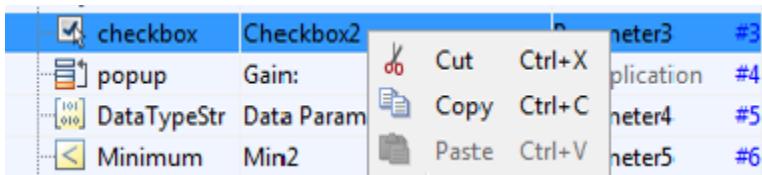

## Delete nodes

Right-click the control that you want to delete in the **Dialog box**. Select, from the context menu. For example, to delete a **Check box** dialog control, right-click and select **Delete**:




You can also use the **Delete** menu option to delete a dialog control.

## Error Display

If you have errors in parameters names, such as, duplicate, invalid parameter names, or empty names, the mask editor displays the parameter names in red outline. When you edit the parameters to fix errors, the modified fields are identified by a yellow background.

|                   |                                  |
|-------------------|----------------------------------|
| Parameter2 #2     | Error: Duplicate parameter names |
| Parameter2 #3     |                                  |
| Multiplication #4 |                                  |
| Parameter4 #5     | Edited parameters to fix errors  |
| Parameter5 #6     |                                  |

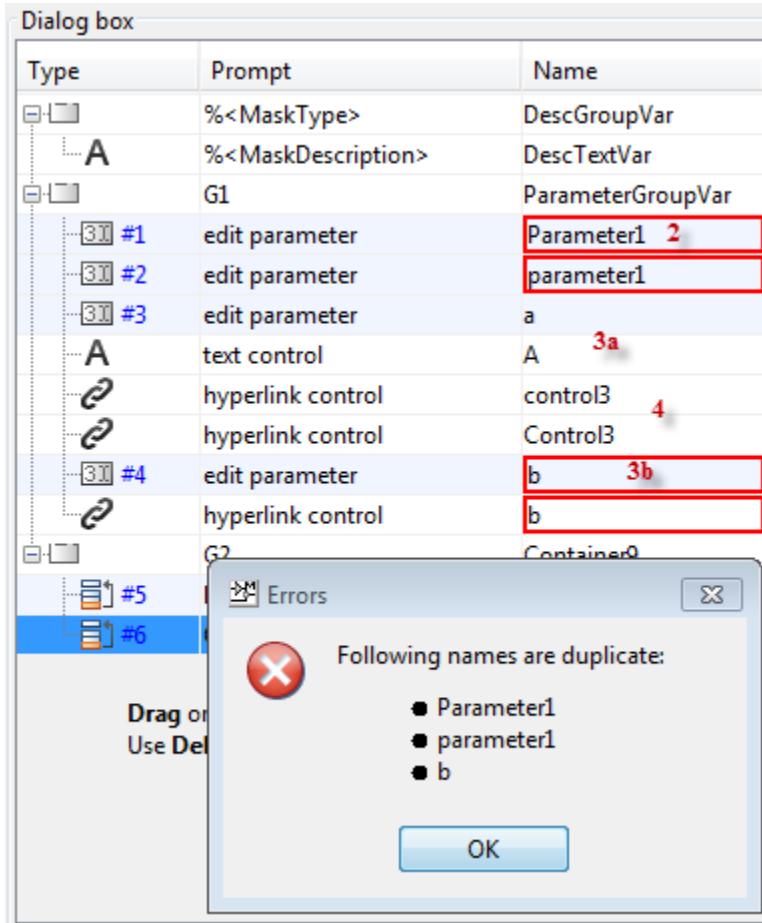

- 1 Duplicate **Parameter**, **Display**, and **Action** control names are not allowed.
- 2 **Parameter** names must be unique and are case insensitive. Names varying only in lowercase and uppercase letters, are treated as duplicates. For example, Parameter1 and parameter1 are not allowed.
- 3 **Parameter**, **Display**, and **Action** control names can be same as long as different lowercase and uppercase characters are used. For example, while a and A are allowed, b and b are not allowed.
- 4 **Action** and **Display** control names are case-sensitive. For example, while Control3 and control3 are allowed, control3 and control3 are not allowed.

## See Also

["Create Block Masks"](#)

## Specify Data Types Using **DataTypeStr** Parameter

Similar to any mask parameter, the **DataTypeStr** parameter can be added on a mask dialog box from the Mask Editor. Adding the **DataTypeStr** parameter to the mask dialog box allows the end user of the block to specify the acceptable data types for the associated **Edit** type parameter. While defining the mask, you can specify single or multiple data types for the **Edit** parameter. The end user of the block can select from one of these data types. Specifying a data type for the **Edit** parameter defines a rule for the input value that can be provided through the mask dialog box.

The **DataTypeStr** parameter also allows you to specify a minimum and maximum value for the **Edit** parameter. You can do so by using the **Min** and **Max** mask parameters and associating these parameters to the **DataTypeStr** parameter. **DataTypeStr** parameter can be used to do fixed-point analysis.

### Associate Data Types to Edit Parameter


- 1 Open the model in which you want to mask a block. For example, open the **DataTypeStr** model in Mask Parameters.
- 2 Select the Subsystem block on the **Subsystem Block** tab, in the **Mask** group, click **Create Mask**.

---


**Note** If you are editing an existing mask, to open the Mask Editor, on the **Subsystem Block** tab, in the **Mask** group, click **Edit Mask**.

---


- 3 In the Mask Editor, click the **Parameters & Dialog** pane and add the **Edit**, **Min**, **Max**, **DataTypeStr** parameters.

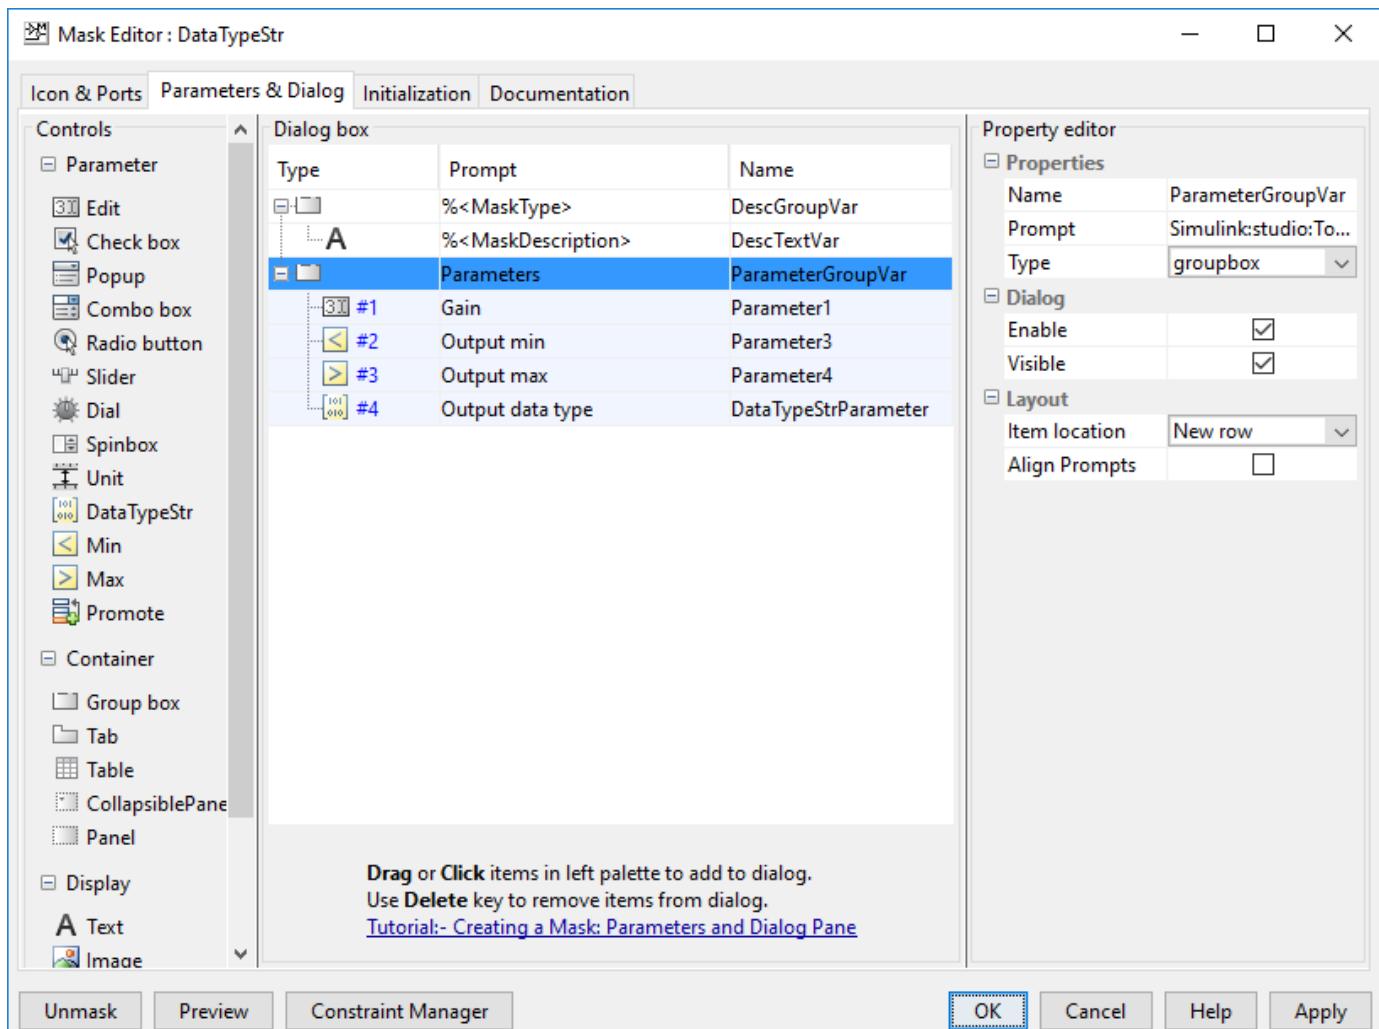


- 4 To specify data types for the **Edit** parameter, select **DataTypeStr** in the **Dialog box** section of the Mask Editor and click the button next to **Type options** in the **Property editor** pane. The **Type options** editor has a tabbed user interface containing these tabs for data type rules.
  - a **Inherit rules**- Specify inheritance rules for determining the data types. The inherit rules are grouped under three categories: Common Simulink rules, Custom rules, and Advanced Simulink rules. By default, the Common Simulink rules and Advanced Simulink rules are available under **Inherit rules** tab. The Advanced rules section allows you to inherit rules from breakpoint data, constant value, gain, table data, logic data, accumulator, product output, and Simulink. It also allows you to have same word length as input and have same data types for all ports. The Custom rules are listed under **Inherit rules** tab only if there are any custom inheritance rules registered on the MATLAB search path. For definitions of some Inherit rules, see “Data Type Inheritance Rules”.

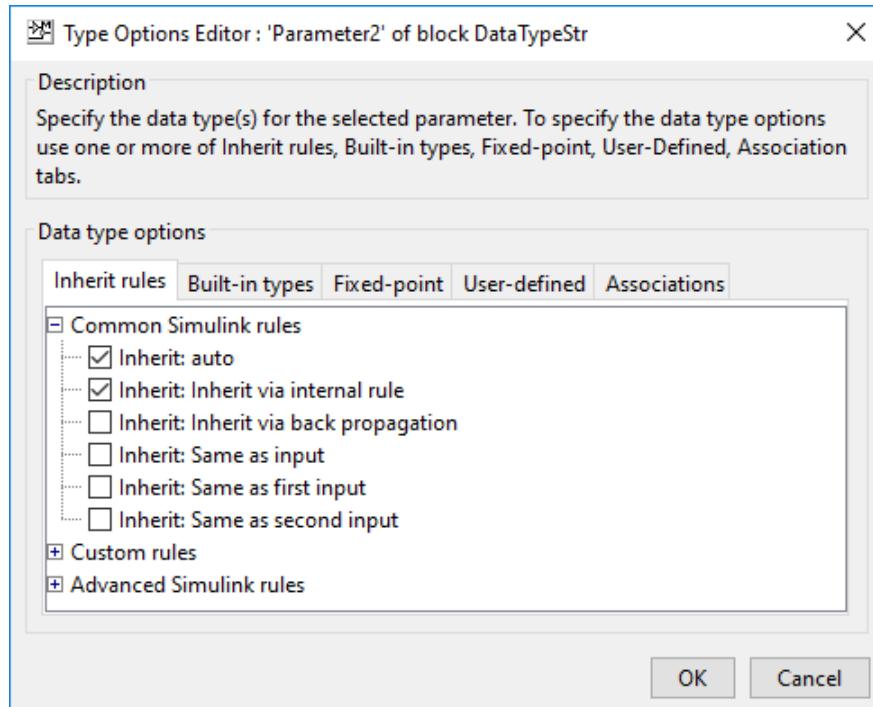


- b Built-in types:** Specify one or more built-in Simulink data types, such as double or single. For more information, see "Data Types Supported by Simulink".

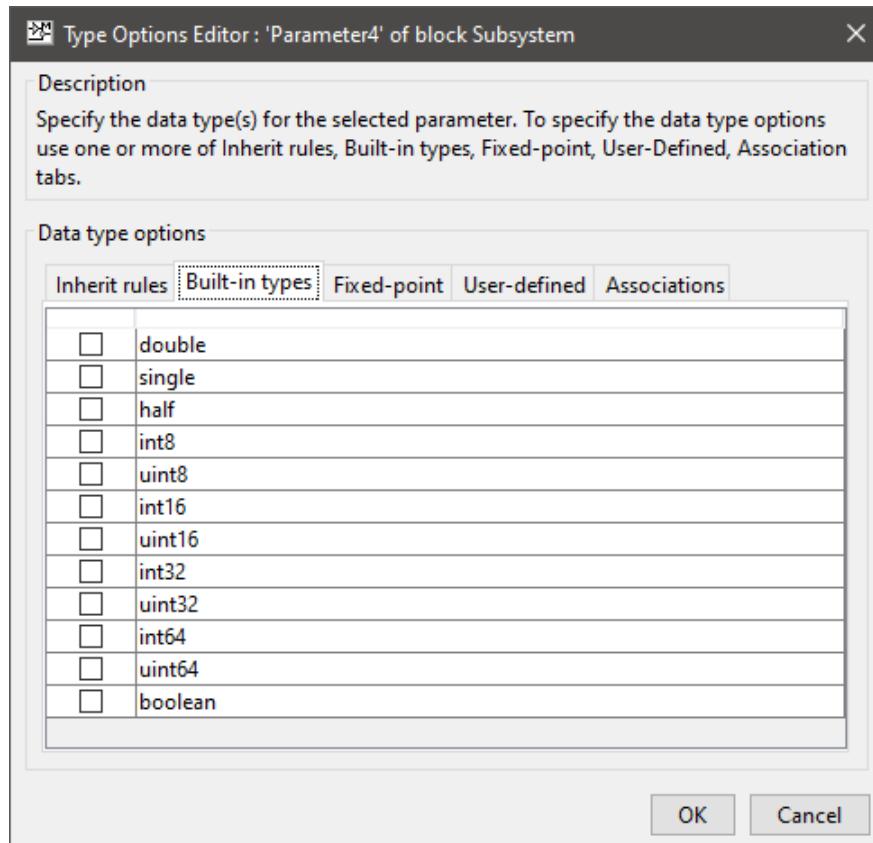


- c **Fixed-point:** Specify the scaling and signed modes for a fixed-point data type. For more information, see “Specifying a Fixed-Point Data Type”.

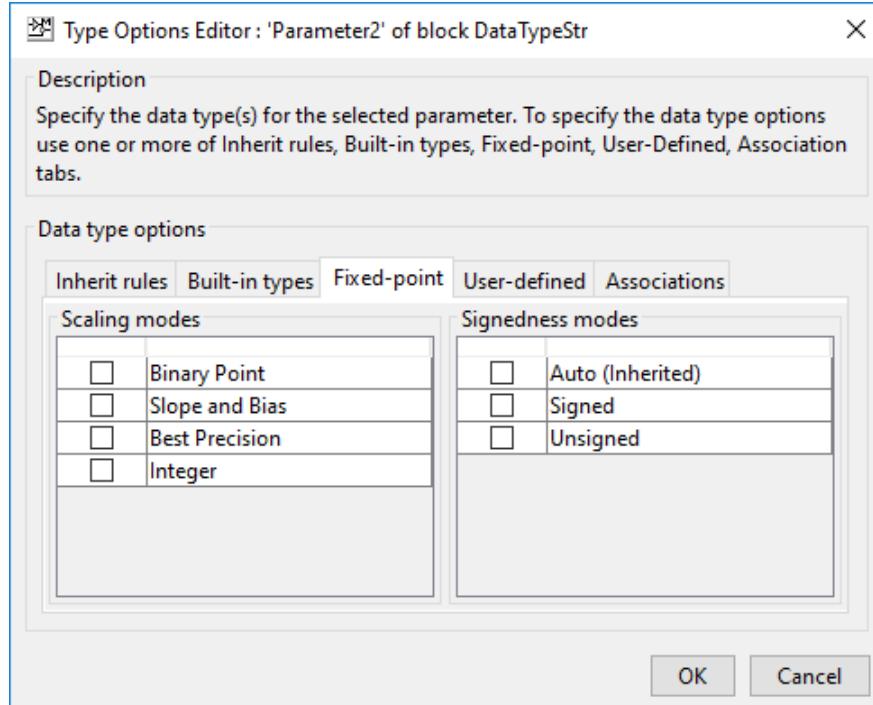

- d **User-defined:** Specify a bus object, an enumerated (enum) data type, or a string. For more information, see “Specify an Enumerated Data Type”, “Specify a Bus Object Data Type”, and “Simulink Strings”.

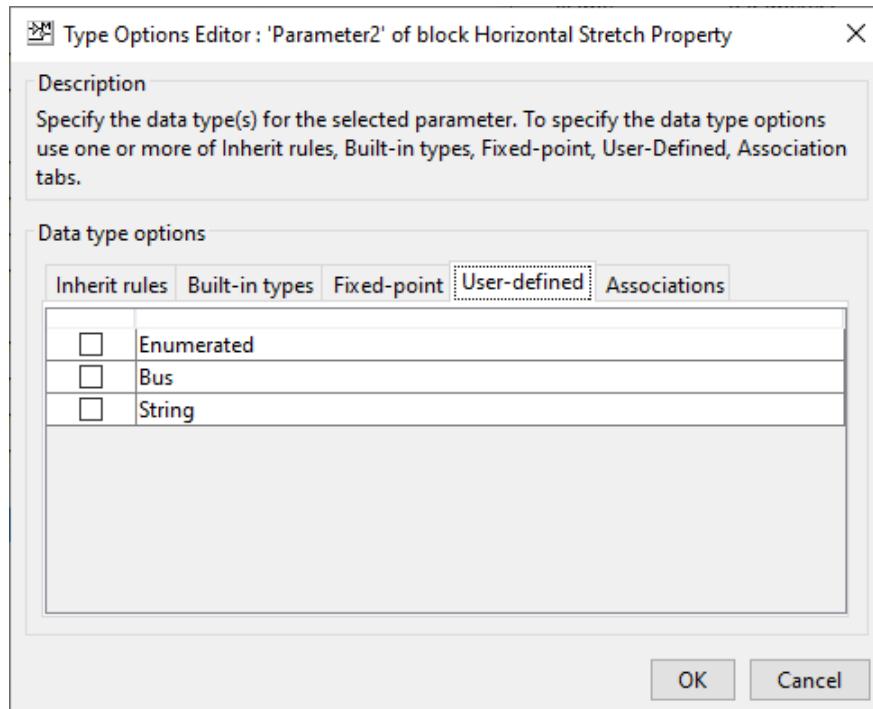

- e **Associations:** Associate a data type parameter with an **Edit** parameter. You can also associate the **Min** and **Max** parameters to the **Edit** parameter.

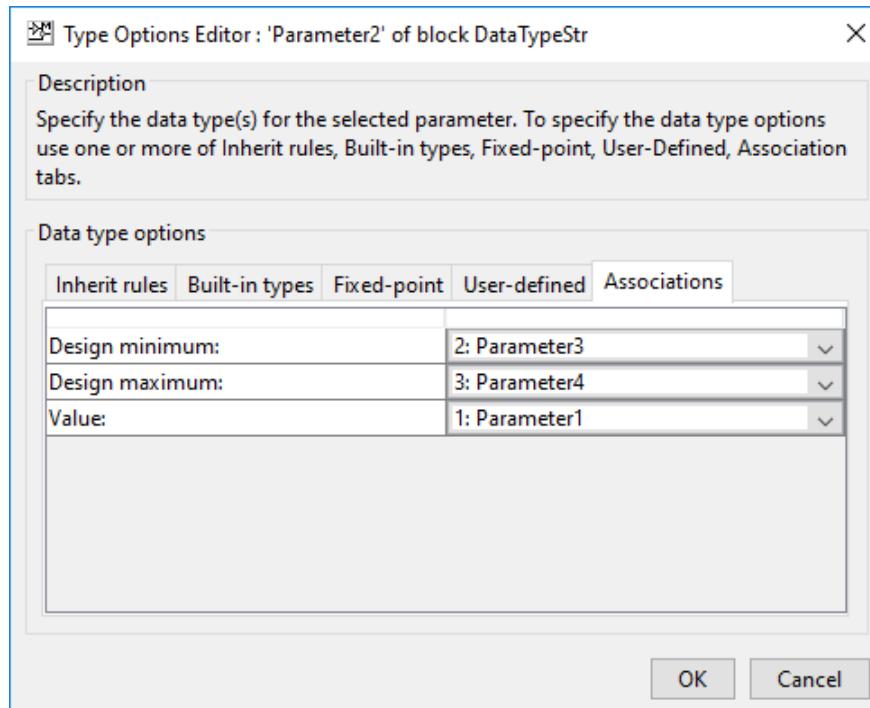

- To save the rules selection, click **OK** in the **Type Options Editor**.
- To save changes and exit the Mask Editor, click **OK**.

## View DataTypeStr Programmatically

You can use the `Simulink.Mask.get` command in the MATLAB command window to view the data type values specified for a block mask. MATLAB uses a predefined nomenclature to represent the data type information in the command line.

This example shows how to view the `DataTypeStr` Parameter for the example model Mask Parameters programmatically.

```
maskobj = Simulink.Mask.get(gcb)

maskobj =
Mask with properties:

 Type: ''
 Description: ''
 Help: ''
 Initialization: ''
 SelfModifiable: 'off'
 Display: ''
 IconFrame: 'on'
 IconOpaque: 'opaque'
 RunInitForIconRedraw: 'off'
 IconRotate: 'none'
 PortRotate: 'default'
 IconUnits: 'autoscale'
 Parameters: [1x4 Simulink.MaskParameter]
 BaseMask: [0x0 Simulink.Mask]
 ParameterConstraints: [0x0 Simulink.Mask.Constraints]
```

```

BlockConstraintRules: [0x0 Simulink.Mask.BlockConstraints]
ConstraintParamAssociator: [0x0 Simulink.Mask.ConstraintParamAssociator]

maskobj.getParameter('DataTypeStrParameter')

ans =
MaskParameter with properties:

Type: 'unidt({a=4|2|3|1}{i=Inherit: auto|Inherit: Inherit via internal rule}{b=double|single})'
 TypeOptions: {0x1 cell}
 Name: 'DataTypeStrParameter'
 Prompt: 'Output data type'
 Value: 'Inherit: auto'
 Evaluate: 'on'
 Tunable: 'off'
 NeverSave: 'off'
 Hidden: 'off'
 ReadOnly: 'off'
 Enabled: 'on'
 Visible: 'on'
 ShowTooltip: 'on'
 Callback: ''
 Alias: ''

```

The result displays the properties that are defined for the **DataTypeStr** parameter. This example defines the nomenclature for the specified type options:

```
Type: 'unidt({a=4|2|3|1}{i=Inherit: auto|Inherit: Inherit via internal rule}
{b=double|single})'
```

Here, **Type** displays the values specified for the **DataTypeStr** parameter and has these definitions:

- **a** defines **Associations** and its corresponding values are 4, 2, 3, 1. These values are index numbers for the parameter and represent the **DataTypeStr**, **Min**, **Max**, and **Edit** parameters sequentially.
- **i** defines the **Inherit rules** and its corresponding value as **Inherit: Same as first input**.
- **b** defines the **Built-in types** and its corresponding value as **double** and **single**.

## See Also

["Create Block Masks"](#)


## Design a Mask Dialog Box

This example shows how to create a mask dialog box using the Parameters & Dialog pane of the Mask Editor. When you mask a block, you encapsulate the details of the block logic and create a custom interface for the block.


Consider this model containing a masked Subsystem block called AC System. The AC System block contains an air conditioning system. For more on masking subsystems, see Create a Simple Mask.



To open the Mask Editor, right-click the AC System block, then select **Mask > Edit Mask**.

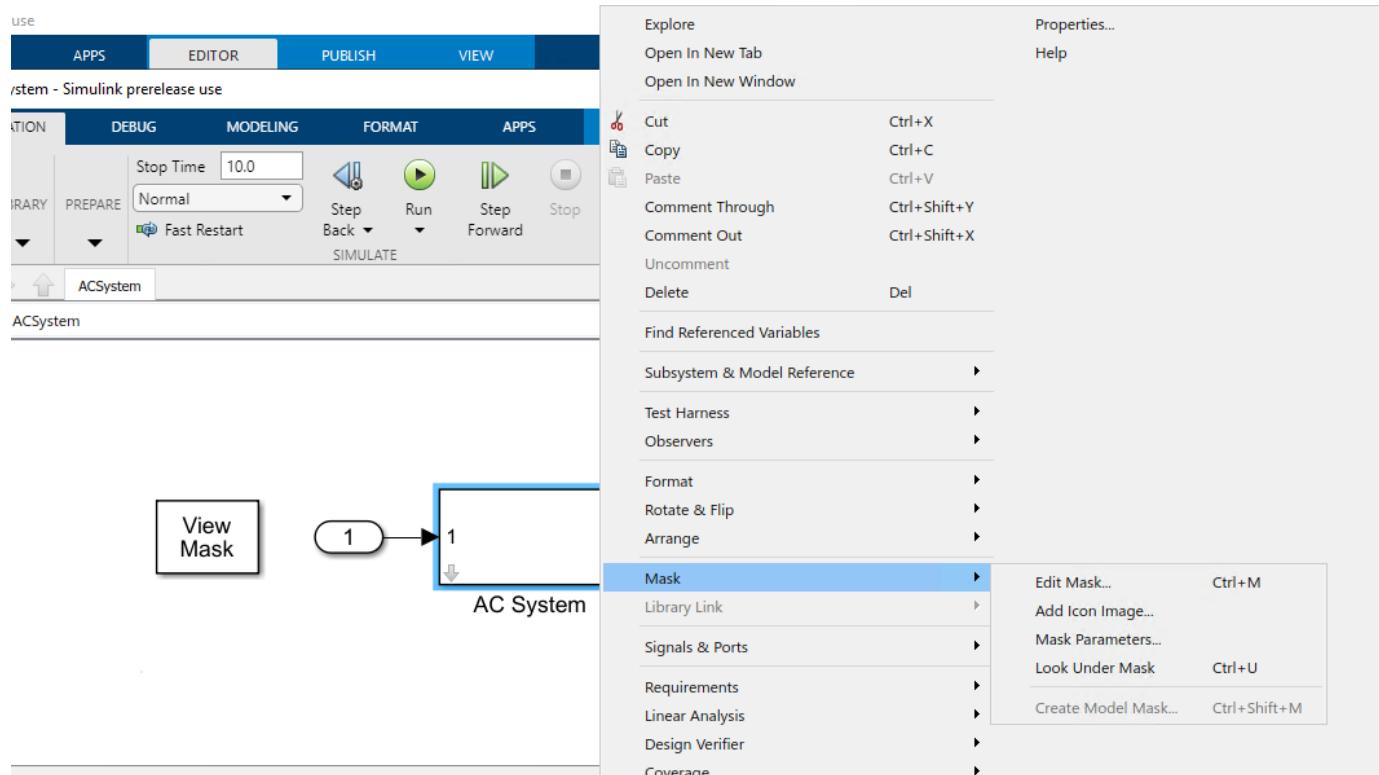


In the Mask Editor, use the Parameters & Dialogs pane to add controls on the mask dialog box and manage the mask dialog box layout. Select items from the Controls section to add parameters to the mask dialog box. Use the Property editor section to edit parameter properties.

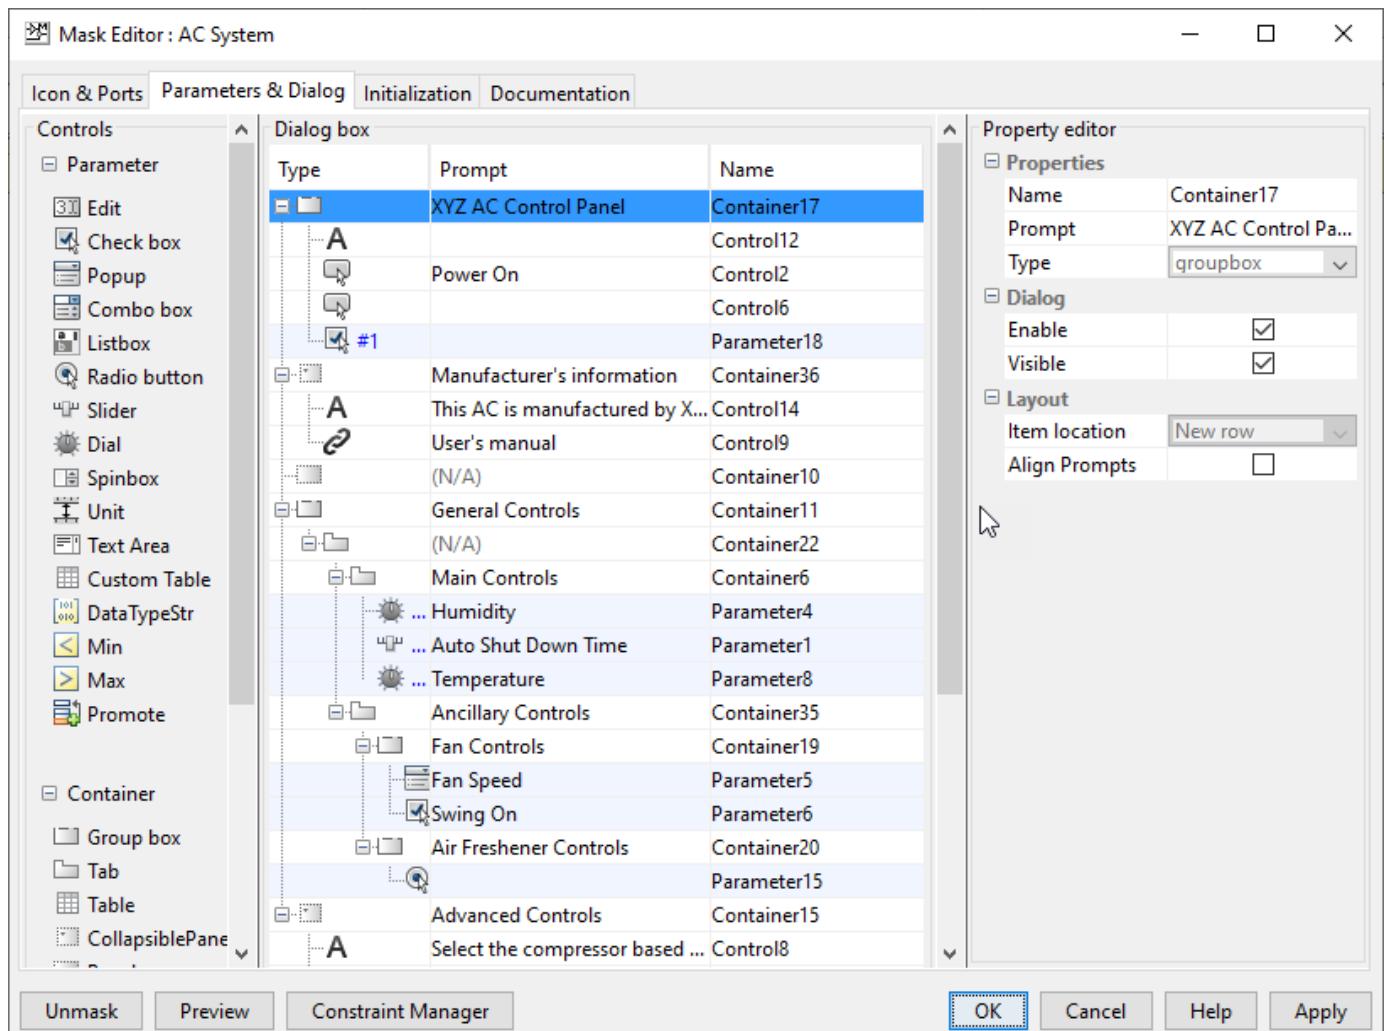


For example, in the **Controls** panel, click **Collapsible Panel**. Observe that a collapsible panel container is now added in the **Dialog box** section. In the **Prompt** column, type a value to be displayed on the mask dialog box. For example, **Manufacturer's Information**. The **Name** column gets populated automatically when you add a control. You can change this value. You can change the name and the type of this parameter from the **Property editor**.

Edit the properties of collapsible panel in the Property editor. Click **Preview** to view the mask dialog box as you build it.

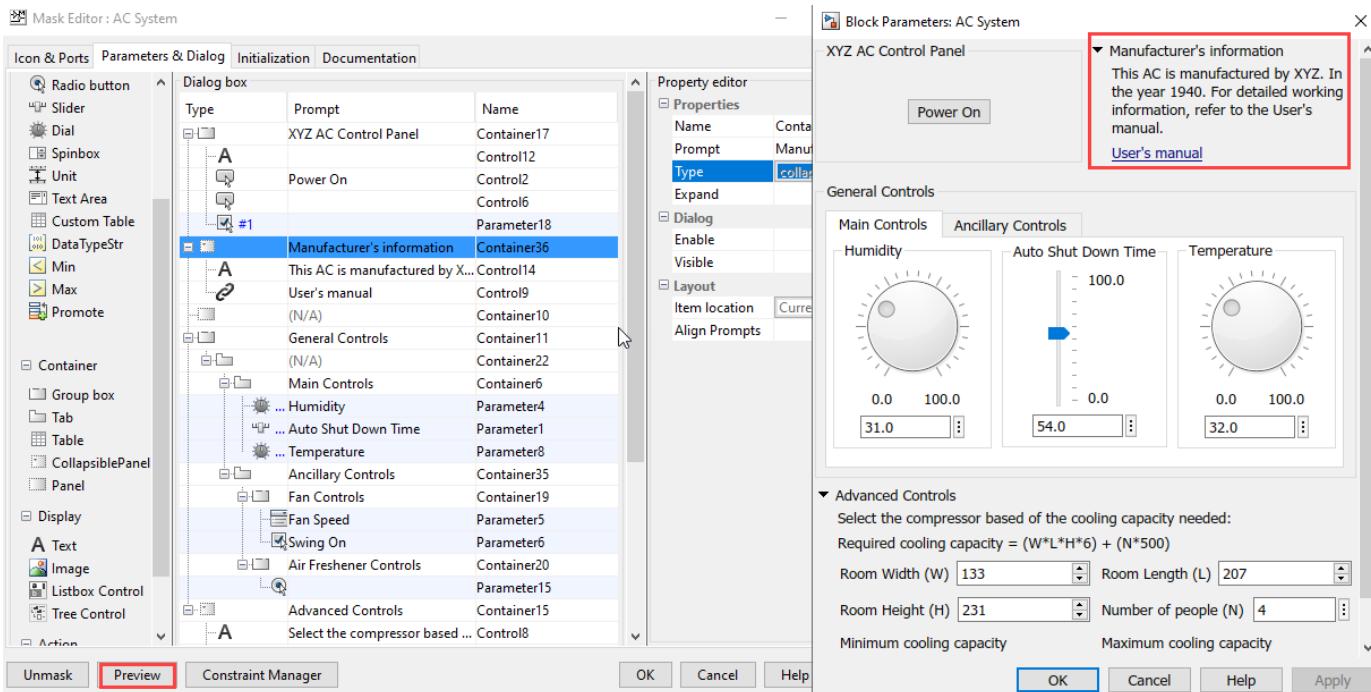


Similarly, you can add and configure various controls from the Mask Editor to build the mask dialog box.


Observe the mask layout. Containers like group boxes, collapsible panels, and tabs group the controls together. Here, yellow represents **Group Box**, pink represents **Tab**, and green represents the **Collapsible Panel**.

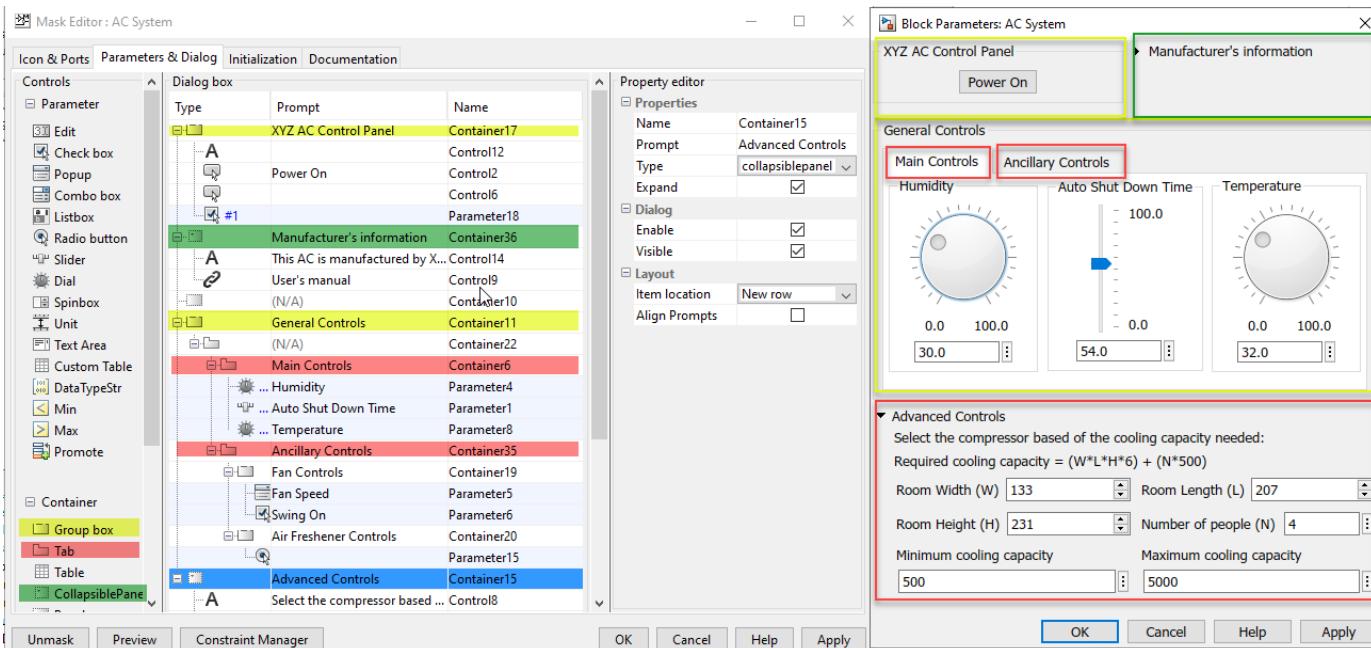


The **Button** controls type is used to create the Power On button on the mask dialog box. To manage the button placement, apply the **Horizontal Stretch** property. You can also add callback code to execute when the button is pressed. You can view a sample callback code for the **Button** controls type in the attached model.

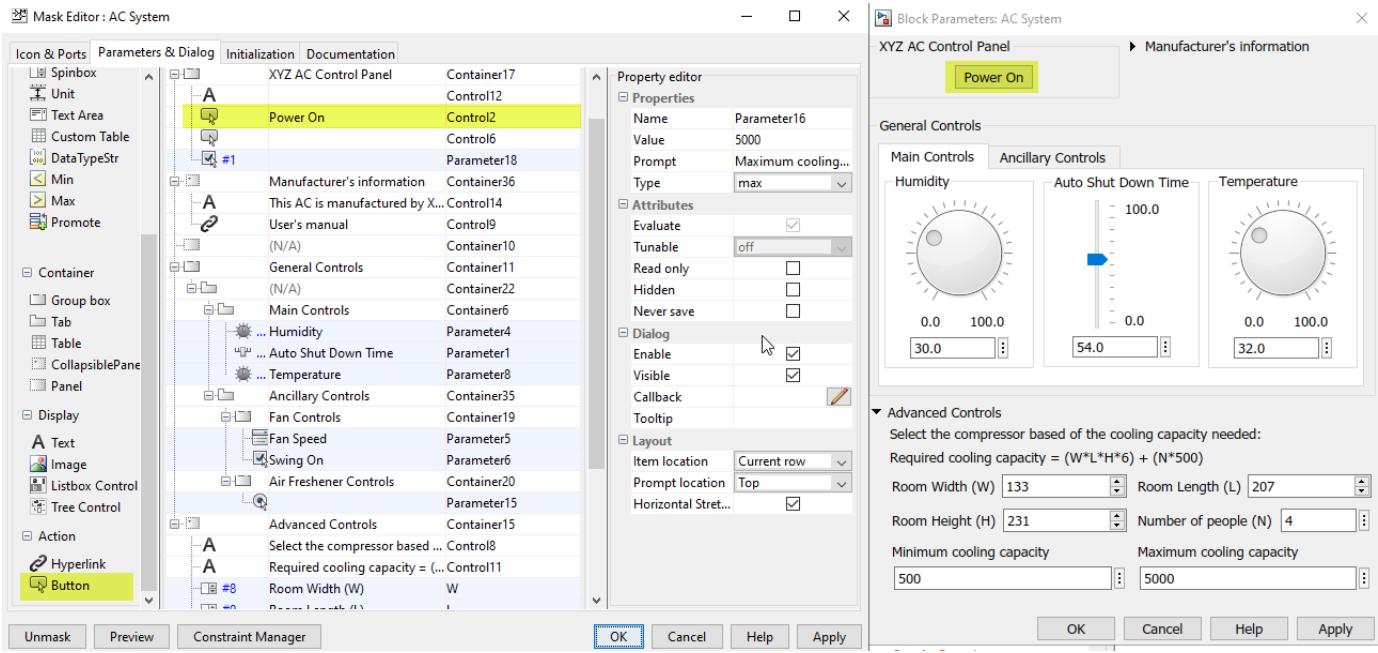


The collapsible panel for **Manufacturer's information** contains **Text** and **Hyperlink** control types.

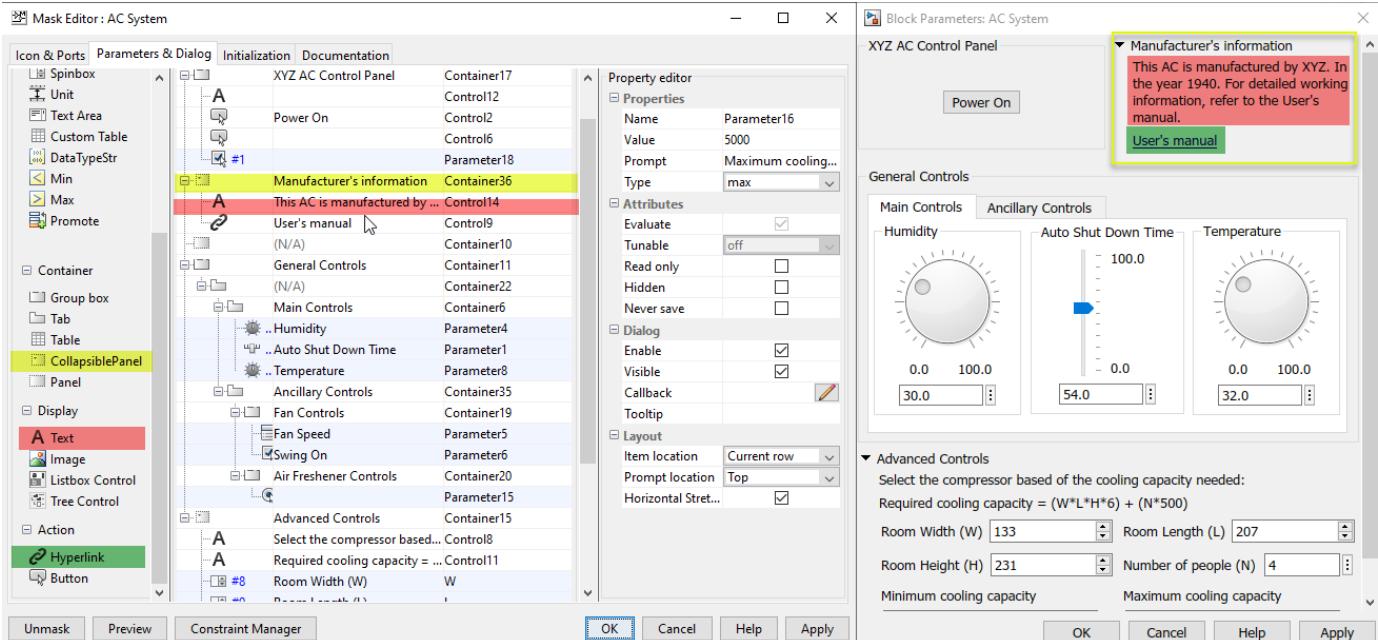


You can add MATLAB code as a callback for the hyperlink.

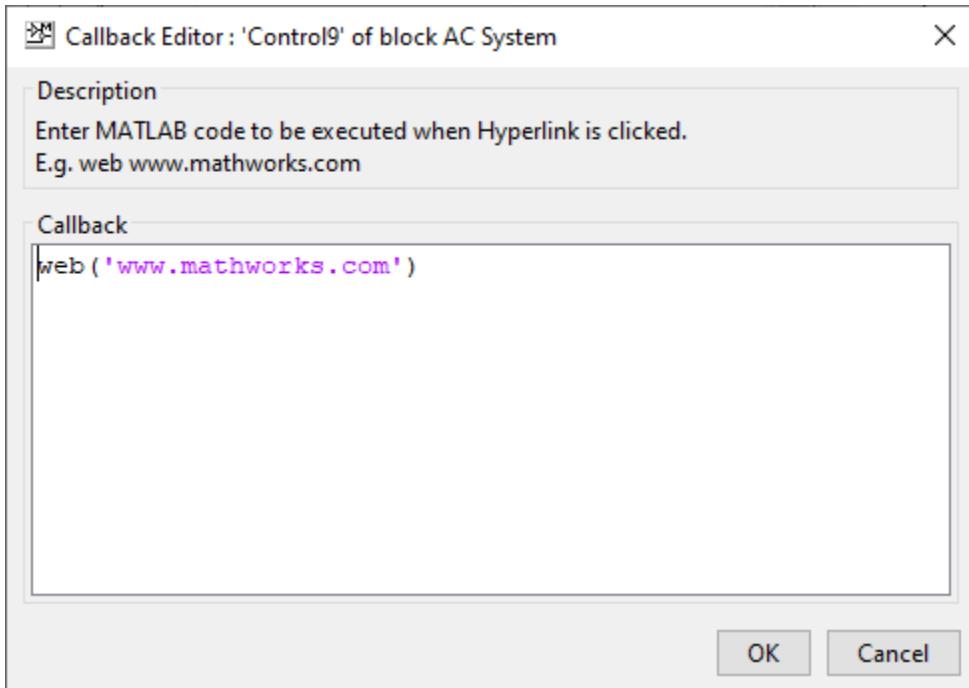

The **General Controls** section contains tabs to segregate and categorize information under **Main Controls** and **Ancillary Controls**. The **Main Controls** tab uses **Dials** and **Slider** to accept inputs for air conditioner parameters. You can edit the property of dial and slider in the property editor section of Mask Editor to place them horizontally or vertically.

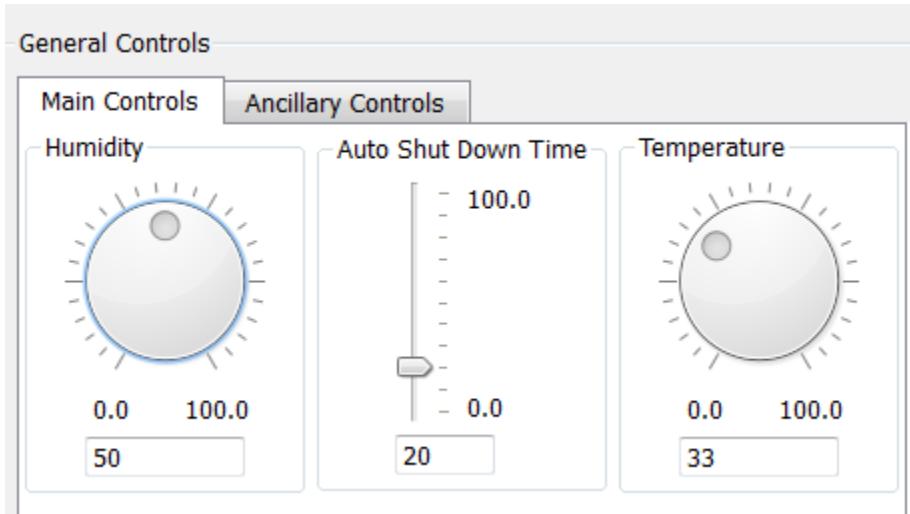

The **Ancillary Controls** use **Popup**, **Check Box**, and **Radio Buttons**.

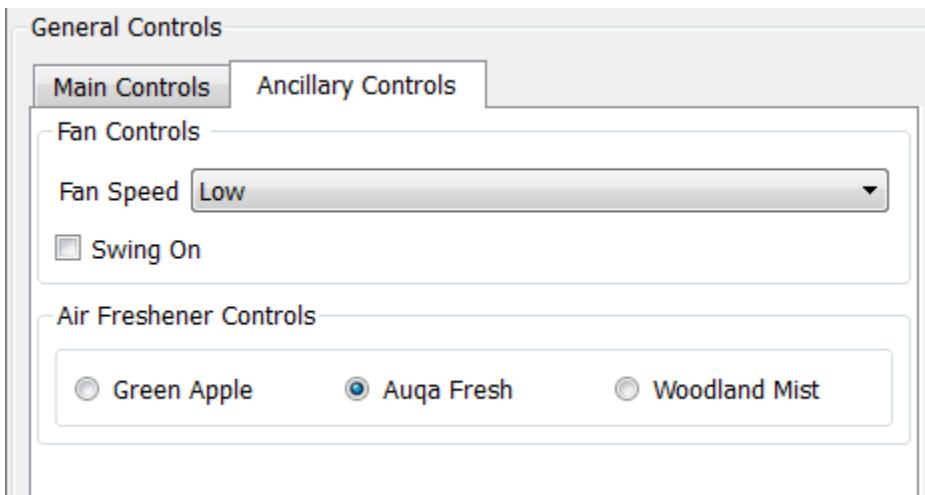

The **Advanced Controls** section is a collapsible panel that contains spinbox, minimum, and maximum parameters to accept inputs.

▼ Advanced Controls

Select the compressor based of the cooling capacity needed:

Required cooling capacity =  $(W*L*H*6) + (N*500)$

|                          |                          |                      |     |
|--------------------------|--------------------------|----------------------|-----|
| Room Width (W)           | 130                      | Room Length (L)      | 205 |
| Room Height (H)          | 231                      | Number of people (N) | 4   |
| Minimum cooling capacity | Maximum cooling capacity |                      |     |
| 500                      | 5000                     |                      |     |

## See Also

### More About

- “Mask Editor Overview” on page 19-2



# Concurrent Execution Window

---

- “Concurrent Execution Window: Main Pane” on page 20-2
- “Data Transfer Pane” on page 20-5
- “CPU Pane” on page 20-8
- “Hardware Node Pane” on page 20-9
- “Periodic Pane” on page 20-11
- “Task Pane” on page 20-13
- “Interrupt Pane” on page 20-15
- “System Tasks Pane” on page 20-18
- “System Task Pane” on page 20-19
- “System Interrupt Pane” on page 20-21
- “Profile Report Pane” on page 20-23


## Concurrent Execution Window: Main Pane

### In this section...

[“Concurrent Execution Window Overview” on page 20-2](#)

[“Enable explicit model partitioning for concurrent behavior” on page 20-3](#)

### Concurrent Execution Window Overview

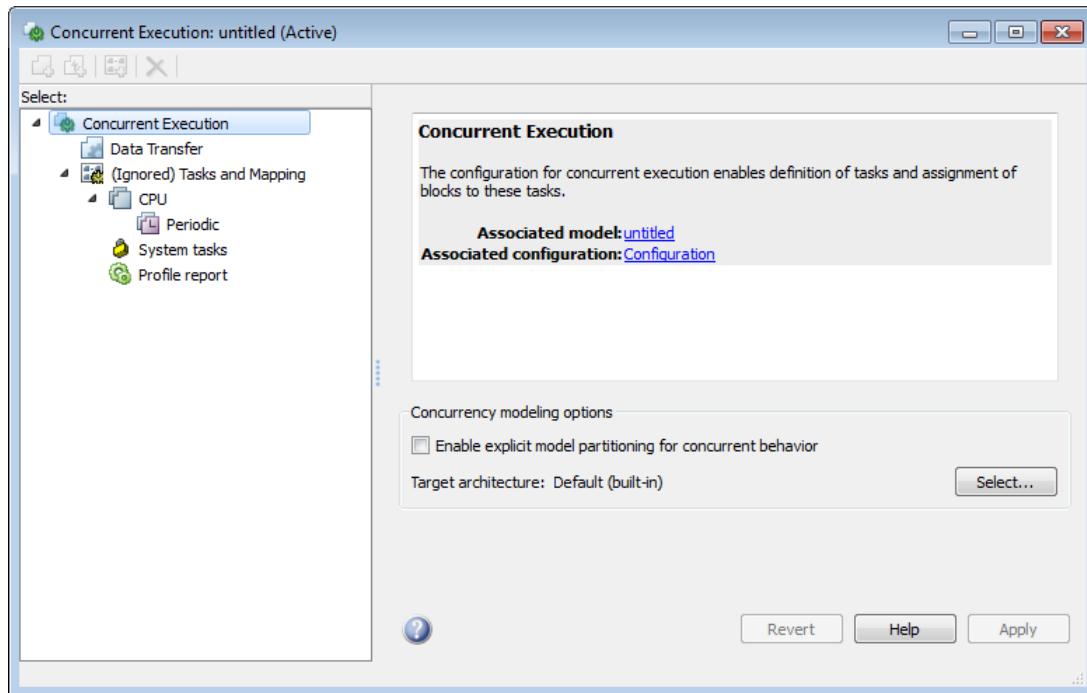

The Concurrent Execution window comprises the following panes:

- Concurrent Execution (root level)
  - Display general information for the model, including model name, configuration set name, and status of configuration set.
- Data Transfer on page 20-5
  - Configure data transfer methods between tasks.
- Tasks and Mapping
  - Map blocks to tasks.
- “CPU Pane” on page 20-8
  - Set up software nodes.
- Periodic on page 20-11
  - Name periodic tasks.

- Task on page 20-13  
Define and configure a periodic task that the target operating system executes.
- Interrupt on page 20-15  
Define aperiodic event handler that executes in response to hardware or software interrupts.
- System Task Pane on page 20-18  
Display system tasks.
- System Task on page 20-19  
Display periodic system tasks.
- System Interrupt on page 20-21  
Display interrupt system tasks.
- “Profile Report Pane” on page 20-23  
Generate and examine profile report for model.

Click items in the tree to select panes.

### Configuration

This pane appears only if you select **Allow tasks to execute concurrently on target** in the **Solver** pane in the Configuration Parameters dialog box.

- 1 Open the Model Settings from the **Modeling** tab of the current model and select **Solver**.
- 2 Expand the **Solver details** section and select **Allow tasks to execute concurrently on target**.

This option is visible only if the **Solver Type** is Fixed Step and the **Periodic sample time constraint** is set to Unconstrained.

- 3 Click **Configure Tasks**.

The concurrent execution dialog box is displayed.

### See Also

“Configure Your Model for Concurrent Execution”

## Enable explicit model partitioning for concurrent behavior

Specify whether you want to manually map tasks (explicit mapping) or use the rate-based tasks.

### Settings

**Default:** On



On

Enable manual mapping of tasks to blocks.



Off

Allow implicit rate-based tasks.

### Command-Line Information

**Parameter:** ExplicitPartitioning

**Value:** 'on' | 'off'

**Default:** 'off'

### See Also

"Configure Your Model for Concurrent Execution"

### Dependencies

Selecting this check box:

- Allows custom task-to-block mappings. The node name changes to **Tasks and Mapping** label and the icon changes.
- Disables the **Automatically handle rate transition for data transfer** check box on the Data Transfer pane.

Clearing this check box


- Causes the software to ignore the task-to-block mappings. The node name changes to **(Ignored Tasks and Mapping)**.
- Enables the **Automatically handle rate transition for data transfer** check box on the Data Transfer pane.

# Data Transfer Pane

## In this section...

- “Data Transfer Pane Overview” on page 20-5
- “Periodic signals” on page 20-5
- “Continuous signals” on page 20-6
- “Extrapolation method” on page 20-6
- “Automatically handle rate transition for data transfer” on page 20-7

## Data Transfer Pane Overview

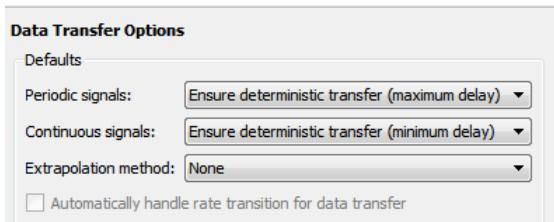

Edit options to define data transfer between tasks.

## See Also

“Configure Your Model for Concurrent Execution”

## Periodic signals

Select the data transfer mode of synchronous signals.

### Settings

**Default:** Ensure deterministic transfer (maximum delay)

**Ensure deterministic transfer (maximum delay)**

Ensure maximum capacity during data transfer.

**Ensure data integrity only**

Ensure maximum data integrity during data transfer.

### Dependency

This parameter is enabled if the **Enable explicit task mapping to override implicit rate-based tasks** check box on the Concurrent Execution pane is selected.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

## See Also

“Configure Your Model for Concurrent Execution”

## Continuous signals

Select the data transfer mode of continuous signals.

### Settings

**Default:** Ensure deterministic transfer (maximum delay)

Ensure deterministic transfer (maximum delay)

    Ensure maximum capacity during data transfer.

Ensure data integrity only

    Ensure maximum data integrity during data transfer.

### Dependency

This parameter is enabled if the **Enable explicit task mapping to override implicit rate-based tasks** check box on the Concurrent Execution pane is cleared.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Extrapolation method

Select the extrapolation method of data transfer to configure continuous-to-continuous task transitions.

### Settings

**Default:** None

None

    Do not use any extrapolation method for task transitions.

Zero Order Hold

    User zero order hold extrapolation method for task transitions.

Linear

    User linear extrapolation method for task transitions.

Quadratic

    User quadratic extrapolation method for task transitions.

### Dependency

This parameter is enabled if the **Enable explicit task mapping to override implicit rate-based tasks** check box on the Concurrent Execution pane is selected.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

## See Also

"Configure Your Model for Concurrent Execution"

## Automatically handle rate transition for data transfer

Select the extrapolation method of data transfer to configure continuous-to-continuous task transitions.

### Settings

**Default:** Off



On

Enable the software to handle rate transitions for data transfers automatically, without user intervention.



Off

Disable the software from handling rate transitions for data transfers automatically.

### Dependencies

This parameter is enabled if the Concurrent Execution pane **Enable explicit task mapping to override implicit rate-based tasks** check box is cleared.

### Command-Line Information

See "Programmatic Interface for Concurrent Execution".

## See Also

"Configure Your Model for Concurrent Execution"

## CPU Pane

### CPU Pane Overview

Configure software nodes.

#### See Also

["Configure Your Model for Concurrent Execution"](#)

#### Name

Specify a unique name for software node.

#### Settings

**Default:** CPU

- Alternatively, enter a unique character vector to identify the software node. This value must be a valid MATLAB variable.

#### Command-Line Information

See ["Programmatic Interface for Concurrent Execution"](#).

#### See Also

["Configure Your Model for Concurrent Execution"](#)

# Hardware Node Pane

## Hardware Node Pane Overview

Configure hardware nodes.

### Name

Specify name of hardware node.

#### Settings

**Default:** FPGAN

- Alternatively, enter a unique character vector to identify the hardware node. This value must be a valid MATLAB variable.

#### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

#### See Also

“Configure Your Model for Concurrent Execution”

### Clock Frequency [MHz]

Specify clock frequency of hardware node.

#### Settings

**Default:** 33

#### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

#### See Also

“Configure Your Model for Concurrent Execution”

### Color

Specify the color for the hardware node icon.

#### Settings

**Default:** Next color in basic color sequence

#### Tips

The hardware node icon appears in the tree.

**Command-Line Information**

See “Programmatic Interface for Concurrent Execution”.

**See Also**

“Configure Your Model for Concurrent Execution”

# Periodic Pane

## In this section...

- “Periodic Pane Overview” on page 20-11
- “Name” on page 20-11
- “Periodic Trigger” on page 20-11
- “Color” on page 20-12
- “Template” on page 20-12

## Periodic Pane Overview



Configure periodic (synchronous) tasks.

### See Also

“Configure Your Model for Concurrent Execution”

## Name

Specify a unique name for the periodic task trigger configuration.

### Settings

#### Default: Periodic

- Alternatively, enter a unique character vector to identify the periodic task trigger configuration. This value must be a valid MATLAB variable.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Periodic Trigger

Specify the period of a periodic trigger

**Settings****Default:**

- Change ERTDefaultEvent to the actual trigger source event.

**Command-Line Information**

See “Programmatic Interface for Concurrent Execution”.

**See Also**

“Configure Your Model for Concurrent Execution”

**Color**

Specify a color for the periodic trigger icon.

**Settings****Default:** Blue

- Click the color picker icon to select a color for the periodic trigger icon.

**Command-Line Information**

See “Programmatic Interface for Concurrent Execution”.

**See Also**

“Configure Your Model for Concurrent Execution”

**Template**

Specify the XML-format custom architecture template file that code generation properties use for the task, periodic trigger or aperiodic triggers.

**Settings****Default:** None

The XML-format custom architecture template file defines these settings.

**Command-Line Information**

See “Programmatic Interface for Concurrent Execution”.

**See Also**


- “Define a Custom Architecture File”
- “Configure Your Model for Concurrent Execution”

# Task Pane

## In this section...

- “Task Pane Overview” on page 20-13
- “Name” on page 20-13
- “Period” on page 20-14
- “Color” on page 20-14

## Task Pane Overview

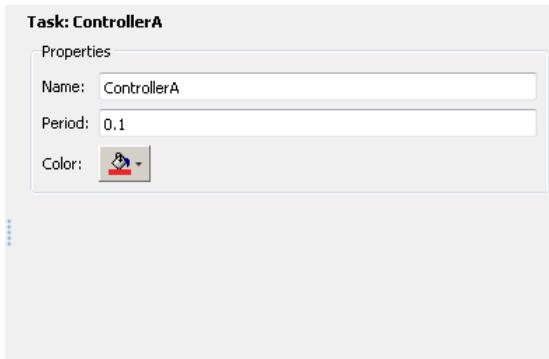

Specify concurrent execution tasks. You can add tasks for periodic and interrupt-driven (aperiodic) tasks.

### See Also

“Configure Your Model for Concurrent Execution”

## Name

Specify a unique name for the task configuration.

### Settings

#### Default: Task

- Alternatively, enter a unique character vector to identify the periodic task trigger configuration. This value must be a valid MATLAB variable.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Period

Specify the period for the task.

### Settings

**Default:** 1

**Minimum:** 0

- Enter a positive real or ratio value.

### Tip

You can parameterize this value by using MATLAB expression character vectors as values.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Color

Specify a color for the task icon.

### Settings

**Default:** Blue

- Click the color picker icon to select a color for the task icon.

### Tips

The task icon appears on the top left of the Model block. It indicates the task to which the Model block is assigned.

- As you add a task, the software automatically assigns a color to the task icon, up to six colors. When the current list of colors is exhausted, the software reassigns previously used colors to the new tasks, starting with the first color assigned.
- If you select a different color for an icon and then use the software to automatically assign colors, the software assigns a preselected color.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”


# Interrupt Pane

## In this section...

- “Interrupt Pane Overview” on page 20-15
- “Name” on page 20-15
- “Color” on page 20-16
- “Aperiodic trigger source” on page 20-16
- “Signal number [2,SIGRTMAX-SIGRTMIN-1]” on page 20-17
- “Event name” on page 20-17

## Interrupt Pane Overview

Configure interrupt-driven (aperiodic) tasks.

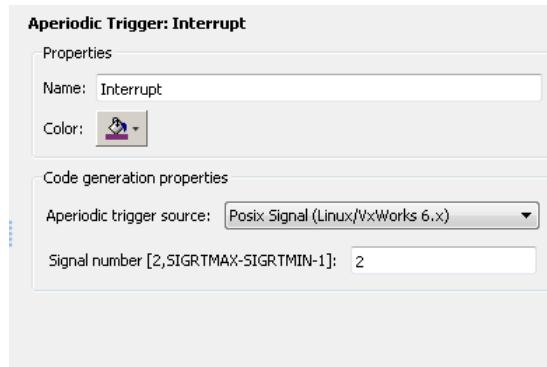

## See Also

“Configure Your Model for Concurrent Execution”

## Name

Specify a unique name for the interrupt-driven task configuration.

## Settings

### Default: Interrupt

- Enter a unique character vector to identify the interrupt-driven task configuration. This value must be a valid MATLAB variable.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

## See Also

“Configure Your Model for Concurrent Execution”

## Color

Specify a color for the interrupt icon.

### Settings

**Default:** Blue

- Click the color picker icon to select a color for the interrupt icon.

### Tips

The interrupt icon appears on the top left of the Model block. It indicates the task to which the Model block is assigned.

- As you add an interrupt, the software automatically assigns a color to the interrupt icon, up to six colors. When the current list of colors is exhausted, the software reassigns previously used colors to the new interrupts, starting with the first color assigned.
- If you select a different color for an icon and then use the software to automatically assign colors, the software assigns a preselected color.

### Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Aperiodic trigger source

Specify the trigger source for the interrupt-driven task.

### Settings

**Default:** Posix Signal (Linux/VxWorks 6.x)

Posix Signal (Linux/VxWorks 6.x)

For Linux® or VxWorks® systems, select Posix Signal (Linux/VxWorks 6.x).

Event (Windows)

For Windows systems, select Event (Windows).

### Dependencies

This parameter enables either **Signal number [2,SIGRTMAX-SIGRTMIN-1]** or **Event name**.

- Selecting Posix Signal (Linux/VxWorks 6.x) enables the following parameter:

**Signal number [2,SIGRTMAX-SIGRTMIN-1]**

- Selecting Event (Windows) enables the following parameter:

**Event name**

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Signal number [2,SIGRTMAX-SIGRTMIN-1]

Enter the POSIX® signal number as the trigger source.

### Settings

**Default:** 2

**Minimum:** 2

**Maximum:** SIGRTMAX - SIGRTMIN - 1

- Enter the POSIX signal number as the trigger source.

### Dependencies

**Aperiodic trigger source > Posix signal (Linux/VxWorks 6.x)** enables this parameter.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

### See Also

“Configure Your Model for Concurrent Execution”

## Event name

Enter the name of the event as the trigger source.

### Settings

**Default:** ERTDefaultEvent

- Change ERTDefaultEvent to the actual trigger source event.

### Dependencies

**Aperiodic trigger source > Event (Windows)** enables this parameter.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.


### See Also

“Configure Your Model for Concurrent Execution”

## System Tasks Pane

### System Tasks Pane Overview

Display system tasks.

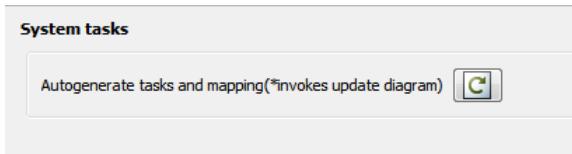

### See Also

"Configure Your Model for Concurrent Execution"

# System Task Pane

## In this section...

- “System Task Pane Overview” on page 20-19
- “Name” on page 20-19
- “Period” on page 20-19
- “Color” on page 20-20

## System Task Pane Overview

Display periodic system tasks.



## See Also

“Configure Your Model for Concurrent Execution”

## Name

Specify a default name for the periodic system task configuration.

## Settings

**Default:** DiscreteN

## Tip

To change the name, period, or color of this task, right-click the task node and select **Convert to editable periodic task**.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

## See Also

“Configure Your Model for Concurrent Execution”

## Period

Specify the period for the task.

**Settings****Default:** 1**Minimum:** 0

- Enter a positive real or ratio value.

**Tip**

- To change the name, period, or color of this task, right-click the task node and select **Convert to editable periodic task**.

**Command-Line Information**

See “Programmatic Interface for Concurrent Execution”.

**See Also**

“Configure Your Model for Concurrent Execution”

**Color**

Specify the outline color for the task icon.

**Settings****Default:** Blue**Tips**

The task icon appears on the top left of the Model block. It indicates the task the Model block is assigned to.

- To change the name, period, or color of this task, right-click the task node and select **Convert to editable periodic task**.

**See Also**

“Configure Your Model for Concurrent Execution”


# System Interrupt Pane

## In this section...

- “System Interrupt Pane Overview” on page 20-21
- “Name” on page 20-21
- “Color” on page 20-21

## System Interrupt Pane Overview

Display interrupt system tasks.

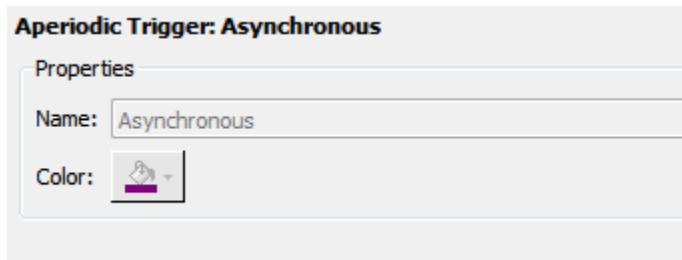

## See Also

“Configure Your Model for Concurrent Execution”

## Name

Specify a default name for the interrupt system task.

## Settings

**Default:** Asynchronous

## Tip

To change the name or color of this task, right-click the task node and select **Convert to editable aperiodic trigger**.

## Command-Line Information

See “Programmatic Interface for Concurrent Execution”.

## See Also

“Configure Your Model for Concurrent Execution”

## Color

Specify the outline color for the task icon.

### Tips

The task icon appears on the top left of the Model block. It indicates the task the Model block is assigned to.

- To change the name or color of this task, right-click the task node and select **Convert to editable aperiodic task**.

### See Also

[“Configure Your Model for Concurrent Execution”](#)

# Profile Report Pane


## In this section...

"Profile Report Pane Overview" on page 20-23

"Number of time steps" on page 20-23

## Profile Report Pane Overview

Generate and examine profile report for model.

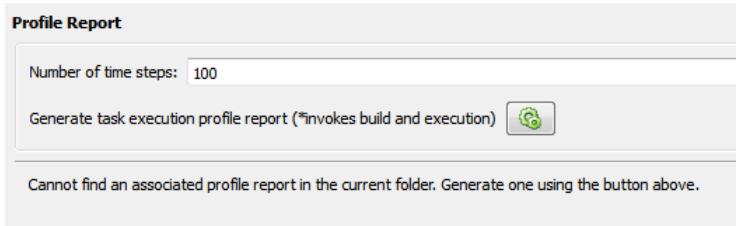

## See Also

"Configure Your Model for Concurrent Execution"

## Number of time steps

Specify number of time steps to generate profile report.

### Settings

**Default:** 100

- Enter the number of time steps to collect data.

### Command-Line Information

See "Programmatic Interface for Concurrent Execution".

## See Also


"Configure Your Model for Concurrent Execution"



# Simulink Simulation Stepper

---

## Simulation Stepping Options

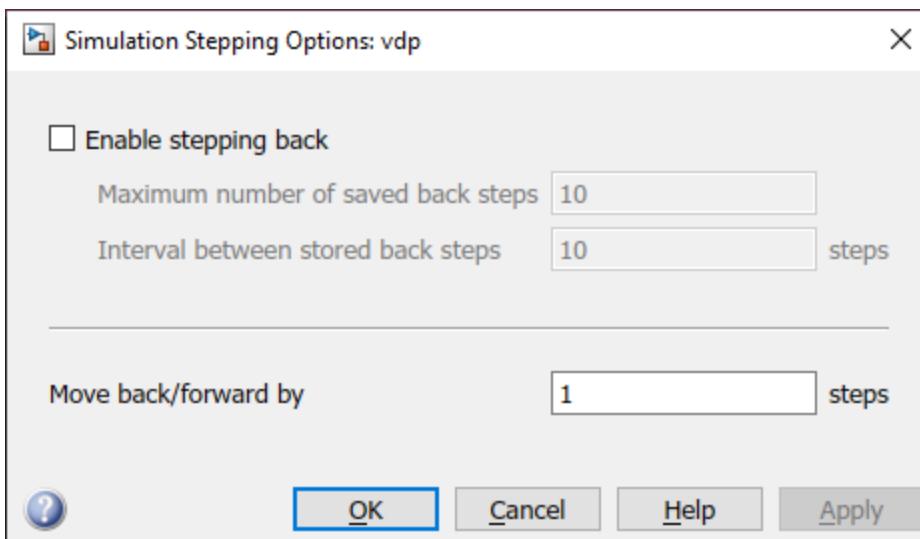

### In this section...

["Simulation Stepping Options Overview" on page 21-2](#)  
["Enable stepping back" on page 21-3](#)  
["Maximum number of saved back steps" on page 21-3](#)  
["Interval between stored back steps" on page 21-4](#)  
["Move back/forward by" on page 21-4](#)

## Simulation Stepping Options Overview

Use the Simulation Stepping Options dialog box to configure the time and the manner of manually stepping through a simulation.

### Configuration

This pane appears when you select **Step Back > Configure Simulation Stepping** in the **Simulation** tab.

Simulation > Step Back > .

- 1 Set the time at which you wish to pause the simulation
- 2 To step backwards through a simulation, select **Enable stepping back** and specify the total number and frequency of snapshots.
- 3 Specify the increment of steps by which the simulation steps either forward or backwards.
- 4 To pause simulation at a particular time, select **Pause simulation when time reaches** check box and enter the pause time.

### Tips

- To start the Simulation Stepping Options dialog box from the Simulink toolbar, click .

- You can change the value while the simulation is running or paused.

### See Also

- “How Simulation Stepper Helps With Model Analysis”

## Enable stepping back

Enable stepping back.

### Settings

**Default:** Off



Enable stepping back.



Disable stepping back.

### Tip

Simulation stepping (forward and back) is available only for Normal and Accelerator modes.

### Dependencies

This parameter enables the **Maximum number of saved back steps** and **Interval between stored back steps** parameters.

### See Also

- “How Simulation Stepper Helps With Model Analysis”

## Maximum number of saved back steps

Enter the maximum number of snapshots that the software can capture. A snapshot at a particular simulation time captures all the information required to continue a simulation from that point.

### Settings

**Default:** 10

**Minimum:** 0

### Dependencies

**Enable stepping back** enables this parameter and the **Interval between stored back steps** parameter.

### See Also

- “How Simulation Stepper Helps With Model Analysis”
- “Simulation Snapshots”

## Interval between stored back steps

Enter the number of major time steps to take between capturing simulation snapshots.

### Settings

**Default:** 10

**Minimum:** 1

- “How Simulation Stepper Helps With Model Analysis”
- “Simulation Snapshots”

### Tip

The number of steps to skip between snapshots. This parameter enables you to save snapshots of simulation state for stepping backward at periodic intervals, such as every three steps forward. This interval is independent of the number of steps taken in either the forward or backward direction. Because taking simulation snapshots affects simulation speed, saving snapshots less often can improve simulation speed.

### Dependencies

**Enable stepping back** enables this parameter and the **Maximum number of saved back steps** parameter.

### See Also

- “How Simulation Stepper Helps With Model Analysis”
- “Simulation Snapshots”

## Move back/forward by

Enter the number of major time steps for a single call to step forward or back.

### Settings

**Default:** 1

**Minimum:** 1

### Tip

The maximum number of steps, or snapshots, to capture while simulating forward. The greater the number, the more memory the simulation occupies and the longer the simulation takes to run.

### See Also

- “How Simulation Stepper Helps With Model Analysis”
- “Simulation Snapshots”

# Simulink Variant Manager

---

## Variant Manager Overview

### In this section...

["Variant Configuration Data" on page 22-3](#)

["Model Hierarchy" on page 22-8](#)

["Log" on page 22-12](#)

The Variant Manager is a central tool that allows you to manage various variation points that are modeled using variant blocks in a system model or variant transitions in a Stateflow chart.

A model hierarchy may contain several variant blocks, each with many variant choices, combinations of which correspond to particular configurations of the system. Switching between variant choices and validating them manually can be complicated and erroneous.

Use the Variant Manager to create predefined configurations for a model, and use the model under any of the configurations. You can create the configurations by combinations of different variant choices across the model hierarchy.


Using the Variant Manager, you can:

- Define, validate, and visualize variant configurations.
- Define and validate constraints for the model.
- Specify the default active configuration.
- Set control variables to either integer, enumeration values, or `Simulink.Parameter` objects.
- Associate `Simulink.VariantConfigurationData` object with the model.
- Validate a variant configuration or model without updating the model.
- Reduce a model to retain subset of variant configurations.
- Analyze variant configurations.


For information on analyzing variant configurations from Variant Manager, see “[Analyze Variant Configurations in Models Containing Variant Blocks](#)”. For information on analyzing variant configurations from command line, see `Simulink.VariantConfigurationAnalysis`.

Consider the model Variant Management. To open the Variant Manager, you can:

- Right-click the variant badge and select **Open in Variant Manager**.

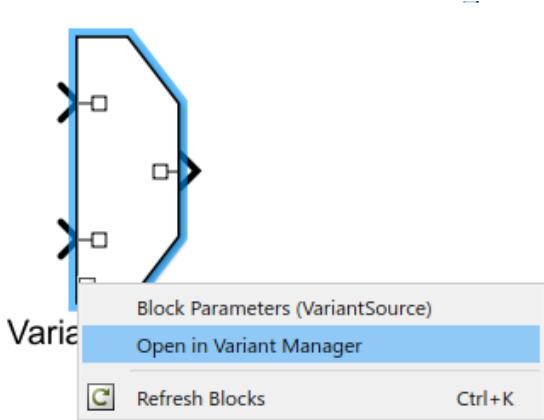

- Right-click the variant block, and select **Variant > Open in Variant Manager**.
- Select the variant block, for example Variant Subsystem block, and then in the **Variant Subsystem** tab of toolbar select **Variant Manager**.
- In the **Modeling** tab of toolbar, open **Design** section, click **Variant Manager**.
- Click **Open block in Variant Manager** available on the variant block's **Block Parameter** dialog box.

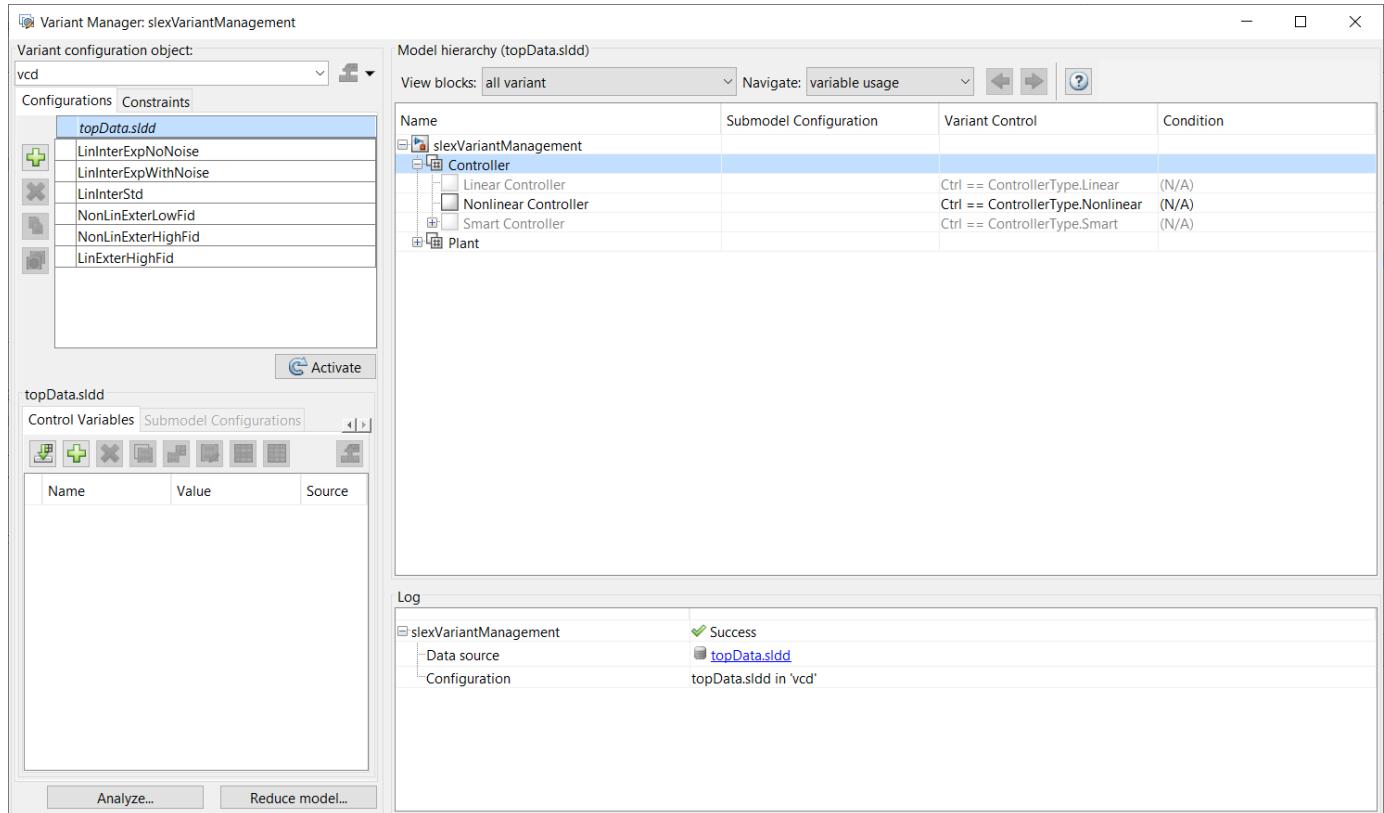


The **Variant Manager** window is divided into three panes:

- The “Variant Configuration Data” on page 22-3 pane which enables you to define variant configurations and constraints, and export them in variant configuration data object.
- The “Model Hierarchy” on page 22-8 pane which enables you to visualize the variant hierarchy.
- The “Log” on page 22-12 pane which displays information on the source of control variables and validation errors.

## Variant Configuration Data

Use this pane to create configurations, define control variables, associate referenced model configurations, and define constraints. The configurations and associated data are stored in a variant configuration data object.

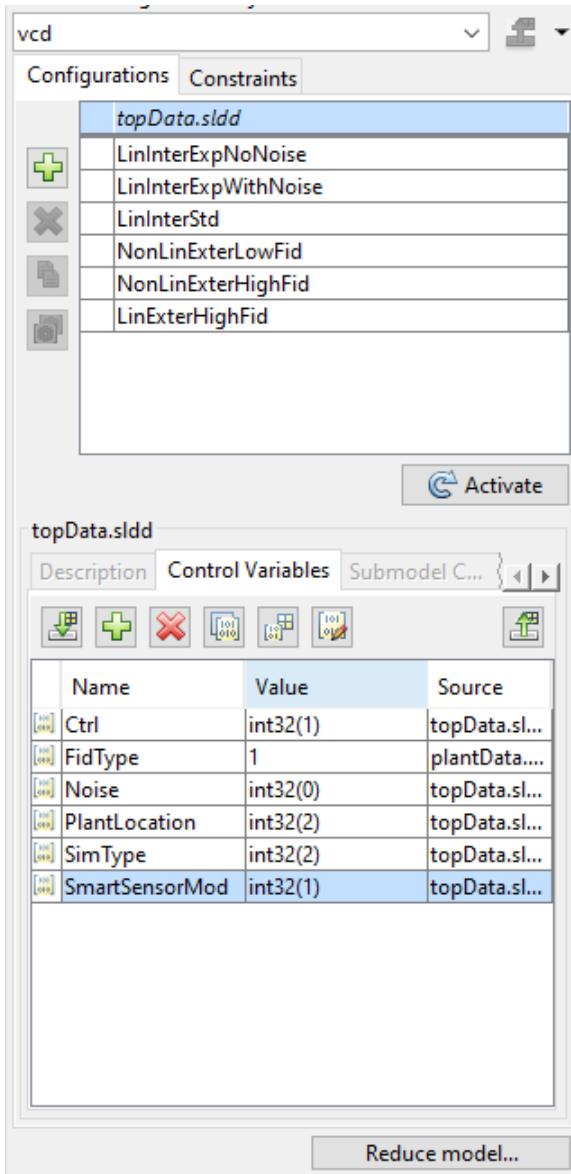

### Variant Configuration Object

After you add a variant configuration, type a name for the variant configuration object in the **Variant configuration object** box. You can use the drop-down menu to load a variant configuration object from a file or refresh a loaded variant configuration object. You can load a variant configuration object either from a MAT file or a MATLAB script (.m file). To store the variant configuration object in the model, global workspace and associate it with the model, click **Export** . To store the variant configuration object in a folder of your choice either as a MAT-file or a MATLAB script (.m file), click **Save As** from the drop-down menu of the **Export** button.

### Configurations

The **Configurations** tab is divided into upper and the lower panes. You can use the upper pane to add, delete, or copy a variant configuration. You can also set a default configuration. When you set a

configuration to be default configuration, validating or updating the model activates the variant choice specified in the default configuration.

The upper pane has these buttons to manage a variant configuration.

| Button | Description                            |
|--------|----------------------------------------|
|        | Add variant configuration              |
|        | Delete variant configuration           |
|        | Duplicate variant configuration        |
|        | Set/Clear default active configuration |

After a variant configuration is added, you can use the lower pane on the **Configurations** tab to add a description, control variables, and the submodel configurations for it. You can add control variables and export them to the global workspace even when a variant configuration is not added. The lower pane contains these tabs:


- **Description** — Provide a description for the selected variant configuration.
- **Control Variables** — Add, delete, copy or import control variables. Toggle data type and import control variables from the workspace. Show, hide usage of selected control variables.

| Button | Description                                                                                                                                                                                                                                                                                                                                                                                     |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|        | Add control variable                                                                                                                                                                                                                                                                                                                                                                            |
|        | Delete the selected control variable                                                                                                                                                                                                                                                                                                                                                            |
|        | Create a copy of the selected control variable                                                                                                                                                                                                                                                                                                                                                  |
|        | Toggle type of a control variable<br>A control variable can be either a plain MATLAB variable or a <b>Simulink.Parameter</b> object.                                                                                                                                                                                                                                                            |
|        | Edit <b>Simulink.Parameter</b> control variables. This option gets activated when the selected control variable is a <b>Simulink.Parameter</b> object.<br><br><b>Note</b> To specify <b>Simulink.Parameter</b> control variable as an expression, set the Value property of the parameter object by using an equals sign (=) followed by a mathematical expression. For example, enter = A + B. |
|        | Import control variables from entire model reference hierarchy<br><br><b>Note</b> Control variables from blocks in Label mode are not imported, as they are not variant control variables.                                                                                                                                                                                                      |

| Button | Description                              |
|--------|------------------------------------------|
|        | Show usage of selected control variables |
|        | Hide usage of selected control variables |


The control variables usage is computed on an on-demand basis, where you can choose to show or hide the control variable usage in the model hierarchy table of the Variant Manager.

To do so, in the Variant Manager window, right-click the required control variable and select **Show usage** or **Hide usage**. A sample screenshot is as shown below.

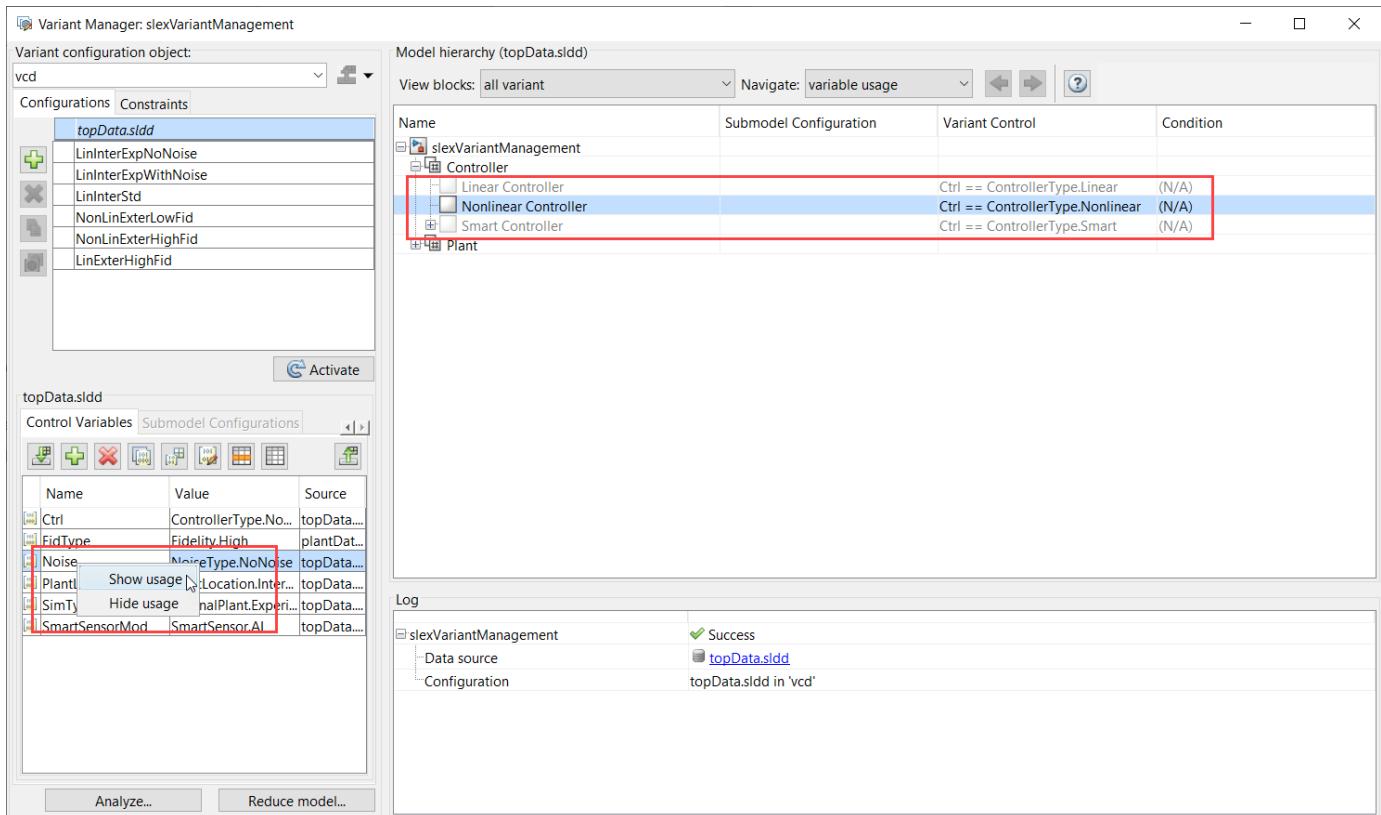

- **Submodel Configurations** — Define variant configuration for a referenced model.


Add or delete a referenced model configuration.

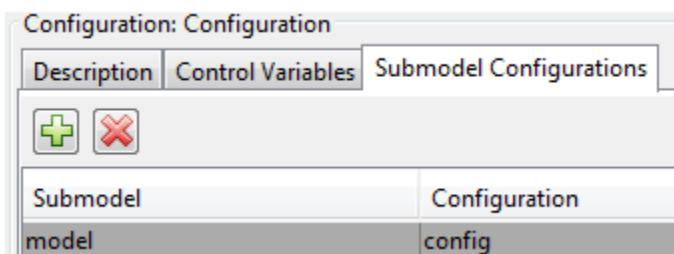

## Activate Configuration

To refresh and activate the variant model for a configuration, select a configuration from the list of **Configurations** and click **Activate**. If you click the **Activate** button without selecting any configuration, the values for the **Control Variables** are picked from the global workspace. For such cases, the **Control Variables** that are defined in the Variant Manager overrides the corresponding values in the global workspace unless a default configuration is set. If a default variant configuration is set, the corresponding control variables are applied.


When you open the Variant Manager for a parent model that contains referenced models (submodels), only the parent model is validated. The referenced models (submodels) are validated only when you activate or expand (click +) the reference models.

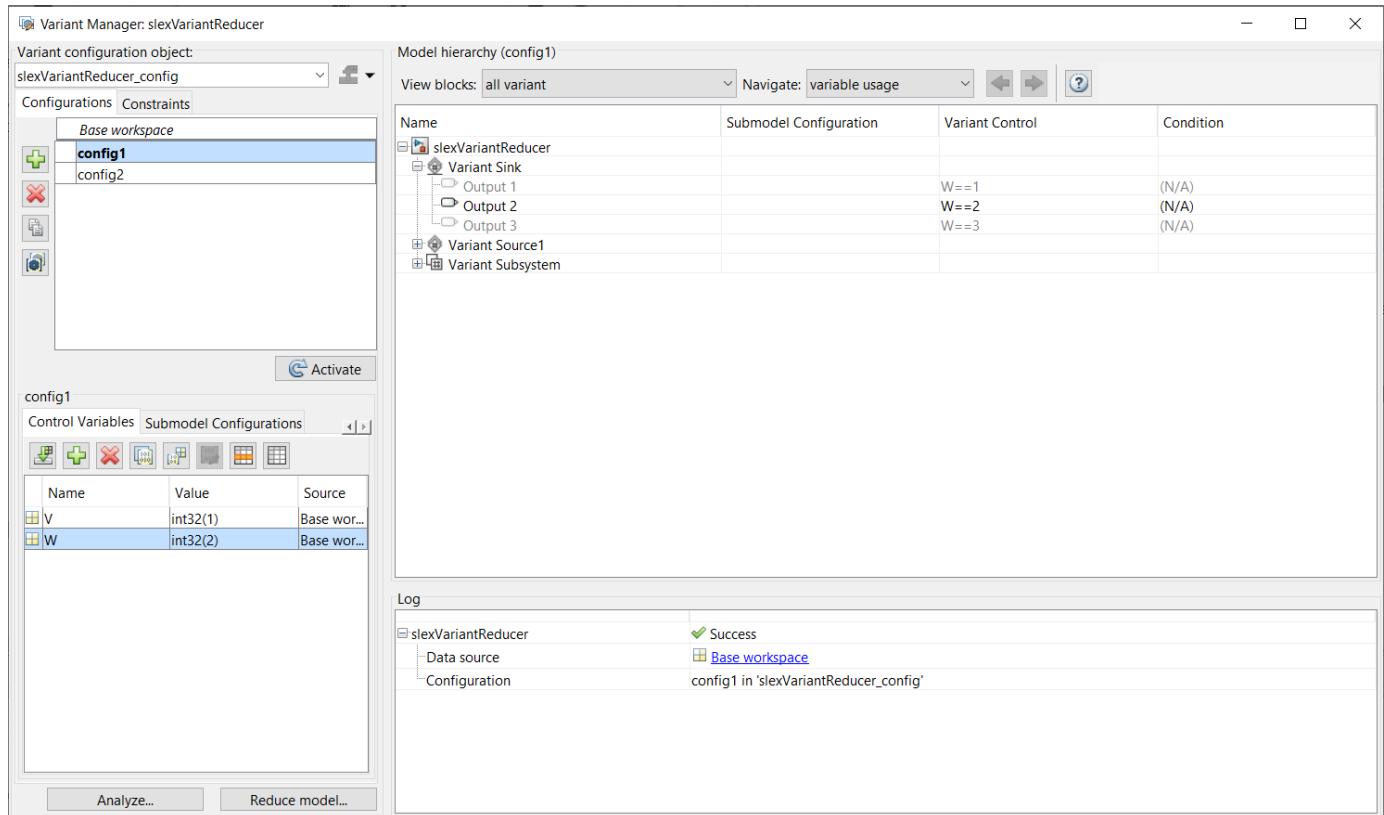

## Constraints

Use the **Constraints** tab to add or delete the model-level constraints. Similar to the **Configurations** tab, the **Constraints** tab also contains upper and lower panes.

The upper pane displays the name and condition of the constraints while the lower pane displays the description. The condition expression of the constraint must be satisfied by all variant configurations in the model.

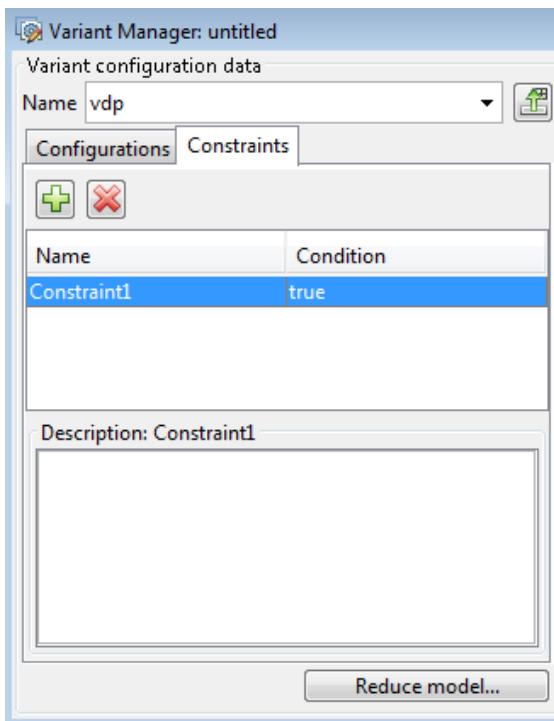

## Model Hierarchy

You can visualize and explore the variant hierarchy of a model and edit the properties of variant blocks, variant choices, and variant objects from the **Model hierarchy** pane. This pane displays the **Name**, **Submodel Configuration**, **Variant Control**, and associated **Conditions** of variant objects used as variant controls.

Browse the hierarchy using the navigation icons. The controls on the **Model hierarchy** pane allow you to perform the following actions:

- Refresh and validate hierarchy.
- Display only variant blocks.
- Navigate among variable usage, active choices, invalid choices, and overridden variant choices.

### View Blocks

Selectively display blocks in the variant hierarchy:

- Select **all variant** to display all variant blocks.
- Select **label mode** to display variant blocks in Label mode and other Model blocks. Variant blocks in Expression mode, which contains blocks in Label mode within their hierarchy are also displayed.
- Select **expression mode** to display variant blocks in Expression mode and other Model blocks. Variant blocks in Label mode, which contains blocks in Expression mode within their hierarchy are also displayed.
- Select **hierarchical** to display all hierarchical blocks (for example, Subsystems, Model blocks) in the model.

- Select **sim codegen switching mode** to display variant blocks in **sim codegen switching mode**.

## **Navigate**

Navigate among variable usage, active choices, invalid choices, and overridden choices:

- **Variable usage**— selects the previous/next rows in the model where the selected control variable is used.
- **Active choices**— selects the previous/next rows in the model having active variant choices.
- **Invalid choices**— selects the previous/next rows in the model having invalid variant choices.

## **Hierarchy Table**

The model hierarchy is displayed in a tree, with each block representing a node in the hierarchy. The hierarchy displays active, inactive, overridden, and invalid variants. You can edit referenced model configurations, variant controls, and variant conditions. Expand nodes to view the underlying blocks.

---

**Note** Protected reference models cannot be viewed in the hierarchy.

---

The hierarchy table consists of these columns:

- **Name** — Name of the model or block.
- **Submodel Configuration** — Configurations used by referenced models. You can only edit the **Submodel Configuration** for rows that display models referenced by the top model.
- **Variant Control** — Variant control parameter of a variant choice. This column is identical to the Variant Control column of the parameter dialog box of variant blocks. You can edit this column for variant choices across the hierarchy.
- **Condition** — Displays and allows you to edit the condition for the `Simulink.Variant` object when it is used as variant control. You can edit this column for variant choices across the variant hierarchy.

In the hierarchy table, you can Right-click a block and use one of these options from the context menu, as appropriate:

- **Open and Highlight Block:** Highlights the selected block in the model while displaying selected block location from the top model.
- **Open Model:** Opens the selected model while displaying selected model location from the top model. This option is available only when you select a model from the hierarchy table.
- **Open Block Parameters:** Opens the block parameter dialog box for the selected block. You can choose to modify the parameter values.
- **Open Parent Block Parameters:** Opens the block parameter dialog box for the parent block of the selected block. You can choose to modify the parameter values.
- **Set as Label Mode Active Choice:** Sets the selected choice of Variant Subsystem, or Variant Sink, or Variant Source blocks as active choice. This option is available only for the Variant Subsystem, or Variant Sink, or Variant Source blocks in label mode.

In the model hierarchy section, each block is represented with an icon. The following table displays the icons and the corresponding block name.

| Icon | Block Name                                                                                                                                                            |
|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | Model Block                                                                                                                                                           |
|      | Inline Variants Block (Variant Source and Variant Sink)                                                                                                               |
|      | Variant Subsystem block                                                                                                                                               |
|      | Subsystem block                                                                                                                                                       |
|      | Variant Model block                                                                                                                                                   |
|      | Subsystem Reference block                                                                                                                                             |
|      | Simulink Function block                                                                                                                                               |
|      | Trigger Port block                                                                                                                                                    |
|      | Stateflow chart block                                                                                                                                                 |
|      | Variant Sink output port                                                                                                                                              |
|      | Variant Source input port                                                                                                                                             |
|      | Variant Subsystem block with <b>Propagate conditions outside of variant subsystem</b> option selected.                                                                |
|      | Variant Subsystem block with <b>Variant activation time</b> set to <b>update diagram</b> .                                                                            |
|      | Variant Subsystem block with <b>Variant activation time</b> set to <b>analyze all choices</b> .                                                                       |
|      | Variant Subsystem block with <b>Variant activation time</b> set to <b>code compile</b> .                                                                              |
|      | Variant Subsystem block with <b>Allow zero active variant controls</b> and <b>Variant activation time</b> set to <b>update diagram</b> .                              |
|      | Variant Subsystem block with <b>Allow zero active variant controls</b> and <b>Variant activation time</b> set to <b>analyze all choices</b> .                         |
|      | Variant Subsystem block with <b>Allow zero active variant controls</b> and <b>Variant activation time</b> set to <b>code compile</b> .                                |
|      | Variant Subsystem block with <b>Label</b> selected as <b>Variant control mode</b> and an active variant choice is selected from the <b>Label mode active choice</b> . |

| Icon | Block Name                                                                                                                                                                                                                                           |
|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|      | Variant Subsystem block with <b>Propagate conditions outside of variant subsystem</b> and <b>Variant activation time</b> set to update diagram.                                                                                                      |
|      | Variant Subsystem block with <b>Propagate conditions outside of variant subsystem</b> and <b>Variant activation time</b> set to update diagram analyze all choices.                                                                                  |
|      | Variant Subsystem block with <b>Propagate conditions outside of variant subsystem</b> and <b>Variant activation time</b> set to code compile.                                                                                                        |
|      | Variant Subsystem block with <b>Propagate conditions outside of variant subsystem</b> option selected. Also, Label selected as <b>Variant control mode</b> and an active variant choice is selected from the <b>Label mode active choice</b> option. |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Allow zero active variant control</b> option selected.                                                                                                                               |
|      | Inline Variants Block (Variant Source and Variant Sink) with Label selected as <b>Variant control mode</b> and an active variant choice is selected from the <b>Label mode active choice</b> option.                                                 |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Variant activation time</b> set to update diagram.                                                                                                                                   |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Variant activation time</b> set to update diagram analyze all choices.                                                                                                               |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Variant activation time</b> set to code compile.                                                                                                                                     |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Allow zero active variant control</b> and <b>Variant activation time</b> set to update diagram.                                                                                      |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Allow zero active variant control</b> and <b>Variant activation time</b> set to update diagram analyze all choices.                                                                  |
|      | Inline Variants Block (Variant Source and Variant Sink) with <b>Allow zero active variant control</b> and <b>Variant activation time</b> set to code compile.                                                                                        |

| Icon | Block Name                                                                      |
|------|---------------------------------------------------------------------------------|
|      | Initialize Function block                                                       |
|      | Event Listener block of Initialize Function block                               |
|      | Reset Function block                                                            |
|      | Event Listener block of Rest Function block                                     |
|      | Terminate Function block                                                        |
|      | Event Listener block of Terminate Function block                                |
|      | Stateflow chart with <b>Generate preprocessor conditionals</b> option selected. |
|      | Stateflow transition with <b>Treat as Variant Transition</b> option selected.   |

## Log

The Log pane displays information and validation results of the source of control variables for the models in the hierarchy.

For example, if a variant configuration is used for a referenced model, the referenced model name is displayed in the row along with name of the variant configuration data object and variant configuration. The pane also displays errors encountered during validation of the variant configuration.

The screenshot shows the 'Log' pane with the title 'Log'. The pane displays validation results for a variant configuration named 'iv\_21\_variant\_reducer'. It lists two errors under 'Variant Source1' and 'Variant Source2' respectively, stating that they do not contain an active variant. The left side of the pane shows a tree view of data sources used for models, with 'iv\_21\_variant\_reducer' expanded.

| Data source           | Validation result                                                                                    |
|-----------------------|------------------------------------------------------------------------------------------------------|
| iv_21_variant_reducer | Configuration 'Configuration2' of unexported variant configuration data object 'Vconfig'<br>2 Errors |
| Variant Source1       | The variant Source block 'iv_21_variant_reducer/Variant Source1' does not contain an active variant. |
| Variant Source2       | The variant Source block 'iv_21_variant_reducer/Variant Source2' does not contain an active variant. |

## See Also

### Related Examples

- “Create and Validate Variant Configurations”
- “Import Control Variables to Variant Configuration”
- “Define Constraints”
- “Code Generation Using Variant Transitions” (Stateflow)

### More About

- Variant System Design

# Math and Data Types

---

## Math and Data Types Pane

The **Math and Data Types** pane includes parameters for specifying data types and net slope calculations.

| Parameter                                                                         | Description                                                                                                                                                |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Simulation behavior for denormal numbers" on page 23-4                           | Specify the desired behavior for denormal results from arithmetic operations. Requires a Fixed-Point Designer license.                                     |
| "Use algorithms optimized for row-major array layout" on page 23-15               | Enable algorithms for row-major format code generation and corresponding row-major algorithms for simulation.                                              |
| "Default for underspecified data type" on page 23-5                               | Specify the default data type to use for inherited data types if Simulink software could not infer the data type of a signal during data type propagation. |
| "Use division for fixed-point net slope computation" on page 23-7                 | The Fixed-Point Designer software performs net slope computation using division to handle net slopes when simplicity and accuracy conditions are met.      |
| "Gain parameters inherit a built-in integer type that is lossless" on page 23-9   | The data type of the gain parameter is a built-in integer when certain conditions are met.                                                                 |
| "Use floating-point multiplication to handle net slope corrections" on page 23-11 | The Fixed-Point Designer software uses floating-point multiplication to perform net slope correction for floating-point to fixed-point casts.              |

These configuration parameters are in the **Advanced parameters** section.

| Parameter                                                           | Description                                                                                                                                           |
|---------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| "Application lifespan (days)" on page 23-13                         | Specify how long (in days) an application that contains blocks depending on elapsed or absolute time should be able to execute before timer overflow. |
| "Implement logic signals as Boolean data (vs. double)" on page 2-83 | Controls the output data type of blocks that generate logic signals.                                                                                  |

# **Math and Data Types Overview**

The Math and Data Types pane allows you to configure data types and specify net slope calculations.

# Configuration

Set the parameters that appear.

## Tip

To open the Math and Data Types pane, in the Simulink Editor, on the **Modeling** tab, click **Modeling Settings**. Then, in the Configuration Parameters dialog box, select **Math and Data Types**.

## To get help on an option

- 1 Right-click the option text label.
  - 2 From the context menu, select **What's This**.



### **See Also**

## Related Examples

- “Math and Data Types Pane” on page 23-2

## Simulation behavior for denormal numbers

### Description

Specify the desired behavior for denormal results from arithmetic operations. Denormal numbers are any non-zero numbers whose magnitude is smaller than the smallest normalized floating-point number (see `realmin`). Some hardware targets flush denormal results from arithmetic operations to zero. You can emulate this behavior by setting the parameter to **Flush To Zero (FTZ)**.

### Settings

**Default:** Gradual Underflow

#### Gradual Underflow

Denormal numbers are used in the results from arithmetic operations. This setting is supported by all simulation modes.

#### Flush To Zero (FTZ)

Emulates flush-to-zero behavior for denormal numbers. This setting flushes denormal results from arithmetic operations to zero. This setting is not supported during normal mode simulation.

### Tips

In model reference systems, you can simulate a top-level model using gradual underflow with any simulation mode. Models referenced by the top-level model can simulate the flush-to-zero behavior only if the instance of the referenced model uses an accelerated simulation mode and has the **Simulation behavior for denormal numbers** parameter set to **Flush to zero (FTZ)**.

### Command-Line Information

**Parameter:** `DenormalBehavior`

**Value:** `'GradualUnderflow'` | `'FlushToZero'`

**Default:** `'GradualUnderflow'`

### Dependency

This parameter requires a Fixed-Point Designer license.

### See Also

#### More About

- “Exceptional Arithmetic” (Fixed-Point Designer)

# Default for underspecified data type

## Description

Specify the default data type to use for inherited data types if Simulink software could not infer the data type of a signal during data type propagation.

**Category:** Math and Data Types

## Settings

**Default:** double

double

Sets the data type for underspecified data types during data type propagation to double.  
Simulink uses double as the data type for inherited data types.

single

Sets the data type for underspecified data types during data type propagation to single.  
Simulink uses single as the data type for inherited data types.

## Tips

- This setting affects both simulation and code generation.
- For embedded designs that target single-precision processors, set this parameter to single to avoid the introduction of double data types.
- Use the Model Advisor Identify questionable operations for strict single-precision design check to identify the double-precision usage in your model.

## Command-Line Information

**Parameter:** DefaultUnderspecifiedDataType

**Value:** 'double' | 'single'

**Default:** 'double'

## Recommended Settings

| Application       | Setting                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------|
| Debugging         | No impact                                                                                  |
| Traceability      | No impact                                                                                  |
| Efficiency        | single (when target hardware supports efficient single computations)<br>double (otherwise) |
| Safety precaution | No impact                                                                                  |

## See Also

### Related Examples

- “Underspecified data types” on page 6-10
- “Validate a Single-Precision Model”
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

# Use division for fixed-point net slope computation

## Description

The Fixed-Point Designer software performs net slope computation using division to handle net slopes when simplicity and accuracy conditions are met.

**Category:** Math and Data Types

## Settings

**Default:** Off

Off

Performs net slope computation using integer multiplication followed by shifts.

On

Performs net slope computation using a rational approximation of the net slope. This results in an integer multiplication and/or division when simplicity and accuracy conditions are met.

**Use division for reciprocals of integers only**

Performs net slope computation using division when the net slope can be represented by the reciprocal of an integer and simplicity and accuracy conditions are met.

## Tips

- This optimization affects both simulation and code generation.
- When a change of fixed-point slope is not a power of two, net slope computation is necessary. Normally, net slope computation uses an integer multiplication followed by shifts. Enabling this new optimization replaces the multiplication and shifts with an integer division or an integer multiplication and division under certain simplicity and accuracy conditions.
- Performing net slope computation using division is not always more efficient than using multiplication followed by shifts. Ensure that the target hardware supports efficient division.
- To ensure that this optimization occurs:
  - Set the word length of the block so that the software can perform division using the `long` data type of the target hardware. That setting avoids use of multiword operations.
  - Set the **Signed integer division rounds to** configuration parameter on the Hardware Implementation pane to `Zero` or `Floor`. The optimization does not occur if you set this parameter to `Undefined`.
  - Set the **Integer rounding mode** parameter of the block to `Simplest` or to the value of the **Signed integer division rounds to** configuration parameter setting on the Hardware Implementation pane.

## Dependency

This parameter requires a Fixed-Point Designer license.

## Command-Line Information

**Parameter:** UseDivisionForNetSlopeComputation

**Value:** 'off' | 'on' | 'UseDivisionForReciprocalsOfIntegersOnly'

**Default:** 'off'

## Recommended Settings

| Application       | Setting                                                                  |
|-------------------|--------------------------------------------------------------------------|
| Debugging         | No impact                                                                |
| Traceability      | No impact                                                                |
| Efficiency        | On (when target hardware supports efficient division)<br>Off (otherwise) |
| Safety precaution | No impact                                                                |

## See Also

### Related Examples

- “Net Slope Computation” (Fixed-Point Designer)
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

# Gain parameters inherit a built-in integer type that is lossless

## Description

The data type of the gain parameter is a built-in integer when the following conditions are met.

- The input type is a built-in integer.
- The **Parameter data type** is set to **Inherit:Inherit via internal rule**.
- The value of the gain parameter can be represented without losing any precision by a built-in integer.
- The **Parameter minimum** and **Parameter maximum** values in the **Parameter Attributes** tab of the Gain block parameters can be represented without losing any precision by a built-in integer.

## Settings

**Default:** Off



On

For Gain blocks with the **Parameter data type** set to **Inherit:Inherit via internal rule**, the parameter data type compiles to a built-in integer type whenever possible.



Off

For Gain blocks with the **Parameter data type** set to **Inherit:Inherit via internal rule**, the parameter data type is the type which maximizes precision.

## Tips

- This optimization affects both simulation and code generation.
- This optimization affects only Gain blocks in the model.
- For more efficient code, specify the **Parameter minimum** and **Parameter maximum** values in the **Parameter Attributes** tab of the Gain block parameters.

## Dependencies

- In cases where the data type of the gain parameter compiles to a fixed-point data type (non-zero scaling), the software checks out a Fixed-Point Designer license.

## Command-Line Information

**Parameter:** GainParamInheritBuiltInType

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application | Setting   |
|-------------|-----------|
| Debugging   | No impact |

| <b>Application</b> | <b>Setting</b>                                                                 |
|--------------------|--------------------------------------------------------------------------------|
| Traceability       | No impact                                                                      |
| Efficiency         | On (when target hardware supports efficient multiplication)<br>Off (otherwise) |
| Safety precaution  | No recommendation                                                              |

# Use floating-point multiplication to handle net slope corrections

## Description

The Fixed-Point Designer software uses floating-point multiplication to perform net slope correction for floating-point to fixed-point casts.

**Category:** Math and Data Types

## Settings

**Default:** Off



On

Use floating-point multiplication to perform net slope correction for floating-point to fixed-point casts.



Off

Use division to perform net slope correction for floating-point to fixed-point casts.

## Tips

- This optimization affects both simulation and code generation.
- When converting from floating point to fixed point, if the net slope is not a power of two, slope correction using division improves precision. For some processors, use of multiplication improves code efficiency.

## Dependencies

- This parameter requires a Fixed-Point Designer license.

## Command-Line Information

**Parameter:** UseFloatMulNetSlope

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application  | Setting                                                                        |
|--------------|--------------------------------------------------------------------------------|
| Debugging    | No impact                                                                      |
| Traceability | No impact                                                                      |
| Efficiency   | On (when target hardware supports efficient multiplication)<br>Off (otherwise) |

| Application       | Setting           |
|-------------------|-------------------|
| Safety precaution | No recommendation |

## See Also

### Related Examples

- “Floating-Point Multiplication to Handle a Net Slope Correction” (Simulink Coder)
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)

# Application lifespan (days)

## Description

Specify how long (in days) an application that contains blocks depending on elapsed or absolute time should be able to execute before timer overflow.

**Category:** Math and Data Types

## Settings

**Default:** auto

**Min:** Must be greater than zero

**Max:** inf

Enter a positive (nonzero) scalar value (for example, 0.5) or inf.

If you use Embedded Coder and select an ERT target for your model, the underlying value for auto is 1. If you are generating production code, you should set the value of this parameter based on your model.

If you use Simulink Coder and select a GRT target for your model, the underlying value for auto is inf.

This parameter is ignored when you are operating your model in external mode, have **MAT-file logging** enabled, or have a continuous sample time because a 64 bit timer is required in these cases.

## Tips

- Specifying a lifespan, along with the simulation step size, determines the data type used by blocks to store absolute time values.
- For simulation, setting this parameter to a value greater than the simulation time will ensure time does not overflow.
- Simulink software evaluates this parameter first against the model workspace. If this does not resolve the parameter, Simulink software then evaluates it against the base workspace.
- The Application lifespan also determines the word size used by timers in the generated code, which can lower RAM usage. For more information, see “Control Memory Allocation for Time Counters” (Simulink Coder).
- Application lifespan, when combined with the step size of each task, determines the data type used for integer absolute time for each task, as follows:
  - If your model does not require absolute time, this option affects neither simulation nor the generated code.
  - If your model requires absolute time, this option optimizes the word size used for storing integer absolute time in generated code. This ensures that timers do not overflow within the lifespan you specify. If you set **Application lifespan** to inf, two uint32 words are used.
  - If your model contains fixed-point blocks that require absolute time, this option affects both simulation and generated code.

For example, using 64 bits to store timing data enables models with a step size of 0.001 microsecond (10E-09 seconds) to run for more than 500 years, which would rarely be required. To

run a model with a step size of one millisecond (0.001 seconds) for one day would require a 32-bit timer (but it could continue running for 49 days).

- A timer will allocate 64 bits of memory if you specify a value of `inf`.
- To minimize the amount of RAM used by time counters, specify a lifespan no longer than necessary.
- For code generation, must be the same for parent and referenced models. For simulation, the setting can be different for the parent and referenced models.
- Optimize the size of counters used to compute absolute and elapsed time.

## Command-Line Information

**Parameter:** `LifeSpan`

**Type:** character vector

**Value:** positive (nonzero) scalar value or '`inf`'

**Default:** '`auto`'

## Recommended Settings

| Application       | Setting          |
|-------------------|------------------|
| Debugging         | No impact        |
| Traceability      | No impact        |
| Efficiency        | Finite value     |
| Safety precaution | <code>inf</code> |

## See Also

### Related Examples

- “Optimize Memory Usage for Time Counters” (Simulink Coder)
- “Time-Based Scheduling and Code Generation” (Simulink Coder)
- “Timers in Asynchronous Tasks” (Simulink Coder)
- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)
- “Performance” (Simulink Coder)

# Use algorithms optimized for row-major array layout

## Description

For certain blocks, enable optimized algorithms for row-major format code generation and corresponding row-major algorithms for model simulation.

**Category:** Math and Data Types

## Settings

**Default:** Off

When **Array layout** (Simulink Coder) is set to **Row-major**, the code generator uses algorithms to maintain consistency of numeric results between the simulation and the generated code. Sometimes, the generated code for these algorithms might be inefficient. You can enable the **Use algorithms optimized for row-major array layout** configuration parameter to enable efficient algorithms that are optimized for certain blocks. The **Use algorithms optimized for row-major array layout** parameter affects the simulation and the generated code.

This parameter affects only these blocks:

- Sum of Elements
- Product of Elements
- n-D Lookup Table
- Interpolation Using Prelookup
- Direct Lookup Table (n-D)

For these blocks, the column-major and row-major algorithms might differ in the order of output calculations, possibly resulting in slightly different numeric values.

On

- When **Array layout** is set to **Row-major**, this parameter enables the use of efficient algorithms that traverse the data in row-major order. The generated code is efficient.
- When **Array layout** is set to **Column-major**, this parameter enables the use of algorithms that traverse the data in row-major order. The generated code is inefficient.

Off

- When **Array layout** is set to **Row-major**, the code generator uses algorithms that traverse the data in column-major order. The generated code is inefficient.
- When **Array layout** is set to **Column-major**, the code generator uses algorithms that traverse the data in column-major order. The generated code is efficient.

## Tips

When **Array layout** is set to **Row-major**, the row-major algorithm operates on table data that is contiguous in memory. This table data leads to faster cache access, making these algorithms cache-friendly.

This table summarizes the relationship between array layout and cache-friendly algorithms. It is a best practice to use the algorithm that is optimized for the specified array layout to achieve good performance. For example, select **Use algorithms optimized for row-major array layout** when the **Array layout** is set to Row-major for code generation.

| ArrayLayout  | UseRowMajorAlgorithm | Algorithm Applied                                            |
|--------------|----------------------|--------------------------------------------------------------|
| Column-major | 'off'                | Efficient column-major algorithm<br><b>Recommended</b>       |
| Row-major    | 'off'                | Inefficient column-major algorithm<br><b>Not recommended</b> |
| Column-major | 'on'                 | Inefficient row-major algorithm<br><b>Not recommended</b>    |
| Row-major    | 'on'                 | Efficient row-major algorithm<br><b>Recommended</b>          |

## Command-Line Information

**Parameter:** `UseRowMajorAlgorithm`

**Type:** character vector

**Value:** 'on' | 'off'

**Default:** 'off'

## Recommended Settings

| Application       | Setting   |
|-------------------|-----------|
| Debugging         | No impact |
| Traceability      | No impact |
| Efficiency        | No impact |
| Safety precaution | No impact |

## See Also

### Related Examples

- “Math and Data Types Pane” on page 23-2
- “Code Generation of Matrices and Arrays” (Simulink Coder)


# Model Parameter Configuration Dialog Box

---

## Model Parameter Configuration Dialog Box

The **Model Parameter Configuration** dialog box allows you to declare specific tunable parameters when you set **Default parameter behavior** to **Inlined**. The parameters that you select appear in the generated code as tunable parameters. For more information about **Default parameter behavior**, see “Default parameter behavior” (Simulink Coder).

To declare tunable parameters, use `Simulink.Parameter` objects instead of the **Model Parameter Configuration** dialog box. See “Create Tunable Calibration Parameter in the Generated Code” (Simulink Coder).

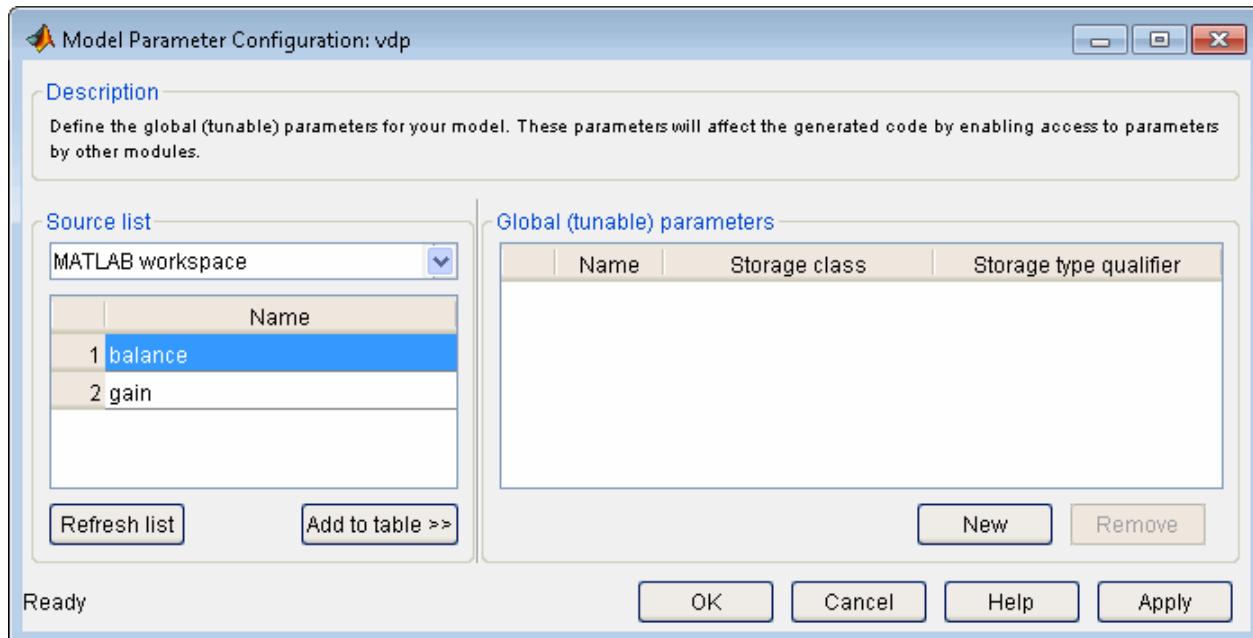

---

**Note** Simulink Coder software ignores the settings of this dialog box if a model contains references to other models. However, you can still generate code that uses tunable parameters with model references, using `Simulink.Parameter` objects. See “Create Tunable Calibration Parameter in the Generated Code” (Simulink Coder).

---

The dialog box has the following controls.

### Source list

Displays a list of workspace variables. The options are:

- MATLAB workspace — Lists all variables in the MATLAB workspace that have numeric values.
- Referenced workspace variables — Lists only those variables referenced by the model.

### Refresh list

Updates the source list. Click this button if you have added a variable to the workspace since the last time the list was displayed.

## Add to table

Adds the variables selected in the source list to the adjacent table of tunable parameters.

## New

Defines a new parameter and adds it to the list of tunable parameters. Use this button to create tunable parameters that are not yet defined in the MATLAB workspace.

---

**Note** This option does not create the corresponding variable in the MATLAB workspace. You must create the variable yourself.

---

## Storage class

Used for code generation. For more information, see “Choose Storage Class for Controlling Data Representation in Generated Code” (Simulink Coder).

## Storage type qualifier

Used for code generation. For variables with a storage class other than `Auto`, you can add a qualifier (such as `const` or `volatile`) to the generated storage declaration. To do so, you can select a predefined qualifier from the list, or add qualifiers not in the list by typing them in.

## See Also

### Related Examples

- “Model Configuration Parameters: Code Generation Optimization” (Simulink Coder)
- “How Generated Code Stores Internal Signal, State, and Parameter Data” (Simulink Coder)

