






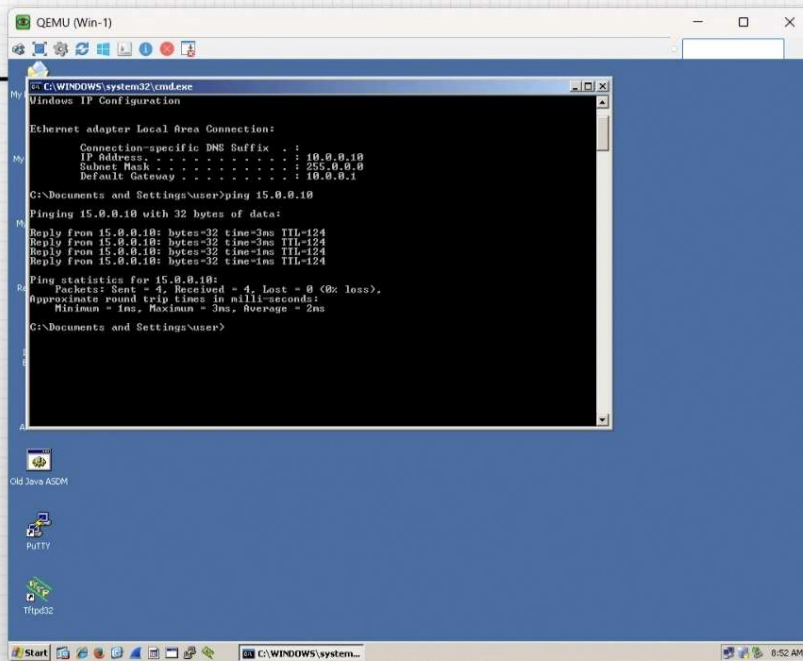

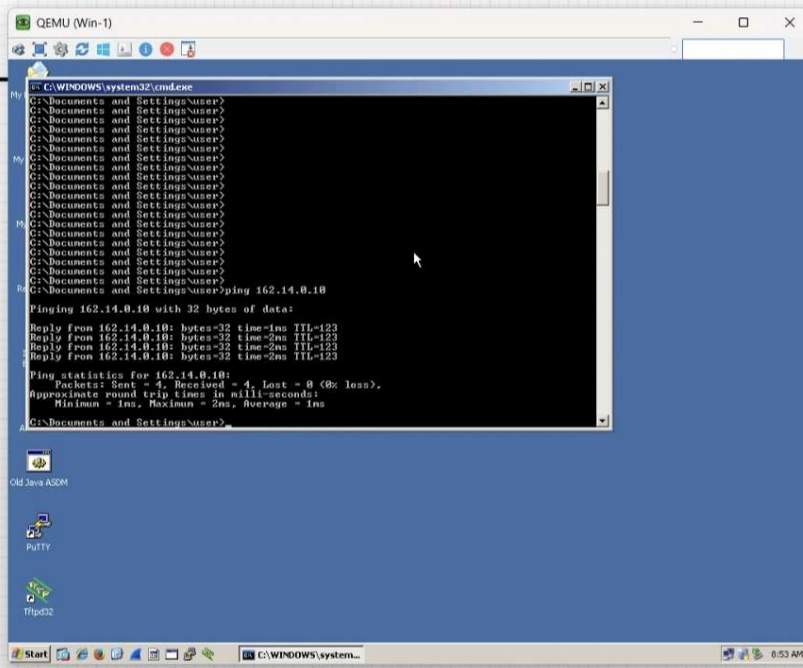

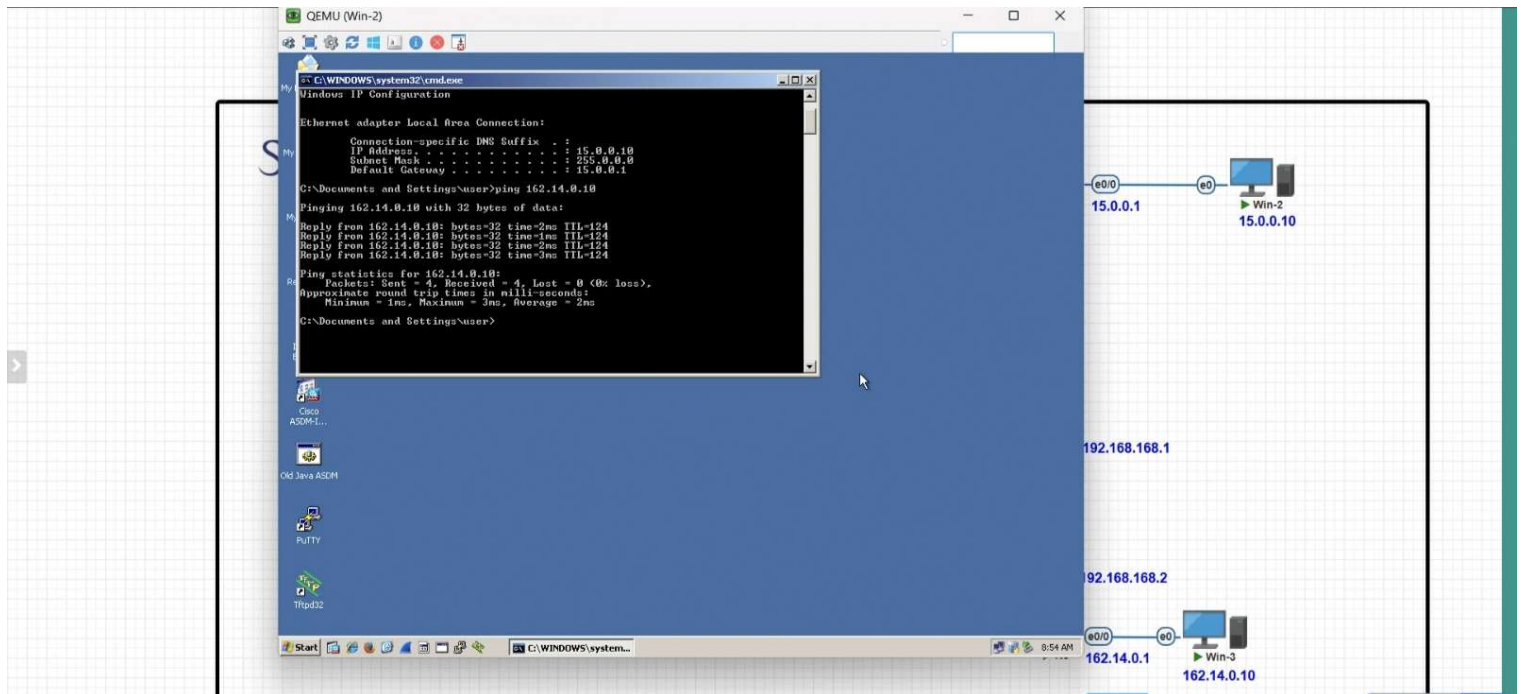

```

R1
R1(config)#ip route 15.0.0.0 255.0.0.0 20.0.0.2
R1(config)#exit
R1#sh ip route
*Jul 21 07:17:00.887: %SYS-5-CONFIG_I: Configured from console by console
R1#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
        D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
        N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
        E1 - OSPF external type 1, E2 - OSPF external type 2
        i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
        ia - IS-IS inter area, * - candidate default, U - per-user static route
        o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
        a - application route
        + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, Ethernet0/0
L       10.0.0.1/32 is directly connected, Ethernet0/0
S       15.0.0.0/8 [1/0] via 20.0.0.2
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       20.0.0.0/8 is directly connected, Ethernet0/1
L       20.0.0.1/32 is directly connected, Ethernet0/1
S       21.0.0.0/8 [1/0] via 20.0.0.2
S       30.0.0.0/8 [1/0] via 20.0.0.2
S       162.14.0.0/16 [1/0] via 20.0.0.2
S       172.19.0.0/16 [1/0] via 20.0.0.2
S       192.168.0.0/24 [1/0] via 20.0.0.2
  
```

Win-1  
10.0.0.10

R1

R6  
192.168.168.2  
162.14.0.1

Win-3  
162.14.0.10


Physical


01 : 00 : 00 START

```
R2#
*Jul 21 07:21:06.616: %SYS-5-CONFIG_I: Configured from console by console
R2#sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 30.0.0.2
    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    20.0.0.0/8 is directly connected, Ethernet0/0
L    20.0.0.2/32 is directly connected, Ethernet0/0
S    21.0.0.0/8 [1/0] via 30.0.0.2
    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    30.0.0.0/8 is directly connected, Ethernet0/1
L    30.0.0.1/32 is directly connected, Ethernet0/1
S    162.14.0.0/16 [1/0] via 30.0.0.2
S    172.19.0.0/16 [1/0] via 30.0.0.2
S    192.168.168.0/24 [1/0] via 30.0.0.2
R2#^C
R2#
```

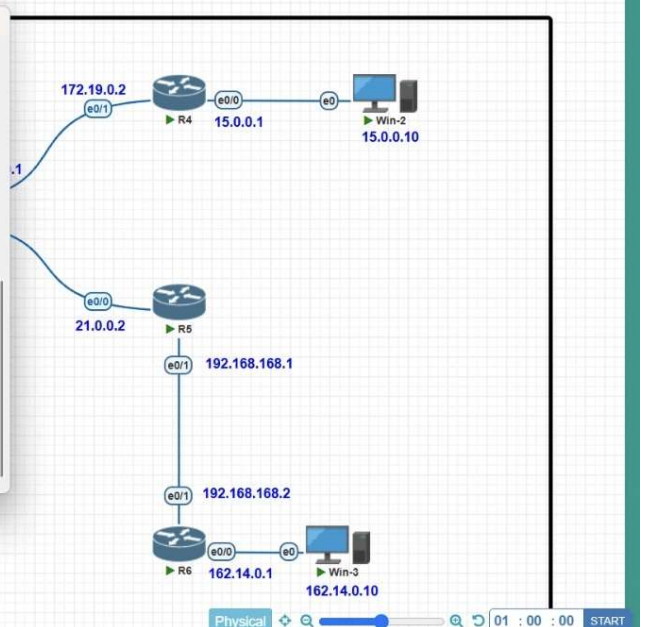

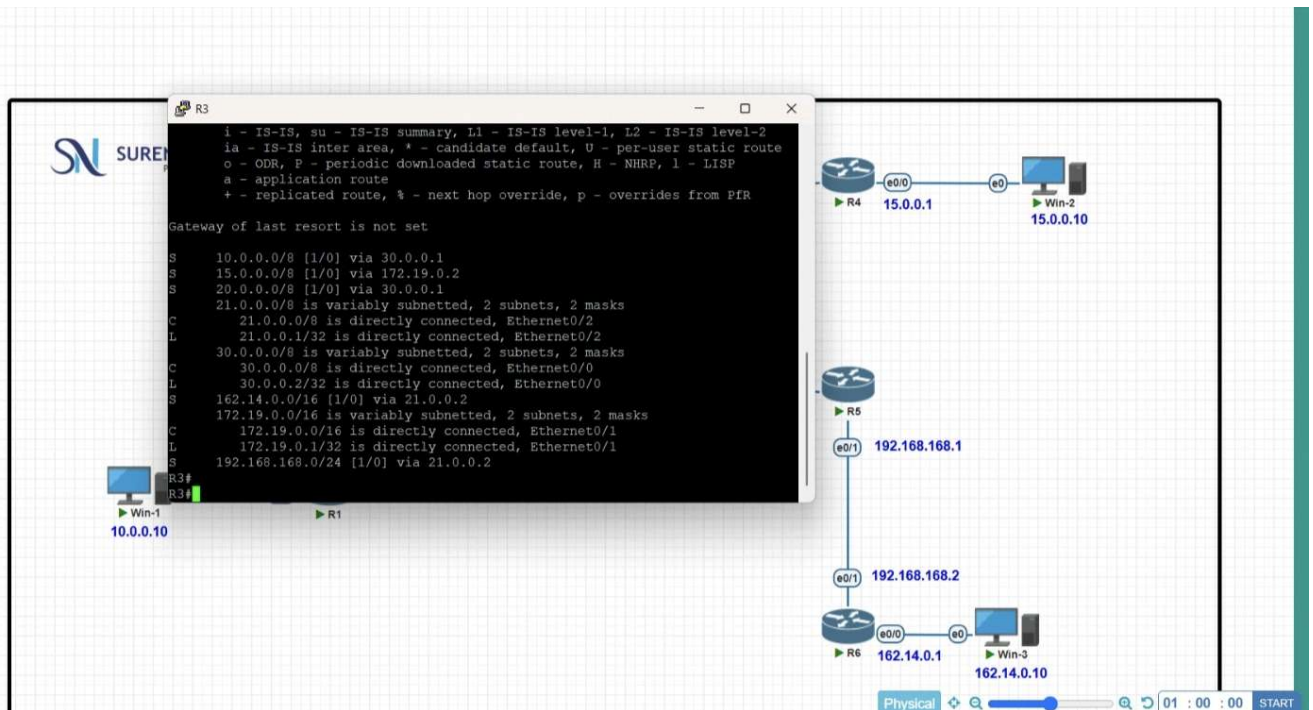




```
R4
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set


S 10.0.0.0/8 [1/0] via 172.19.0.1
C 15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 15.0.0.0/8 is directly connected, Ethernet0/0
S 20.0.0.0/8 [1/0] via 172.19.0.1
S 21.0.0.0/8 [1/0] via 172.19.0.1
S 30.0.0.0/8 [1/0] via 172.19.0.1
S 162.14.0.0/16 [1/0] via 172.19.0.1
C 172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
L 172.19.0.0/16 is directly connected, Ethernet0/1
L 172.19.0.2/32 is directly connected, Ethernet0/1
S 192.168.168.0/24 [1/0] via 172.19.0.1
```

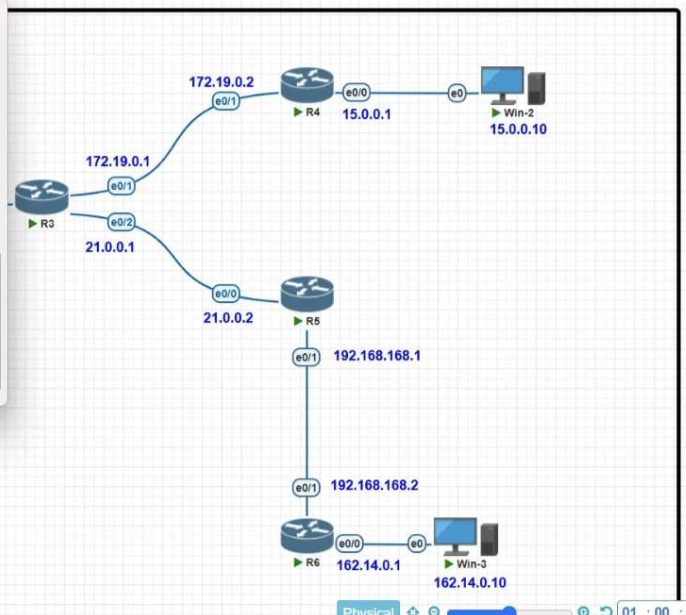

```
R5
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 21.0.0.1
S 15.0.0.0/8 [1/0] via 21.0.0.1
S 20.0.0.0/8 [1/0] via 21.0.0.1
C 21.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
L 21.0.0.0/8 is directly connected, Ethernet0/0
S 30.0.0.0/8 [1/0] via 21.0.0.1
S 162.14.0.0/16 [1/0] via 192.168.168.2
S 172.19.0.0/16 [1/0] via 21.0.0.1
C 192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
L 192.168.168.0/24 is directly connected, Ethernet0/1
L 192.168.168.1/32 is directly connected, Ethernet0/1
R5#
```

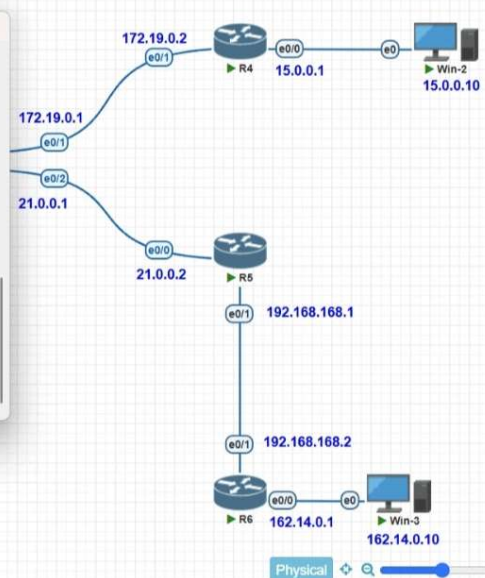



```
R6
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 192.168.168.1
S 15.0.0.0/8 [1/0] via 192.168.168.1
S 20.0.0.0/8 [1/0] via 192.168.168.1
S 21.0.0.0/8 [1/0] via 192.168.168.1
S 30.0.0.0/8 [1/0] via 192.168.168.1
162.14.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 162.14.0.0/16 is directly connected, Ethernet0/0
L 162.14.0.1/32 is directly connected, Ethernet0/0
S 172.19.0.0/16 [1/0] via 192.168.168.1
192.168.168.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.168.0/24 is directly connected, Ethernet0/1
L 192.168.168.2/32 is directly connected, Ethernet0/1
R6#
```

