


SHOP PLAN · TABLE SAW, GLUE AND CLAMPS ONLY

TWO-BY-FOUR DIAMOND SWORD

FINISHEDSTOCKEVERY CUT

30 × 7 × 1½"One 8-ft 2×490°, through

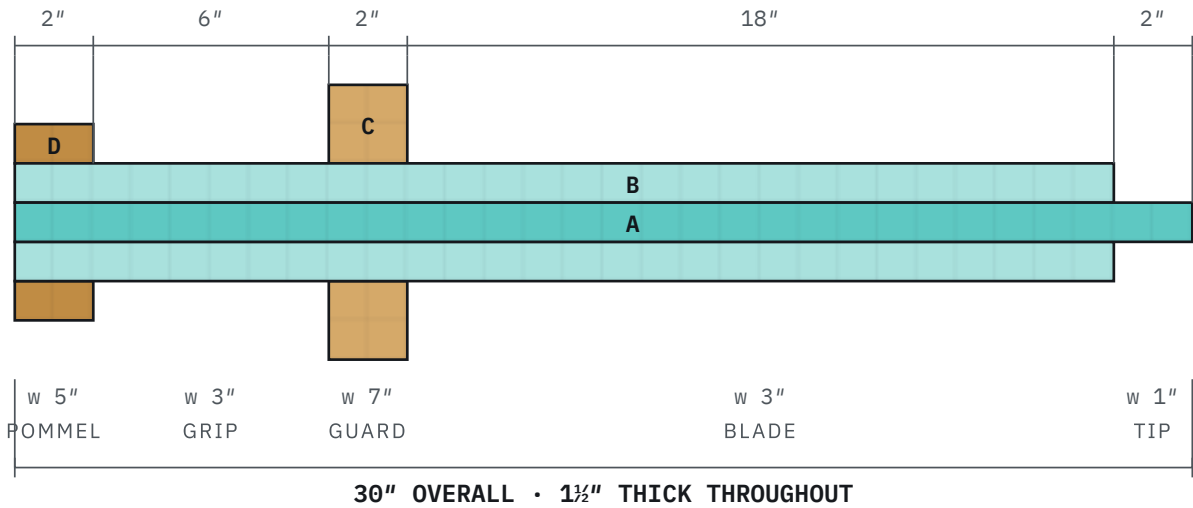

Elevation, pommel left and tip right. The grid is 1" = one Minecraft pixel, so the silhouette is just a pixel count. Every visible seam is a long-grain glue joint — nothing is carved, and the profile falls out of how the strips are stacked.

CUT LIST

PART	T × W × L	QTY
A Spine	1½ × 1 × 30	1
B Flank	1½ × 1 × 28	2
C Guard wing	1½ × 2 × 2	2
D Pommel nub	1½ × 1 × 2	2

A “2×4” actually measures 1½" × 3½" — every part keeps the full 1½" thickness, so you only ever set the fence for width. One 8-ft stick covers it with spares. Fence settings assume a ¼" kerf — if yours differs, set the fence so the piece that *falls off* measures 1". Pick the straightest, knot-free stick on the rack.

SEQUENCE

- 1 Break down
- Crosscut the stick into three 31" lengths; 2¾" falls off the end. Nothing is ever ripped at full length — every rip below is a 31" push, so one person and no outfeed support.
- 2 Rip the strips
- Fence at 2-3/8" and rip all three; the 1" strip falls free on the *outside* of the blade while your hands stay on the wide piece riding the fence. Then fence at 2" and rip one 2-3/8" spare down for the guard wings.
- 3 Cut to length
- Miter gauge with a stop block clamped *ahead* of the blade. Strip 1 → A at 30". Strips 2 and 3 → a B at 28" with a D at 2" off each tail. The 2" strip → two C at 2".
- 4 Glue the core
- A between both B, dead flush at the pommel end — the 2" of A left standing proud at the far end *is* the tip. Thin film on both faces, clamp every 6", faces pressed flat against a board. 45 min in clamps.
- 5 Glue the wings
- A C on each edge, near edge 8" from the pommel end. A D on each edge flush with the butt. One clamp across each pair. Scrape squeeze-out at 30 min, once it is rubbery; leave it 24 h before it becomes a sword.

AT THE SAW

The fence never comes closer than 2" — that is the whole point of the rip order. Narrow strips fall free on the *outside* of the blade rather than being trapped against the fence, so the guard shroud has room and your push stick always has a wide board to ride. Keep the riving knife in even if you lift the shroud; that is the part that stops kickback. Blade ¼" above the stock. **Rip long, crosscut short** — no 2" block goes past the blade freehand, and never use the rip fence as a crosscut stop. Leave the free offcut alone until the blade stops.

FINISH & SAFE PLAY

Sand 80 → 120 and stop — the crisp 90° steps are the whole point, so break only the sharpest arrises so nobody gets a splinter. Optional paint: blade pale cyan, guard and grip brown. The tip is a flat 1 × 1½" block, blunt by design. Finished weight about 2½ lb, so it still swings like a club — supervise young duelists.