


# Provecta™ Hot Melt

## FTA3270X39+PEX39

Provecta™ Hot Melt aliphatic optical film is transparent and non-yellowing. It is designed for lamination with glass and PC board, such as bullet-resistant glass.

### Applications:

- Vehicle armoring
- Residential glazing
- Jewelry shops and banks
- Decorative glass

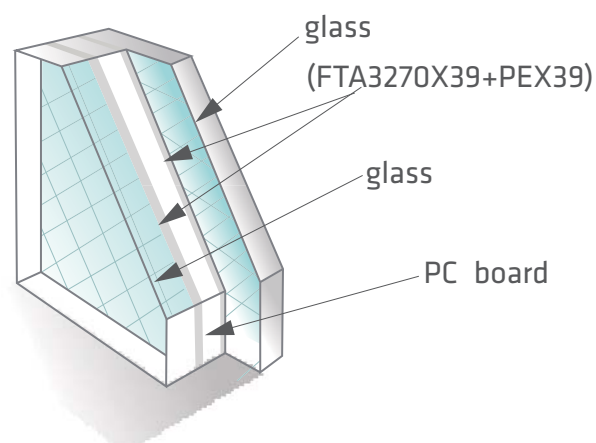

Hardness	Specific Gravity	Tensile Strength	Tear Strength	300% Modulus	Elongation	Melting Point
(Shore A/D) D2240	D792	(kg/cm <sup>2</sup> ) D412	(kg/cm) D624 (Die C)	(kg/cm <sup>2</sup> ) D412	(%) D412	(°C)
78A	1.07	warp: 345 weft: 354	warp: 48 weft: 50	warp: 82 weft: 79	warp: 514 weft: 537	93

The data and information provided are for reference only and are not guaranteed.

#### About DingZing

DingZing is a leader in the development and production of high-performance polymers. We specialize in thermoplastic polyurethane and polyurethane products and solutions, with a focus on advanced technical films.

#### DingZing Chemical Corporation

No.8-1, Pei-Lin Road, Hsiao-Kang District,  
Kaohsiung 812, Taiwan  
T +886-7-807-0166  
F +886-7-807-1616  
www.dingzing.com

# DingZing

Science. Innovation. Collaboration.