





## Retaining Rings - External, C-Type

Part Number STWS16

**MISUMI**

20181108224900

Type	Outer Ring Stopper	Shape	Standard (C Ring)
Material	Stainless Steel	For Shaft Size/For Bore Size(mm)	16
Applicable Shaft or Hole d1(Reference)(mm)	16	Applicable Shaft or Hole d2(Reference)(mm)	15.2
Min. Qty of Sale	Low Quantity Available beginning with 1 pc.	Retaining Ring Type	Outer Ring Stopper
Attaching Style	Standard	Shaft/Hole/Groove Dia. (Reference)(mm)	16
Product Types	Retaining Ring	-	-

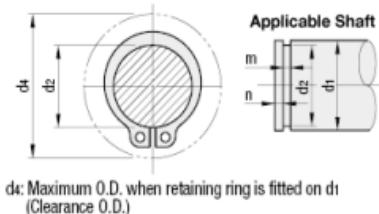

Copyright © MISUMI Corporation All Rights Reserved.

STWS (Stainless Steel)	4	3.6	±0.1	0.25	±0.03	0.7	1.4	0.7	9	4	3.7	±0.06	0.3	+0.10 0	1.0	
	5	4.5		0.4		0.7	1.4		10.5	5	4.7		0.45			
	6	5.5			±0.04	0.8	2.0		12	6	5.7			0.7	1.5	
	7	6.3		0.65		0.9	2.0		14	7	6.5					
	8	7.1				1.0	2.2		15	8	7.4					
STWN STWS (Stainless Steel)	10	9.3	±0.15			1.8	3	1.2	17	10	9.6	0 -0.09		1.15		
	11	10.2				2	3.1		18	11	10.5					
	12	11.1				3.2			19	12	11.5					
	13	12				3.3			20	13	12.4					
	14	12.9				3.4			22	14	13.4					
	15	13.8	±0.18			3.5		1.7	23	15	14.3	0 -0.11		1.35		
	16	14.7				3.6			24	16	15.2					
	17	15.7				3.7			25	17	16.2					
	18	16.5				2.6	3.8		26	18	17			+0.14 0	1.5	
	19	17.5				3.8			27	19	18					
	20	18.5	±0.2			3.9			28	20	19					
	21	19.5				4			30	21	20					
	22	20.5				4.1			31	22	21					
	23	21.4				2.9	4.5		32.5	23	22					
	24	22.2				4.2			33	24	22.9	0 -0.21				
	25	23.2	±0.06			4.3			34	25	23.9					
	26	24.2				4.4			35	26	24.9					
	28	25.9				4.6			38	28	26.6					
	29	26.9				4.7			39	29	27.6					
	30	27.9				4.8			40	30	28.6					
	32	29.6	±0.25			5		2.5	43	32	30.3					
	35	32.2				4	5.4		46	35	33					
	40	37				4.5	5.8		53	40	38	0 -0.25		1.9	2	
	45	41.5				4.8	6.3		58	45	42.5					
	50	45.8				5	6.7		64	50	47					
	52	47.8	±0.07			6.8			66	52	49					
	60	55.8				5.5	7.2		75	60	57					
	80	74.5				2.5	±0.08		97	80	76.5	-0.3		2.7	2.5	
						7.4	8.2									