


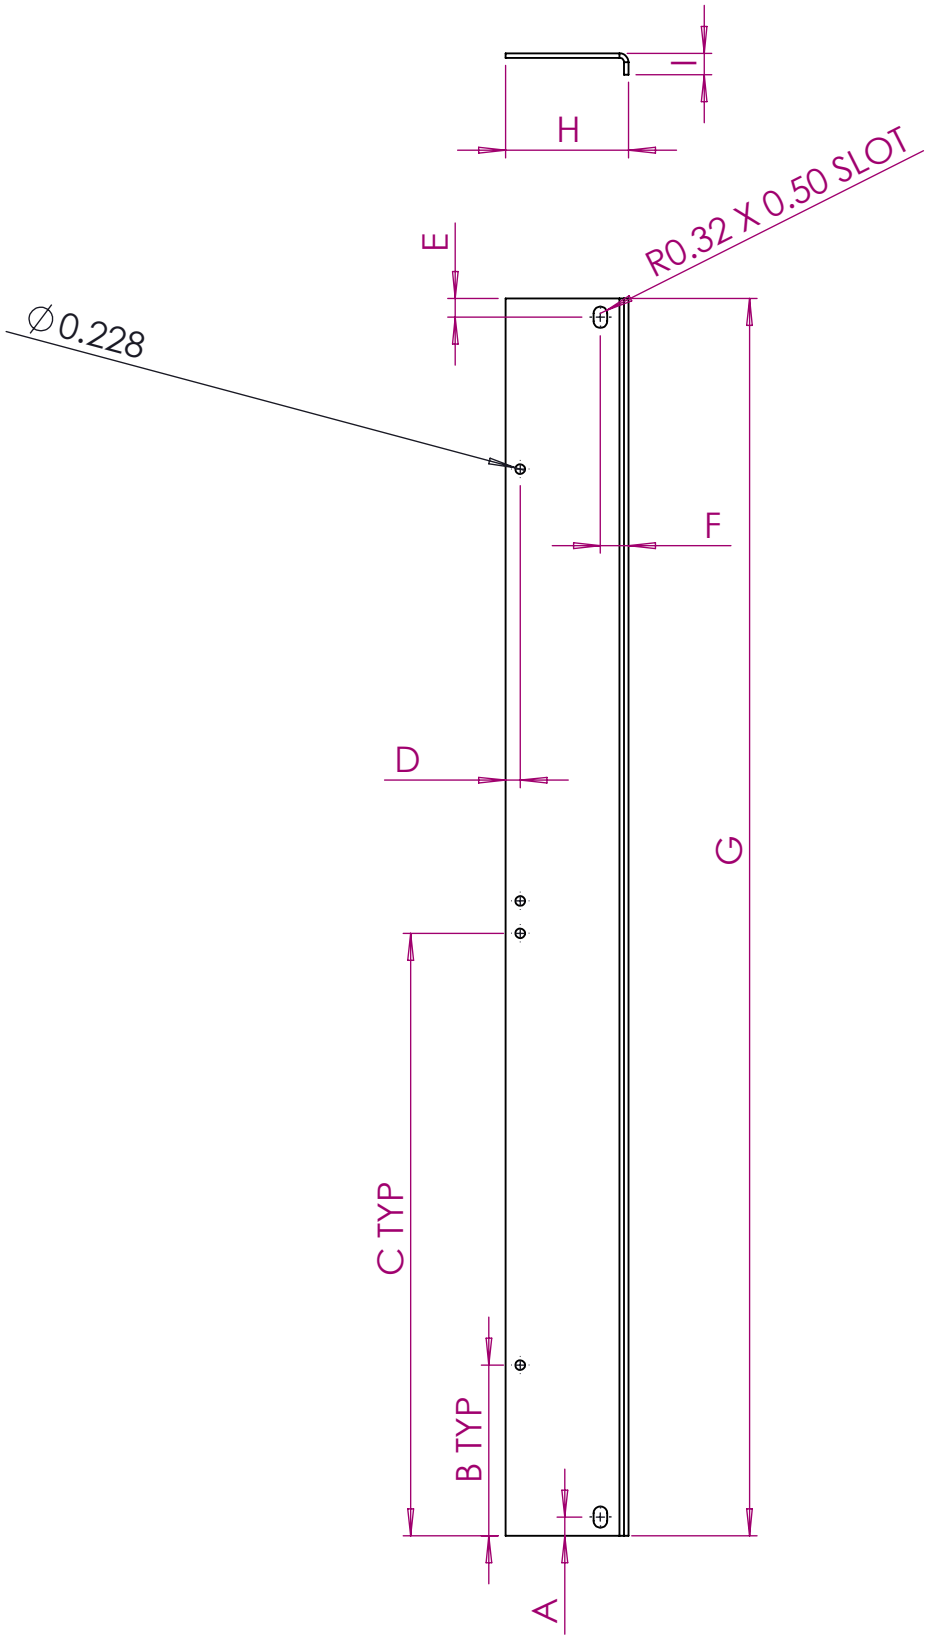

MEDIDA	DIMENSION	L.I	L.S	VALOR MFG	VoBo MFG	VALOR CAL	VoBo CAL
A	0.440	0.425	0.455				
B	4.000	3.985	4.015				
C	14.120	14.105	14.135				
D	0.340	0.325	0.355				
E	0.440	0.425	0.455				
F	0.660	0.645	0.675				
G	29.000	28.985	29.015				
H	2.880	2.865	2.895				
I	0.500	0.485	0.515				




TABLA DE CRITERIOS				
CRITERIO	Correcto	Incorrecto	VoBo MFG	VoBo Cal
Gauge Perfil	Embona	No Embona		
V de Doblado	10 mm			

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches




END ANGLE SUPPORT			
Dwn: AWV	24/02/2026	Chk: AWV	24/02/2026

Dwn No: 16-6047-01-(12gacr ANSI-61) - K56 - V9-R0		Rev: 00	
Apvd: AWV	24/02/2026	Sht 1 of 1	

TABLE								
No.	RESP	Dim	L.I.	L.S.	Valor MFG	VoBo MFG	Valor Cal	VoBo Cal
1	LASER	3.226	3.211	3.241				
2	LASER	29.000	28.985	29.015				
3	LASER	0.228	0.213	0.243				

Revisión	Nombre DXF	Fecha	Factor K	Ancho	Largo	Espesor
R0	16-6047-01-(12gacr ANSI-61) - K56 - V9-R0	24/02/26	0.56	3.217	29.000	0.105
R1						
R2						
R3						

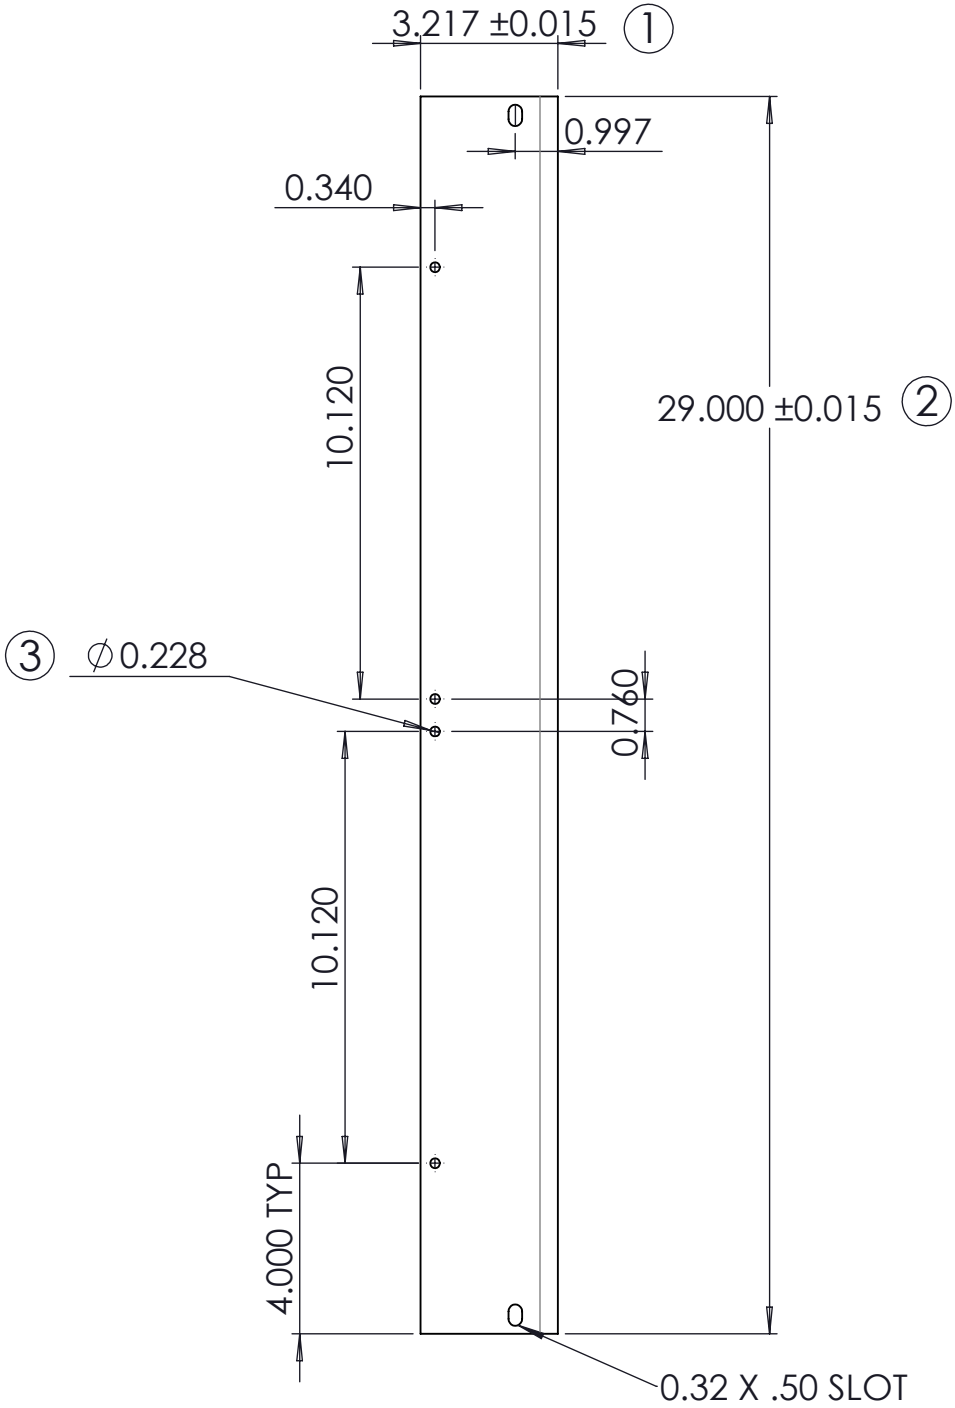

Tolerances:
.XX ± .030
.XXX ± .015
Angular ± 2°
Units are in inches



END ANGLE SUPPORT			
Dwn: AWV	24/02/2026	Chk: AWV	24/02/2026

Dwn No: 16-6047-01-(12gacr ANSI-61) - K56 - V9-R0	Rev: 00
Apvd: AWV	Sht 1 of 1