

JLC06161H-3313

沉金，板厚：1.6mm


	信号层	参考层	线宽	线距	计算阻抗	目标阻抗	阻抗值公差范围
单端	L1 & L6	L2 / L5	5	/		50	±10
	L3 & L4	L2 / L5	4	/		50	±10
差分	L1	L2 / L5	4.5	4.5		90	±10
	L1	L2	4.5	9		100	±10






编号：JLC06161H-3313(免费)

成品板厚：1.6 外层铜厚：1 内层铜厚：0.5




层名	材料	厚度 (mil)	厚度 (mm)
L1	外层铜厚1oz	1.38	0.0350
PP	3313 RC57% 4.2mil	3.91	0.0994
L2	内层铜厚	0.60	0.0152
芯板	0.55mm H/H不含铜	21.65	0.5500
L3	内层铜厚	0.60	0.0152
PP	2116 RC54% 4.9mil	4.28	0.1088
L4	内层铜厚	0.60	0.0152
芯板	0.55mm H/H不含铜	21.65	0.5500
L5	内层铜厚	0.60	0.0152
PP	3313 RC57% 4.2mil	3.91	0.0994
L6	外层铜厚1oz	1.38	0.0350

原理图	CanMV-K230-LP4-V3.0_20240509		更新日期	2026-08-22
			创建日期	2026-08-22
图页	P1		物料编码	
绘制		ProDocument_CanMV-K230-LP4-V3.0-20240509		
审阅				
		版本	尺寸	页 1 共 7
嘉立创EDA		V1.0	A4	嘉立创EDA




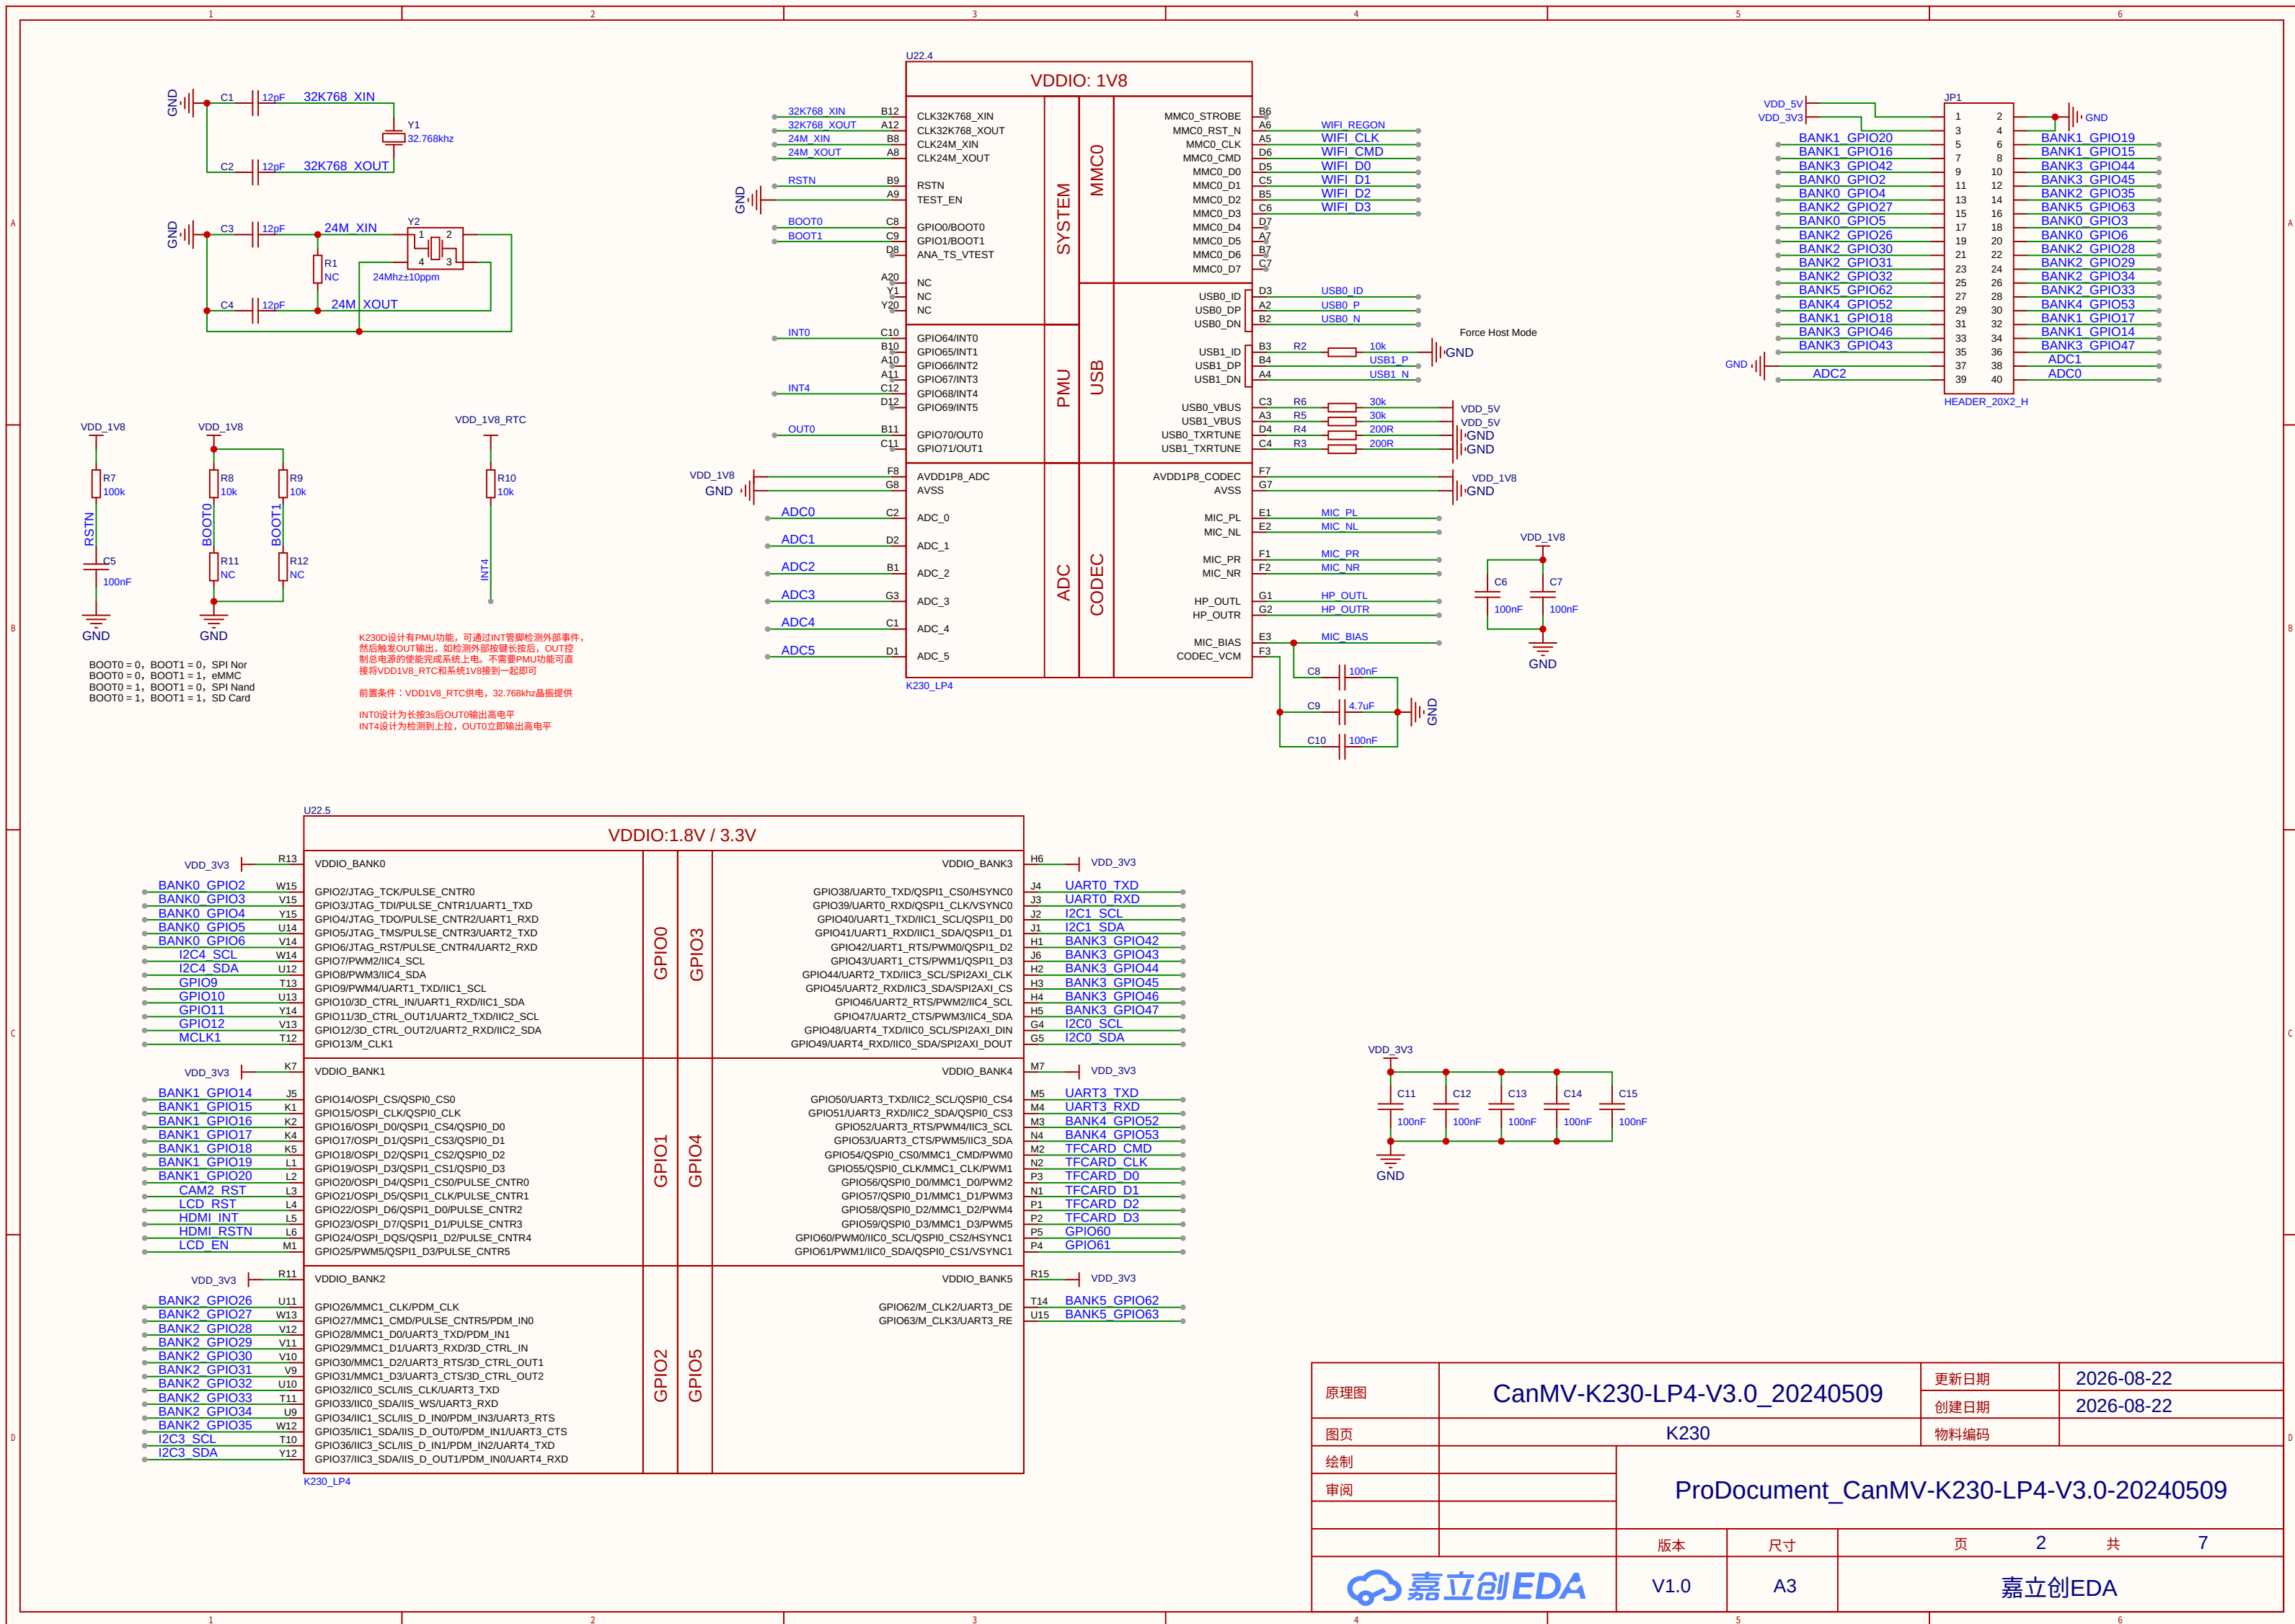


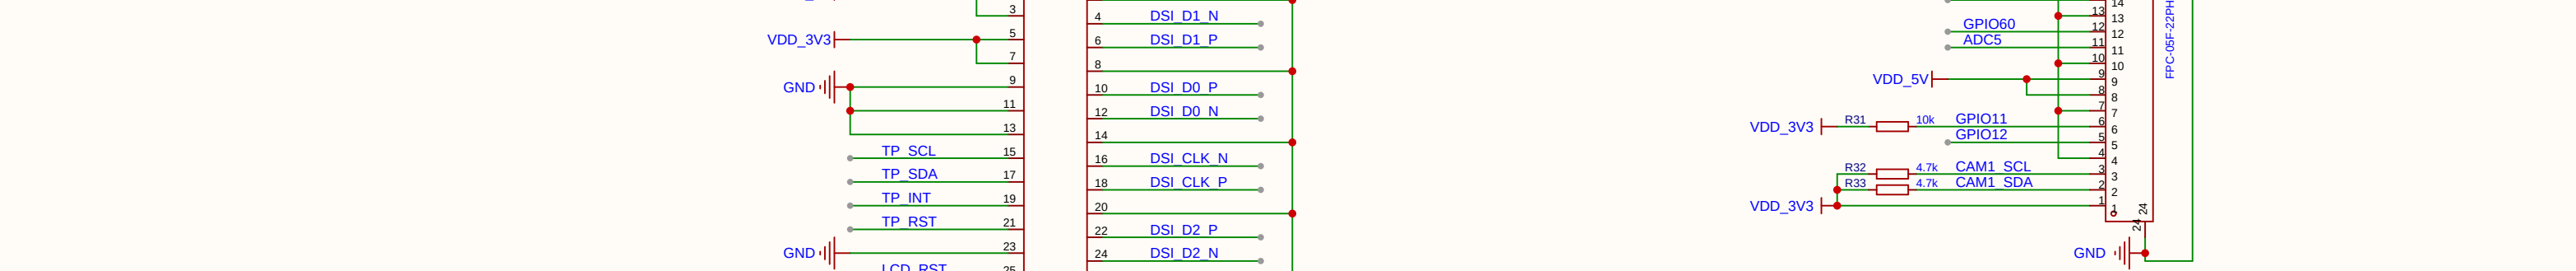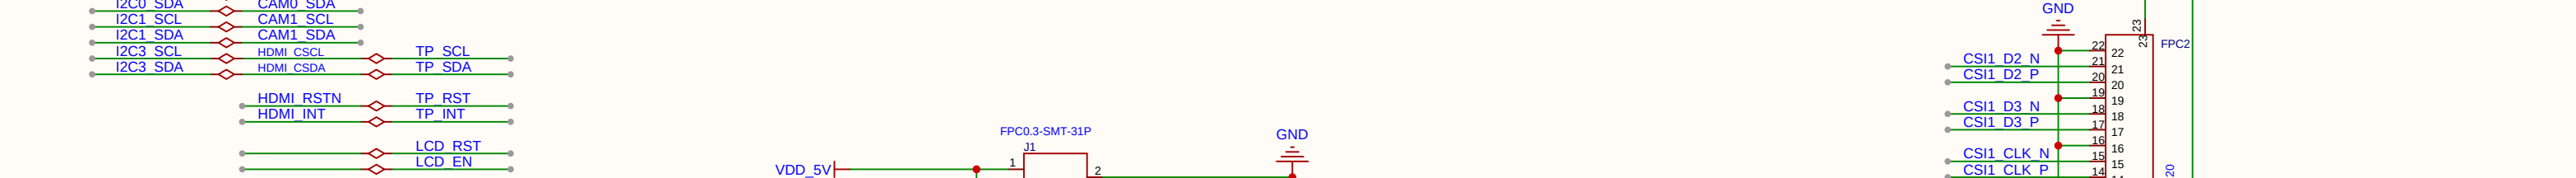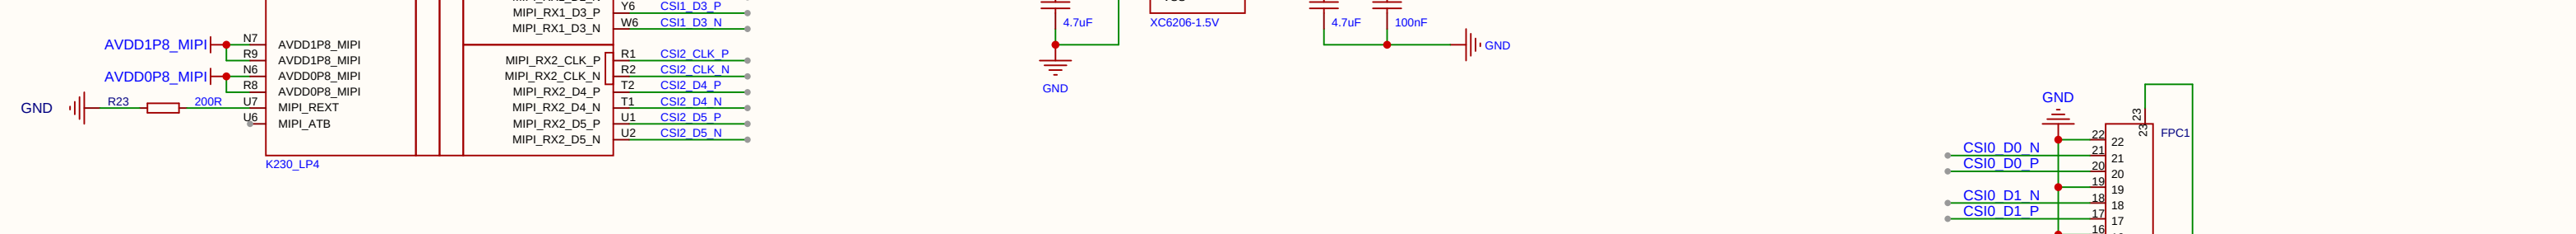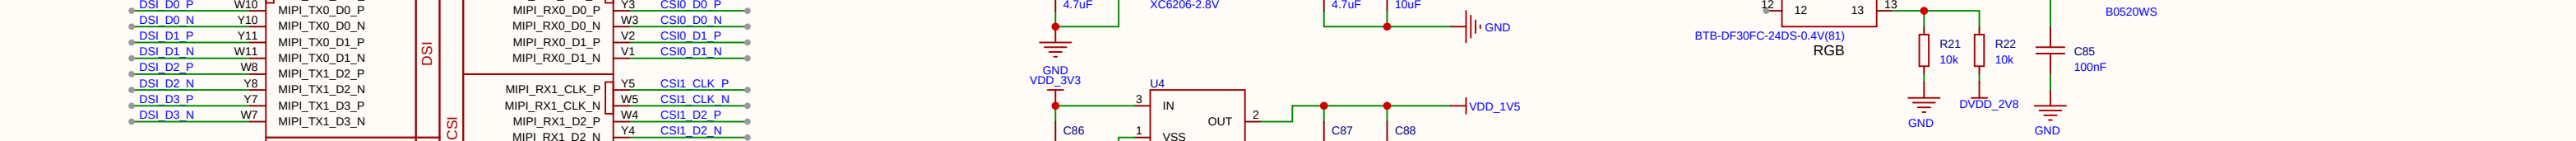


原理图	CanMV-K230-LP4-V3.0_20240509		更新日期	2026-08-22
			创建日期	2026-08-22
图页	Video		物料编码	
绘制	ProDocument_CanMV-K230-LP4-V3.0-20240509			
审阅				
		版本	尺寸	页 4 共 7
嘉立创EDA		V1.0	A3	嘉立创EDA

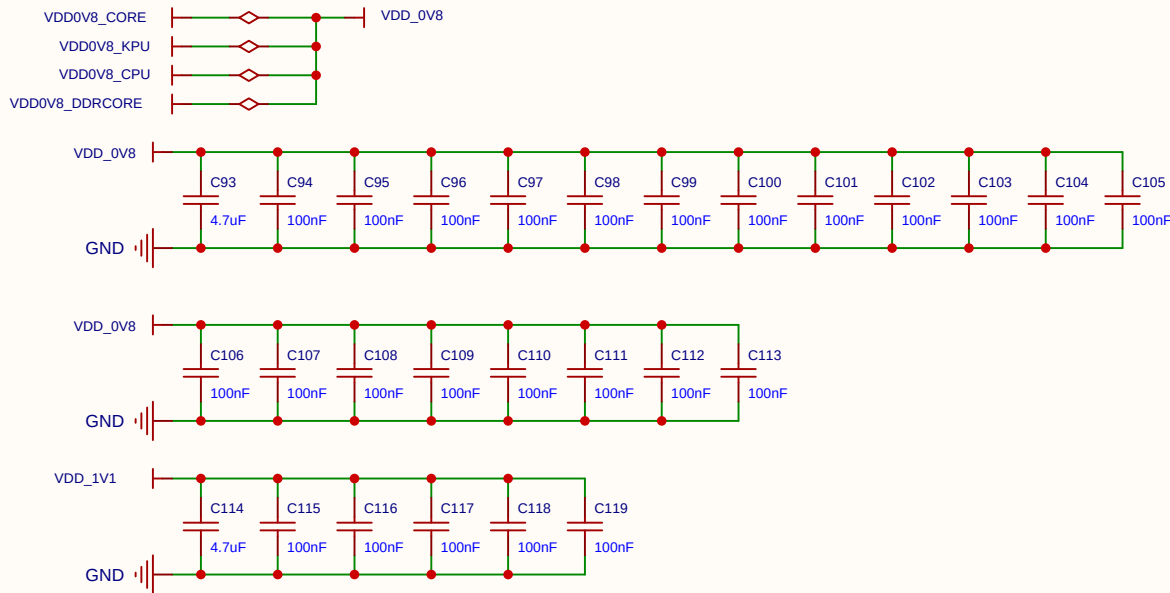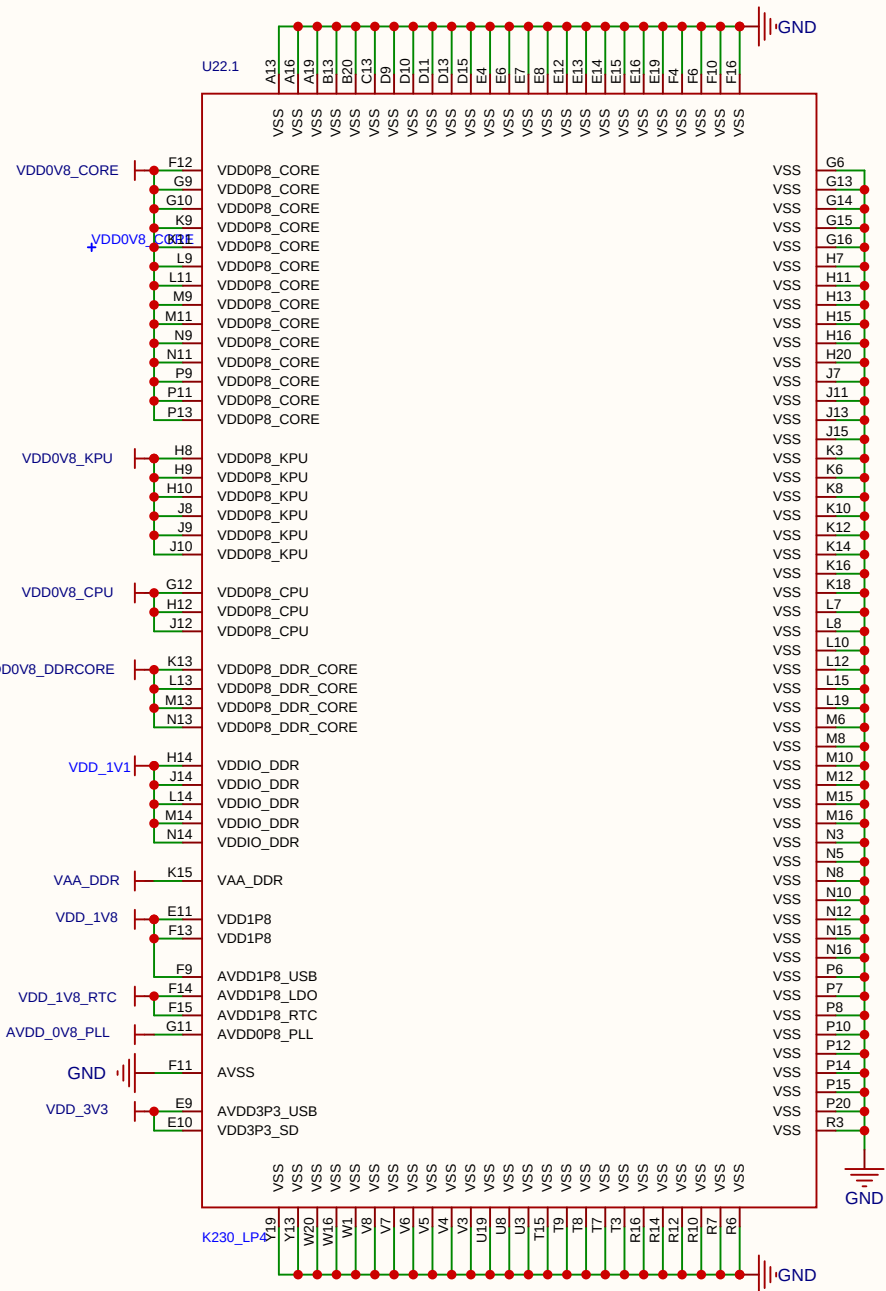


$$V_o = 0.6 * (R1+R2) / R2$$
$$R1 = (V_o / 0.6 - 1) * R2$$
$$R2 \leq 200k$$
$$R2 = 0.6 * R1 / (V_o - 0.6)$$

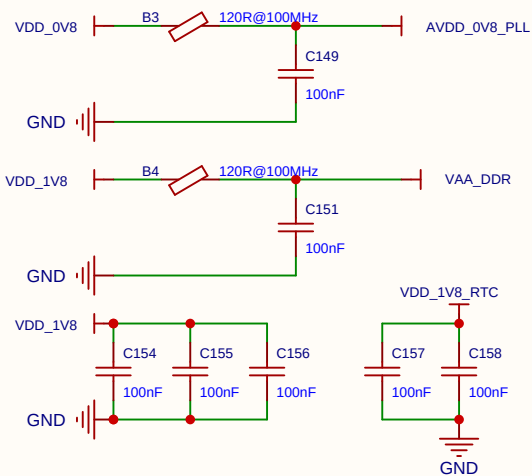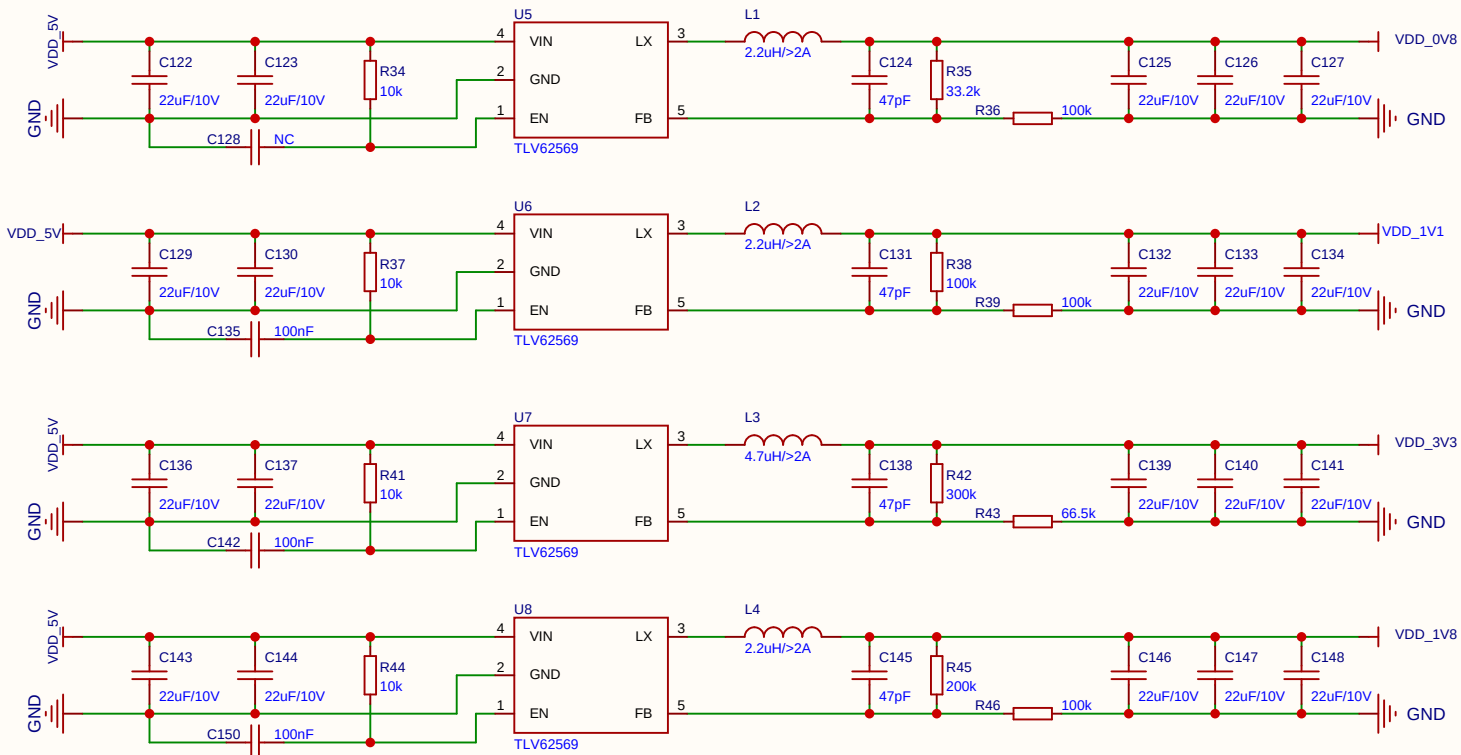

原理图	CanMV-K230-LP4-V3.0_20240509			更新日期	2026-08-22
				创建日期	2026-08-22
图页	Power-K230			物料编码	
绘制		ProDocument_CanMV-K230-LP4-V3.0-20240509			
审阅					
		版本	尺寸	页	共
		V1.0	A3	5	7
 嘉立创EDA				嘉立创EDA	

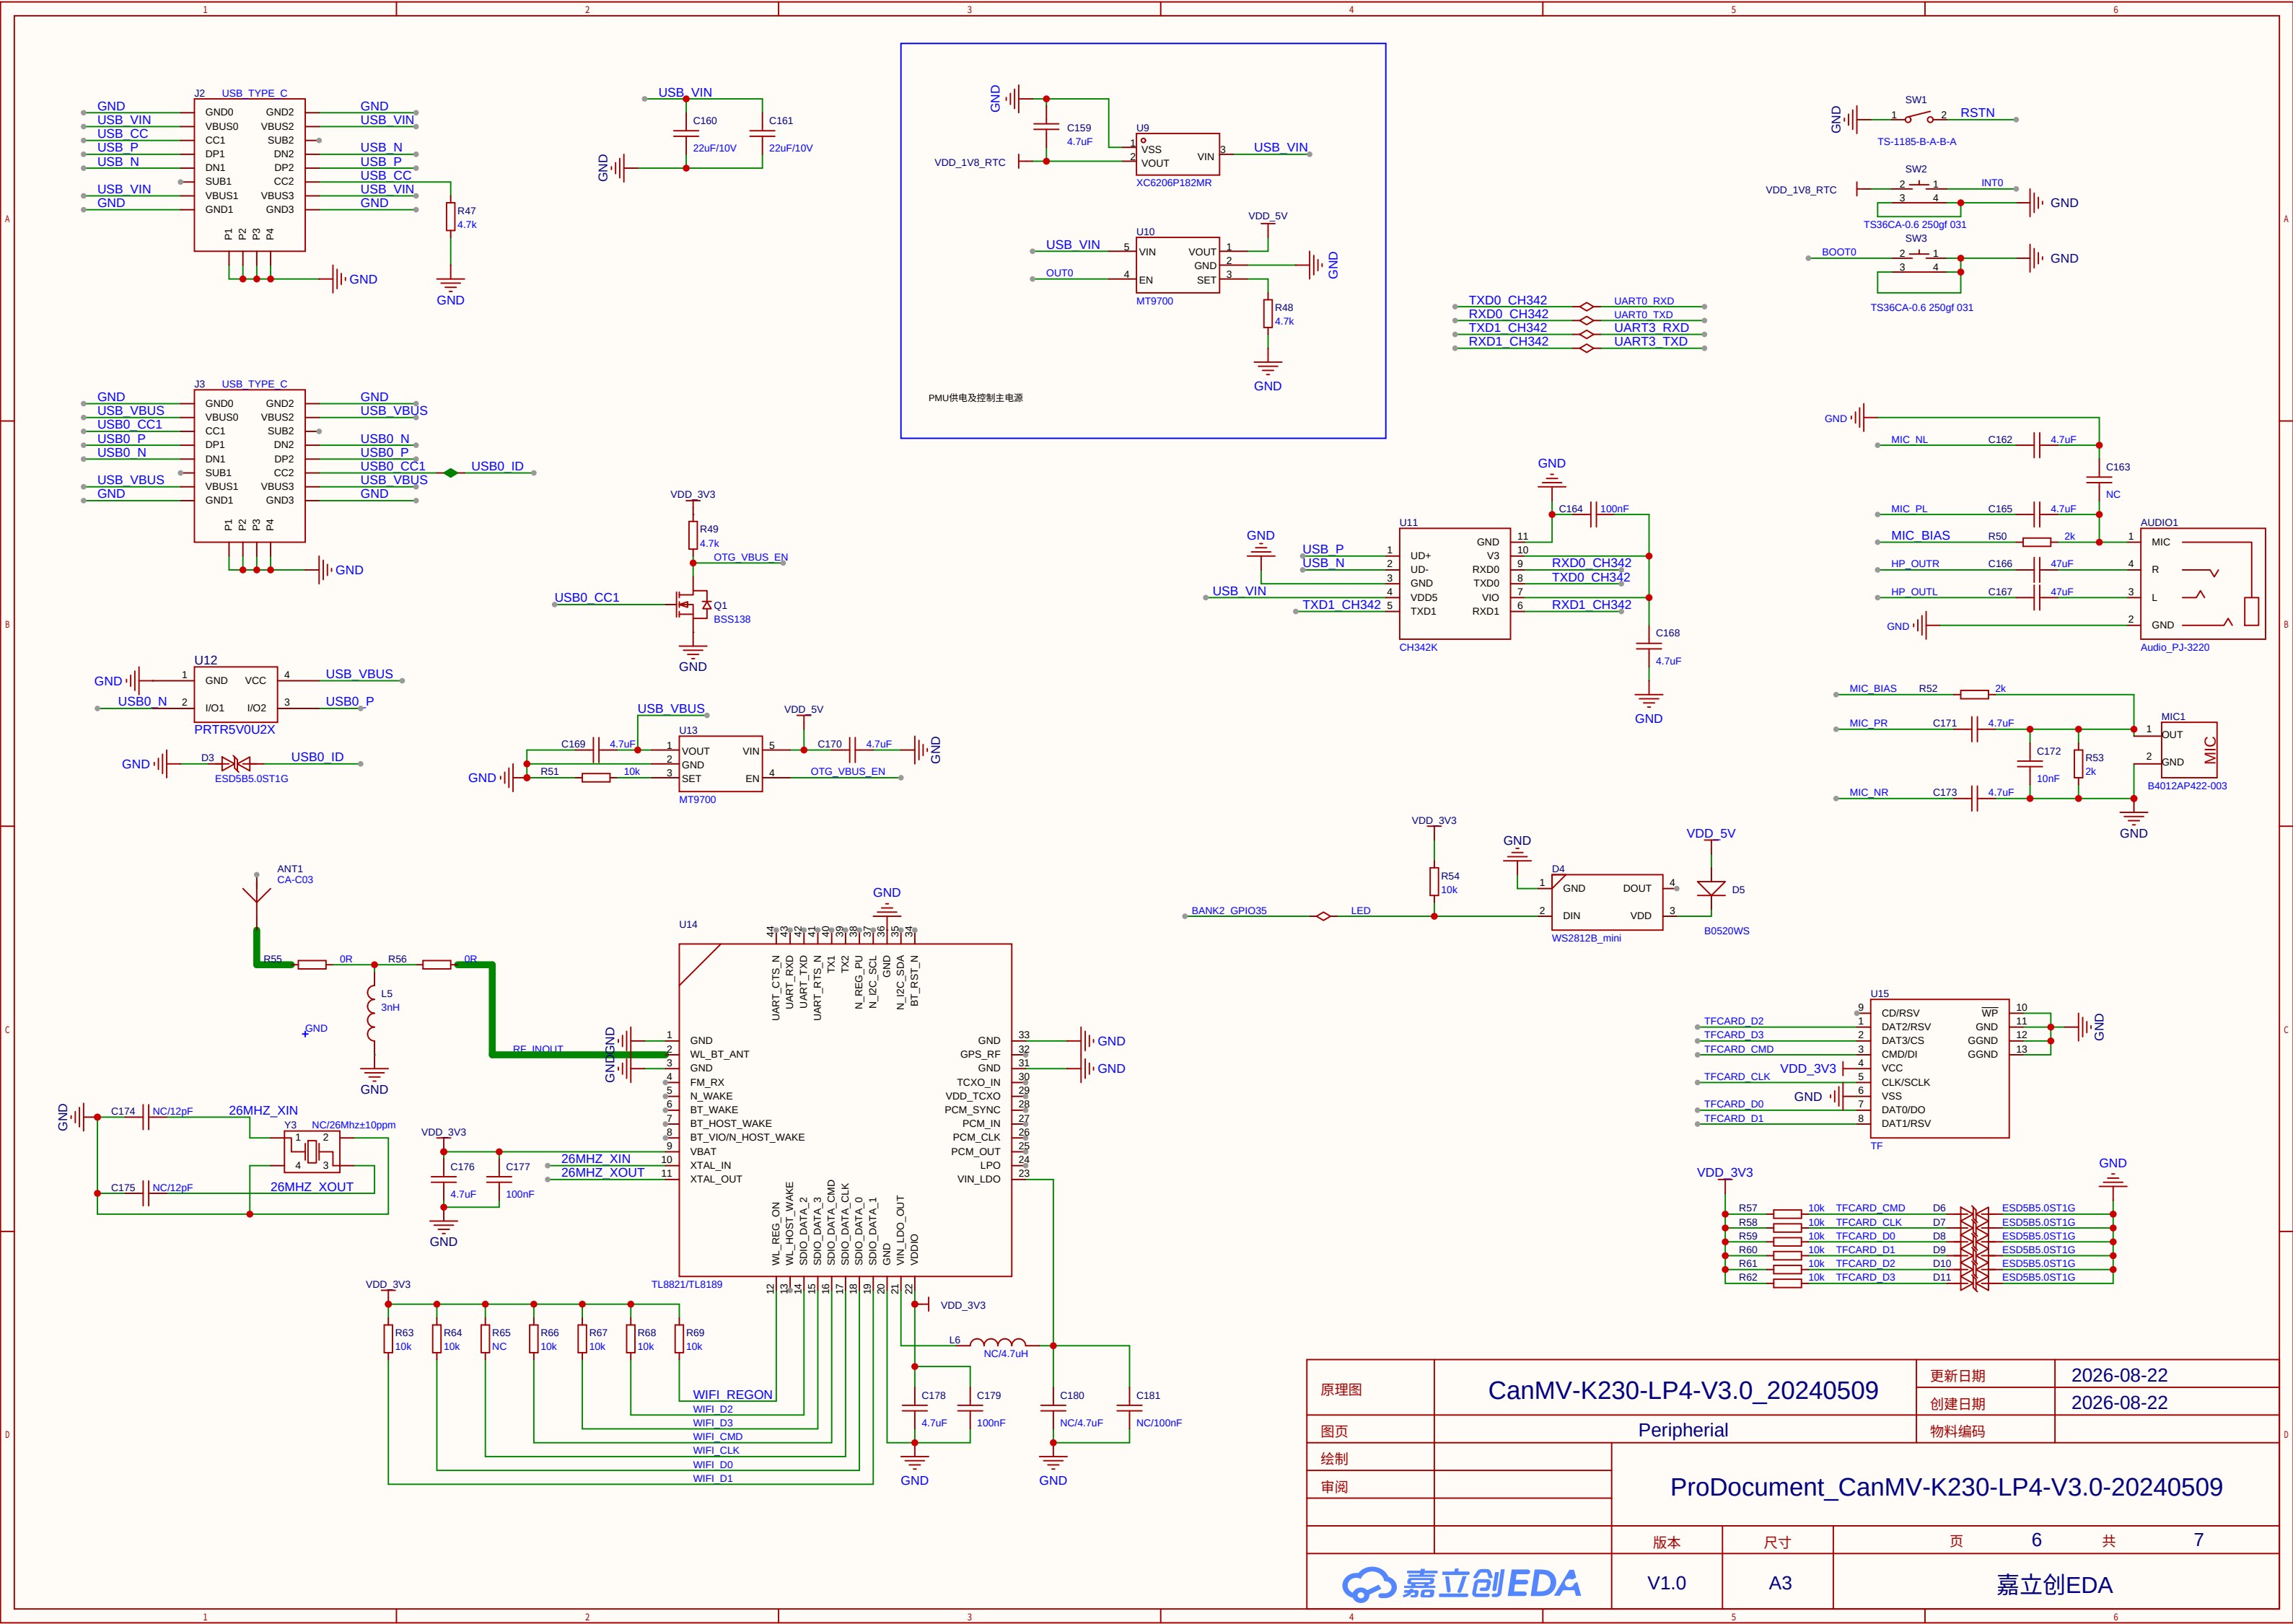

HDMI

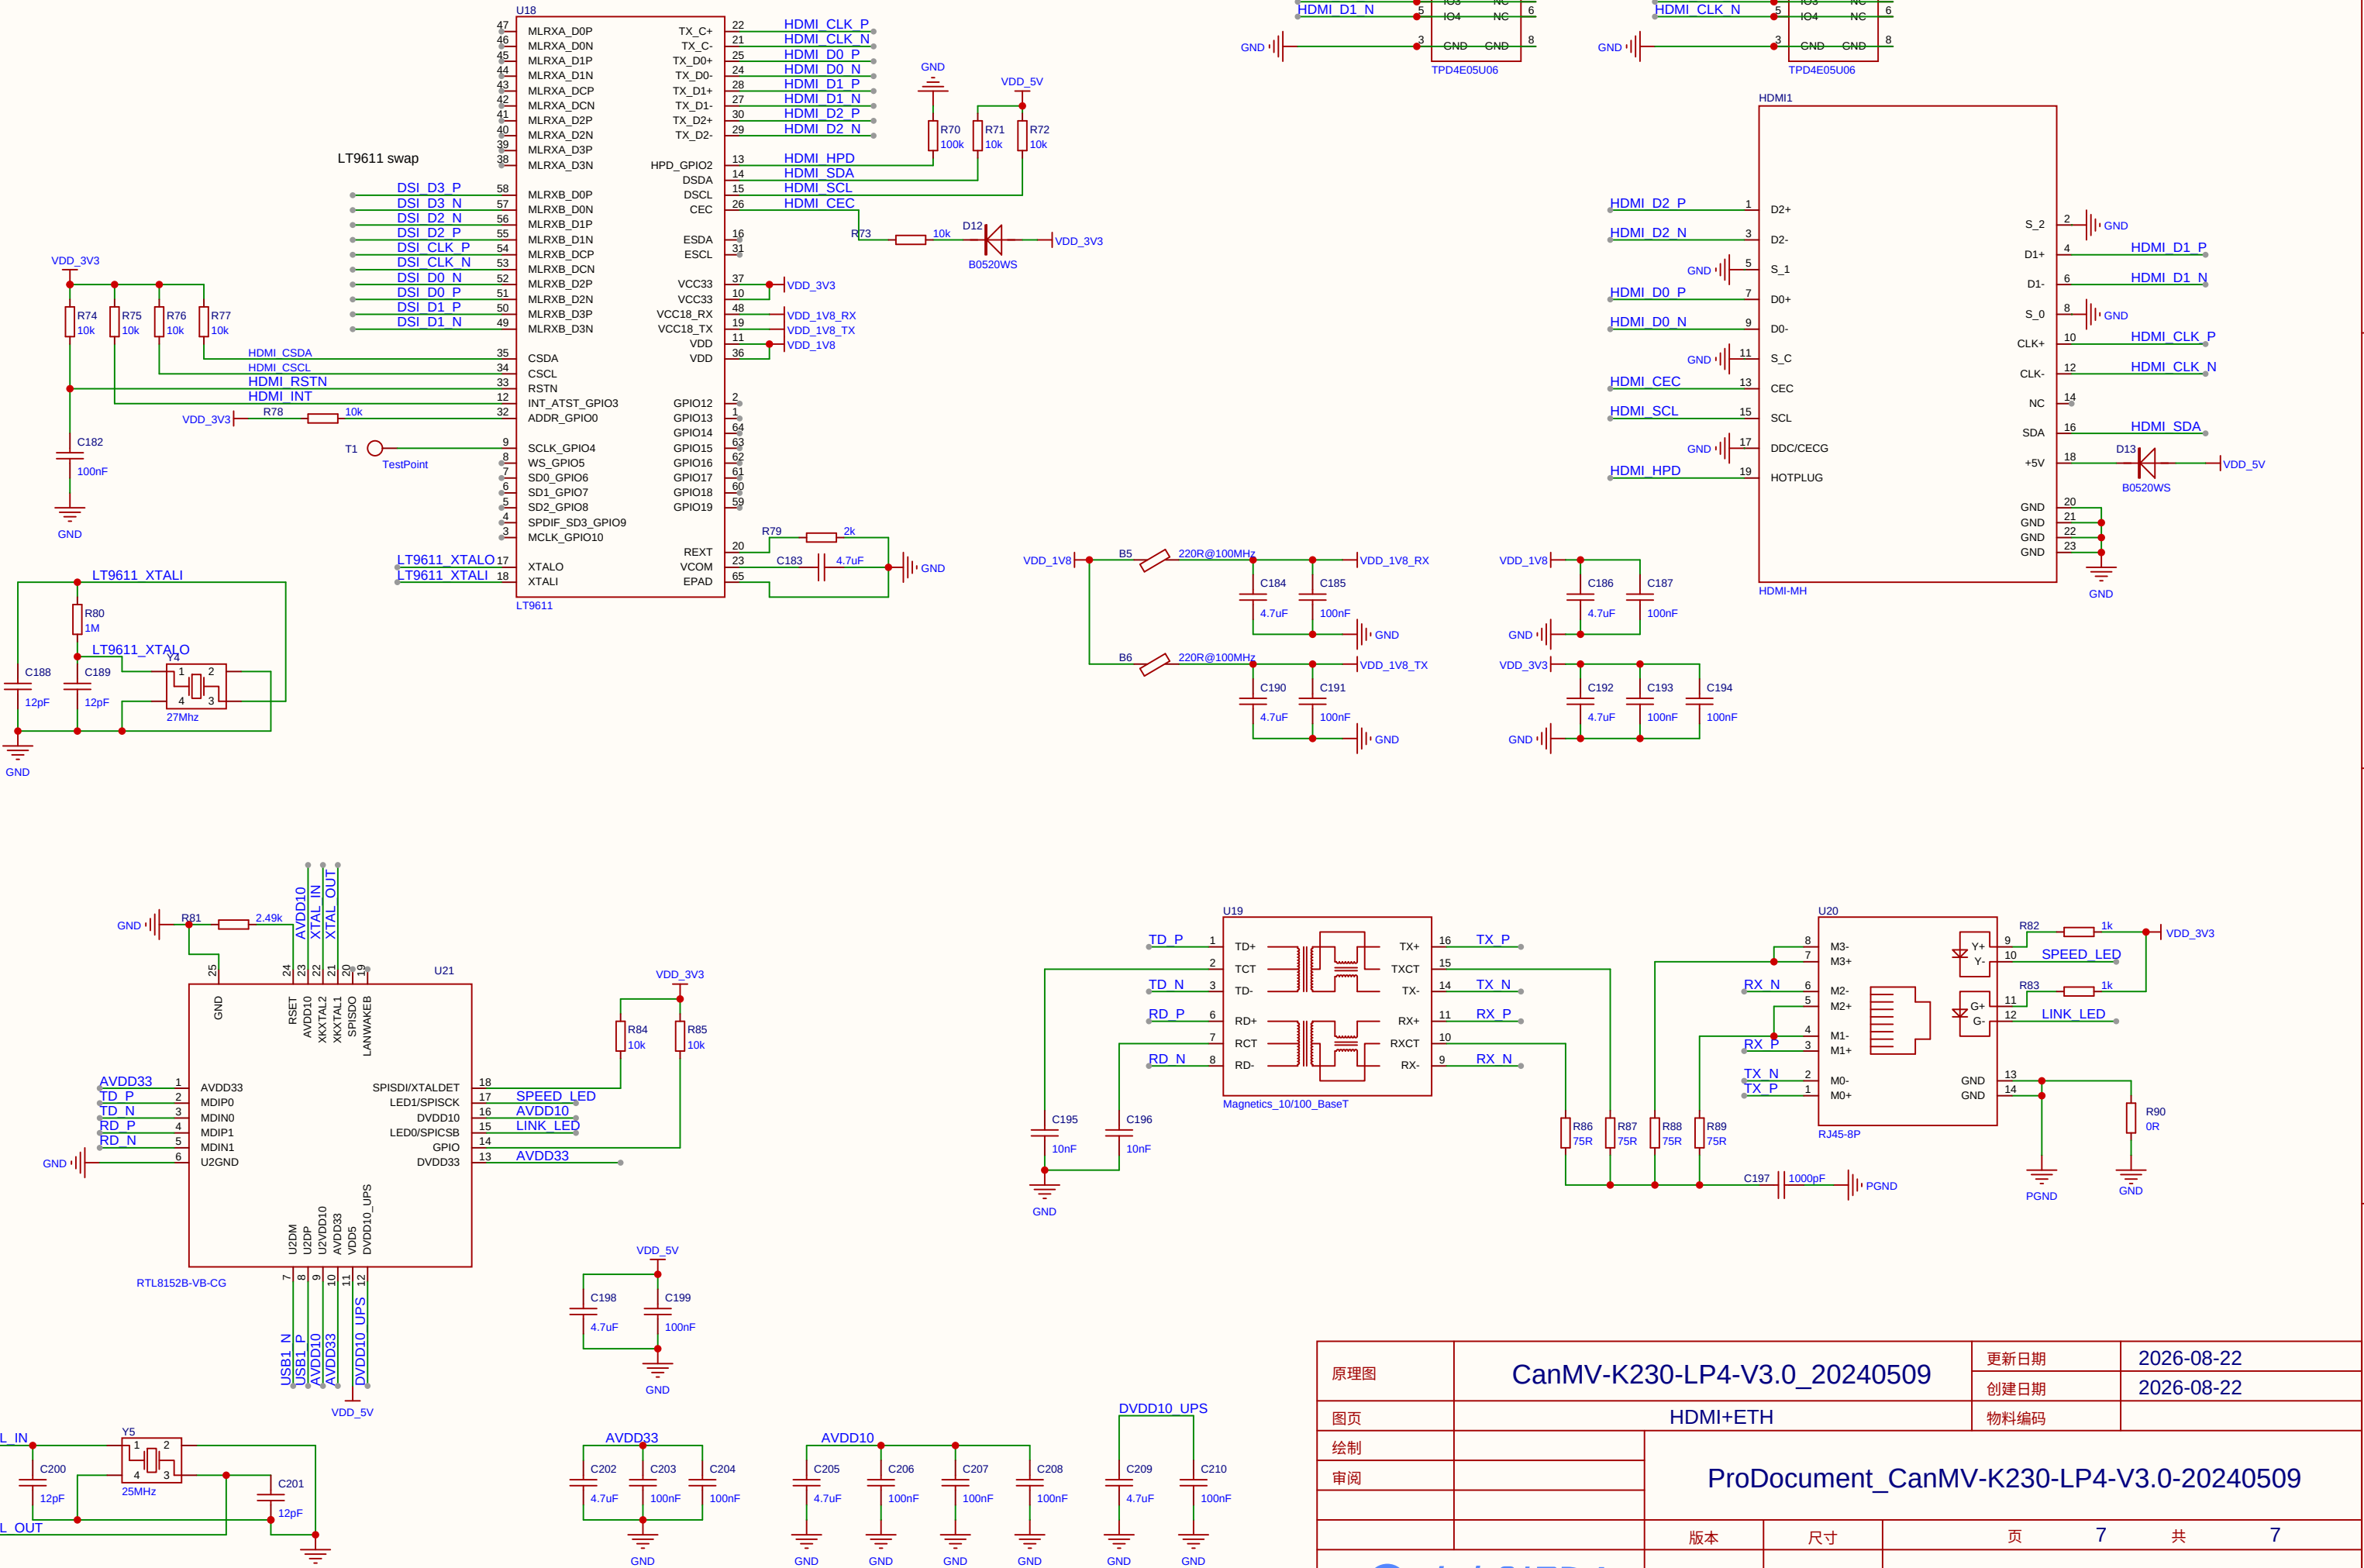

原理图	CanMV-K230-LP4-V3.0_20240509	更新日期	2026-08-22
		创建日期	2026-08-22
图页	HDMI+ETH		
绘制	ProDocument_CanMV-K230-LP4-V3.0-20240509		
审阅			
		版本	7
		尺寸	共 7
		页	7
		物料编码	嘉立创EDA
		版本	V1.0
		尺寸	A3
		页	7
		物料编码	嘉立创EDA