

PLAN

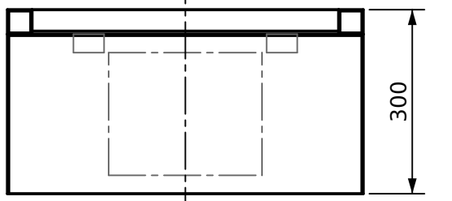


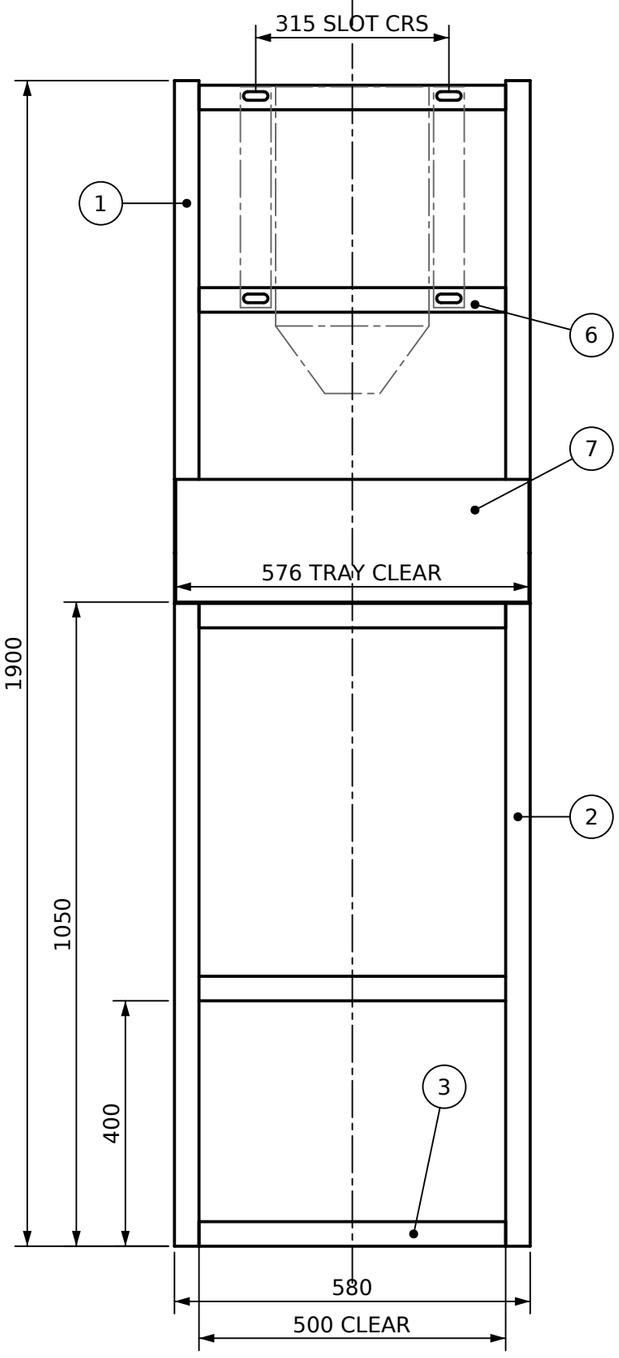

FRONT VIEW


SCALE 1:10

CATCH BOX (REF ONLY, NOT SUPPLIED)

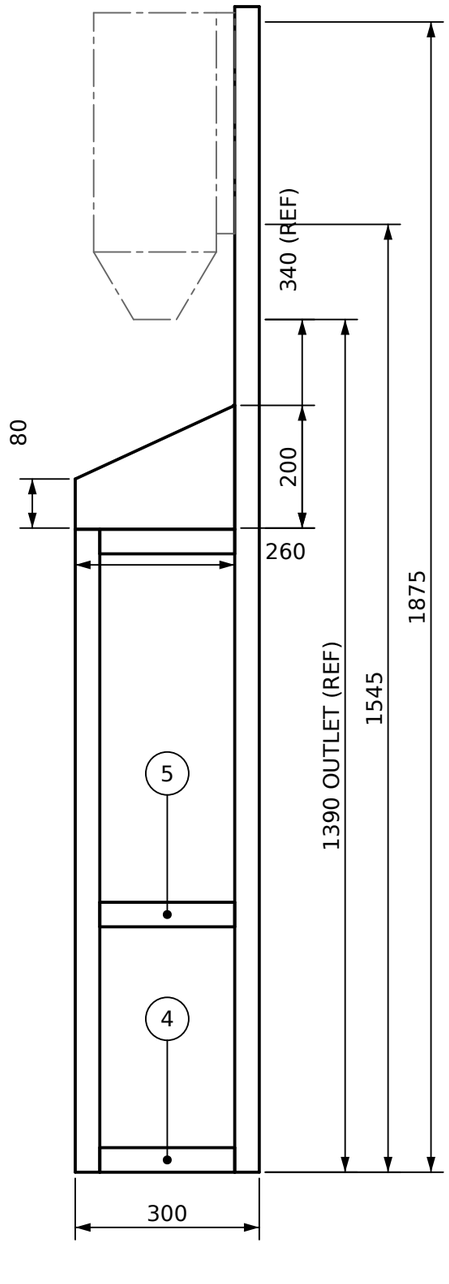

RIGHT SIDE VIEW

SCALE 1:10

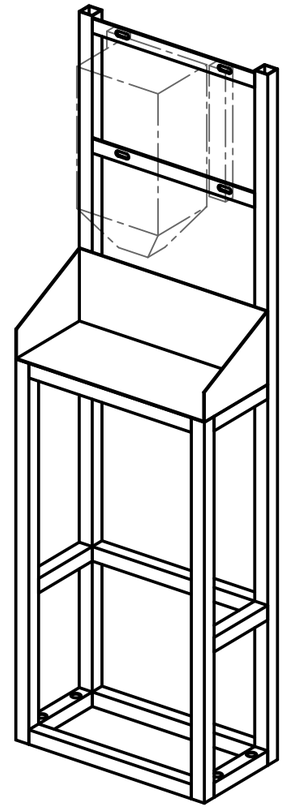

ISOMETRIC VIEW (NTS)

ITEM	QTY	DESCRIPTION	MATERIAL	LENGTH	kg
1	2	Rear upright	SHS 40x40x2.0 Duragal	1900	9.1
2	2	Front leg	SHS 40x40x2.0 Duragal	1048	5.0
3	5	Cross rail	SHS 40x40x2.0 Duragal	500	6.0
4	2	Base side rail (drilled)	SHS 40x40x2.0 Duragal	220	1.0
5	5	Side rail / shelf bearer	SHS 40x40x2.0 Duragal	220	2.6
6	2	Catch box mounting angle (slotted)	EA 40x40x5.0 Duragal	500	2.9
7	1	Shelf tray (base, sides & back)	2.0 galvanised sheet	-	5.3
		TOTAL (APPROX., EXCL. FIXINGS)			31.9

PRELIMINARY - FOR REVIEW - NOT FOR CONSTRUCTION


TITLE

CLASSIFICATION SAMPLER CATCH BOX STAND

GENERAL ARRANGEMENT


DRAWN	CHECKED	APPROVED	DATE
CLAUDE (DRAFT)			09/10/2026

SCALE @ A3	UNITS	SHEET	DRAWING No.	REV
1:10	mm	1 OF 2	**CBS-001**	**A**

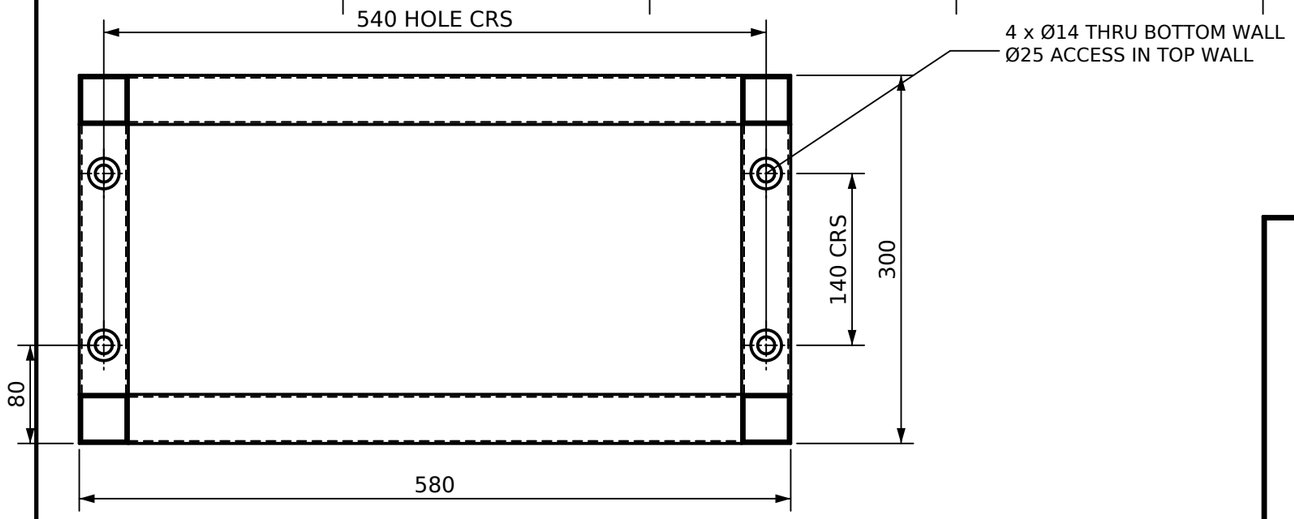


PLAN ON BASE FRAME

SCALE 1:5

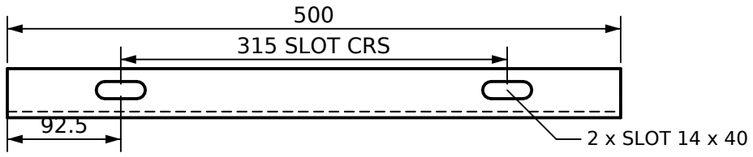


ITEM 6 - MOUNTING ANGLE (2 OFF)

SCALE 1:5



END VIEW

SCALE 1:2

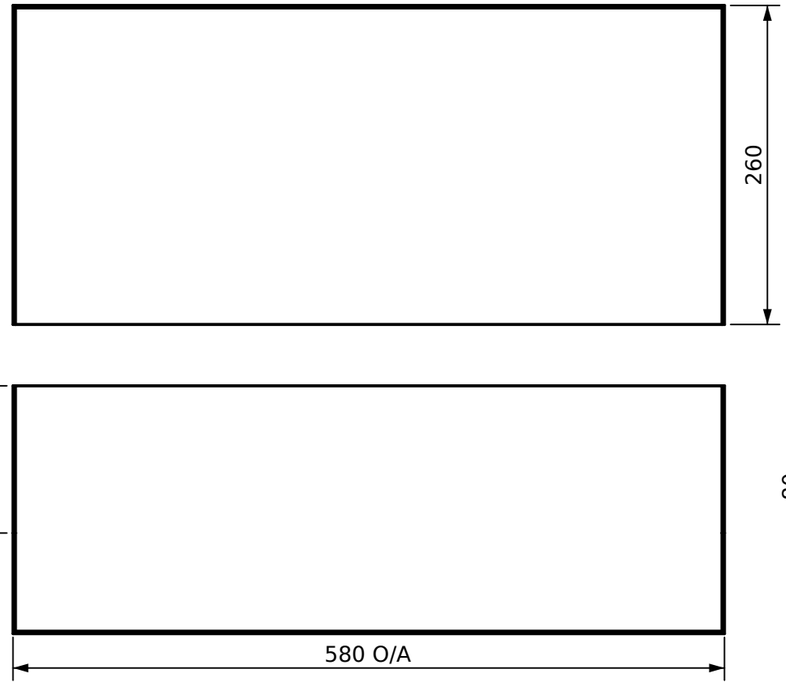

ITEM 7 - SHELF TRAY, 2.0 GALV SHEET

SCALE 1:5

Tray folded/welded from 2.0 galvanised sheet: base, two tapered sides and back. Corners seam welded. Base plug or stitch welded to shelf frame; back fixed to rear uprights. Drill 4 x Ø8 drain holes in base corners.

CUT LIST (PER STAND, SQUARE CUT)

ITEM	SECTION	CUT L	QTY	m
1	SHS 40x40x2.0 Duragal	1900	2	3.80
2	SHS 40x40x2.0 Duragal	1048	2	2.10
3	SHS 40x40x2.0 Duragal	500	5	2.50
4	SHS 40x40x2.0 Duragal	220	2	0.44
5	SHS 40x40x2.0 Duragal	220	5	1.10
6	EA 40x40x5.0 Duragal	500	2	1.00
	TOTAL SHS 9.94 m, EA 1.00 m (PER STAND)			

GENERAL NOTES

1. Dimensions in mm. Do not scale. Third angle projection.
2. SHS 40x40x2.0 Duragal C450L0 to AS/NZS 1163; EA 40x40x5.0 Duragal angle.
3. Welds: 3 mm continuous fillet all round to AS/NZS 1554.1 (SP) unless noted. Tray 2.0 sheet to frame: 25 long stitch welds @ 150 crs.
4. Wire-wheel all welds; touch up with cold galvanising coating, 2 coats.
5. Cap open SHS ends at tops of uprights with plastic end caps.
6. Fix to Webforge C325MPG grating with 4 x M12 galv grating clamps through base rail holes (fixing type to be confirmed by installer).
7. Catch box mounting holes taken from sketch: 330 crs vertical, 315 crs horizontal (sketch reads "31.5"). CONFIRM AGAINST CATCH BOX BRACKETS BEFORE FABRICATION. Slots give ±13 horizontal adjustment.
8. Shelf top (platform) 1050 above grating; catch box outlet 340 above platform. Catch box shown chain-dotted for reference only.
9. Quantity required: 4 off.
10. Bolts by others: 4 x M12 catch box (with washers), 4 x M12 grating clamps.

PRELIMINARY - FOR REVIEW - NOT FOR CONSTRUCTION

TITLE

CLASSIFICATION SAMPLER CATCH BOX STAND

FABRICATION DETAILS & NOTES

DRAWN	CHECKED	APPROVED	DATE
CLAUDE (DRAFT)			09/10/2026

SCALE @ A3	UNITS	SHEET	DRAWING No.	REV
AS SHOWN	mm	2 OF 2	**CBS-001**	**A**