
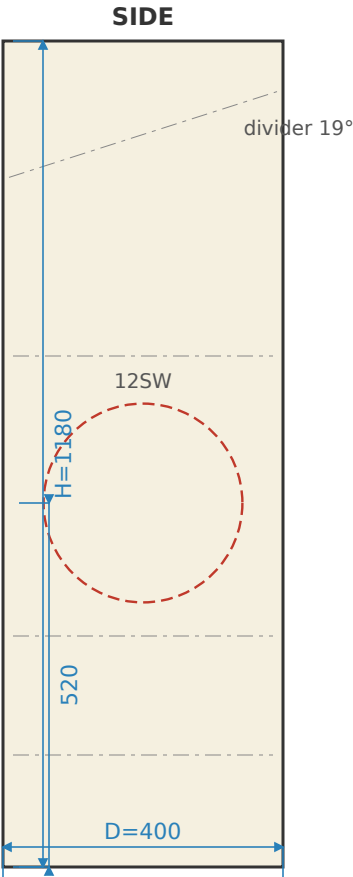


Mk3 Cabinet — Assembly Measurement Drawing

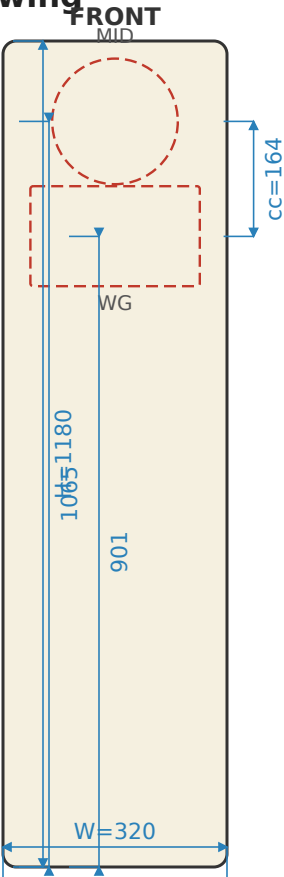

Internal: 276 × 356 × 1136 mm | Wall: 22 mm | Roundover: R19
Driver heights: MID z=1065 WG/TW z=901 Woofer z=520 | C-C mid/tw: 164 mm
Shelf bracs at z=[160, 330, 730] | Divider tilt: 19°

Mk3 Cabinet — Panel Cut List

Material: 22 mm birch plywood | External: 320 × 400 × 1180 mm


Panel	Width (mm)	Height/Depth (mm)	Qty	Thickness	Notes
Front baffle	320	1180	1	22	R19 front vertical edges, mid + WG cutouts
Back panel	320	1180	1	22	Square edges
Side panel L	400	1180	1	22	Woofer cutout Ø284, 8×Ø5.5 on Ø319 BCD
Side panel R	400	1180	1	22	Woofer cutout Ø284, 8×Ø5.5 on Ø319 BCD (opposed)
Top panel	320	400	1	22	Square edges
Bottom panel	320	400	1	22	Square edges
Divider plate	320	400	1	22	Tilted 19°, cut to fit cavity
Shelf brace 1	276	356	1	22	Ring shelf, rim 45 mm, z=160
Shelf brace 2	276	356	1	22	Ring shelf, rim 45 mm, z=330
Shelf brace 3	276	356	1	22	Ring shelf, rim 45 mm, z=730

Total panels: 10 | Total panel area: 2.38 m² | Plywood volume: 0.05 L

NOTE: Divider plate and shelf braces are cut to fit the internal cavity (276 × 356 mm). Measure actual internal dims before cutting. (1) Verify cutout dimensions and positions.

Cutout & Hole Layout

18W/4424G00 Ø145 cut Ø179 rebate 6xØ5.3

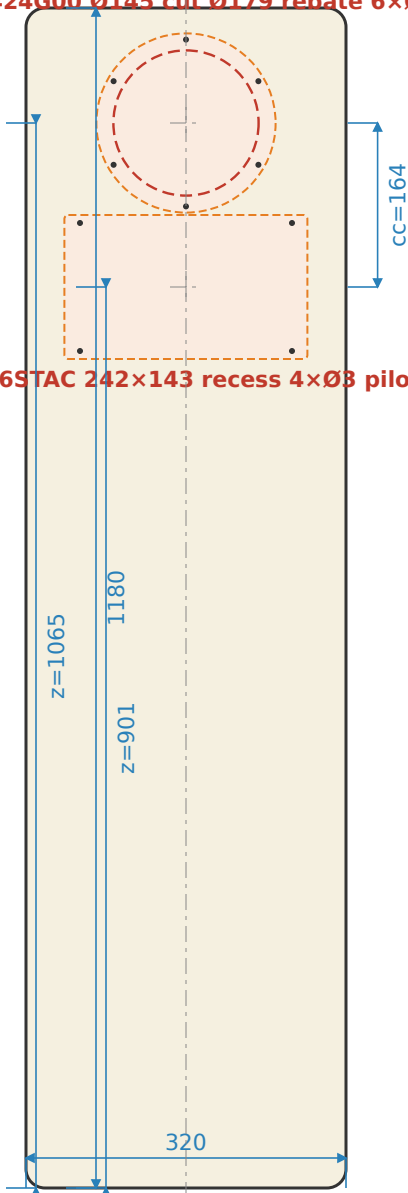


SB26STAC 242x143 recess 4xØ3 pilot

Red dashed: cutout Orange: rebate Dots: pilot Ø3

Mk3 Side Panel — Woofer Cutout & Hole Layout


Panel: 400 x 520 mm, 22 mm thick ply (flat, no roundover)

GRS 12SW-4HE Ø284 cut Ø332 frame 8xØ5.5

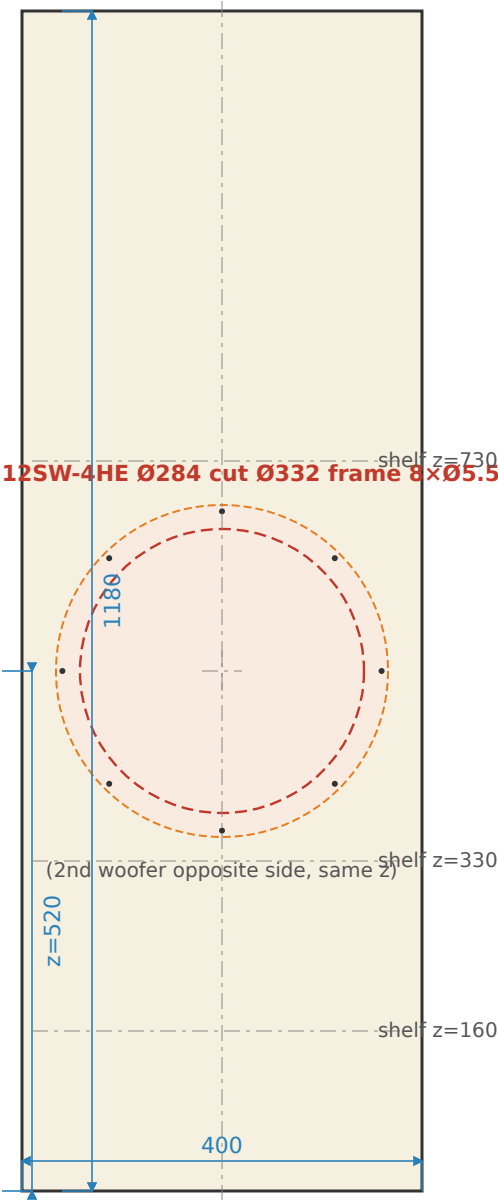


Front Baffle — Cut Drawing

22 mm, 22 mm ply, R19 front edges

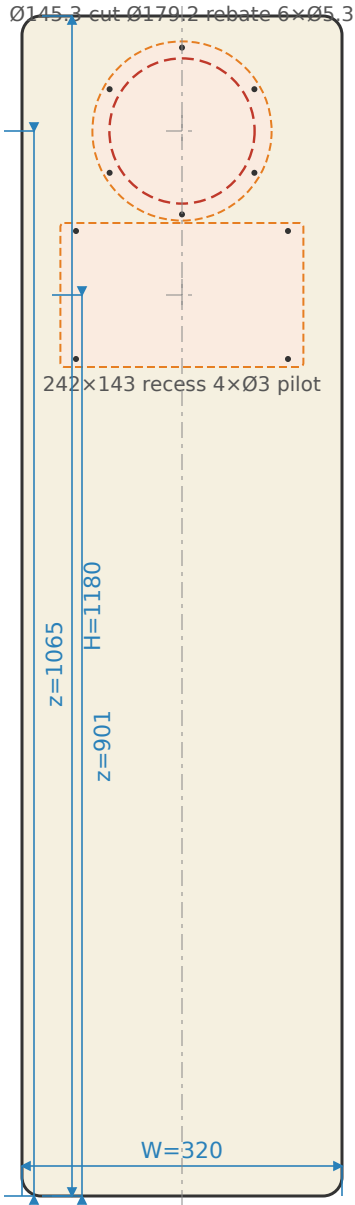


Back Panel — Cut Drawing

320 × 1180 mm, 22 mm ply, square edges

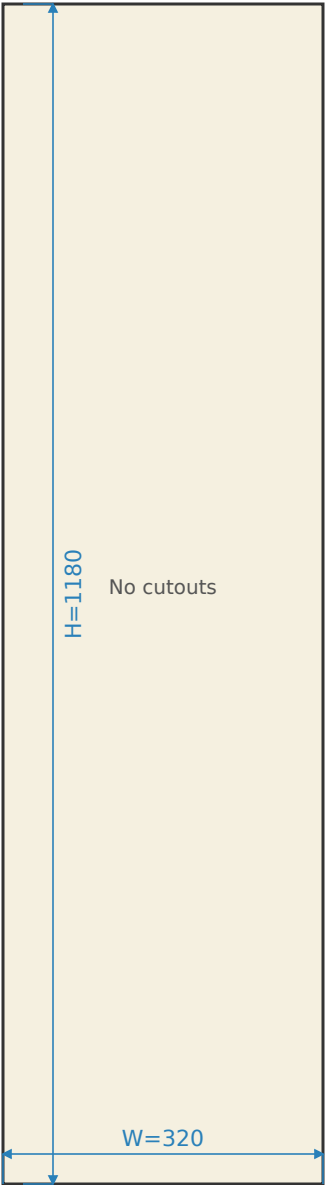


Drawing

Drawing

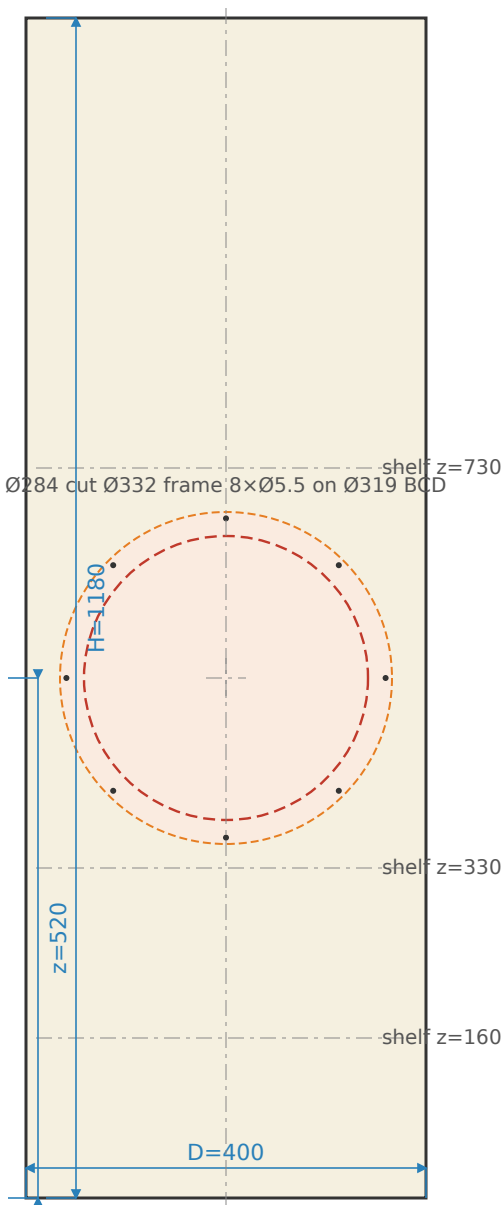


Side Panel RIGHT — Cut Drawing

1000 mm, 22 mm ply, woofer on right (opposed) face

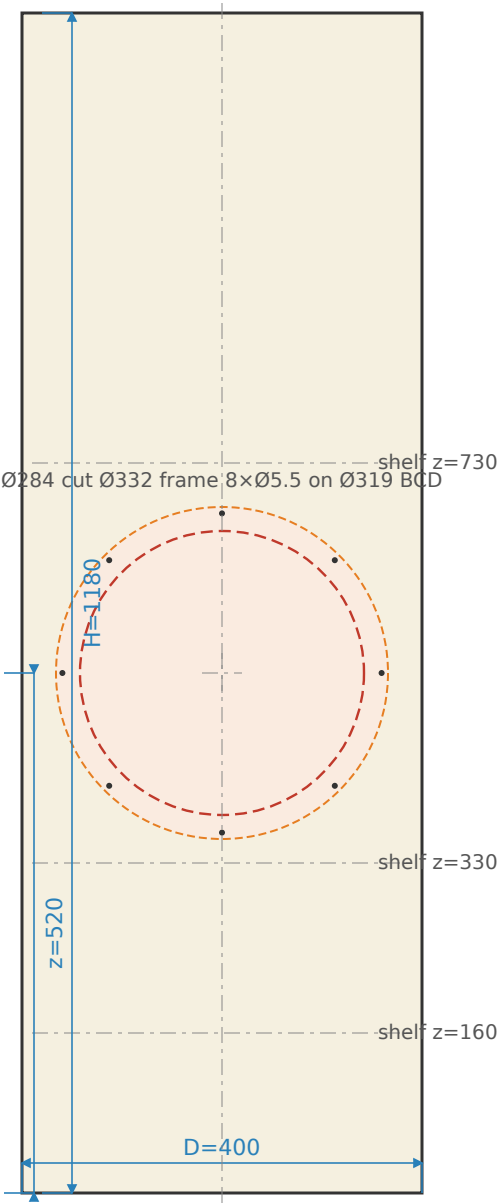

Top Panel — Cut Drawing


320 × 400 mm, 22 mm ply, R19 front edge

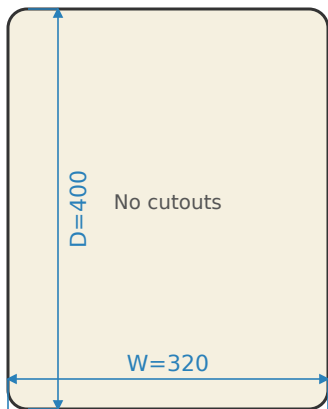

Bottom Panel — Cut

Drawing


22 mm ply, R19 front
edge

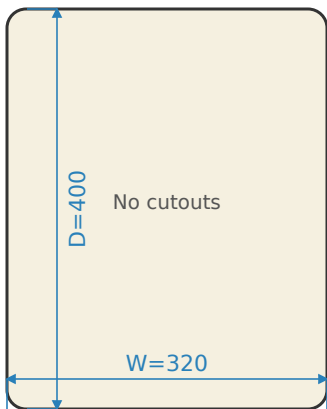

Divider Plate — Cut

276 mm x 356 mm, 22 mm ply, tilted 19°
in cabinet


tilt 19°
internal cavity shape
follows rounded side
(walls)

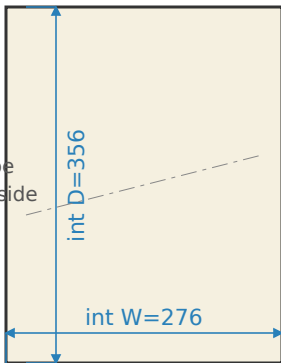

Front edge sits at $z=985$ mm, rises
 19° toward rear

Shelf Brace x3 — Cut Drawing

Outer: 356 x 276 mm (internal cavity)
Rim: 45 mm Thickness: 22 mm
Qty: 3 (z=[160, 330, 730])

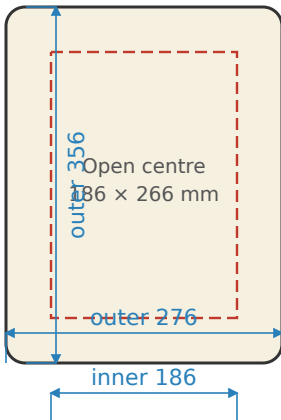

Skæreplan — massiv fyr 25 mm (Jem & Fix) — ET PAR

5 × 620×2420×25 mm | 320×380×1180 mm | 2 kabinetter (V+H)

