


DATE CODE

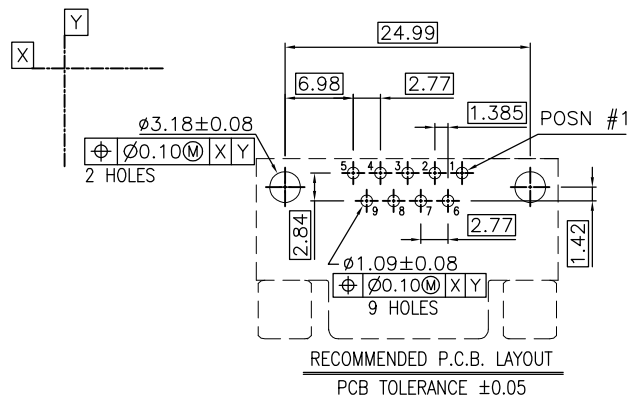

1. MATERIAL:

- 1.1 HOUSING: NY9T WITH 30% G.F. UL 94V-0,
COLOR: BLACK
- 1.2 CONTACTS: PHOSPHOR BRONZE
- 1.3 SHELL: SPCC
- 1.4 BOARDLOCKS: BRASS
- 1.5 RIVET: BRASS
- 1.6 SCREWLOCKS: BRASS, THREAD LENGTH OF SCREW: 6.0 MIN.

2. FINISH:


- 2.1 CONTACT:
GOLD PLATING ON CONTACT AREA. (SEE TABLE)
2.54µm[100µ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
1.27µm[50µ"] MIN. NICKEL UNDERPLATED ON ENTIRE CONTACT.
- 2.2 BOARDLOCK:
2.54µm[100µ"] MIN. MATTE-TIN PLATING OVER
1.27µm[50µ"] MIN. NICKEL UNDERPLATED ON ENTIRE CONTACT.

- 2.3 SHELL: NICKEL PLATED
2.4 RIVET: NICKEL PLATED
2.5 SCREWLOCKS: NICKEL PLATED

3. NET WEIGHT: 8.9 gram/PC.
4. THREADED INSERTS AND SCREWLOCKS MUST WITHSTAND 6 IN-LBS TORQUE.
5. DAET CODE: YYWW
6. REFLOW SOLDER CAPABLE TO 260°C
PER TE CONNECTIVITY SPEC. 109-201, CONDITION B.

| | |
|---------------------|-----------|
| 0.38um[15u"] | 1734354-2 |
| GOLD-FLASH | 1734354-1 |
| CONTACT FINISH MIN. | PART NO. |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | | | |
|--|----------|---------------------------|-----|-----------|
| THIS DRAWING IS AN UNCONTROLLED DOCUMENT | | J. LEE | CHK | 17NOV2006 |
| DIMENSIONS: | | S. HOU | | |
| MM | | APVD W.J. KE 17NOV2006 | | |
|  | | PRODUCT SPEC | | |
| | | 108-57541 | | |
| | | QUALIFICATION TEST REPORT | | |
| | | 501-57623 | | |
| | | | | |
| MATERIAL | FINISH | WEIGHT SEE NOTE | | |
| SEE NOTE | SEE NOTE | CUSTOMER DRAWING | | |



TE Connectivity

| | |
|------|--|
| NAME | RECEPTACLE ASSEMBLY, 9 POSN, RIGHT ANGLE, 8.08mm[0.318in] SERIES, AMPLIMITE, WITH SCREWLOCKS |
|------|--|

| | | | |
|------|-----------|------------|---------------|
| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
| A3 | 00779 | C=1734354 | — |
| | | SCALE | SHEET |
| | | — | 1 OF 2 |
| | | | REV A1 |

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-.-

ALL RIGHTS RESERVED.

©

COPYRIGHT - BY -

LOC


DIST

DW

-

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|-----|--------------|------|-----|------|
| - | - | SEE SHEET 1. | - | - | - |

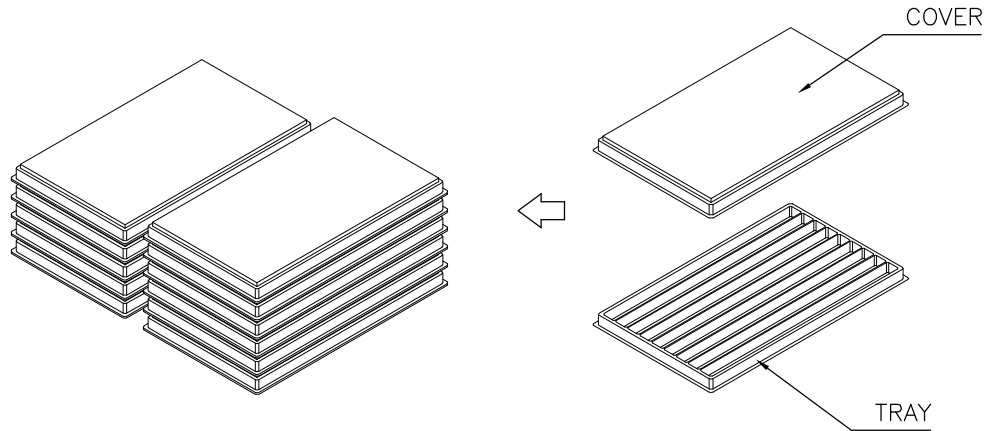

NOTES:

1. MATERIAL:

1.1 TRAY: PVC

1.2 SHIPPING CARTON: CORRUGATED FIBERBOARD

2. DIMENSION:

2.1 TRAY: L=306, W=217, H=15.8

2.2 SHIPPING CARTON: L=440, W=321, H=153

3. QUANTITY:



3.1 PRIMARY PACKING: 90 PCS/TRAY

3.2 SECONDARY PACKING: 11 TRAY/CARTON(990PCS)

4. CARTON WEIGHT:

4.1 NET WEIGHT: 8.9 KG


4.2 GROSS WEIGHT: 9.9 KG

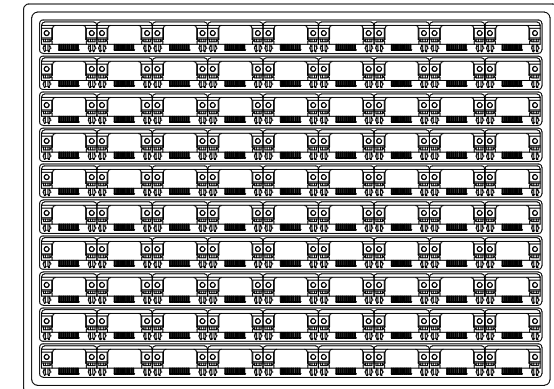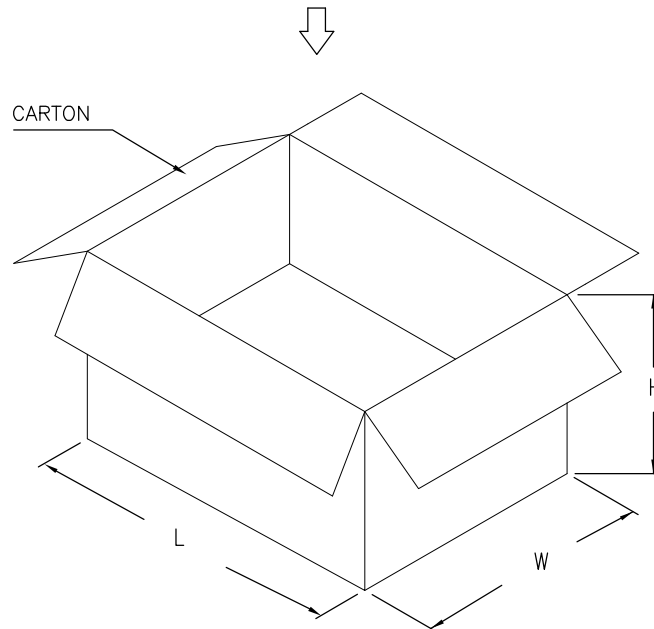

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



TOLERANCES UNLESS OTHERWISE SPECIFIED:

| | |
|--------|---|
| 0 PLC | ± |
| 1 PLC | ± |
| 2 PLC | ± |
| 3 PLC | ± |
| 4 PLC | ± |
| ANGLES | ± |

MATERIAL

FINISH

DWN J. LEE 17NOV2006

CHK S. HOU 17NOV2006

APVD W.J. KE 17NOV2006

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

RECEPTACLE ASSEMBLY, 9 POSN,
RIGHT ANGLE, 8.08mm[0.318in]
SERIES, AMPLIMITE, WITH SCREWLOCKS

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|------|-----------|------------|---------------|
| A3 | 00779 | C=1734354 | - |

| SCALE | SHEET | REV |
|-------|--------|-----|
| - | 2 OF 2 | A1 |