

Roof: Condition & Drainage

Roof Clean/Clear of Debris/Drainage Check

Frequency

Monthly

Models

All Flat Roofs

Estimated Time to Complete

15 Minutes

Health & Safety Hazards



Fall from Height



Slippery Floors / Tripping



Chemicals

Food Safety



Wash and dry hands **after** performing this task



Check and clean the brushes, cloths, etc. Discard and replace if these cannot be effectively cleaned.

Equipment



1 Degreaser Spray

2 Bucket

3 Green Yard Broom

4 Green deck scrub

5 Cleaning Gloves



Warning – this procedure applies to flat roof surfaces where edge protection is in place.

See safety information on next page.

Do not access any flat roof or section of flat roof not fitted with edge protection.

If you are not sure which areas are safe to access always ask your manager.

Sloping roofs, pitched roofs, or those without edge protection must only be accessed by competent contractors.

Clear debris

1. Sweep any leaves or loose debris using green yard broom.



2. Collect debris / rubbish in a bin liner and lower carefully down ladder when done.


3. Large or heavy items (e.g. equipment parts left by engineers) must be left until a contractor can remove these.

Card No. RF281

Ensure roof surface is clean

1. Ensure roof surface is clean and free from grease build-up

2. For small areas of the roof showing signs of grease build-up:
- Spray with degreaser solution and leave for 15 minutes

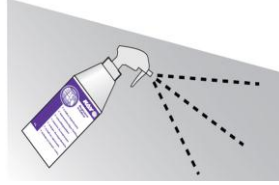

3. Brush lightly if necessary then rinse with water



Take care not to damage roof surface

For larger areas or heavy grease build-up it may be necessary to use a specialist contractor

Check drainage

1. Ensure drain protectors are in place:
- guards are in place on all downpipes to prevent blockage
- leaf catching mesh is in place where water flows under side panel of roof.

2. Gutters are clear and clean.




3. All downpipes are secure with no signs of leaks.

Note:

If water from your roof drains away inside the mansard roof OR under a 'step' in the roof, this indicates the presence of an internal box gutter. These gutters need to be inspected and maintained regularly by a contractor to prevent leaks into the building.

See M&R website for details of contractors:

<http://www.mcdonaldsmandr.co.uk>

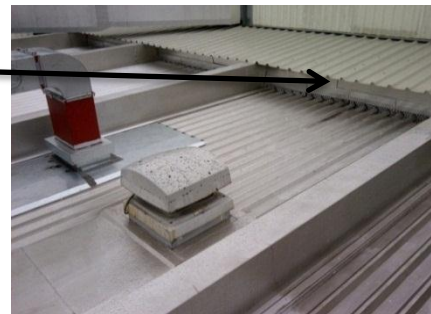

Roof Safety (see Health & Safety section of Operations & Training manual for full details)

DOs

- Limit roof access to managers, authorised employees and contractors.
- Only access areas of flat roof where full edge protection is in place (e.g. railings / mansard roof edge) or using harness system (where provided).
- Wear shoes that are dry, clean, in good condition and which have a good grip.
- When using the a ladder to access to roof:
 - Ensure ladder is clean and in good condition
 - Climb one rung at a time, ensuring safe foot and hand hold
 - Open the hatch carefully and use the 'ladder-up' or handrails provided.

DON'Ts

- Don't complete planned maintenance tasks during icy or very windy conditions.
- Don't access sloping or tiled roof areas – cleaning in these areas will be a specialist contractor task.
- Don't carry anything by hand whilst climbing a ladder (use a bag / bucket on a rope to pull light objects up to the roof level).
- Don't drop anything from the roof or ladder – you may not be able to see others below.
- Don't attempt to remove any large or heavy items left on the roof by contractors – contact the Restaurant Services Department for advice.