

Quality Engineering - Class Notes (experimental)

Jonathan Rosenblatt

October 30, 2015

Preface

The purpose of this text is to accompany my Quality Engineering course at the Dept. of Industrial Engineering at the Ben-Gurion University of the Negev. It has several purposes:

- Help me organize and document the course material.
- Help students during class so that they may focus on listening and not writing.
- Help students after class, so that they may self-study.

At it's current state it is experimental. It can thus be expected to change from time to time, and include mistakes. I will thus be enormously grateful to whoever decides to share with me the mistakes found.

I also ask for the readers' forgiveness for my Wikipedia quoting style. It is highly unorthodox to cite Wikipedia as one would cite a peer reviewed publication. I do so, in this text, merely for technical convenience.

I hope the reader will find this text interesting and useful.

Contents

1	Introduction	5
1.1	Terminology and Concepts	7
1.1.1	Basic Terminology	7
1.1.2	Statistical Terminology	8
1.2	Some History	10
1.3	Management Aspects of Improving Quality	11
1.4	Programs and Initiatives	12
1.4.1	Zero Defects Program (ZD)	12
1.4.2	Quality is Free Initiative	12
1.4.3	Value Engineering Program (VE)	12
1.4.4	Total Quality Management (TQM)	13
1.4.5	Six-Sigma	13
1.4.6	Lean Systems	15
1.4.7	Design for Six-Sigma (DFSS)	15
1.4.8	Quality Systems and Standards	16
1.5	DMAIC	16
2	Exploratory Data Analysis (EDA)	18
2.1	Summary Statistics	18
2.1.1	Categorical Data	18
2.1.2	Continuous Data	19
2.2	Visualization	21
2.2.1	Categorical Data	21
2.2.2	Continuous Data	23
2.2.3	On-Line Visualization	23
3	Statistical Inference	27
4	System Capability Analysis	28

5	Statistical Process Control	29
5.1	Univariate Control Charts	29
5.1.1	Control Charts for Variables	29
5.1.2	Control Charts for Attributes	29
5.2	Multivariate Control Charts	29
5.3	Non-Statistical Target Functions	29
6	Design of Experiments	30
7	Acceptance Sampling	31
8	Reliability	32
A	Notation	33
	Bibliography	34

List of Figures

1.1	3-sigma probability of failure	15
1.2	6-sigma probability of failure	15
1.3	DMAIC	17
2.1	Bar Plot	21
2.2	Mosaic Plot	22
2.3	Dot Plot	23
2.4	Histogram	24
2.5	BoxPlot	24
2.6	Stem and Leaf Pot	25
2.7	Scatter Plot	25
2.8	HexBin Plot	26

Chapter 1

Introduction

Quality Engineering is the study and design of practices aimed improving the “quality” of production. Production is understood in a wide sense, and includes services as well. Quality is understood in many senses. Here are several definitions compiled verbatim from Montgomery [2007] and Wikipedia [2015d]:

1. Montgomery: “Fitness to use”.
2. Montgomery: “The reciprocal of variability” (stability?) .
3. American Society for Quality: A combination of quantitative and qualitative perspectives for which each person has his or her own definition; examples of which include, “Meeting the requirements and expectations in service or product that were committed to” and “Pursuit of optimal solutions contributing to confirmed successes, fulfilling accountabilities. In technical usage, quality can have two meanings: (a) The characteristics of a product or service that bear on its ability to satisfy stated or implied needs. (b) A product or service free of deficiencies.”
4. Subir Chowdhury: “Quality combines people power and process power”.
5. Philip B. Crosby: “Conformance to requirements.”
6. W. Edwards Deming: “The efficient production of the quality that the market expects”.
7. W. Edwards Deming: “Costs go down and productivity goes up as improvement of quality is accomplished by better management of design, engineering, testing and by improvement of processes.”

8. Peter Drucker: “Quality in a product or service is not what the supplier puts in. It is what the customer gets out and is willing to pay for.”
9. Victor A. Elias: “Quality is the ability of performance, in each Theme of Performance, to enact a strategy.”
10. ISO 9000: “Degree to which a set of inherent characteristics fulfills requirements.”
11. Joseph M. Juran: “Fitness for use.”
12. Noriaki Kano and others, present a two-dimensional model of quality: “must-be quality” and “attractive quality.” The former is near to “fitness for use” and the latter is what the customer would love, but has not yet thought about. Supporters characterize this model more succinctly as: “Products and services that meet or exceed customers’ expectations.”
13. Robert Pirsig: “The result of care.”
14. Six Sigma: “Number of defects per million opportunities.”
15. Genichi Taguchi: “Uniformity around a target value.”
16. Genichi Taguchi: “The loss a product imposes on society after it is shipped.”
17. Gerald M. Weinberg: “Value to some person”.
18. Jonathan D. Rosenblatt: “The efficient fulfilment of a promise”.

Collecting ideas

1. Quality is not only about production.
2. Quality is the means, not the end.
3. Quality may deal with the **design** or with **conformance** to a given design.

Almost all of the above definitions, may apply to different characteristics, we call *dimensions of quality*. Following Wikipedia [2015b] :

Dimen-
sions of
Quality

Performance Performance refers to a product's primary operating characteristics. This dimension of quality involves measurable attributes; brands can usually be ranked objectively on individual aspects of performance.

Features Features are additional characteristics that enhance the appeal of the product or service to the user.

Reliability Reliability is the likelihood that a product will not fail within a specific time period. This is a key element for users who need the product to work without fail.

Conformance Conformance is the precision with which the product or service meets the specified standards.

Durability Durability measures the length of a product's life. When the product can be repaired, estimating durability is more complicated. The item will be used until it is no longer economical to operate it. This happens when the repair rate and the associated costs increase significantly.

Serviceability Serviceability is the speed with which the product can be put into service when it breaks down, as well as the competence and the behavior of the service person.

Aesthetics Aesthetics is the subjective dimension indicating the kind of response a user has to a product. It represents the individual's personal preference.

Perceived Quality Perceived Quality is the quality attributed to a good or service based on indirect measures.

1.1 Terminology and Concepts

1.1.1 Basic Terminology

Quality Characteristics A.k.a. *Critical to Quality Characteristics* (CTQs). May be physical, sensory, or temporal properties of a process/product. Obviously related to the dimensions of quality.

Quality Engineering "The set of operational, managerial, and engineering activities that a company uses to ensure that the quality characteristics of a product are at the nominal or required levels and that the variability around these desired levels is minimum." [Montgomery, 2007]

Variables Continuous measurements of some CTQ.

Attributes Discrete measurements of some CTQ.

Target Value The desired level of a particular CTQ. A.k.a. *nominal* value.

Specifications The set of target values of a process.

USL & LSL Largest and smallest allowable values of a CTQ.

Non-conformity A non conforming product is one that fails to meet the specification.

Defect A non-conformity that is serious enough to affect the use of the product.

1.1.2 Statistical Terminology

Exploratory Data Analysis (EDA) An assumption free quantitative inspection of data; “Story telling”; no inference.

Inference Data analysis with the intention of generalizing from a sample to a population.

Causal Inference Inference, with the intention of claiming causal relations between quantities under study.

Predictive Analytics Data analysis with the intention of making predictions with future data. Can be seen as inference, without aiming at causality.

Design of experiments (DOE) By far the best and most established way for causal inference. The *random assignment* of units to groups allows to interpret statistical correlations as causal.

Statistical Process Control (SPC) Data analysis with the intention of identifying anomalous behaviour with respect to history¹.

Computer Simulation Well, just what the name implies.

Control Chart A graphic visualization of one (or several) CTQs, along with specification limits.

¹Akin to *anomaly detection*, or *novelty detection*, in the machine learning literature.

(Un)Controllable Inputs Each process has inputs that affect the behaviour of the CTQ. Some are controllable, and some are not.

Factorial Design In the language of DOE, inputs are *factors*. A factorial design, is an experiment where factors are varied in order to study their effect on the CTQ.

Off/On-line process control SPC can be performed on or off line. On-line, a.k.a. *in-process control*, meaning control happens as the process evolves, and off-line meaning before it starts or after it has finished.

On-line quality control A.k.a. *in-process* procedure.

Engineering control A.k.a. *automatic control*, or *feedback control*. SPC that triggers an intervention that keeps the process in control

Outgoing/Ingoing Inspection Refers to the stage at which SPC is performed. As inputs come in (ingoing), or as outputs come out (outgoing).

1.2 Some History

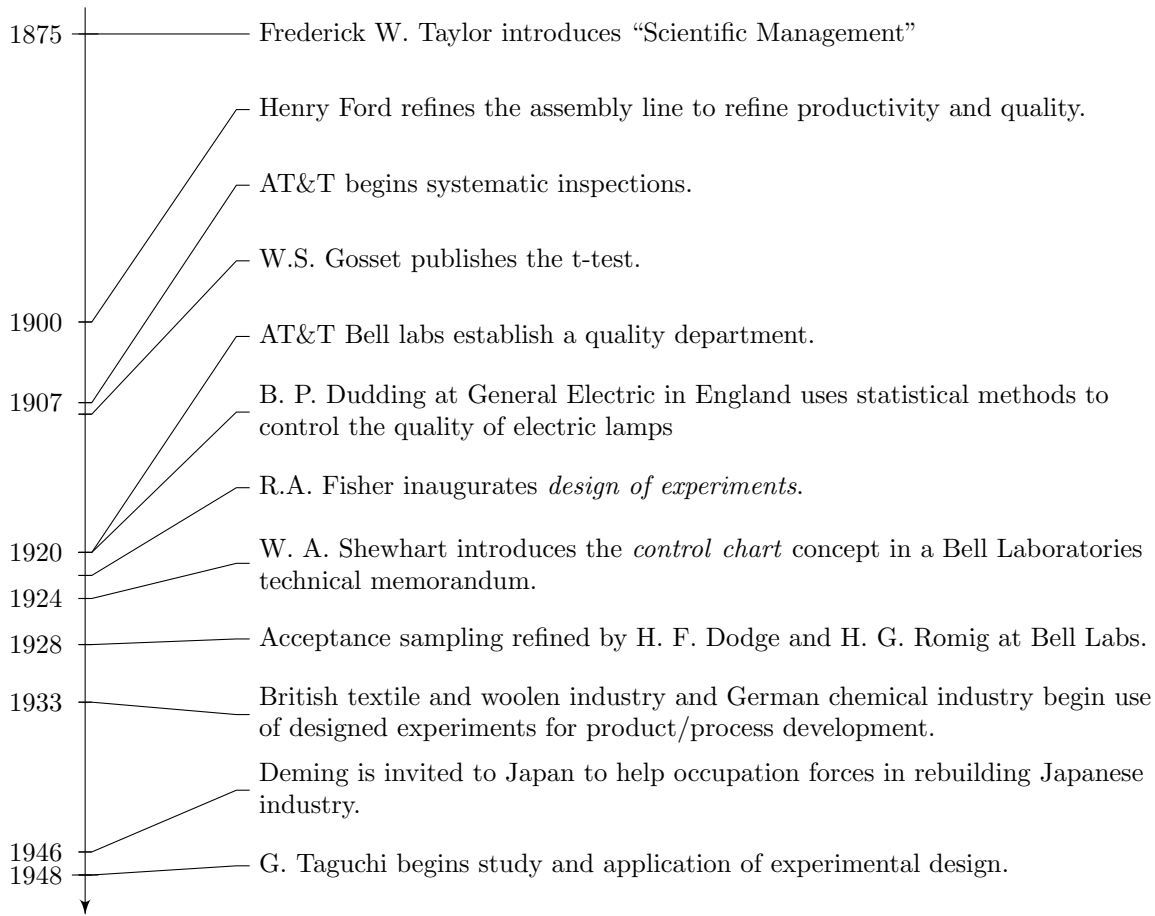


Table 1.1: Adapted from [Montgomery, 2007, Table 1.1].

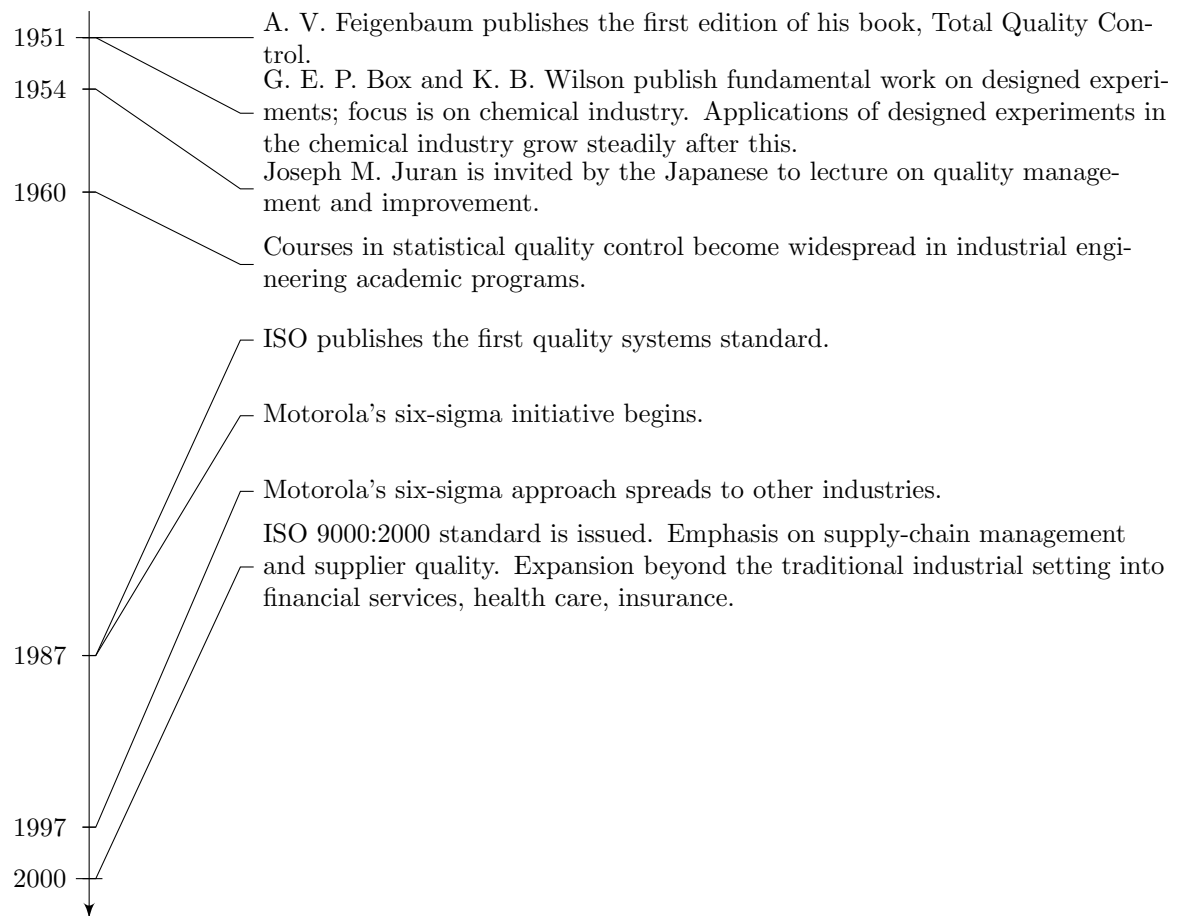


Table 1.2: Adapted from [Montgomery, 2007, Table 1.1].

1.3 Management Aspects of Improving Quality

The founding fathers of QC have many do's-and-don'ts for managers. See Montgomery [2007, Sec 1.4] for details. As usual, we collect recurring ideas:

1. The responsibility for quality rests with management.
2. QC is not a one-time project, but an on-going process. It may advance continuously, or incrementally.
3. QC is (or should be) manifested in organizational structure, training, recruitment, incentives, knowledge management, to name a few.

1.4 Programs and Initiatives

1.4.1 Zero Defects Program (ZD)

Quoting Wikipedia [2015f]:

... a management-led program to eliminate defects in industrial production that enjoyed brief popularity in American industry from 1964 to the early 1970's. Quality expert Philip Crosby later incorporated it into his "Absolutes of Quality Management" and it enjoyed a renaissance in the American automobile industry, as a performance goal more than as a program, in the 1990s. Although applicable to any type of enterprise, it has been primarily adopted within supply chains wherever large volumes of components are being purchased (common items such as nuts and bolts are good examples).

1.4.2 Quality is Free Initiative

Quoting Montgomery [2007]:

... in which management worked on identifying the cost of quality (or the cost of *nonquality*, as the Quality is Free devotees so cleverly put it). Indeed, identification of quality costs can be very useful, but the Quality is Free practitioners often had no idea about what to do to actually improve many types of complex industrial processes.

1.4.3 Value Engineering Program (VE)

Quoting Wikipedia [2015e]:

Value engineering (VE) is systematic method to improve the “value” of goods or products and services by using an examination of function. Value, as defined, is the ratio of function to cost. Value can therefore be increased by either improving the function or reducing the cost. It is a primary tenet of value engineering that basic functions be preserved and not be reduced as a consequence of pursuing value improvements.

1.4.4 Total Quality Management (TQM)

TQM originates in the 1980’s with the ideas of Deming and Juran. It is a very wide framework that attempts at capturing the company-wide efforts required for QC. According to Montgomery [2007, p.23]:

TQM has only had moderate success for a variety of reasons, but frequently because there is insufficient effort devoted to widespread utilization of the technical tools of variability reduction. Many organizations saw the mission of TQM as one of training. Consequently, many TQM efforts engaged in widespread training of the workforce in the philosophy of quality improvement and a few basic methods. This training was usually placed in the hands of human resources departments, and much of it was ineffective. The trainers often had no real idea about what methods should be taught, and success was usually measured by the percentage of the workforce that had been “trained,” not by whether any measurable impact on business results had been achieved.

... Another reason for the erratic success of TQM is that many managers and executives have regarded it as just another “program” to improve quality. During the 1950’s and 1960’s, programs such as Zero Defects and Value Engineering abounded, but they had little real impact on quality and productivity improvement.

1.4.5 Six-Sigma

Quoting Montgomery [2007]:

Products with many components typically have many opportunities for failure or defects to occur. Motorola developed the Six-Sigma program in the late 1980s as a response to the demand for their products. The focus of six-sigma is reducing variability

in key product quality characteristics to the level at which failure or defects are extremely unlikely.

Assume a device has m components. The failure probability of component $j \in 1, \dots, m$ is α_j . What is the probability of the device failing, when assuming independent failures?

$$\begin{aligned} P(\text{failure}) &= P(\text{at least one failure}) \\ &= 1 - P(\text{no failure}) \\ &= 1 - \prod_{j=1}^m (1 - \alpha_j) \end{aligned} \tag{1.1}$$

Assuming all components have the same quality guarantees, we omit the index j in α_j .

The failure probability α is implied by the CTQs, and its specification limits (USL, LSL). Denoting the target value of the CTQ by TV , 3-sigma means that the production variability, σ , is small enough so that

$$3\sigma < TV - LSL = USL - TV.$$

Denoting the CTQ by Z , and assuming

$$Z - TV \sim \mathcal{N}(0, \sigma)$$

, we can compute:

$$\begin{aligned} 1 - \alpha &= P(LSL < Z < USL) \\ &= P(|Z| < USL - TV) \\ &< P(|Z| < 3\sigma) = 0.0027. \end{aligned} \tag{1.2}$$

The 3-sigma quality guarantee is also known as 2,700 defective parts per million (ppm) for now obvious reasons. Plugging the 3-sigma performance in Eq.(1.1) returns PPM

$$P(\text{3-sigma failure}) < 1 - (1 - 0.0027)^m$$

Figure 1.1 illustrates the probability of failure against the number of components. For simple devices, the 3-sigma criterion may suffice. But now imagine the number of components in a car, a cellular phone, The 3-sigma rule is just not good enough. This is where 6-sigma requirement comes along. It implies that the production process is so accurate, that

$$6\sigma < TV - LSL = USL - TV.$$

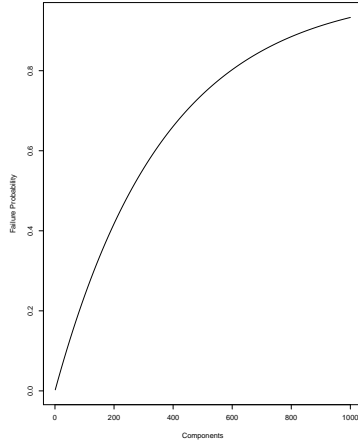


Figure 1.1: The probability of failure as a function of components under the 3-sigma standard.

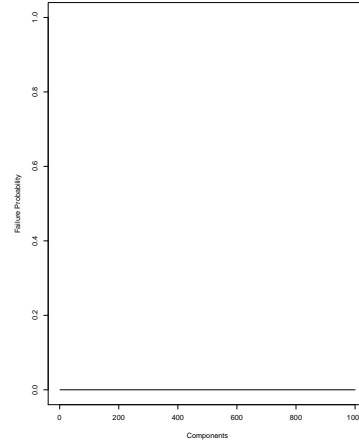


Figure 1.2: The probability of failure as a function of components under the 6-sigma standard.

Updating Eq.(1.2) we get that the defective *ppm* of 6-sigma is 0.002. This is obviously excellent news, except for the typically tremendous effort involved in achieving this level of quality.

According to Montgomery [2007], the 6-sigma methodology has gained more success than its predecessors:

The reason for the success of six-sigma in organizations outside the traditional manufacturing sphere is that variability is everywhere, and where there is variability, there is an opportunity to improve business results.

1.4.6 Lean Systems

Quoting Wikipedia [2015c] (my own emphasis in bold):

Essentially, lean is centered on making obvious what **adds value** by **reducing everything else**. Lean manufacturing is a management philosophy derived mostly from the Toyota Production System (TPS) (hence the term Toyotism is also prevalent) and identified as “lean” only in the 1990s.

1.4.7 Design for Six-Sigma (DFSS)

Quoting Wikipedia [2015a] (my own emphasis in bold):

It is based on the use of **statistical tools** like linear regression and enables empirical research similar to that performed in other fields, such as social science. While the tools and order used in Six Sigma require a process to be in place and functioning, DFSS has the objective of **determining the needs of customers** and the business, and driving those needs into the product solution so created. DFSS is relevant for relatively simple items / systems. It is used for product or process design in contrast with process improvement.

1.4.8 Quality Systems and Standards

The first quality standard issued by the International Standards Organization (ISO) in 1987. Current quality standards are known as the *ISO9000 series*.
These include: ISO9000

ISO9000:2000 Quality Management System—Fundamentals and Vocabulary

ISO9001:2000 Quality Management System—Requirements

ISO9004:2000 Quality Management System—Guidelines for Performance Improvement

In Israel, it is the Standards Institute of Israel² that may give ISO9000 (like any ISO) certifications upon inspecting the candidate organization. As emphasized by Montgomery [2007, p.24], ISO9000 is a set of rules and best practices, mostly oriented at *knowledge management*. It may help to *preserve* quality, but it does not, nor does it aim to, *improve* quality. As such, it will not be the focus of our course, which will focus on *statistical tools*.

Extra Info 1. [TODO: Just-in-Time, Poka-Yoke]

1.5 DMAIC

There are many names for the process of quantitative re-evaluations of performance against a given target: *data driven decision making* (DDD), *Shewart cycle*, etc. We will focus on one such framework, illustrated in Figure 1.3 known as DMAIC: Define, Measure, Analyze, Improve, Control.

Here are some general observations on DMAIC:

²<https://portal.sii.org.il/heb/qualityauth/certificationtypes/qualitylinks/iso9001/>



Figure 1.3: The DMAIC cycle. Source: <http://www.sapartners.com/sigma-academy/>

1. It is aimed at promoting improvement and creative thinking.
2. It is not part of the six-sigma methodology, but will typically take part in its implementation.

What do the stages of DMAIC mean?

Define ...

Measure ...

Analyze ...

Improve ...

Control ...

Chapter 2

Exploratory Data Analysis (EDA)

In this chapter, we give a short review of methods for exploratory data analysis, a.k.a. *descriptive statistics*. Recall that our goal is an assumptions-free description of our data. EDA thus consist of computing interpretable summaries of the data, called *summary statistics*, and visualizations.

descrip-
tive
statistics

2.1 Summary Statistics

We now distinguish between summary statistics that apply to attributes, categorical by definition, and variables, continuous by definition.

2.1.1 Categorical Data

Univariate

Summarizing a vector of categorical data can naturally be done by tabulating it, i.e., computing the frequency and relative frequency of each category. Clearly averages, medians, and the likes are incomputable, since categorical data has no ordering, nor does it admit simple operations such as summation.

Extra Info 2. Variability of categorical data can clearly not be measured by its variance, since it does not admit a summation operation. It is, however, possible to define different measures of variability that do apply. The *entropy* is such an example.

Entropy

Bivariate

Generalizing the univariate case to bivariate, or multivariate, one can keep tabulating. I.e., compute the frequency, and relative frequency, of combinations of categories.

2.1.2 Continuous Data

Continuous variables admit many more mathematical manipulations than categorical attributes.

Univariate

We start by presenting the most natural summaries of the data. Without going into the formal definition, we refer to them as *summary of location*. These include:

Location
Sum-
maries

Definition 1 (The Mean (Average)).

$$\bar{x} := \frac{1}{n} \sum_{i=1}^n x_i \quad (2.1)$$

Definition 2 (The Median). The median is the observation that is smaller than half of the sample and larger than half of the sample.

Definition 3 (α -trimmed mean). The α -trimmed mean is the average of the observations left after ignoring the largest and the smallest $(100\alpha)\%$ of them.

The naïve average is the 0-trimmed mean, and the median is the 0.5-trimmed mean.

From summaries of location, we move to summaries of *scale*.

Sum-
mary of
Scale

Definition 4 (The Standard Deviation).

$$S^2(x) := \frac{1}{n-1} \sum_{i=1}^n (x_i - \bar{x})^2 \quad (2.2)$$

For the following, we require the definition of the sample quantiles, themselves **not** a scale summary.

Definition 5 (α Quantile). The α -quantile of the sample is the observation that is larger than $(100\alpha)\%$, and smaller than $(100(1-\alpha))\%$ of the sample.

The empirical maximum and minimum are then x_1 and x_0 , respectively.

Definition 6 (The Range).

$$Range(x) := \max_i \{x_i\} - \min_i \{x_i\} = x_{1.} - x_{0.} \quad (2.3)$$

Definition 7 (The Inter Quantile Range (IQR)).

$$IQR(x) := x_{0.75} - x_{0.25} \quad (2.4)$$

Definition 8 (The Median Absolute Deviation (MAD)).

$$MAD(x) := \{|x_i - x_{0.5}|\}_{0.5} \quad (2.5)$$

Note that the MAD may be sometimes scaled by some constant. Particularly in the **R** function `mad()`.

After summaries of scale, we move to summaries of *skewness*, or *asymmetry*.

Definition 9 (Yule Skewness Measure). [TODO: verify]

$$YULE(x) := \frac{(x_{0.75} + x_{0.25}) - x_{0.5}}{2IQR(x)} \quad (2.6)$$

Bivariate

From univariate data x , we move to bivariate x, y . Clearly we can apply univariate summaries component-wise. We want, however, to summarize the *joint* behaviour of the data. For this purpose, we assume that data comes in pairs, implying that x and y are of same length. The first measure, is naturally the celebrated (Pearson) correlation coefficient, that captures the level of linear association.

Definition 10 (Pearson's Correlation Coefficient).

$$r(x, y) := \frac{\sum_{i=1}^n (x_i - \bar{x})(y_i - \bar{y})}{S(x)S(y)} \quad (2.7)$$

We can dwell into the meaning and intuition underlying Pearson's correlation coefficient, but we will not. The curious reader is referred to Rodgers and Nicewander [1988].

The next measure of association captures a more general association.

Definition 11 (Spearman's Correlation Coefficient). Spearman's correlation coefficient is merely Pearson's correlation coefficient computed on the *ranks* of x and y .

We conclude by noting that *regression coefficients* are also a measure of association.

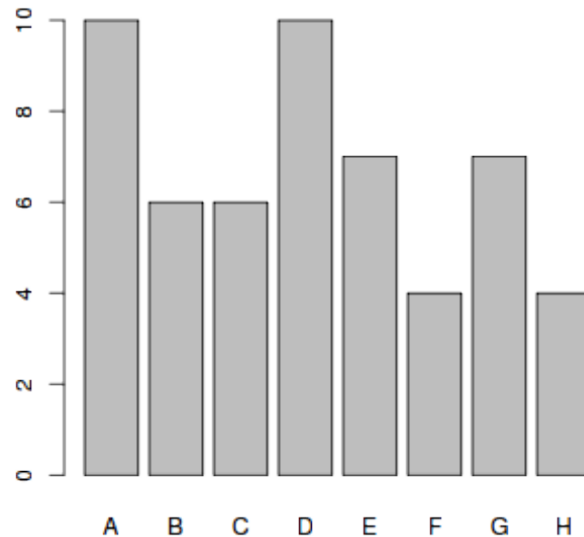


Figure 2.1: The Bar-Plot. Source: <http://www.r-tutor.com/elementary-statistics/qualitative-data/bar-graph>

2.2 Visualization

2.2.1 Categorical Data

Univariate

Much like computing summaries, there is not much to be said about visualizing univariate categorical variables. The most natural, and perhaps only visualization, is the *bar plot*, illustrated in Figure 2.1.

Bivariate

Visualizing a two-way cross-table can be done using an extension of the bar-plot. Several extensions exist. By far, the most informative and recommended figure, in this author's view, is the *mosaic plot*, illustrated in Figure 2.2.

Mosaic
Plot

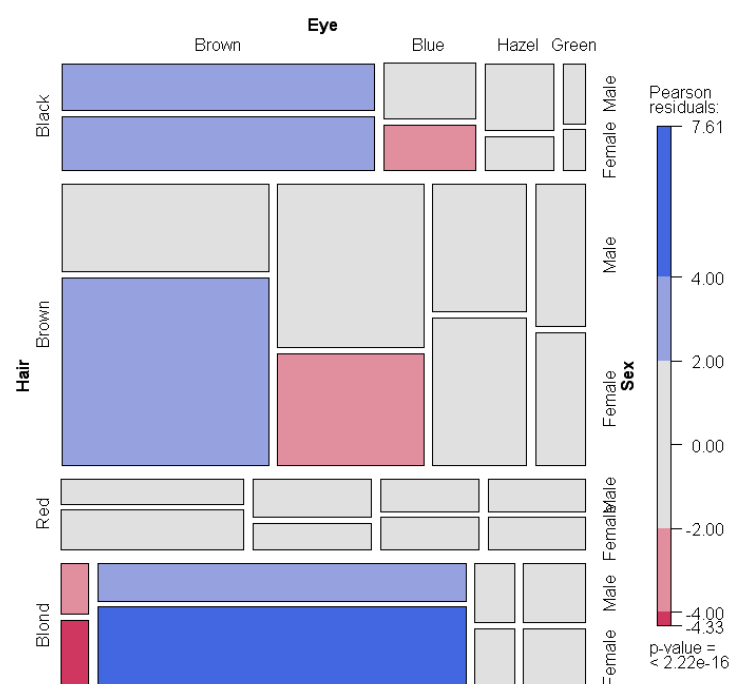


Figure 2.2: Mosaic Plot. Source: <http://www.statmethods.net/advgraphs/mosaic.html>

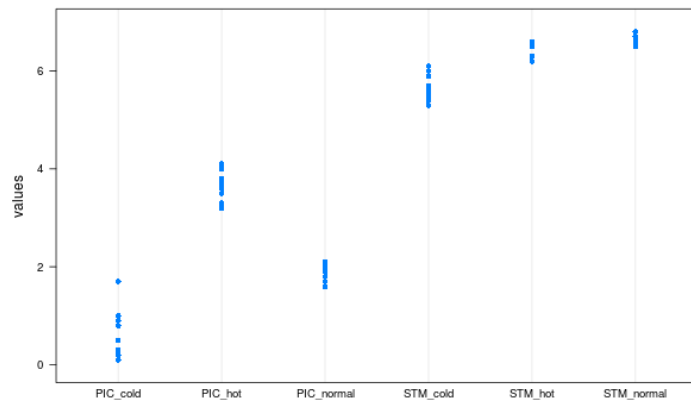


Figure 2.3: Dot Plot. Source: <http://stackoverflow.com/questions/15109822/r-creating-scatter-plot-from-data-frame>

2.2.2 Continuous Data

Univariate

Visualization of univariate continuous vectors can present the raw data, or its distribution (i.e.- discarding the indexes). The most basic visualizations are the *dotchart*, *histogram*, *boxplot*, *stem-and-leaf plot*. These are illustrated in figures 2.3, 2.4, 2.5, 2.6 respectively.

Bivariate

The simultaneous visualization of two continuous variables, can naturally be done with a *scatter plot*. More sophisticated visualization, which generalizes the histogram into two dimensions, is the *hexbin plot*. These are illustrated in figures 2.7, and 2.8, respectively.

Multivariate Data

2.2.3 On-Line Visualization

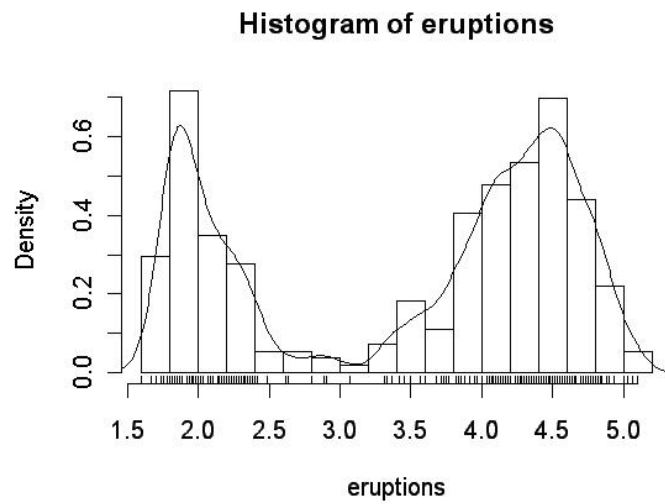


Figure 2.4: Histogram. Source: <http://compbio.pbworks.com/w/page/16252882/Basic>

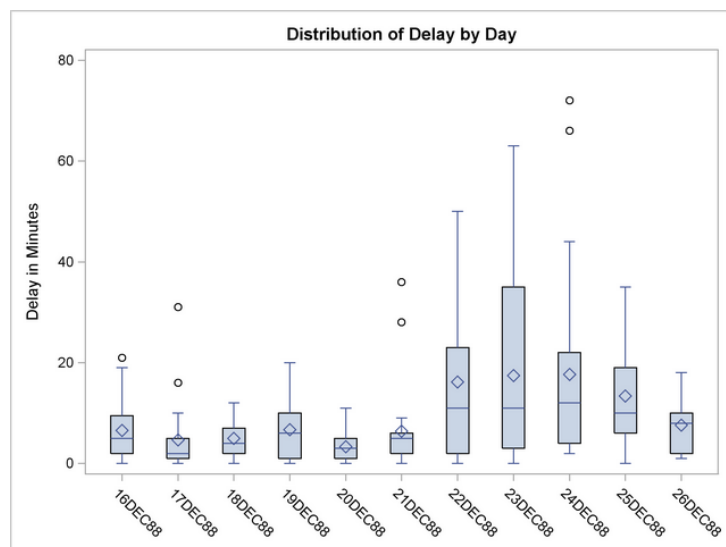


Figure 2.5: Boxplot. Source: <http://support.sas.com/documentation/cdl/en/statug/63033/HTML/default/viewer.htm>

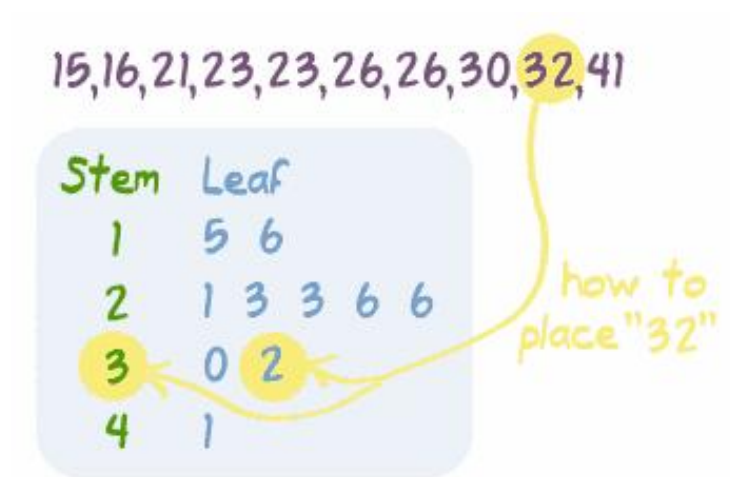


Figure 2.6: Stem-and-leaf plot. Source: <https://www.mathsisfun.com/data/stem-leaf-plots.html>

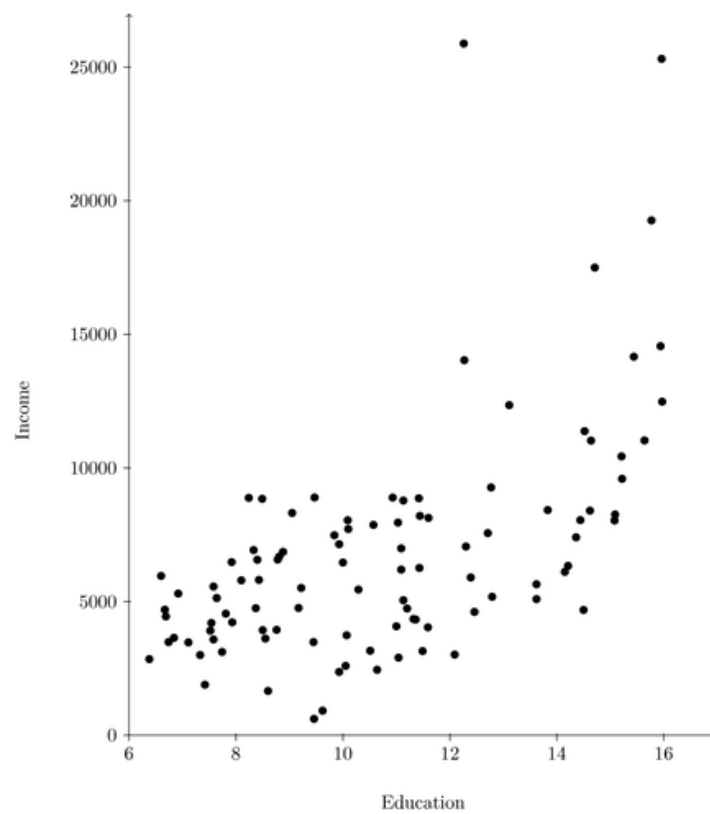


Figure 2.7: Scatter Plot. Source: <http://texample.net/tikz/examples/scatterplot/>

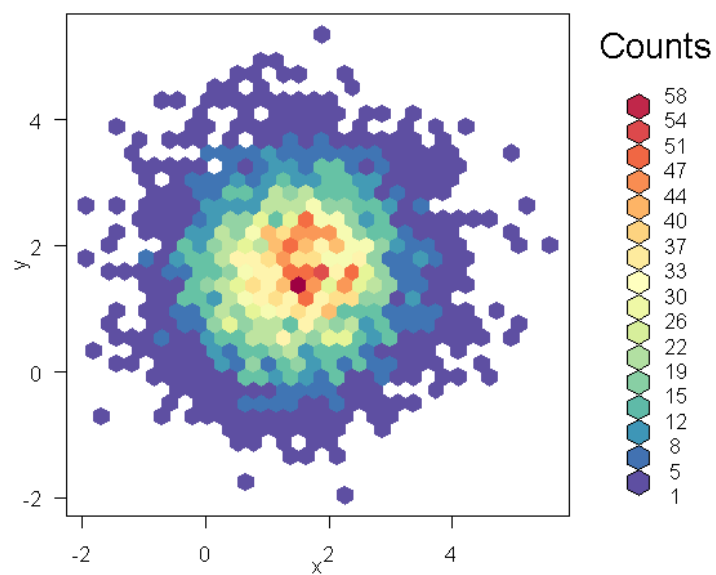


Figure 2.8: HexBin plot. Source: <http://www.r-bloggers.com/5-ways-to-do-2d-histograms-in-r/>

Chapter 3

Statistical Inference

Chapter 4

System Capability Analysis

Chapter 5

Statistical Process Control

5.1 Univariate Control Charts

5.1.1 Control Charts for Variables

5.1.2 Control Charts for Attributes

5.2 Multivariate Control Charts

5.3 Non-Statistical Target Functions

Chapter 6

Design of Experiments

Chapter 7

Acceptance Sampling

Chapter 8

Reliability

Appendix A

Notation

In this text we use the following notation conventions:

x A vector (or scalar). It is typically a column vector, but this should typically be implied from the text.

$:=$ An assignment, or definition: $A := a$ means that A is defined to be a .

$\prod_{i=1}^n$ The product operator: $\prod_{i=1}^n x_i := x_1 \times \cdots \times x_n$

$\#\{A\}$ The count operator. Returns the number of elements of the set A .
Also known as the *cardinality*.

Bibliography

- D. C. Montgomery. *Introduction to statistical quality control*. John Wiley & Sons, 2007.
- J. L. Rodgers and W. A. Nicewander. Thirteen Ways to Look at the Correlation Coefficient. *The American Statistician*, 42(1):59–66, Feb. 1988. ISSN 0003-1305. doi: 10.1080/00031305.1988.10475524. URL <http://dx.doi.org/10.1080/00031305.1988.10475524>.
- Wikipedia. *Design for Six Sigma* — *Wikipedia, The Free Encyclopedia*. 2015a. URL https://en.wikipedia.org/w/index.php?title=Design_for_Six_Sigma&oldid=683747970. [Online; accessed 29-October-2015].
- Wikipedia. *Eight dimensions of quality* — *Wikipedia, The Free Encyclopedia*. 2015b. URL https://en.wikipedia.org/w/index.php?title=Eight_dimensions_of_quality&oldid=685390671. [Online; accessed 28-October-2015].
- Wikipedia. *Lean manufacturing* — *Wikipedia, The Free Encyclopedia*. 2015c. URL https://en.wikipedia.org/w/index.php?title=Lean_manufacturing&oldid=687646421. [Online; accessed 29-October-2015].
- Wikipedia. *Quality (business)* — *Wikipedia, The Free Encyclopedia*. 2015d. URL [https://en.wikipedia.org/w/index.php?title=Quality_\(business\)&oldid=682960115](https://en.wikipedia.org/w/index.php?title=Quality_(business)&oldid=682960115). [Online; accessed 28-October-2015].
- Wikipedia. *Value engineering* — *Wikipedia, The Free Encyclopedia*. 2015e. URL https://en.wikipedia.org/w/index.php?title=Value_engineering&oldid=676994647. [Online; accessed 29-October-2015].
- Wikipedia. *Zero Defects* — *Wikipedia, The Free Encyclopedia*. 2015f. URL https://en.wikipedia.org/w/index.php?title=Zero_Defects&oldid=668207586. [Online; accessed 29-October-2015].