
BTM LH STRINGER

17 bodies / 5 unique part types / installed source positions

ASSEMBLY / ISOMETRIC

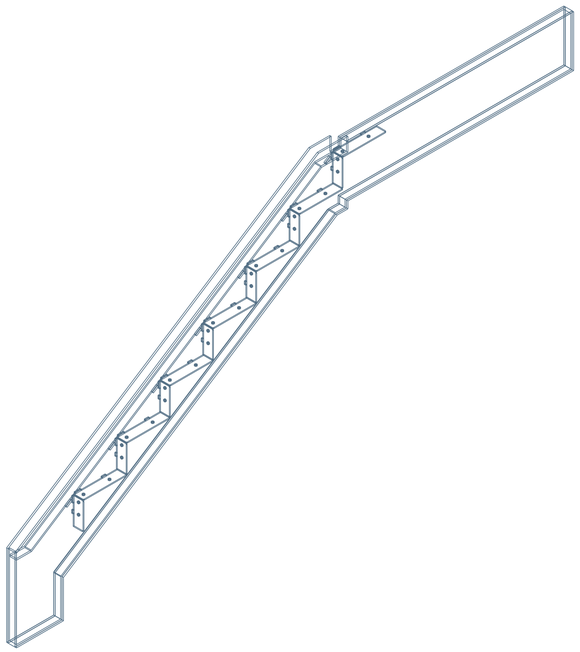

ASSEMBLY / TOP

PART SCHEDULE

One sheet per unique geometry / quantity belongs to this bucket

ITEM / DRAWING	DESCRIPTION	QTY	MAX 3D SPAN
01 / 2606-B003-P01	stringer plates LHB horiz	1	158-1/32"
02 / 2606-B003-P02	stringer plates LHB outside	1	158"
03 / 2606-B003-P03	stringer plates LHB inside	1	158"
04 / 2606-B003-P04	treadplate carriers horiz LH	7	11-11/32"
05 / 2606-B003-P05	treadplate carriers vert LH	7	7-1/4"

DRAWING REFERENCES

END A: length origin. EDGE C: marked transverse edge.

Assembly includes context hardware/vendor parts; schedule lists fabricated metal parts only.

Each row/section includes size and two corner-location dimensions.

Native October 26 thread / release specifications are not supplied; geometry is model-derived.

Perfect bodies, clean mesh source data and actual seams.

Material, finish and manufacturing tolerances require job release data.

CALIPER / 2606


BTM LH STRINGER

2606-B003-P01-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB horiz / COMPLETE PROFILE


body-0546 / QTY 1 / NORMAL DEPTH 1-3/4" / INCHES

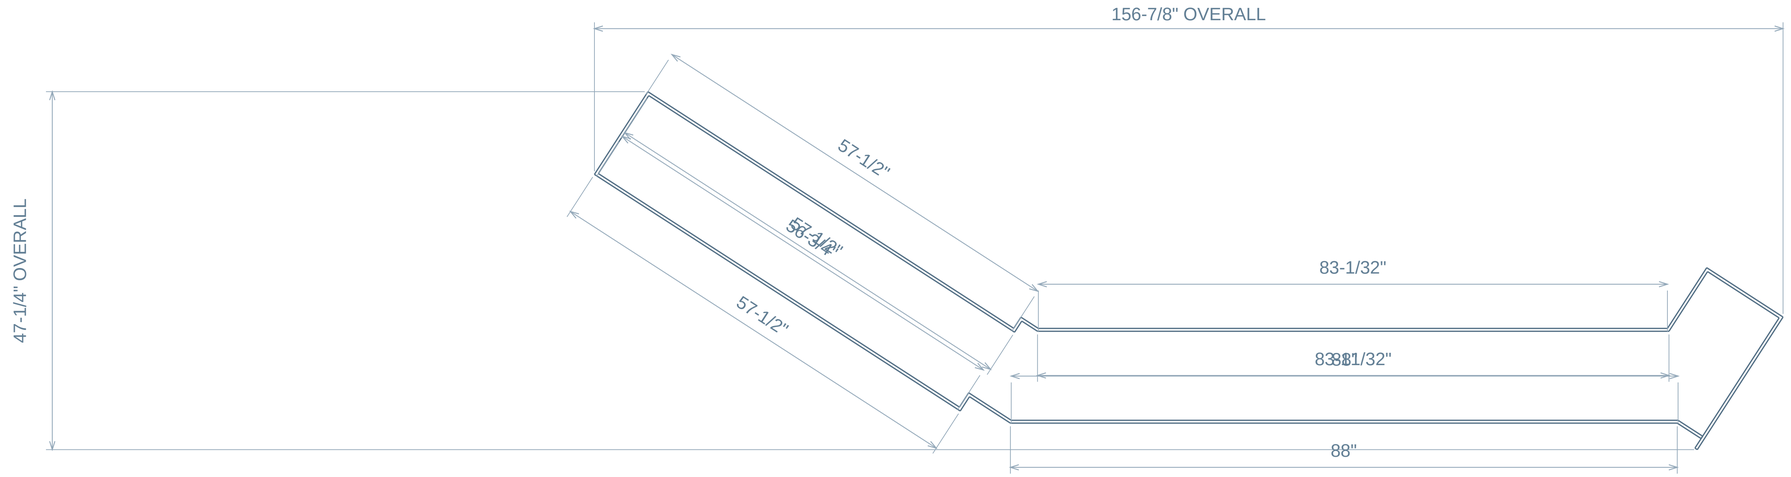


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

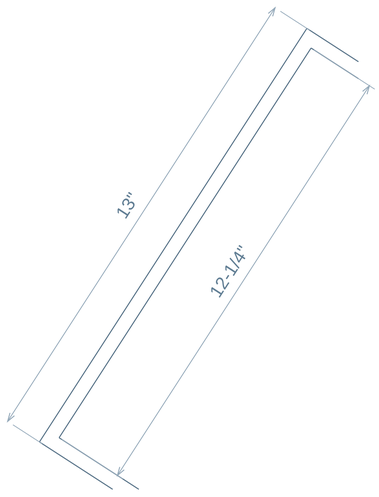

DETAIL 2 / CONNECTED OUTLINE / 1:3

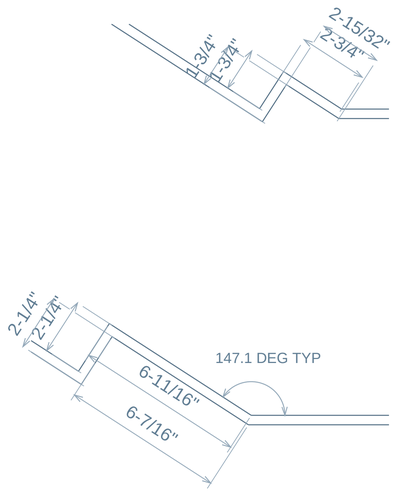

DETAIL 3 / CONNECTED OUTLINE / 1:4

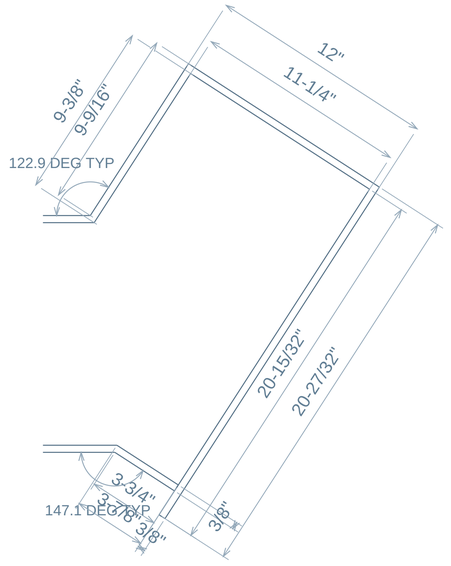

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM LH STRINGER

2606-B003-P02-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB outside / COMPLETE PROFILE


body-0547 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

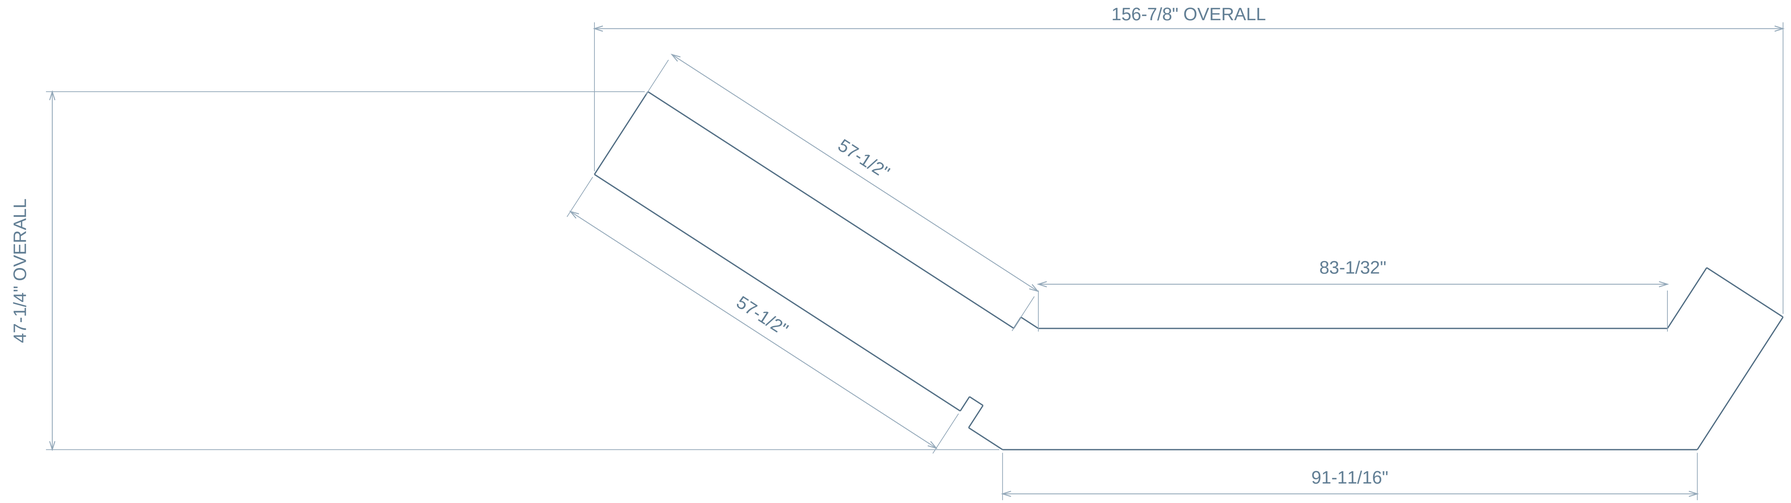


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

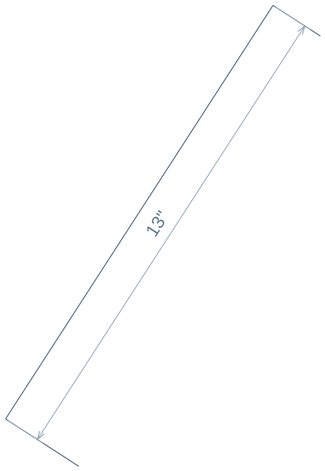

DETAIL 2 / CONNECTED OUTLINE / 1:3

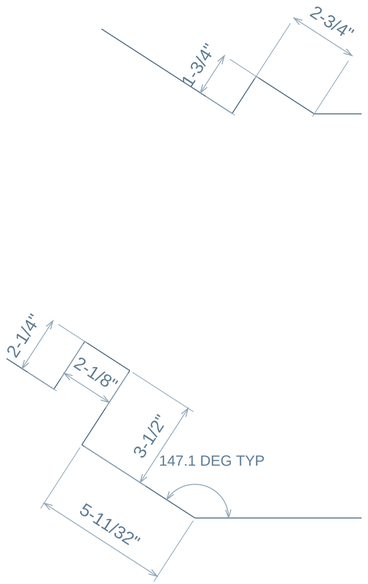

DETAIL 3 / CONNECTED OUTLINE / 1:4

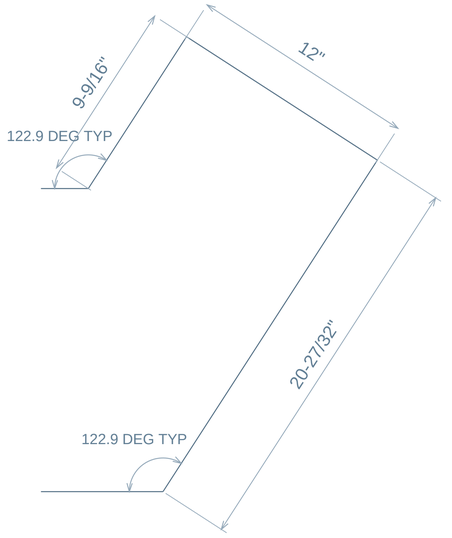

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

CALIPER / 2606


BTM LH STRINGER

2606-B003-P03-R08 / 1

REVIEW 08 / 2026-10-26

stringer plates LHB inside / COMPLETE PROFILE


body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

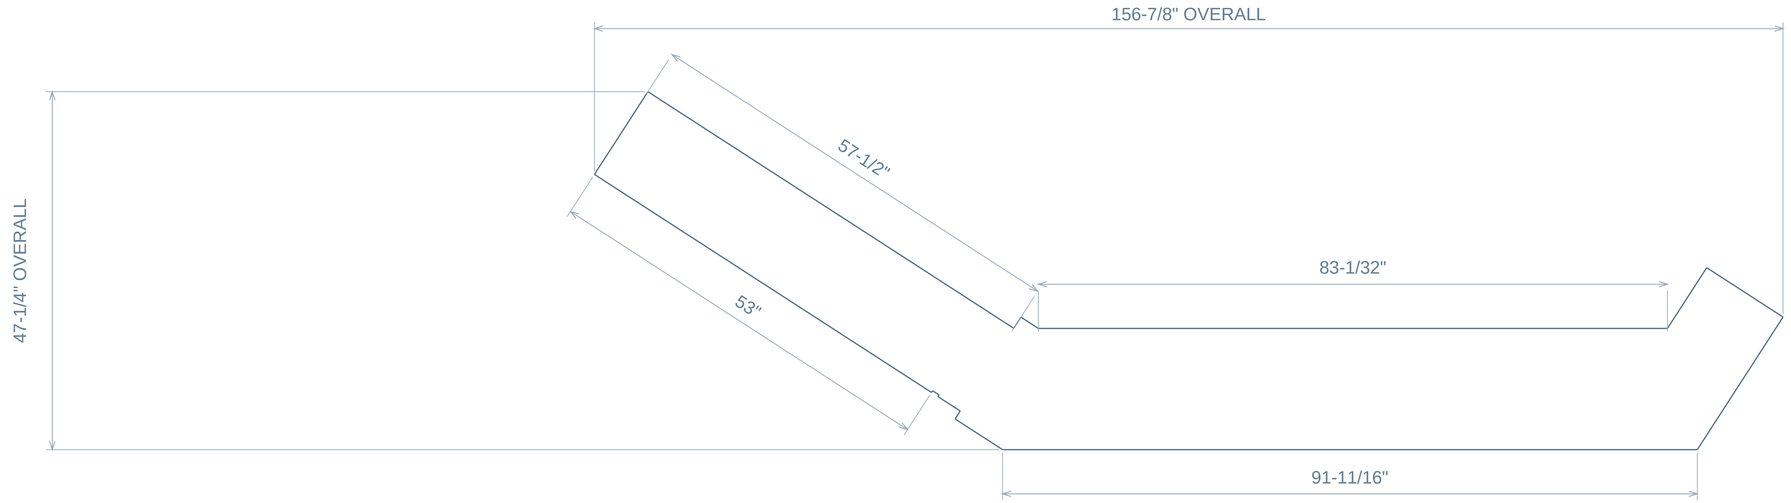


END A / U = 0 AT LEFTMOST MATERIAL

END B


DETAIL 1 / CONNECTED OUTLINE / 1:2

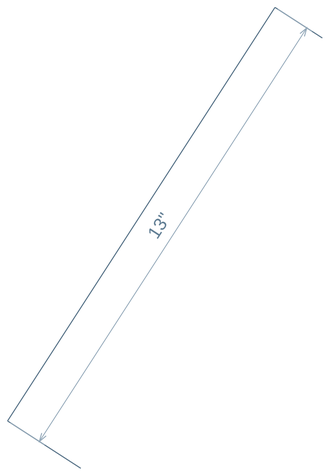

DETAIL 2 / CONNECTED OUTLINE / 1:3

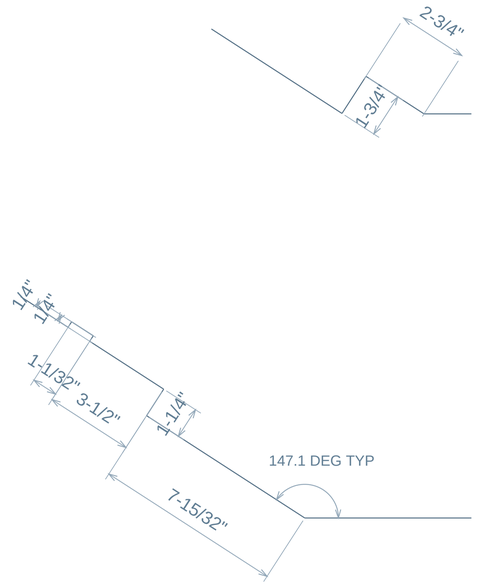

DETAIL 3 / CONNECTED OUTLINE / 1:4

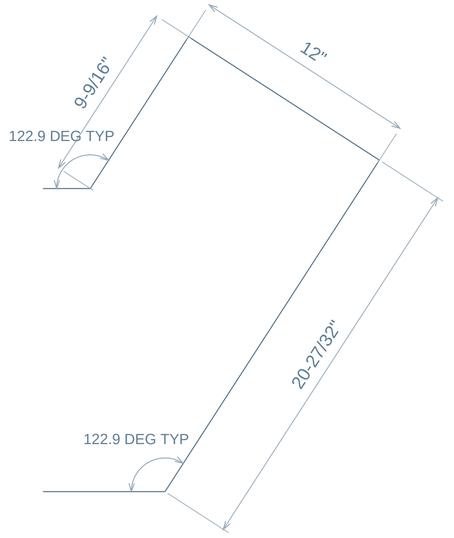

FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG


stringer plates LHB inside / FEATURE LOCATIONS / FIRST INSTANCE AND VERIFIED REPEATS

body-0548 / QTY 1 / NORMAL DEPTH 3/8" / INCHES

DATUM A: U=0 AT FIRST MATERIAL / C: PHYSICAL EDGE AT V=0.00000" / SAME TRUE-FACE FRAME AS PROFILE

F1 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

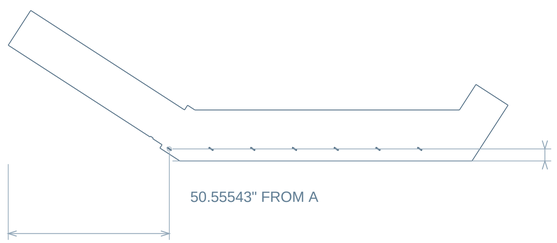




LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.78038" FROM C

F2 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

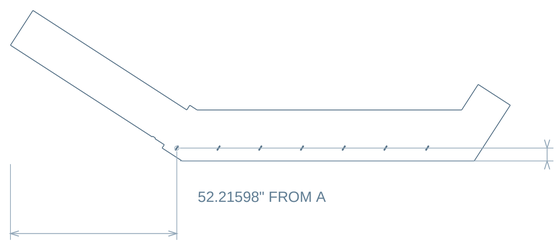




LONG AXIS 57.1 DEG CCW FROM +U


DEPTH 3/8" THROUGH PLATE

4.04626" FROM C

F3 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

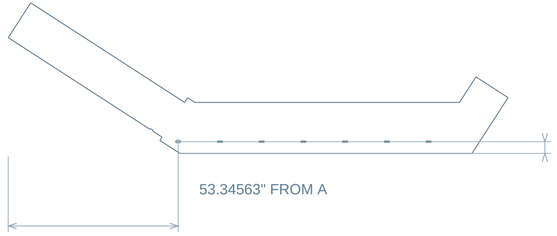




LONG AXIS 0.0 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

3.68750" FROM C

F4 / 7 RECTANGULAR THROUGH SLOTS

6 SPACES @ 13.09976" ALONG +U

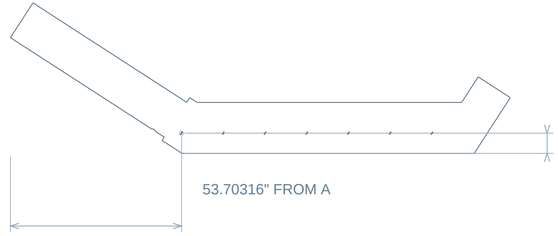




LONG AXIS 57.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

6.34592" FROM C

F5 / 6 RECTANGULAR THROUGH SLOTS

5 SPACES @ 13.09976" ALONG +U

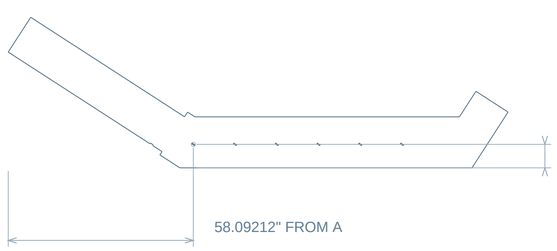



LONG AXIS 147.1 DEG CCW FROM +U

DEPTH 3/8" THROUGH PLATE

7.37799" FROM C


FRACTIONS NEAREST 1/32 / ANGLES 0.1 DEG / DECIMAL PATTERNS PRESERVE SOURCE LOCATIONS / DO NOT SCALE

ARCS: SMALLER INCLUDED ANGLE OF ADJACENT EDGES / UNMARKED ORTHOGONAL CORNERS 90 DEG

treadplate carriers horiz LH

body-0549 | QTY 7 IN BTM LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

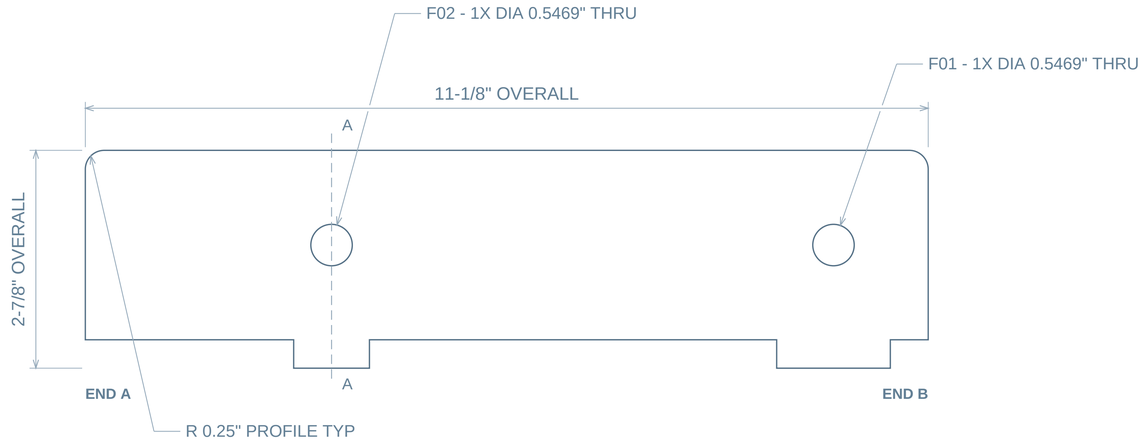

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

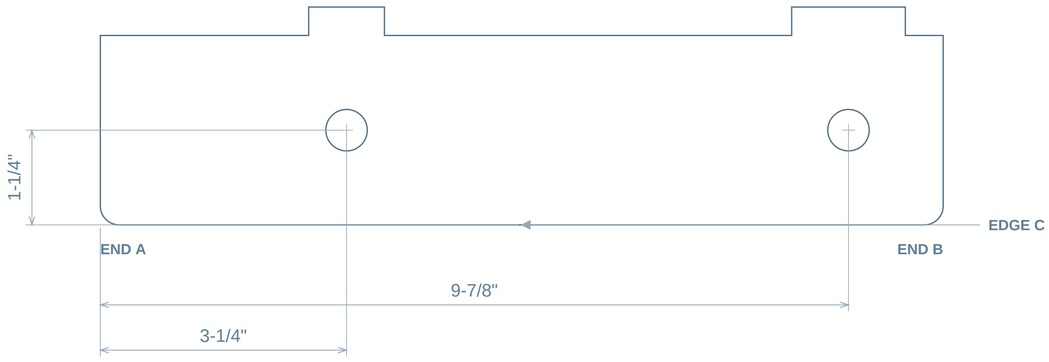


04 / SECTION A-A

X = 3-1/4" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

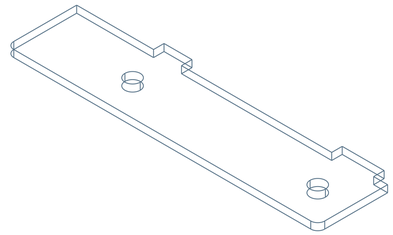

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.


Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.

treadplate carriers vert LH

body-0550 | QTY 7 IN BTM LH STRINGER | INCHES | TOP / FRONT / BOTTOM SCALE 1:1


01 / TOP - FACE A

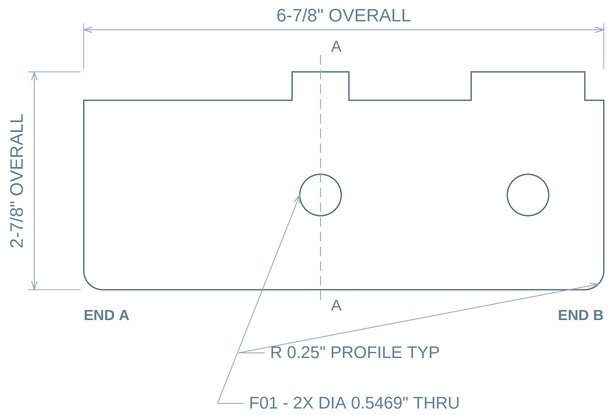

02 / FRONT - EDGE VIEW




03 / BOTTOM - FACE B

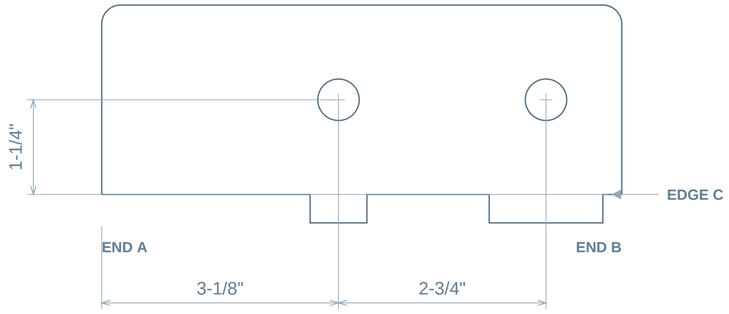


04 / SECTION A-A

X = 3-1/8" FROM END A



SECTION SCALE 1:1

05 / ISOMETRIC

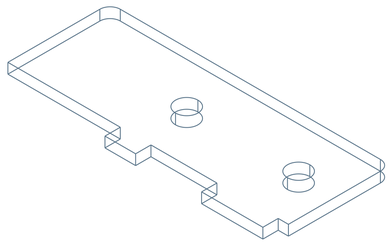

ISOMETRIC REFERENCE / NTS

FEATURE / DATUM NOTES

HOLES / SLOTS LOCATED ON FACE B

X: FROM END A / Y: FROM EDGE C

Dimensions are to feature centers.

Shared columns use one X chain.

Equal row spacing is counted once.

DATUM / REVIEW

END A is the left material extent in both face views.

EDGE C is marked on the bottom face view.

Fractions to 1/32; exact feature sizes/pitches as needed.

GEOMETRY REVIEW: spline chord error <0.00001 in where recorded; no native thread specifications supplied.