stair asm body 12 / SLOT LAYOUT

40 RECTANGULAR SLOTS / 5 TYPES x 8 INSTANCES / ALL THRU 3/8 PLATE / SEE SHEET 1 FOR THE EDGE NOTCH

VERIFIED REPEAT

8 bays / 5 slots per bay

U runs parallel to the long straight edges.

Datum A: U = 0 at the leftmost material.

Edge C: actual lower long edge, V = 0.

First instances are dimensioned below.

Pitch is decimal to preserve all stations.

01 / ALL 40 SLOTS / TRUE FACE / SCALE 1:6

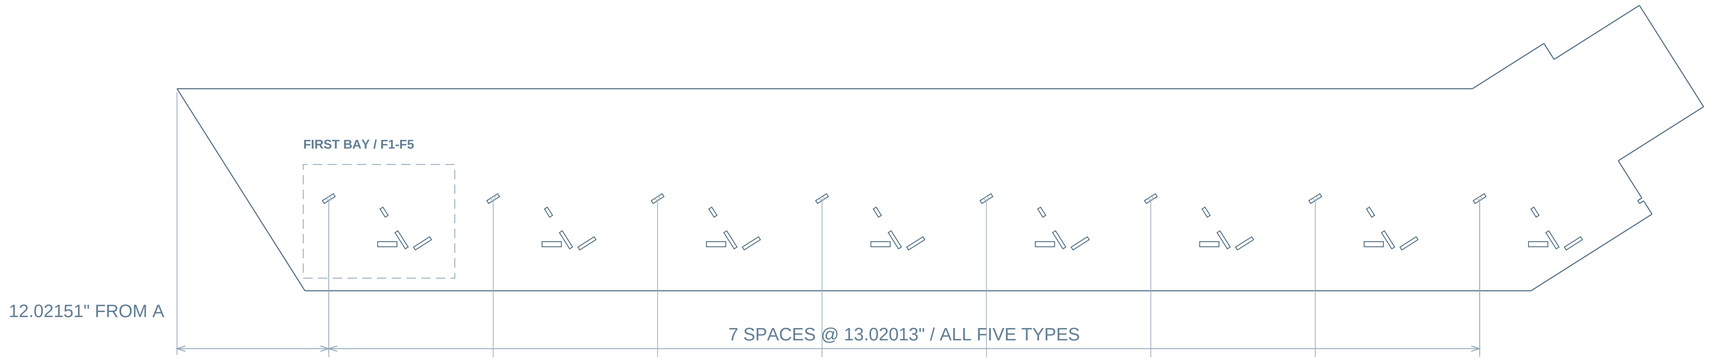

F1 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 12.02151" / V 7.29678" / LOCATION VIEW 1:8

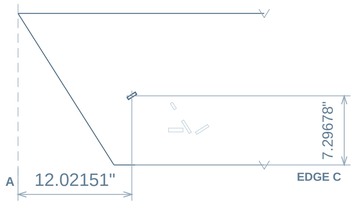

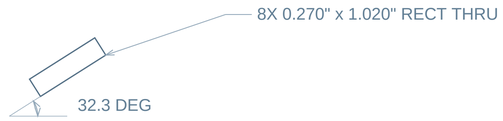

LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

F2 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.40043" / V 6.22294" / LOCATION VIEW 1:8

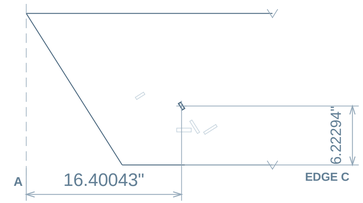

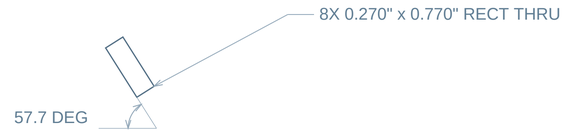

LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F3 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 16.65543" / V 3.68750" / LOCATION VIEW 1:8

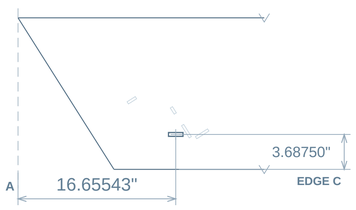

LONG AXIS 0.0 DEG CCW FROM +U / SIZE VIEW 1:1

F4 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 17.78660" / V 4.03402" / LOCATION VIEW 1:8

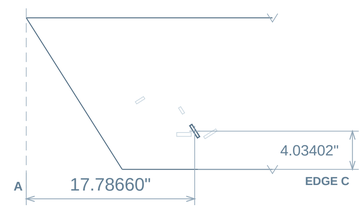

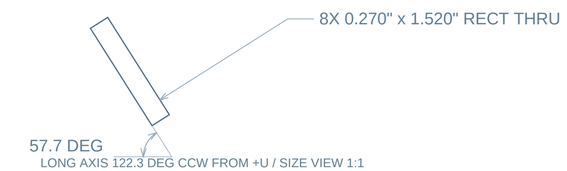

LONG AXIS 122.3 DEG CCW FROM +U / SIZE VIEW 1:1

F5 / FIRST INSTANCE + 7 REPEATS

MODEL CENTER U 19.44454" / V 3.75233" / LOCATION VIEW 1:8

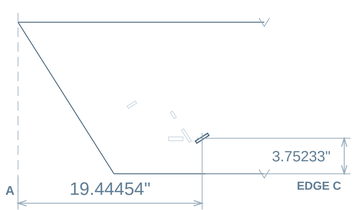

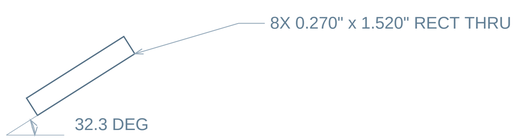

LONG AXIS 32.3 DEG CCW FROM +U / SIZE VIEW 1:1

PROFILE FRACTIONS NEAREST 1/32 / SLOT CENTERS AND REPEAT PITCH RETAINED AS DECIMALS / ANGLES 0.1 DEG

COMMON U/V DATUMS ON EVERY VIEW / ARCS SHOW ACUTE LINE INCLINATION / CCW LONG-AXIS ORIENTATION IS LABELED.