CE TÜVRheinland® Precisely Right.

SKYWORTH
Your Best Friend of Energy-Saving Solutions

Revolutionary BC Module

BC Module-72

650-685W

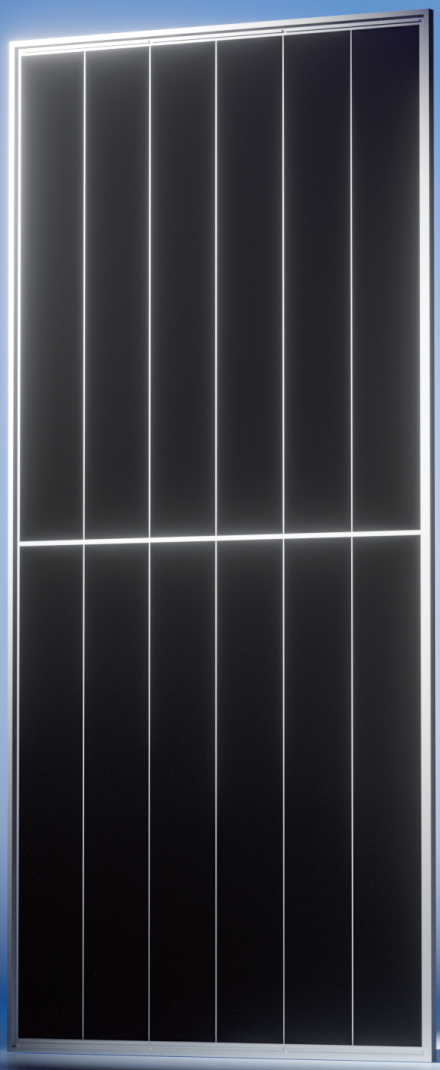

- Partial Shading Optimisation
- Better Temperature Coefficient
- High Temperature Restriction
- Micro-crack Resistance
- Higher Power
- Lower BOS
- More Aesthetic Values
- Shingled Technology
- Durability Against Extreme Environmental Conditions

All Rights Reserved @Shenzhen SKYWORTH Photovoltaic Technology Co., LTD.
Please refer to the latest version for any updates.

Electrical Characteristics

Module Type	QM192 AFCD-650-72	QM192 AFCD-655-72	QM192 AFCD-660-72	QM192 AFCD-665-72	QM192 AFCD-670-72	QM192 AFCD-675-72	QM192 AFCD-680-72	QM192 AFCD-685-72
	STC	STC	STC	STC	STC	STC	STC	STC
Maximum Power[W]	650	655	660	665	670	675	680	685
Maximum Power Voltage[V]	45.30	45.40	45.50	45.60	45.70	45.80	45.90	46.00
Maximum Power Current[A]	14.35	14.43	14.51	14.59	14.67	14.74	14.82	14.90
Open circuit voltage[V]	54.00	54.10	54.20	54.40	54.60	54.80	55.00	55.20
Short Circuit Current[A]	15.06	15.12	15.18	15.24	15.30	15.36	15.42	15.48
Module Efficiency	**24.1%**	**24.2%**	**24.4%**	**24.6%**	**24.8%**	**25.0%**	**25.2%**	**25.4%**
Operating Temperature	-40℃~+70℃							
Maximum System Voltage	DC 1500V							
Maximum Series Fuse Rating	30A							
Power Tolerance[W]	0~+3%							
Voc Temperature Coefficient	-0.22%/℃							
Pmax Temperature Coefficient	-0.26%/℃							
Isc Temperature Coefficient	0.05%/℃							
Nominal Opearting Cell Temperature	45±2℃							

Technical drawing

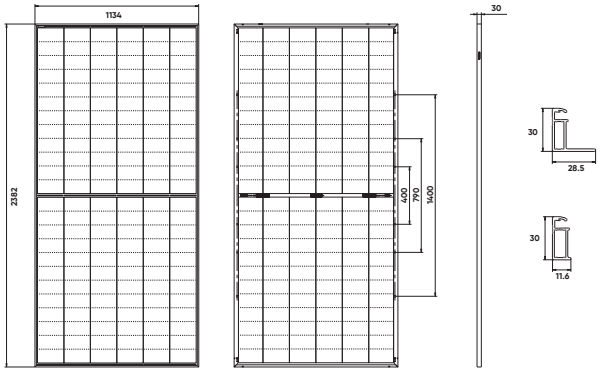

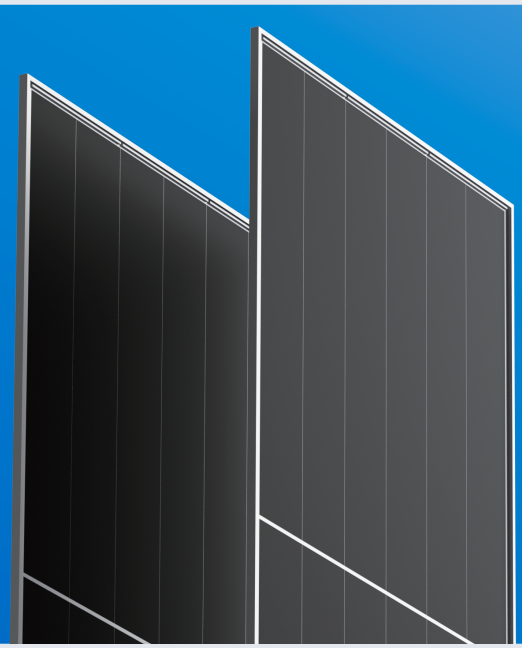

Mechanical Specifications

Solar Cells	144(72x2)
Dimension	2382x1134x30mm
Weight	32.2kg
Front Glass	2.0mm AR coated heat strengthened-Glass
Back Glass	2.0mm heat strengthened-Glass
Frame	Anodized aluminium alloy
Junction Box	IP68 / 3 diodes
Output Cables	4mm²(IEC),+400mm/-200mm or customized
Connector	MC4/EVO2/Others
Bifaciality	80%±5%

Linear Performace Warranty

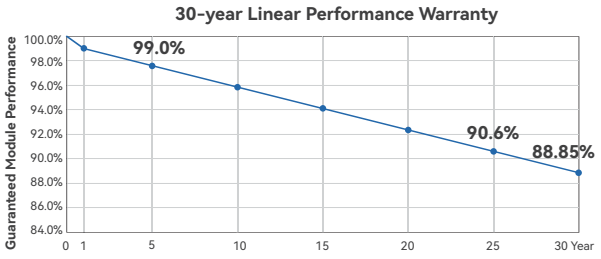

Level

Fire Performance	A
Security Protection	Class II

Packing Configuration

Pallet	36pcs/Pallet
Container	720pcs/40HQ Container

SKYWORTH
Your Best Friend of Energy-Saving Solutions

Global-V1.04-2026EN

Tel: 400-063-8989
Email: solar.overseas@skyworth.com
Web: www.skyworth-pv.com
Add: Room No.0801, C Block, 5th Building, HuaQiang Creative Park, Guangming Street, Guangming District, Shenzhen