

Distributed Inventory System

Project Distributed Systems

for the

Master of Science

from the Course of Studies Computer Science

at the Cooperative State University Baden-Württemberg University of Stuttgart

by

Luca Schwarz,

15.11. 2023

Due Date

12.06.-11.09.2023

Student ID

3731224,

Reviewer

Marco Aiello

Gender-Hinweis

The Project Distributed Systems on hand

Distributed Inventory System

contains internal resp. confidential data of . It is intended solely for inspection by the assigned examiner, the head of the Computer Science department and, if necessary, the Audit Committee at the Cooperative State University Baden-Württemberg University of Stuttgart. It is strictly forbidden

- to distribute the content of this paper (including data, figures, tables, charts etc.) as a whole or in extracts,
- to make copies or transcripts of this paper or of parts of it,
- to display this paper or make it available in digital, electronic or virtual form.

Exceptional cases may be considered through permission granted in written form by the author and .

Author's declaration

Hereby I solemnly declare:

1. that this Project Distributed Systems, titled *Distributed Inventory System* is entirely the product of my own scholarly work, unless otherwise indicated in the text or references, or acknowledged below;
2. I have indicated the thoughts adopted directly or indirectly from other sources at the appropriate places within the document;
3. this Project Distributed Systems has not been submitted either in whole or part, for a degree at this or any other university or institution;
4. I have not published this Project Distributed Systems in the past;
5. the printed version is equivalent to the submitted electronic one.

I am aware that a dishonest declaration will entail legal consequences.

Stuttgart, 15.11. 2023

Luca Schwarz,

Zusammenfassung

Abstract

Contents

Acronyms	VI
List of Figures	VII
List of Tables	VIII
Quellcodeverzeichnis	IX
1 Introduction	1
2 Project Requirement Analysis	2
2.1 Architectural Description	2
2.2 Dynamic Discovery of Hosts	2
2.3 Fault Tolerance	2
2.4 Leader Election	3
2.5 Ordered Reliable Multicast	3

Acronyms

List of Figures

2.1	Architecture Diagram	3
-----	--------------------------------	---

List of Tables

Quellcodeverzeichnis

1 Introduction

As part of the course project an inventory system shall be developed. The system will be a client server architecture where the servers are responsible to keep the data and process updates regarding goods and stock information. The clients can request the currently available goods and the amount and send update information if new goods are available or if goods are taken out of stock. For the updates it's important to ensure strong consistency and ordering of events such that all clients have the current information. Within the servers it shall be possible to add additional nodes to the system dynamically and to handle different failure cases while still being able to process requests.

2 Project Requirement Analysis

2.1 Architectural Description

Client-Server Architecture: Our system will adopt a client-server model, which consists of multiple clients interfacing with a cluster of server nodes. The clients are responsible for querying current stock levels and submitting updates for processing. The server nodes serve these stock level requests and manage inventory updates. Amongst the server nodes, a leader will be elected to coordinate updates and ensure consistency across the distributed system.

2.2 Dynamic Discovery of Hosts

Server-side: Upon initiation, each server node will broadcast its presence and listen for existing members of the system to construct a current view of the cluster. This dynamic discovery protocol allows the system to scale horizontally without manual configuration.

Client-side: Clients are designed to automatically detect server nodes in the system. This enables seamless interaction with the inventory system, ensuring that clients can always locate a server node to process their requests.

2.3 Fault Tolerance

Our system is engineered to handle different types of failures, ensuring continuous operation:

Leader Failure: If the current leader server fails, the remaining servers will initiate a leader election to select a new leader. This ensures that the system continues to process updates without significant downtime.

Server Crash: In the event of a server crash, client requests are automatically redirected to other operational server nodes. A health check mechanism and a server list update protocol ensure that clients and servers are aware of the available nodes in real-time.

Retry Logic: To handle transient failures, the system will implement a retry mechanism. This ensures that, for instance, during a purchase processing, if a write operation fails, the system will retry the operation. We will have a limit to prevent excessive retries that could overwhelm the system, allowing it to fail and recover.

2.4 Leader Election

Consensus on Updates: Write operations, critical for inventory synchronisation, are managed by the leader node. The system ensures a robust leader election process through the use of heartbeats. If the leader fails to send heartbeats within a specified interval, it is presumed to have failed, triggering a new election.

2.5 Ordered Reliable Multicast

Our system uses FIFO ordered reliable multicast to ensure inventory updates, like purchases or deletions, are processed sequentially, maintaining data consistency and preventing access to outdated item statuses.

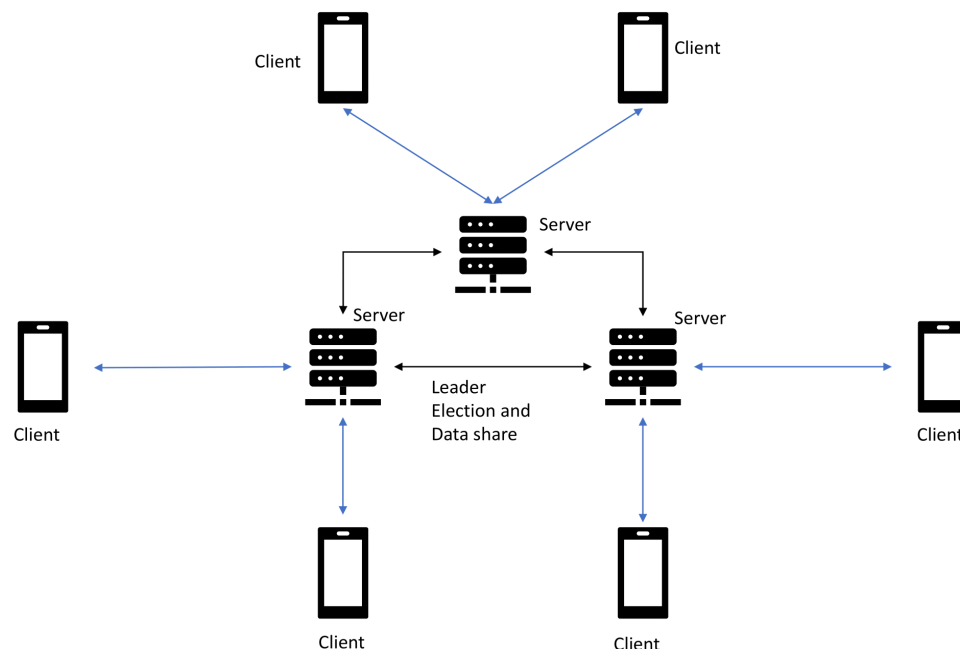


Figure 2.1: Architecture Diagram