


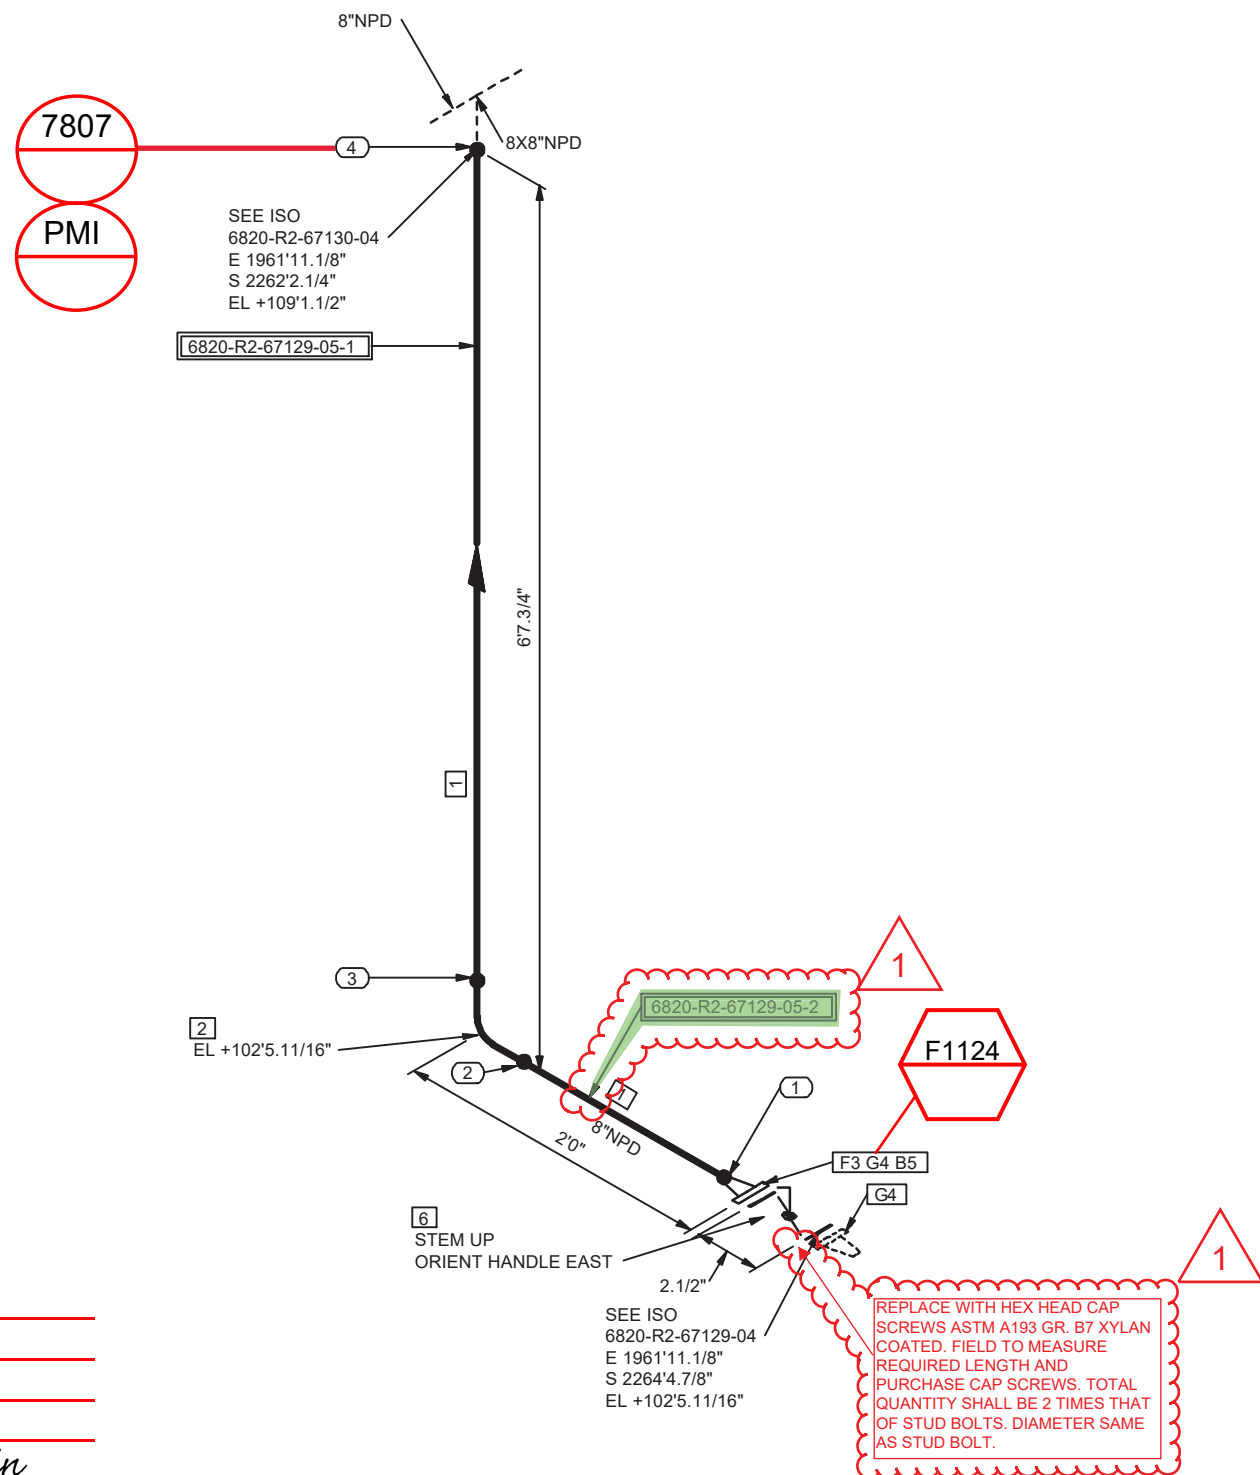

Filler Material Requisition

Date: 3-27-25
Line Class: EPCL-SS01
WPS: 802
Electrode: ER308L
Signature: Pedro Morin

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

1	2025-03-21	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
0	2024-07-25	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	BRD	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	8	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP304L, BE, -, -, S-10S	C7FCT25	6.4 '
2	8	90° Elb LR, Seamless, ASME B16.9, ASTM A403 Gr.WP304L, BW Ends, -, Annealed, S-10S	C6SEUJRF	1
3	8	WN Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/BW End, Annealed, S-10S	C7W2U6T4	1

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
4	8	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C7CT1ZG2	2
5	3/4	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 7.25 in. Length	C6S4K8BR	8
6	8	But Waf, API 609 Cat.B, ASTM A351 Gr.CF8M, 150 Lbs, Lug-type RF, Ends as per ASME B16.5, GO, -, Valve Tag: BU-1191	C8PLE444	1

PIECE MARKS

6820-R2-67129-05-1
6820-R2-67129-05-2
1

Turner Industries Group, LLC
Received
MARCH 27, 2025
DOCUMENT CONTROL

SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -		
 OxyChem Redstone Battleground PROJECT				P&ID: 202998C-001-PID-0021-0329					
				UNIT#: 6800		EWP AREA: 6820		SPEC: EPCL-SS01	
								STRESS CALC #: CN-0404	
				LINE No. 8"-R2-67129-EPCL-SS01-H					
				DRAWING NUMBER 6820-R2-67129-05					
				REV: 1					

