


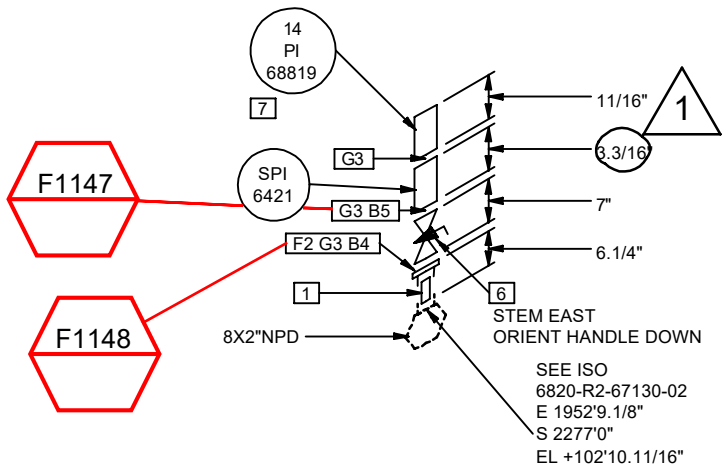

Filler Material Requisition

Date: 3-12-25

Line Class: EPCL-SS01

WPS: N/A

Electrode: N/A

Signature: *Glenn Sumrall Jr*

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFWD DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

| REV | DATE       | BY  | DESCRIPTION             | CHKD | MTO | STRESS | APRVD |
|-----|------------|-----|-------------------------|------|-----|--------|-------|
| 1   | 2025-03-07 | RVA | ISSUED FOR CONSTRUCTION | SAD  | KJK | SMR    | GR    |
| 0   | 2024-07-25 | RVA | ISSUED FOR CONSTRUCTION | SAD  | KJK | BRD    | GR    |

| OTHER THAN SHOP MATERIALS |     |                                                                                                                                             |             |     |
|---------------------------|-----|---------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----|
| NO                        | NPD | DESCRIPTION                                                                                                                                 | IDENT       | QTY |
| 1                         | 2   | Nipple, ASTM A312 Gr.TP304L, NPTM Ends, L = 6in, -, S-80S                                                                                   | CF5AB9Z     | 1   |
| 2                         | 2   | THD Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/NPTF End, Annealed,                                                                    | C7W2U48P    | 1   |
| 3                         | 2   | NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,                                             | C7CT1ZFS    | 3   |
| 4                         | 5/8 | SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.5 in. Length                                                                 | C6S4K88R    | 4   |
| 5                         | 5/8 | SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 6.75 in Length                                                                 | C6S4K894    | 4   |
| 6                         | 2   | Plug Flg, SP, Tapered Plug, Non Lubricated, API 599, ASTM A351 Gr.CF8M, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0548 | C6SDVYKZ    | 1   |
| INSTRUMENTS               |     |                                                                                                                                             |             |     |
| 7                         | 2   | 14-PI-68819                                                                                                                                 | 14-PI-68819 | 1   |



|                                       |                 |                     |                    |                                  |                 |                     |                        |
|---------------------------------------|-----------------|---------------------|--------------------|----------------------------------|-----------------|---------------------|------------------------|
| SERVICE: R2                           | VAPOR/LIQUID: L | INSUL TYPE: Per LDT | INSUL THK: Per LDT | SHOP: N                          | FIELD: Y        | PAINT CODE: Per LDT | MODULE: -              |
|                                       |                 |                     |                    | P&ID: 202998C-001-PID-0021-0329  |                 |                     |                        |
|                                       |                 |                     |                    | UNIT#: 6800                      | EWPA AREA: 6820 | SPEC: EPCL-SS01     | STRESS CALC #: CN-0404 |
|                                       |                 |                     |                    | LINE No. 2"-R2-67130-EPCL-SS01-H |                 |                     |                        |
| OxyChem Redstone Battleground PROJECT |                 |                     |                    | DRAWING NUMBER 6820-R2-67130-09  |                 |                     | REV. 1                 |

