




Filler Material Requisition
Date: 3-27-25
Line Class: EPCL-SS01
WPS: 802
Electrode: ER308L
Signature: *Pedro Morin*

COORDINATE SYSTEM : PLANTCOORDINATES

- NOTES:
- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
 - FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
 - FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
 - FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
 - ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
 - FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
 - REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.

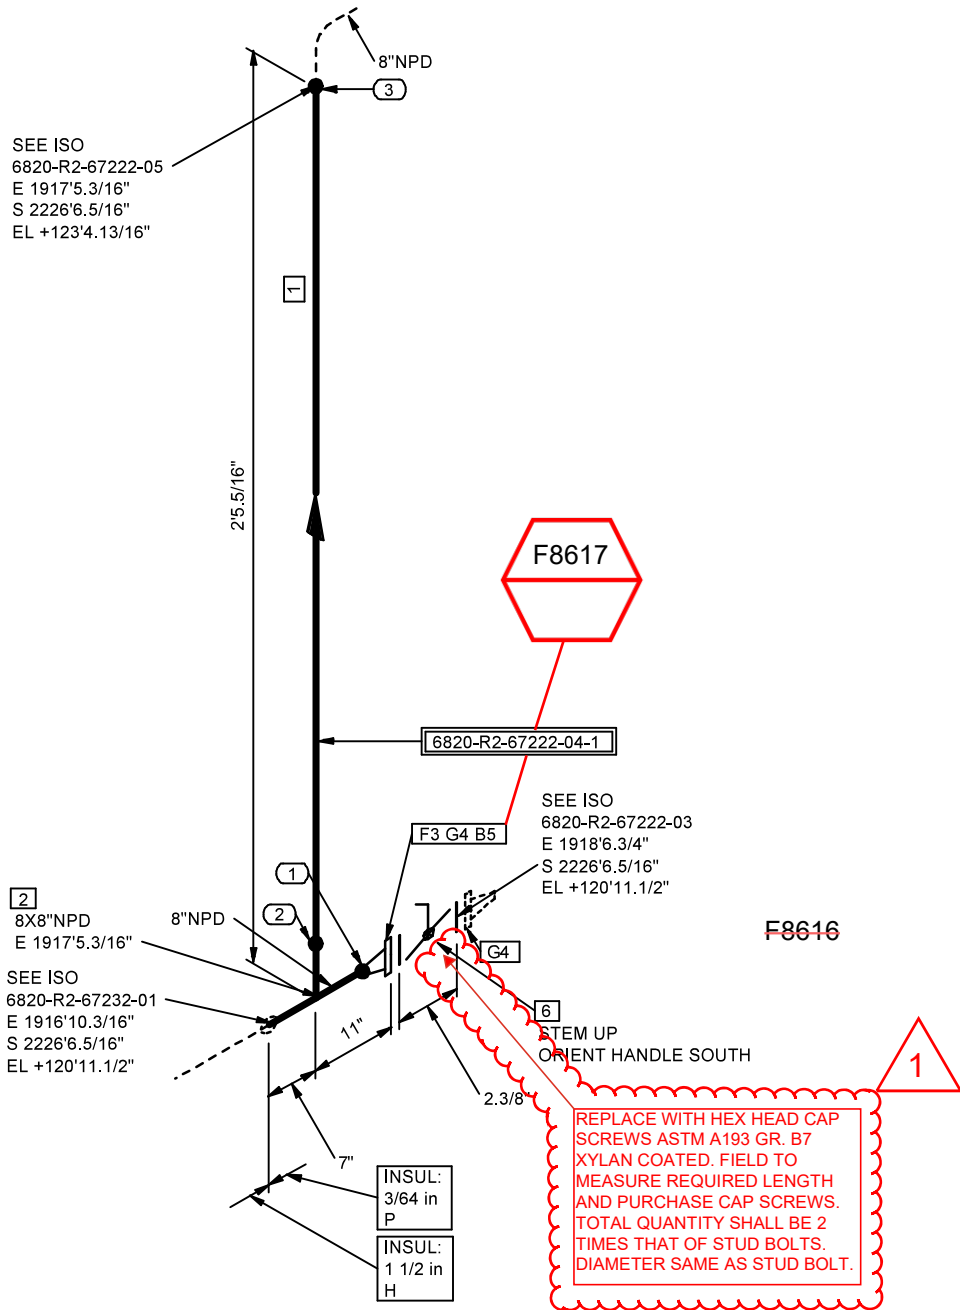

Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

1	2025-03-21	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
0	2024-09-14	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	8	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP304L, BE, -, -, S-10S	C7FCT25	1.9'
2	8X8	Eq Te, Seamless, ASME B16.9, ASTM A403 Gr.WP304L, BW Ends, -, Annealed, S-10S	C6SEUJ1B	1
3	8	WN Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/BW End, Annealed, S-10S	C7W2U6T4	1

OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
4	8	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -	C7CT1ZG2	2
5	3/4	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 7 in. Length	C6S4K8BP	8
6	8	But Waf, API 609 Cat.A, ASTM A395 Gr.60-40-18 PFA Lined, 150 Lbs, Lug-type RF, Ends as per ASME B16.5, GO, -, Valve Tag: BU-0696	C76KHSRM	1

PIECE MARKS
6820-R2-67222-04-1



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				P&ID: 202998C-001-PID-0021-0331			
				UNIT#: 6800	LEWP AREA: 6820	SPEC: EPCL-SS01	STRESS CALC #: -
				LINE No. 8"-R2-67222-EPCL-SS01-P			
				DRAWING NUMBER 6820-R2-67222-04			
OxyChem Redstone Battleground PROJECT				REV. 1			

