
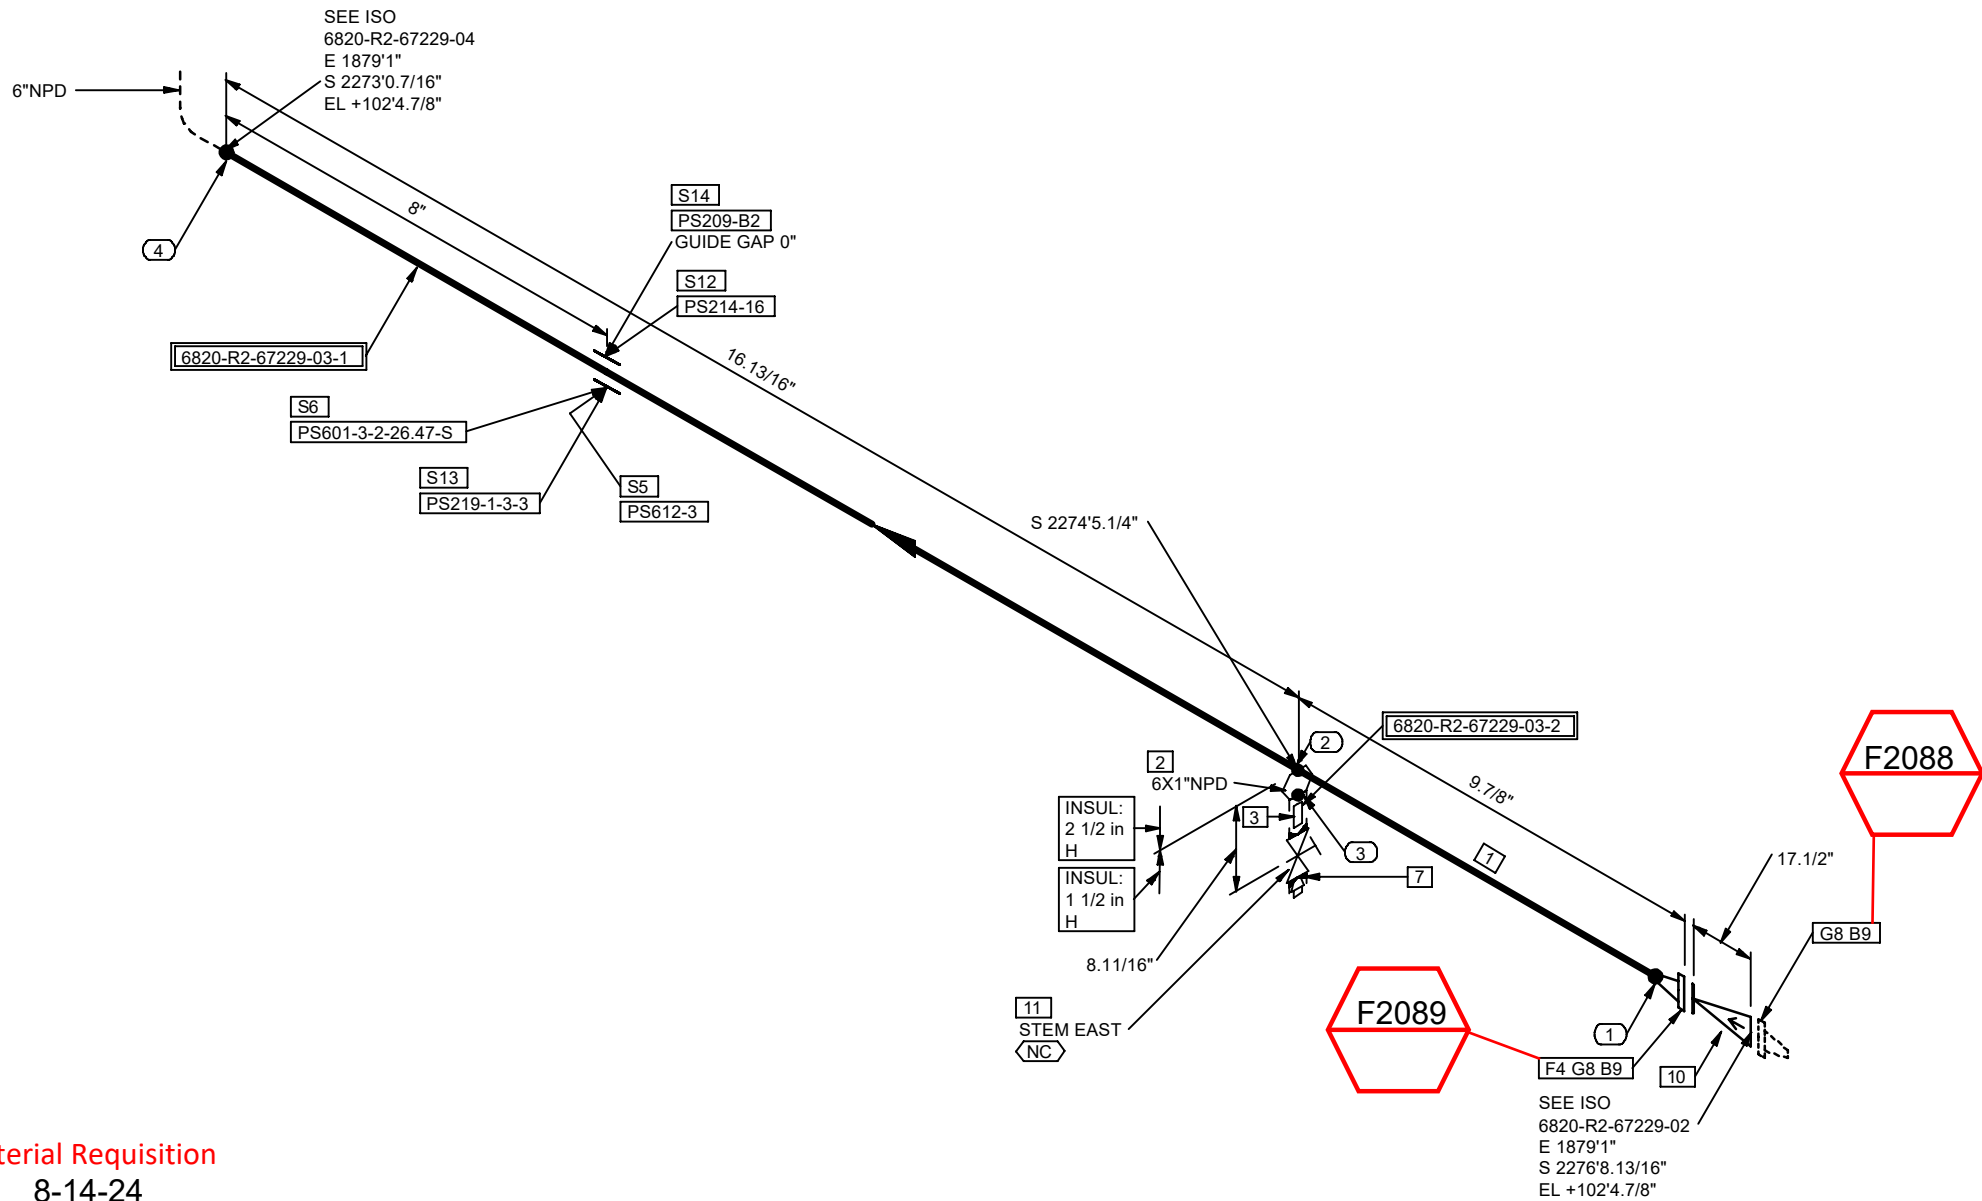




Filler Material Requisition
Date: 8-14-24
Line Class: SCXL-CS02
WPS: 10245
Electrode: ER70S-2
Signature: *Glenn Sumrall Jr*

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2024-08-09	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR		
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD		

SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	6	Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B, BE, -, -, S-STD	CPP00336	2.0
2	6X1	Socket, ASTM A105N, 3000 Lbs, SW Ends, -, -	CYU3EY	1
3	1	Nipple, ASTM A106 Gr.B, PE/NPTM End, L = 3in, -, S-XS	C12GGPTC	1
4	6	WN Flg, ASME B16.5, ASTM A105N, 300 Lbs, RF/BW End, -, S-STD	CFG6WKU7	1

PIPE SUPPORTS

5	6	PS612-3	PS612	1
6	6	PS601-3-2-26.47-S	PS601	1

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
7	1	Plug, Solid Round Head Type, ASME B16.11, ASTM A105N, NPTM End, -, -	CBBPLK4	1
8	6	NM Flat Gk, Barium Sulfate filled PTFE, 300 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -, SBlit 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 5 in. Length	C7CX7CST	2
9	3/4	SwgChk Flg, API 594, ASTM A216 Gr.WCB, 300 Lbs, RF, Ends as per ASME B16.5, -, Valve Tag: CH-1193	C6S4K8BF	24
10	6	Gat Fem, API 602, ASTM A105N, 800 Lbs, NPTF Ends, HO, -, Valve Tag: GA-0120	C99ZZ9E8	1
11	1		C76SPABV	1

PIPE SUPPORTS

12	6	PS214-16	PS214	1
13	6	PS219-1-3-3	PS219	1
14	6	PS209-B2	PS209	1

PIECE MARKS

6820-R2-67229-03-1 6820-R2-67229-03-2



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				P&ID: 202998C-001-PID-0021-0321			
UNIT#: 6800		EW P AREA: 6820	SPEC: SCXL-CS02	STRESS CALC #: CN-0385			
LINE No: 6"-R2-67229-SCXL-CS02-H				DRAWING NUMBER			
				6820-R2-67229-03			
				REV. 0			

