


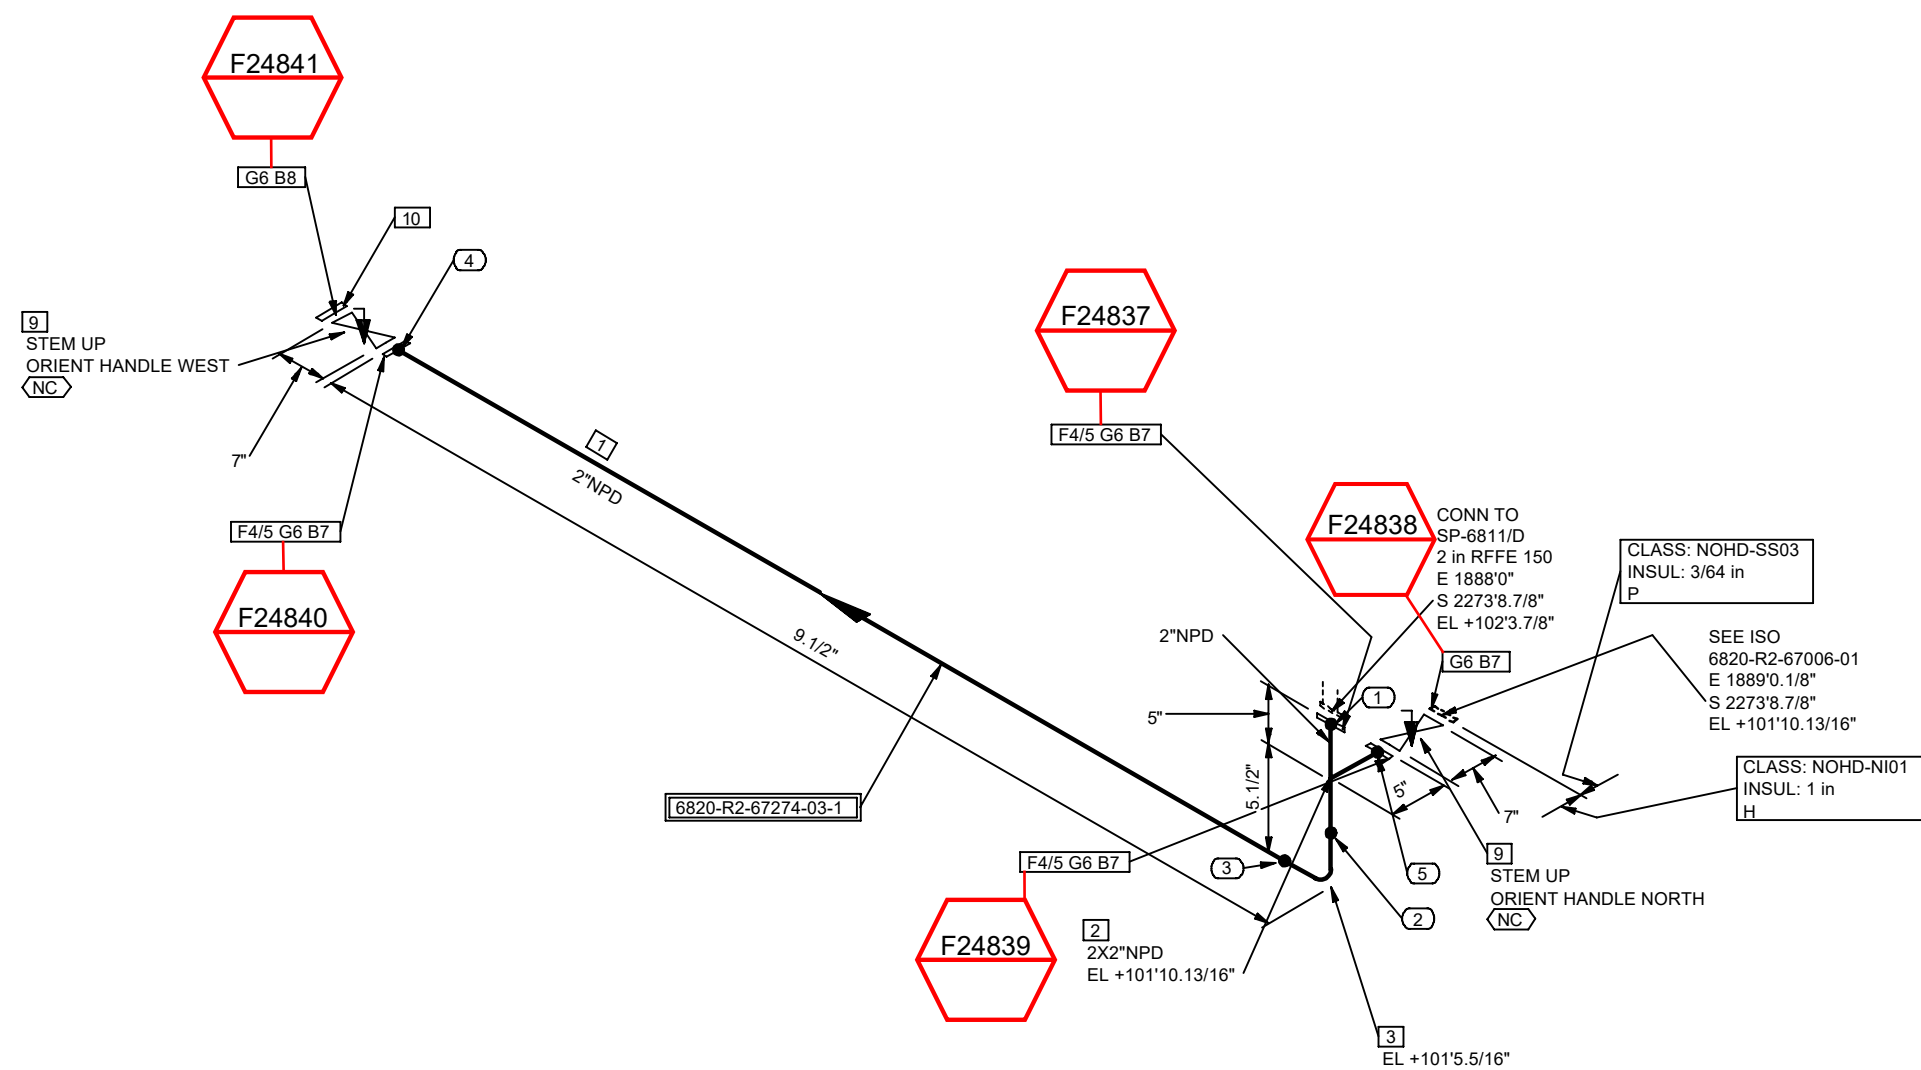

Signature: Glenn Sumrall Jr

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	2	Pipes, Seamless, ASME B36.19/B36.10, ASTM B161 UNS N02200, BE, -, -, S-10S	C7ZWWMT3	0.4
2	2X2	Eq Te, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, S-10S	C7ZWWT9B	1
3	2	90° Elb LR, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, S-10S	C7ZWWZTP	1
4	2	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 150 Lbs, FF, -,	C26WFFFF	3
MISCELLANEOUS COMPONENTS				
5	2	Stub SP, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -,Annealed, x S-10S	C8A5GXXJ	3
OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
6	2	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87J	5
7	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.25 in. Length	C6S4K88P	16
8	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.5 in. Length	C6S4K88R	4
9	2	Plug Flg,SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM B564 UNS N02200, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0503, LO	C8RR9V39	2
10	2	Bld Flg, ASME B16.5, ASTM B564 UNS N02200, 150 Lbs, RF, -,	C7T63YAX	1

6820-R2-67274-03-1

SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				PID: 202998C-001-PID-0021-0320			
				UNIT#: 6800	SWP AREA: 6820	SPEC: NOHD-NI01	STRESS CALC #: -
				LINE No. 2"-R2-67274-NOHD-NI01-H			
				DRAWING NUMBER 6820-R2-67274-03			
OxyChem Redstone Battleground PROJECT				REV. 0			