



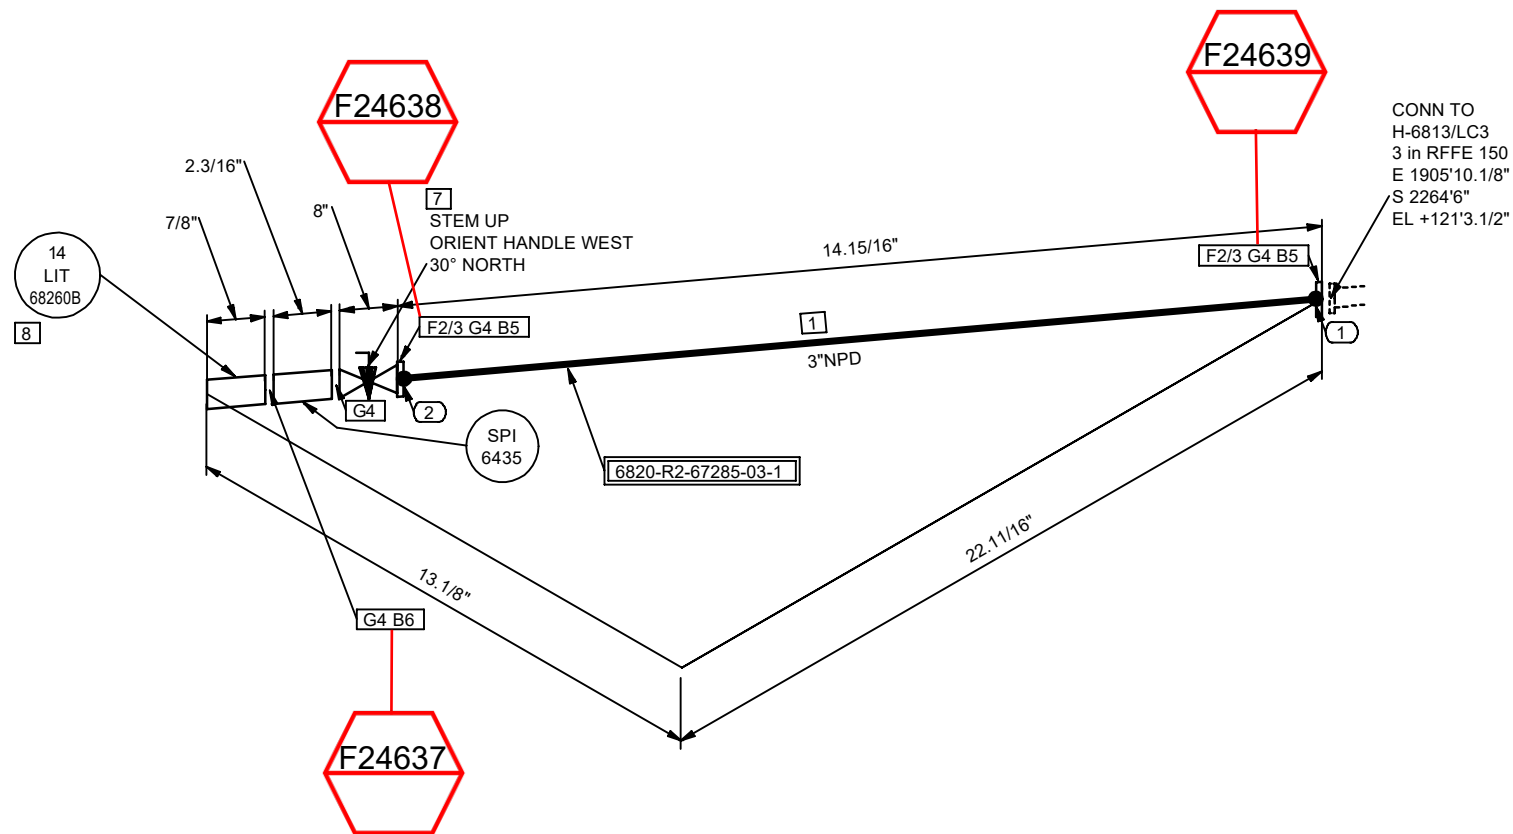

Filler Material Requisition
Date: 11-7-24
Line Class: NOHD-NI01
WPS: 4130
Electrode: ERNi-1
Signature: *Glenn Sumrall, Jr.*

COORDINATE SYSTEM : PLANTCOORDINATES

- NOTES:
- 1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
 - 2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
 - 3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
 - 4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
 - 5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
 - 6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
 - 7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2024-11-01	RVA	ISSUED FOR CONSTRUCTION			SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION			CHKD	MTO	STRESS	APRVD

SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
1	3	Pipes, Seamless, ASME B36.19/B36.10, ASTM B161 UNS N02200, BE, -, -, S-10S	C7ZWWMVR	0.9'
2	3	LJ Flg, ASME B16.5, ASTM A105 Galv. as per ASTM A153, 150 Lbs, FF, -,	C26WFFFK	2
MISCELLANEOUS COMPONENTS				
3	3	Stub SP, Seamless, ASME B16.9, ASTM B366 Gr.WPN, BW Ends, -, Annealed, x S-10S	C8A5GXZ8	2
OTHER THAN SHOP MATERIALS				
NO	NPD	DESCRIPTION	IDENT	QTY
4	3	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, -, Thk=1/8in, -,	C6S4K87L	4
5	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 3.75 in. Length	C6S4K88S	8
6	5/8	SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 6 in. Length	C6S4K891	4
7	3	Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM B564 UNS N02200, 150 Lbs, RF, Ends as per ASME B16.5, -, LO, -, -, Valve Tag: PL-0503_LO	C8RR9V3B	1
INSTRUMENTS				
8	3	14-LIT-68260B	14-LIT-68260B	1
PIECE MARKS				
6820-R2-67285-03-1				



SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
				P&ID: 202998C-001-PID-0021-0324				
				UNIT#: 6800	EWIP AREA: 6820	SPEC: NOHD-NI01	STRESS CALC #: -	
				LINE No. 3"-R2-67285-NOHD-NI01-H				
				DRAWING NUMBER 6820-R2-67285-03			REV. 0	
				OxyChem Redstone Battleground PROJECT				

