



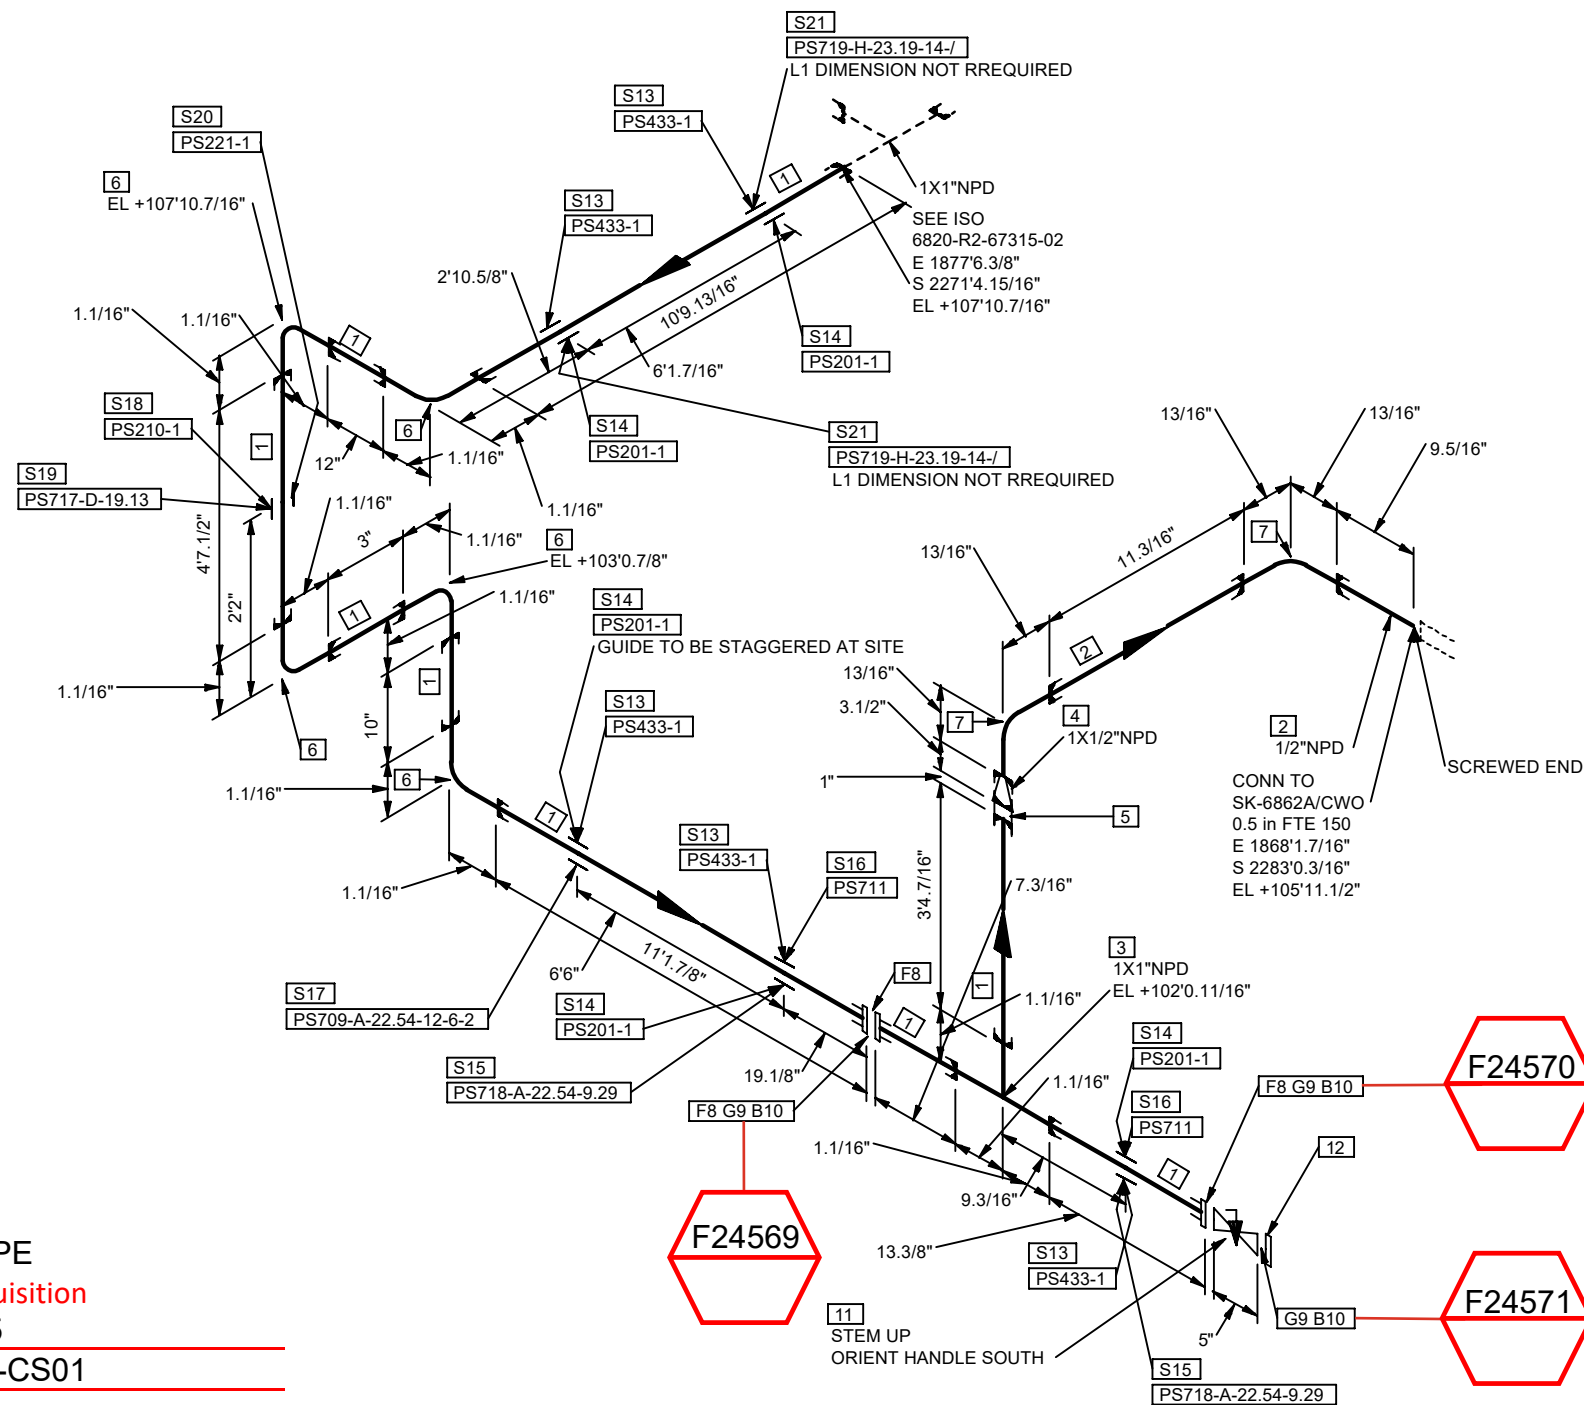

Signature:

1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



|     |            |     |                         |      |     |        |       |
|-----|------------|-----|-------------------------|------|-----|--------|-------|
|     |            |     |                         |      |     |        |       |
|     |            |     |                         |      |     |        |       |
|     |            |     |                         |      |     |        |       |
|     |            |     |                         |      |     |        |       |
|     |            |     |                         |      |     |        |       |
| 0   | 2025-02-28 | RVA | ISSUED FOR CONSTRUCTION | SAD  | KJK | SMR    | GR    |
| REV | DATE       | BY  | DESCRIPTION             | CHKD | MTO | STRESS | APRVD |

| OTHER THAN SHOP MATERIALS |       |                                                                                                                                                         |          |        |
|---------------------------|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------|--------|
| NO                        | NPD   | DESCRIPTION                                                                                                                                             | IDENT    | QTY    |
| 1                         | 1     | Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B Galv. as per ASTM A153, NPTM Ends, w/ coupling, -, S-XS                                                    | CPPD3S28 | 33.8 ' |
| 2                         | 1/2   | Pipes, Seamless, ASME B36.10, ASTM A106 Gr.B Galv. as per ASTM A153, NPTM Ends, w/ coupling, -, S-XS                                                    | CPPD3S11 | 1.8 '  |
| 3                         | 1X1   | Eq Te, ASME B16.11, ASTM A105N Galv. as per ASTM A153, 3000 Lbs, NPTF Ends, -                                                                           | C1DR2HU  | 1      |
| 4                         | 1X1/2 | Concentric swage, MSS SP-95, ASTM A234 Gr.WPB Galv. as per ASTM A153,NPTM Ends,-, -, S-XS                                                               | CDFD3U7Y | 1      |
| 5                         | 1     | Full Coup, ASME B16.11, ASTM A105N Galv. as per ASTM A153, 3000 Lbs, NPTF Ends, -                                                                       | CZ2LEZE  | 1      |
| 6                         | 1     | 90° Elb, ASME B16.11, ASTM A105N Galv. as per ASTM A153, 3000 Lbs, NPTF Ends, -                                                                         | C1DMWEK  | 5      |
| 7                         | 1/2   | 90° Elb, ASME B16.11, ASTM A105N Galv. as per ASTM A153, 3000 Lbs, NPTF Ends, -                                                                         | C5FX5BU  | 2      |
| 8                         | 1     | THD Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF/NPTF End, -                                                                         | C1DR2JM  | 3      |
| 9                         | 1     | NM Flat Gk, Aramid Fiber Reinforced SBR, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -                                                         | C76KHSRZ | 3      |
| 10                        | 1/2   | SBlT 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length                                                                            | C6S4K87U | 12     |
| 11                        | 1     | Plug Flg.SP, Inverted Tapered Plug, Non Lubricated, API 599, ASTM A395 Gr.60-40-18, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0546 | C76RJXHV | 1      |
| 12                        | 1     | Bld Flg, ASME B16.5, ASTM A105N Galv. as per ASTM A153, 150 Lbs, RF, -                                                                                  | C1DR2JV  | 1      |
| <u>PIPE SUPPORTS</u>      |       |                                                                                                                                                         |          |        |
| 13                        | 1     | PS433-1                                                                                                                                                 | PS433    | 5      |
| 14                        | 1     | PS201-1                                                                                                                                                 | PS201    | 5      |
| 15                        | 1     | PS718-A-22.54-9-29                                                                                                                                      | PS718    | 2      |
| 16                        | 1     | PS711                                                                                                                                                   | PS711    | 2      |
| 17                        | 1     | PS709-A-22.54-12-6-2                                                                                                                                    | PS709    | 1      |
| 18                        | 1     | PS210-1                                                                                                                                                 | PS210    | 1      |
| 19                        | 1     | PS717-D-19.13                                                                                                                                           | PS717    | 1      |
| 20                        | 1     | PS221-1                                                                                                                                                 | PS221    | 1      |
| 21                        | 1     | PS719-H-23.19-14-/                                                                                                                                      | PS719    | 2      |



|                                                                                       |                    |                        |                       |                                     |                   |                        |                     |
|---------------------------------------------------------------------------------------|--------------------|------------------------|-----------------------|-------------------------------------|-------------------|------------------------|---------------------|
| SERVICE:<br>R2                                                                        | VAPOR/LIQUID:<br>L | INSUL TYPE:<br>Per LDT | INSUL THK:<br>Per LDT | SHOP:<br>N                          | FIELD:<br>Y       | PAINT CODE:<br>Per LDT | MODULE:<br>-        |
|  |                    |                        |                       | PID:<br>202998C-001-PID-0021-0333   |                   |                        |                     |
|                                                                                       |                    |                        |                       | UNIT#:<br>6800                      | EWP AREA:<br>6820 | SPEC:<br>CTWL-CS01     | STRESS CALC #:<br>- |
|                                                                                       |                    |                        |                       | LINE No.<br>1"-R2-67314-CTWL-CS01-N |                   |                        |                     |
|                                                                                       |                    |                        |                       | DRAWING NUMBER<br>6820-R2-67314-01  |                   |                        |                     |
| OxyChem Redstone Battleground<br>PROJECT                                              |                    |                        |                       | REV:<br>0                           |                   |                        |                     |