



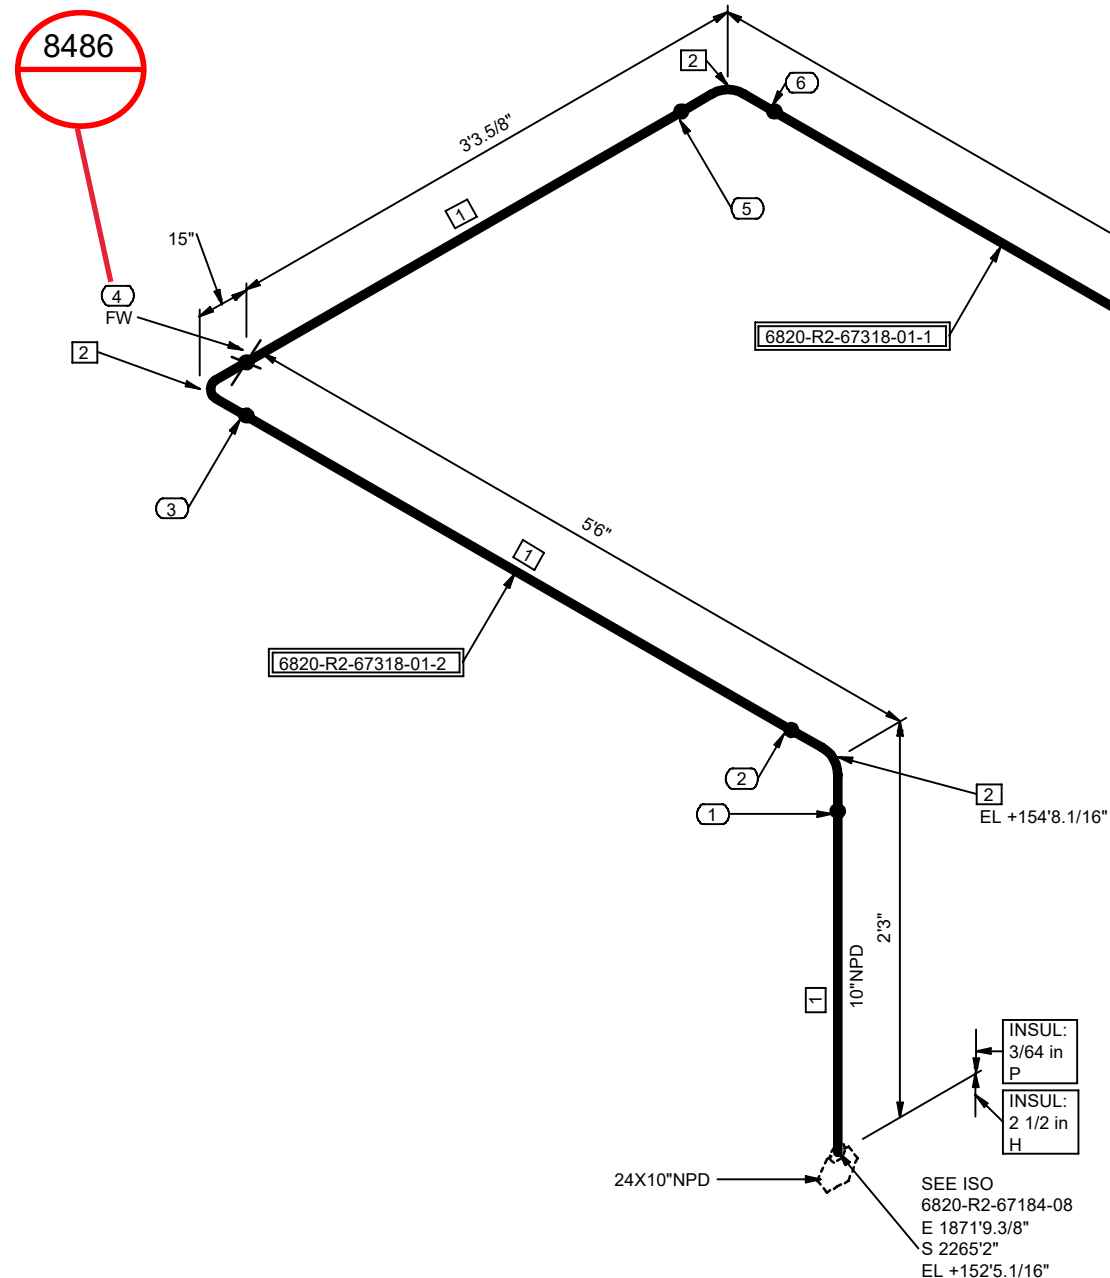

NOTES:

1. FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC.
REFER TO LATEST REVISION OF LDT.
2. FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
3. FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
4. FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
5. ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
6. FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD
9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
7. REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2024-11-08	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRV

Signature: Glenn Sumrall Jr

PIECE MARKS

6820-R2-67318-01-1 6820-R2-67318-01-2

Turner Industries Group, LLC
Received
November 12, 2024
DOCUMENT CONTROL

SERVICE: R2	VAPOR/LIQUID: V	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: Y	FIELD: Y	PAINT CODE: Per LDT	MODULE: -	
				P&ID: 202998C-001-PID-0021-0320				
				UNIT#: 6800	SWP AREA: 6820	SPEC: SIPG-CS01	STRESS CALC #: CN-0413	
				LINE No. 10"-R2-67318-SIPG-CS01-P				
				DRAWING NUMBER 6820-R2-67318-01				REV. 0
				OxyChem Redstone Battleground PROJECT				

