


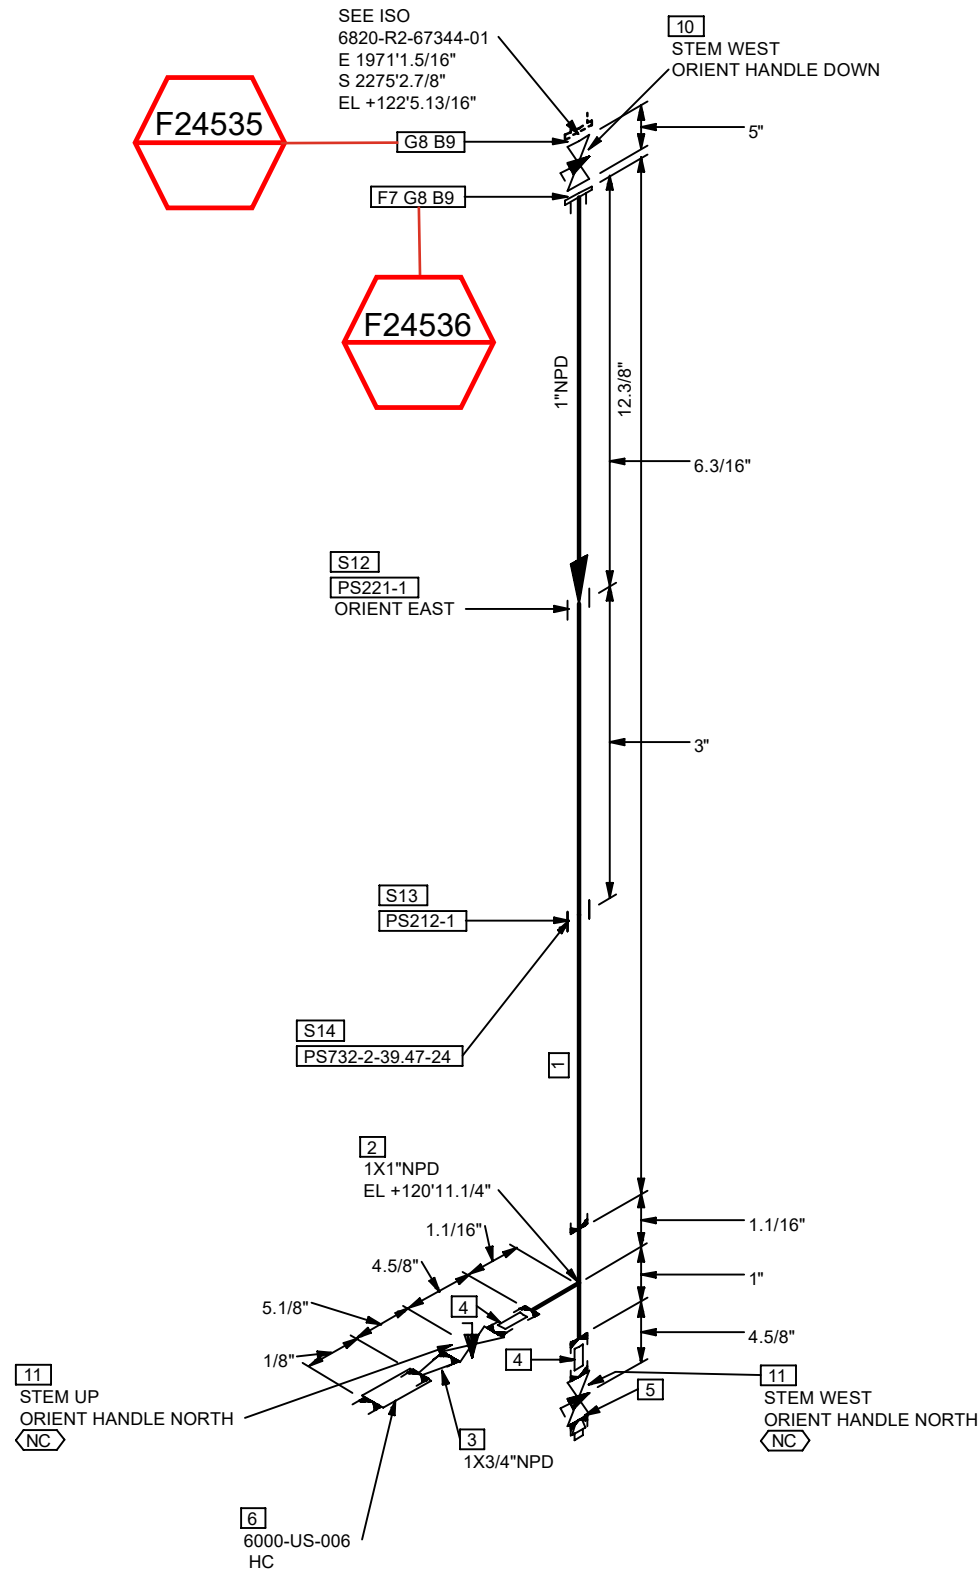

TEFLON TAPE


Filler Material Requisition

Date: 1-7-25
Line Class: EPCL-SS01
WPS: N/A
Electrode: N/A
Signature: Pedro Morin

COORDINATE SYSTEM : PLANTCOORDINATES

NOTES:

- FOR LINE PRESSURES, TEMPERATURES, INSULATION TYPE AND THICKNESS, ETC. REFER TO LATEST REVISION OF LDT.
- FOR STANDARD PIPE SUPPORT DETAILS SEE PROJECT STANDARD.
- FIELD SHIM TO SUIT UNLESS OTHERWISE NOTED.
- FOR PWHT REQUIREMENTS REFER TO LINE CLASS SPECIFICATION.
- ALL THREADED PIPE LINE SYSTEMS, FIELD SHALL VERIFY DIMENSION PRIOR TO ERECTION.
- FFW DESIGNATION AT WELDS INDICATES FIELD FIT WELD, WHERE PIPE FABRICATOR IS TO ADD 9 INCH OF PIPE TO THE ISOMETRIC DIMENSION TO ENABLE THE FIELD TO CUT TO FIT AT SITE.
- REFER TO 202998C-000-W1-1300-0001 FOR FRP AND DUAL-LAM FABRICATION.



Information contained in this document is the work product of one or more legal entities of Technip Energies N.V. and embodies confidential and proprietary information of the applicable entity and/or its client. Use of this information is restricted in accordance with conditions specified by the contract. Technip Energies N.V. and its affiliates disclaim any and all liabilities for any changes or modifications to this document which are made by any person other than the entity that issued the document under the applicable client contract.

THIS DOCUMENT IS UNCONTROLLED WHEN REPRODUCED

0	2024-12-27	RVA	ISSUED FOR CONSTRUCTION	SAD	KJK	SMR	GR
REV	DATE	BY	DESCRIPTION	CHKD	MTO	STRESS	APRVD

OTHER THAN SHOP MATERIALS

NO	NPD	DESCRIPTION	IDENT	QTY
1	1	Pipes, Seamless, ASME B36.19/B36.10, ASTM A312 Gr.TP304L, NPTM Ends, w/ coupling, -, S-80S	C76KFFTD	1.1 '
2	1X1	Eq Te, ASME B16.11, ASTM A182 Gr.F304L, 3000 Lbs, NPTF Ends, Annealed,	C7BP525C	1
3	1X3/4	Concentric swage, MSS SP-95, ASTM A403 Gr.WP304L,NPTM Ends,-, Annealed, S-80S	C7BP5XKV	1
4	1	Nipple, ASTM A312 Gr.TP304L, NPTM Ends, L = 3in, -, S-80S	CEZMKLO	2
5	1	Plug, Solid Round Head Type, ASME B16.11, ASTM A182 Gr.F304L, NPTM End, Annealed,	C7BP51NZ	1
6	3/4	SP-6830	SP-6830	1
7	1	THD Flg, ASME B16.5, ASTM A182 Gr.F304L, 150 Lbs, RF/NPTF End, Annealed,	C7W2U48L	1
8	1	NM Flat Gk, Barium Sulfate filled PTFE, 150 Lbs, RF as per ASME B16.5, Full Face, Thk=1/8in, -,	C7CT1ZFH	2
9	1/2	SBlt 2 HHx N, A193 Gr.B7/A194 Gr.2H, -, Xylan PTFE Coated, - 2.75 in. Length	C6S4K87U	8
10	1	Plug Flg,SP, Tapered Plug, Non Lubricated, API 599, ASTM A351 Gr.CF8M, 150 Lbs, RF, Ends as per ASME B16.5, -, LO,-, -, Valve Tag: PL-0548	C76KHSRR	1
11	1	Plug Fem,RgP, Tapered Plug, Non Lubricated, API 599, ASTM A351 Gr.CF8M, 300 Lbs, NPTF Ends, Ends as per ASME B1.20.1,-, LO, -, Valve Tag: PL-0547	C76KHSRH	2

PIPE SUPPORTS

12	1	PS221-1	PS221	1
13	1	PS212-1	PS212	1
14	1	PS732-2-39.47-24	PS732	1

Turner Industries Group, LLC
Received
January 6, 2025
DOCUMENT CONTROL

SERVICE: R2	VAPOR/LIQUID: L	INSUL TYPE: Per LDT	INSUL THK: Per LDT	SHOP: N	FIELD: Y	PAINT CODE: Per LDT	MODULE: -
				P&ID: 202998C-001-PID-0021-0331			
				UNIT#: 6800	EWPA AREA: 6820	SPEC: EPCL-SS01	STRESS CALC #:
				LINE No. 1"-R2-67344-EPCL-SS01-P			
				DRAWING NUMBER 6820-R2-67344-02			
OxyChem Redstone Battleground PROJECT				REV. 0			

